

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: McGRAW-EDISON

Report Number: P640439

Luminaire Tested: GWS-SA5D-830-U-5WQ-W-GRSBK

Issue Date: 1/10/2023

Test Information

Test Method: LM-79-2019
Report Number: P640439
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2209-782-2)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/10/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: McGRAW-EDISON
Catalog Number: GWS-SA5D-830-U-5WQ-W-GRSBK
Description: GALLEON WALL SLIM LUMINAIRE. (5) LIGHTSQUARES WITH 16 LEDS EACH AND TYPE V WIDE OPTICS W/ FACTORY INSTALLED GLARE SHIELD, BK
Light Source: (80) 3000K CCT, 80 CRI LEDS
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 12558.6 lumens
Efficiency: N/A
Efficacy: 61.4 lumens/watt
Luminous Opening: Rectangular (W 1.5' x L: 1' x H: 0')
IES Classification: Type V - Short
BUG Rating: B3 - U0 - G1


Input Watts (W): 204.6
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 0
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT



REPORT NUMBER: P640439
 CATALOG NUMBER: GWS-SA5D-830-U-5WQ-W-GRSBK

Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd
 - - - 1/2 Max cd

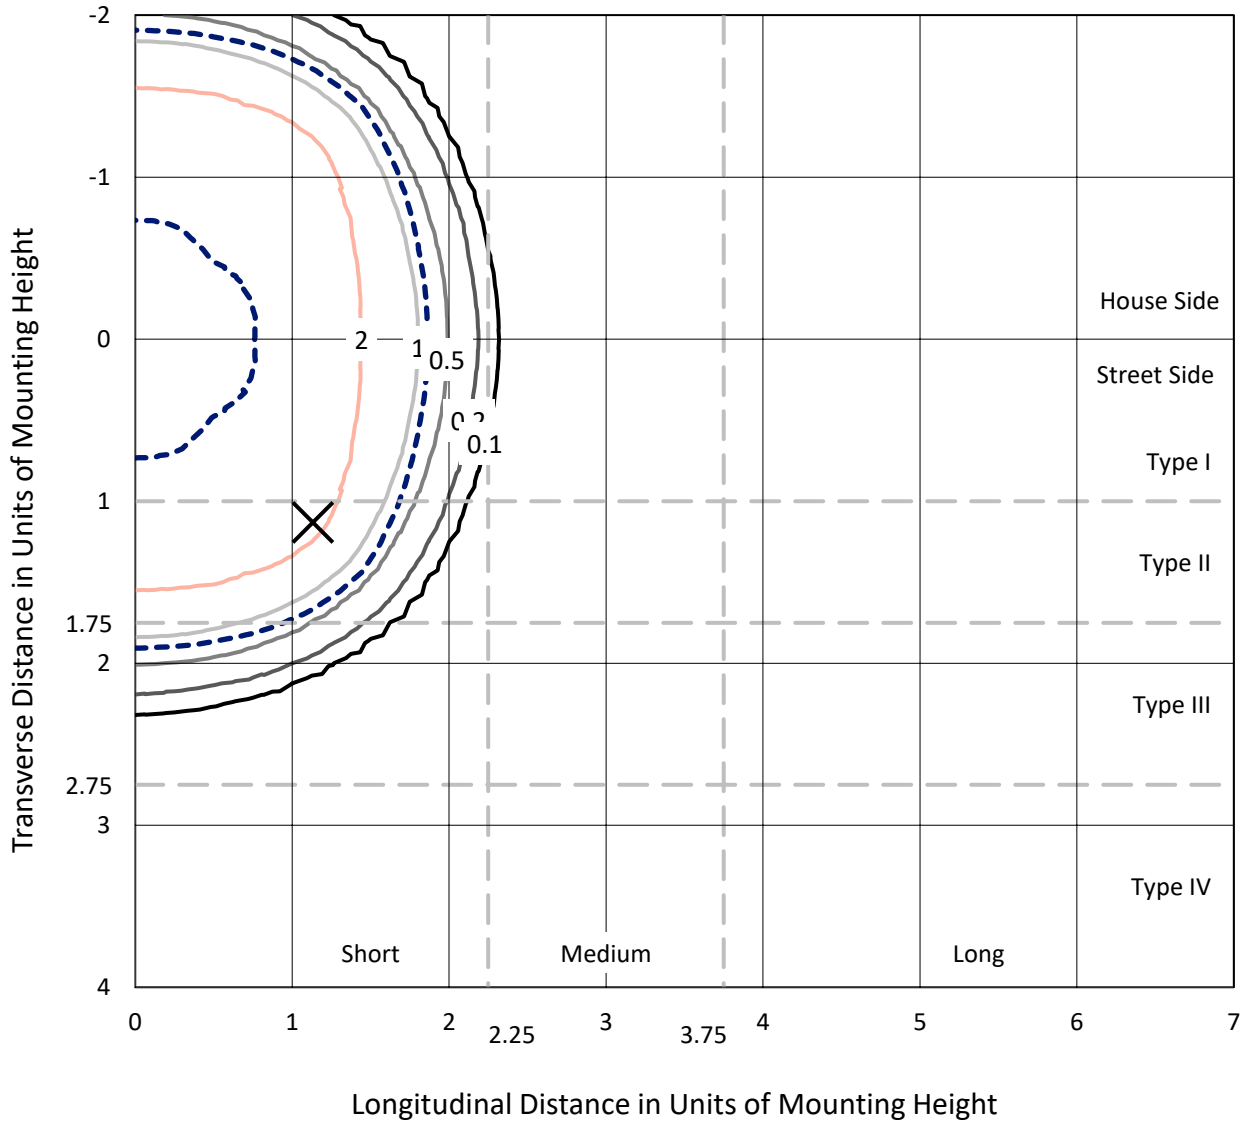

Based on 20 foot mounting height. Maximum calculated value = 4.5 fc
 Type V - Short - N/A

REPORT NUMBER: P640439
CATALOG NUMBER: GWS-SA5D-830-U-5WQ-W-GRSBK

Luminous Intensity Polar Plot

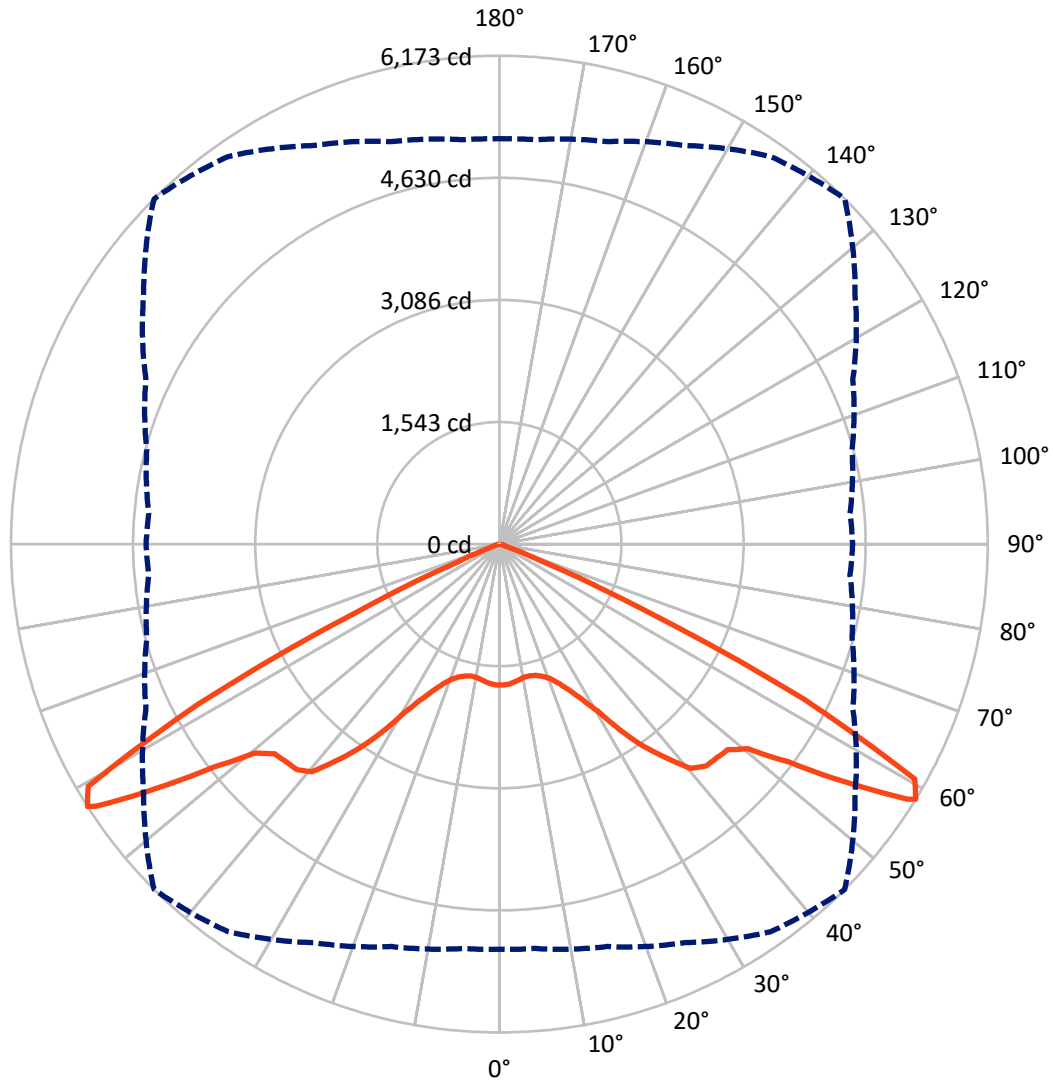

— Vertical Plane Through 45-Deg Lateral - - - Horizontal Cone Through 58-Deg Vertical

REPORT NUMBER: P640439

CATALOG NUMBER: GWS-SA5D-830-U-5WQ-W-GRSBK

FLUX DISTRIBUTION:

| | | Downward | Upward | Total |
|--------------------|-----------|----------|--------|---------|
| House Side | Lumens | 6279.3 | 0.0 | 6279.3 |
| | % Fixture | 50.0 | 0.0 | 50.0 |
| Street Side | Lumens | 6279.3 | 0.0 | 6279.3 |
| | % Fixture | 50.0 | 0.0 | 50.0 |
| Total | Lumens | 12558.6 | 0.0 | 12558.6 |
| | % Fixture | 100.0 | 0.0 | 100.0 |

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|---------|-----------|
| 0°-10° | 166.2 | 1.3 |
| 10°-20° | 491.7 | 3.9 |
| 20°-30° | 929.9 | 7.4 |
| 30°-40° | 1834.0 | 14.6 |
| 40°-50° | 2902.2 | 23.1 |
| 50°-60° | 4266.1 | 34.0 |
| 60°-70° | 1904.2 | 15.2 |
| 70°-80° | 63.8 | 0.5 |
| 80°-90° | 0.5 | 0.0 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-90° | 12558.6 | 100.0 |
| 0°-180° | 12558.6 | 100.0 |

Coefficient of Utilization



REPORT NUMBER: P640439


CATALOG NUMBER: GWS-SA5D-830-U-5WQ-W-GRSBK

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

| Zone | Lumens | % Fixture | Zone Rating/Lumen Limit | | |
|----------------|--------|-----------|-------------------------|------|---------|
| | | | B | U | G |
| FL (0°-30°) | 793.9 | 6.3 | | | |
| FM (30°-60°) | 4501.2 | 35.8 | | | |
| FH (60°-80°) | 984.0 | 7.8 | | | G1/1800 |
| FVH (80°-90°) | 0.3 | 0.0 | | | G0/10 |
| BL (0°-30°) | 793.9 | 6.3 | B2/1000 | | |
| BM (30°-60°) | 4501.2 | 35.8 | B3/5000 | | |
| BH (60°-80°) | 984.0 | 7.8 | B2/1000 | | G1/1800 |
| BVH (80°-90°) | 0.3 | 0.0 | | | G0/10 |
| UL (90°-100°) | 0.0 | 0.0 | | U0/0 | |
| UH (100°-180°) | 0.0 | 0.0 | | U0/0 | |

BUG Rating: B3-U0-G1

Type V Short

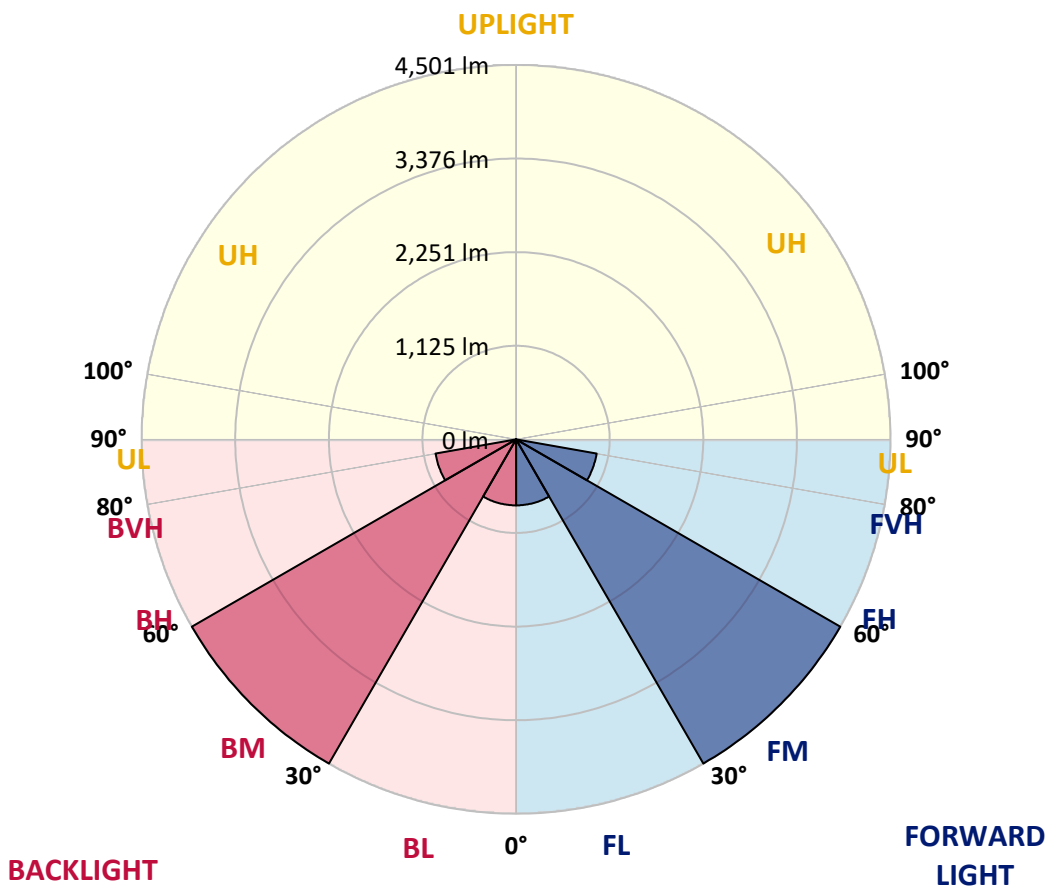



REPORT NUMBER: P640439

CATALOG NUMBER: GWS-SA5D-830-U-5WQ-W-GRSBK

CANDELA DISTRIBUTION (FULL):

| | 0° | 5° | 15° | 25° | 35° | 45° | 55° | 65° | 75° | 85° | 90° |
|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 0° | 1781.0 | 1781.0 | 1781.0 | 1781.0 | 1781.0 | 1781.0 | 1781.0 | 1781.0 | 1781.0 | 1781.0 | 1781.0 |
| 2.5° | 1763.9 | 1767.3 | 1770.7 | 1772.4 | 1774.1 | 1779.3 | 1781.0 | 1775.8 | 1775.8 | 1765.6 | 1777.6 |
| 5° | 1755.3 | 1758.7 | 1762.2 | 1760.4 | 1760.4 | 1760.4 | 1758.7 | 1751.9 | 1750.2 | 1739.9 | 1751.9 |
| 7.5° | 1739.9 | 1743.3 | 1743.3 | 1738.2 | 1734.8 | 1734.8 | 1733.1 | 1724.5 | 1722.8 | 1712.5 | 1724.5 |
| 10° | 1727.9 | 1729.7 | 1727.9 | 1717.7 | 1710.8 | 1710.8 | 1709.1 | 1705.7 | 1707.4 | 1700.6 | 1710.8 |
| 12.5° | 1734.8 | 1736.5 | 1729.7 | 1716.0 | 1707.4 | 1705.7 | 1700.6 | 1695.4 | 1700.6 | 1698.9 | 1709.1 |
| 15° | 1757.0 | 1758.7 | 1746.8 | 1729.7 | 1722.8 | 1722.8 | 1709.1 | 1695.4 | 1702.3 | 1704.0 | 1716.0 |
| 17.5° | 1784.4 | 1784.4 | 1769.0 | 1753.6 | 1755.3 | 1755.3 | 1733.1 | 1709.1 | 1710.8 | 1717.7 | 1729.7 |
| 20° | 1816.9 | 1816.9 | 1801.5 | 1798.1 | 1810.1 | 1811.8 | 1784.4 | 1746.8 | 1738.2 | 1743.3 | 1757.0 |
| 22.5° | 1875.1 | 1875.1 | 1863.1 | 1871.7 | 1899.0 | 1907.6 | 1866.5 | 1813.5 | 1793.0 | 1796.4 | 1810.1 |
| 25° | 1965.7 | 1965.7 | 1962.3 | 1982.9 | 2022.2 | 2041.0 | 1986.3 | 1916.1 | 1881.9 | 1876.8 | 1892.2 |
| 27.5° | 2118.0 | 2119.7 | 2114.6 | 2145.4 | 2195.0 | 2217.2 | 2142.0 | 2049.6 | 2008.5 | 2000.0 | 2015.4 |
| 30° | 2314.8 | 2314.8 | 2316.5 | 2359.2 | 2424.2 | 2453.3 | 2354.1 | 2246.3 | 2198.4 | 2171.0 | 2191.6 |
| 32.5° | 2533.7 | 2537.2 | 2554.3 | 2626.1 | 2740.8 | 2800.6 | 2655.2 | 2504.7 | 2427.7 | 2398.6 | 2420.8 |
| 35° | 2894.7 | 2862.2 | 2841.7 | 2894.7 | 3060.7 | 3139.4 | 2952.9 | 2776.7 | 2718.5 | 2715.1 | 2771.5 |
| 37.5° | 3252.3 | 3233.5 | 3190.7 | 3245.4 | 3394.3 | 3430.2 | 3224.9 | 3077.8 | 3036.7 | 3059.0 | 3115.4 |
| 40° | 3536.3 | 3502.1 | 3445.6 | 3496.9 | 3692.0 | 3727.9 | 3474.7 | 3329.3 | 3313.9 | 3363.5 | 3440.5 |
| 42.5° | 3760.4 | 3712.5 | 3637.2 | 3649.2 | 3806.6 | 3832.3 | 3608.1 | 3498.7 | 3508.9 | 3570.5 | 3657.8 |
| 45° | 3861.3 | 3823.7 | 3757.0 | 3751.9 | 3851.1 | 3852.8 | 3676.6 | 3620.1 | 3647.5 | 3695.4 | 3763.8 |
| 47.5° | 3904.1 | 3887.0 | 3849.4 | 3840.8 | 3897.3 | 3883.6 | 3774.1 | 3750.1 | 3775.8 | 3789.5 | 3828.8 |
| 50° | 4010.2 | 4010.2 | 4015.3 | 4022.2 | 4080.3 | 4066.6 | 3989.7 | 3962.3 | 3929.8 | 3881.9 | 3893.9 |
| 52.5° | 4307.9 | 4319.9 | 4369.5 | 4424.2 | 4530.3 | 4574.8 | 4449.9 | 4290.8 | 4135.1 | 4030.7 | 4030.7 |
| 55° | 4845.1 | 4857.1 | 4915.2 | 5007.6 | 5202.6 | 5308.7 | 5017.9 | 4667.2 | 4453.3 | 4311.3 | 4330.1 |
| 57.5° | 5141.1 | 5154.7 | 5274.5 | 5524.3 | 5902.4 | 6082.0 | 5457.6 | 4937.5 | 4638.1 | 4475.5 | 4489.2 |
| 58° | 5122.2 | 5130.8 | 5265.9 | 5558.5 | 5979.4 | 6172.7 | 5488.4 | 4928.9 | 4614.1 | 4448.2 | 4465.3 |
| 60° | 4550.8 | 4538.8 | 4754.4 | 5171.8 | 5765.5 | 6032.4 | 5182.1 | 4499.5 | 4133.4 | 3964.0 | 3972.6 |
| 62.5° | 2975.1 | 2982.0 | 3168.5 | 3604.7 | 4066.6 | 4318.1 | 3620.1 | 3112.0 | 2817.7 | 2715.1 | 2689.4 |
| 65° | 1242.1 | 1219.8 | 1334.4 | 1577.4 | 1854.5 | 1994.8 | 1714.3 | 1450.8 | 1269.4 | 1201.0 | 1219.8 |
| 67.5° | 319.9 | 311.4 | 318.2 | 398.6 | 487.6 | 576.6 | 484.2 | 369.5 | 321.6 | 325.1 | 325.1 |
| 70° | 181.3 | 171.1 | 138.6 | 128.3 | 124.9 | 124.9 | 124.9 | 124.9 | 143.7 | 169.4 | 174.5 |
| 72.5° | 136.9 | 128.3 | 100.9 | 87.3 | 77.0 | 71.9 | 75.3 | 87.3 | 104.4 | 126.6 | 130.0 |
| 75° | 68.4 | 68.4 | 61.6 | 58.2 | 51.3 | 47.9 | 49.6 | 54.7 | 63.3 | 71.9 | 70.1 |
| 77.5° | 13.7 | 15.4 | 17.1 | 20.5 | 17.1 | 17.1 | 17.1 | 20.5 | 20.5 | 22.2 | 20.5 |
| 80° | 1.7 | 1.7 | 1.7 | 1.7 | 1.7 | 1.7 | 1.7 | 1.7 | 1.7 | 1.7 | 1.7 |
| 82.5° | 0.0 | 1.7 | 1.7 | 0.0 | 0.0 | 0.0 | 0.0 | 1.7 | 1.7 | 1.7 | 1.7 |
| 85° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1.7 | 1.7 |
| 87.5° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



LM-79-2019: Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Report Prepared for

Cooper Lighting Solutions

MCGRAW EDISON

Report Number: SP1-2408-195-9

Test Date: 08/07/2024

Luminaire Tested: GALN-SB1A-830-U-5WQ

Data in this report applies to families of products including GALN-SB1A-830-U-5WQ.

Test Information

Test Method: LM-79-2019
 Report Number: SP1-2408-195-9
 Test Lab: COOPER LIGHTING SOLUTIONS
 Photometer: SP1 - 76IN SPHERE
 Measurement Geometry: 4π
 Issue Date: 08/07/2024
 Manufacturer: COOPER LIGHTING SOLUTIONS
 Product Line: MCGRAW EDISON
 Catalog Number: **GALN-SB1A-830-U-5WQ**
 Description: GALLEON AREA AND ROADWAY LUMINAIRE. (1) 80 CRI, 3000K, 350MA HIGH DENSITY LIGHTSQUARE WITH 26 LEDS AND TYPE V WIDE OPTICS

Spectral Parameters

CCT (K): 3050
 CIE u': 0.2476
 CIE v': 0.5251
 Duv: 0.0034
 CIE x: 0.4383
 CIE y: 0.4131
 CIE z: 0.1487
 Peak Wavelength (nm): 603
 Dominant Wavelength (nm): 581
 Purity: 55.55201
 Rf: 81.5
 Rg: 99.2

| | | | |
|-----------|------|------|------|
| CRI (Ra): | 81.0 | | |
| R1: | 79.6 | R9: | 7.1 |
| R2: | 85.6 | R10: | 67.0 |
| R3: | 92.0 | R11: | 82.7 |
| R4: | 82.6 | R12: | 63.2 |
| R5: | 78.9 | R13: | 80.3 |
| R6: | 81.7 | R14: | 95.0 |
| R7: | 85.2 | R15: | 71.7 |
| R8: | 62.0 | | |



Test Conditions


Stabilization Time: 20M
 Operation Time: 1H 20M
 Sphere Temperature (°C): 24.2

REPORT NUMBER: SP1-2408-195-9

| Measurement and Test Equipment | | | |
|--------------------------------|-----------------------|------------------|----------------------|
| Instrument | Identification Number | Calibration Date | Calibration Due Date |
| Photometer | IN0058 | 6/18/2024 | 12/18/2024 |
| Power Meter | INXT2011004 | 2/8/2024 | 2/8/2025 |
| AC Power Source | IN0063 | 10/24/2023 | 10/24/2024 |
| DC Power Source | IN0208 | 10/24/2023 | 10/24/2024 |
| Sphere Thermometer | IN0085 | 10/24/2023 | 10/24/2024 |
| Room Thermometer | IN0046 | 10/24/2023 | 10/24/2024 |

REPORT NUMBER: SP1-2408-195-9

CIE 1931 Chromaticity Diagram

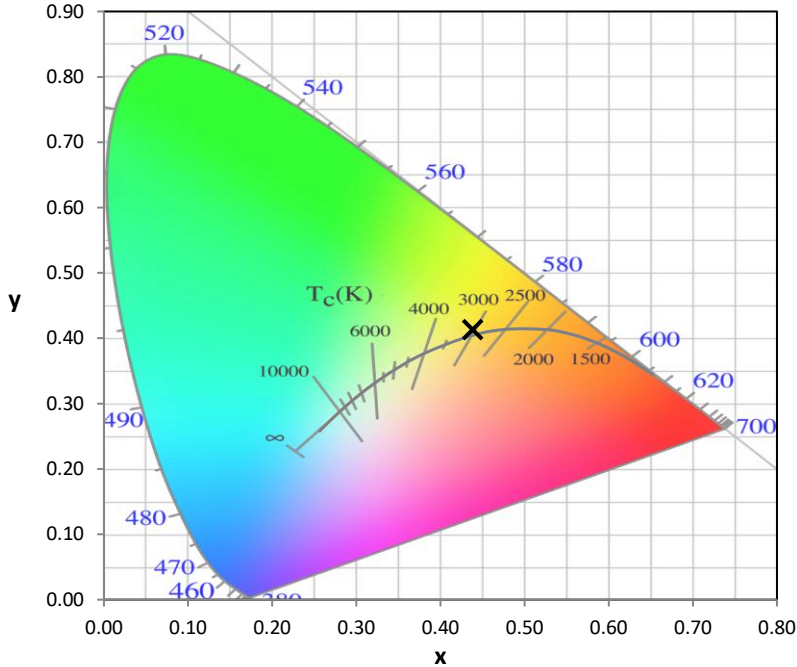

CIE 1931 Chromaticity Diagram with 2017 ANSI 7-Step and 4-Step Quadrangles



Point lies inside the ANSI 3000K 4-step quadrangle

REPORT NUMBER: SP1-2408-195-9

Photopic Flux vs. Wavelength



Photopic Lumens: NR

| λ (nm) | Power W [^] /nm | Lumens (ϕ /nm) | λ (nm) | Power W [^] /nm | Lumens (ϕ /nm) | λ (nm) | Power W [^] /nm | Lumens (ϕ /nm) | λ (nm) | Power W [^] /nm | Lumens (ϕ /nm) | λ (nm) | Power W [^] /nm | Lumens (ϕ /nm) |
|-------------------|-----------------------------|-------------------------|-------------------|-----------------------------|-------------------------|-------------------|-----------------------------|-------------------------|-------------------|-----------------------------|-------------------------|-------------------|-----------------------------|-------------------------|
| 360 | 0 | NR | 490 | 168 | NR | 620 | 940 | NR | 750 | 35 | NR | 880 | 1 | NR |
| 365 | 0 | NR | 495 | 233 | NR | 625 | 897 | NR | 755 | 30 | NR | 885 | 1 | NR |
| 370 | 0 | NR | 500 | 300 | NR | 630 | 847 | NR | 760 | 26 | NR | 890 | 1 | NR |
| 375 | 0 | NR | 505 | 372 | NR | 635 | 790 | NR | 765 | 22 | NR | 895 | 1 | NR |
| 380 | 0 | NR | 510 | 430 | NR | 640 | 730 | NR | 770 | 19 | NR | 900 | 1 | NR |
| 385 | 0 | NR | 515 | 483 | NR | 645 | 668 | NR | 775 | 16 | NR | 905 | 1 | NR |
| 390 | 0 | NR | 520 | 524 | NR | 650 | 605 | NR | 780 | 14 | NR | 910 | 0 | NR |
| 395 | 2 | NR | 525 | 555 | NR | 655 | 545 | NR | 785 | 12 | NR | 915 | 0 | NR |
| 400 | 4 | NR | 530 | 581 | NR | 660 | 485 | NR | 790 | 10 | NR | 920 | 0 | NR |
| 405 | 7 | NR | 535 | 604 | NR | 665 | 430 | NR | 795 | 9 | NR | 925 | 0 | NR |
| 410 | 17 | NR | 540 | 623 | NR | 670 | 378 | NR | 800 | 8 | NR | 930 | 0 | NR |
| 415 | 34 | NR | 545 | 645 | NR | 675 | 331 | NR | 805 | 7 | NR | 935 | 0 | NR |
| 420 | 68 | NR | 550 | 667 | NR | 680 | 290 | NR | 810 | 6 | NR | 940 | 0 | NR |
| 425 | 128 | NR | 555 | 693 | NR | 685 | 251 | NR | 815 | 5 | NR | 945 | 0 | NR |
| 430 | 214 | NR | 560 | 719 | NR | 690 | 218 | NR | 820 | 4 | NR | 950 | 0 | NR |
| 435 | 339 | NR | 565 | 754 | NR | 695 | 188 | NR | 825 | 4 | NR | 955 | 0 | NR |
| 440 | 507 | NR | 570 | 791 | NR | 700 | 162 | NR | 830 | 3 | NR | 960 | 0 | NR |
| 445 | 573 | NR | 575 | 830 | NR | 705 | 139 | NR | 835 | 3 | NR | 965 | 0 | NR |
| 450 | 356 | NR | 580 | 873 | NR | 710 | 119 | NR | 840 | 3 | NR | 970 | 0 | NR |
| 455 | 217 | NR | 585 | 913 | NR | 715 | 102 | NR | 845 | 2 | NR | 975 | 0 | NR |
| 460 | 168 | NR | 590 | 948 | NR | 720 | 88 | NR | 850 | 2 | NR | 980 | 0 | NR |
| 465 | 113 | NR | 595 | 974 | NR | 725 | 76 | NR | 855 | 2 | NR | 985 | 0 | NR |
| 470 | 85 | NR | 600 | 994 | NR | 730 | 65 | NR | 860 | 1 | NR | 990 | 0 | NR |
| 475 | 85 | NR | 605 | 998 | NR | 735 | 55 | NR | 865 | 1 | NR | 995 | 0 | NR |
| 480 | 94 | NR | 610 | 994 | NR | 740 | 47 | NR | 870 | 1 | NR | 1000 | 0 | NR |
| 485 | 120 | NR | 615 | 973 | NR | 745 | 41 | NR | 875 | 1 | NR | | | |

REPORT NUMBER: SP1-2408-195-9

Scotopic Flux vs. Wavelength



Scotopic Lumens: NR

S/P: 1.27

| λ (nm) | Power W [^] /nm | Lumens (φ/nm) | λ (nm) | Power W [^] /nm | Lumens (φ/nm) | λ (nm) | Power W [^] /nm | Lumens (φ/nm) | λ (nm) | Power W [^] /nm | Lumens (φ/nm) | λ (nm) | Power W [^] /nm | Lumens (φ/nm) |
|--------|--------------------------|---------------|--------|--------------------------|---------------|--------|--------------------------|---------------|--------|--------------------------|---------------|--------|--------------------------|---------------|
| 360 | 0 | NR | 490 | 168 | NR | 620 | 940 | NR | 750 | 35 | NR | 880 | 1 | NR |
| 365 | 0 | NR | 495 | 233 | NR | 625 | 897 | NR | 755 | 30 | NR | 885 | 1 | NR |
| 370 | 0 | NR | 500 | 300 | NR | 630 | 847 | NR | 760 | 26 | NR | 890 | 1 | NR |
| 375 | 0 | NR | 505 | 372 | NR | 635 | 790 | NR | 765 | 22 | NR | 895 | 1 | NR |
| 380 | 0 | NR | 510 | 430 | NR | 640 | 730 | NR | 770 | 19 | NR | 900 | 1 | NR |
| 385 | 0 | NR | 515 | 483 | NR | 645 | 668 | NR | 775 | 16 | NR | 905 | 1 | NR |
| 390 | 0 | NR | 520 | 524 | NR | 650 | 605 | NR | 780 | 14 | NR | 910 | 0 | NR |
| 395 | 2 | NR | 525 | 555 | NR | 655 | 545 | NR | 785 | 12 | NR | 915 | 0 | NR |
| 400 | 4 | NR | 530 | 581 | NR | 660 | 485 | NR | 790 | 10 | NR | 920 | 0 | NR |
| 405 | 7 | NR | 535 | 604 | NR | 665 | 430 | NR | 795 | 9 | NR | 925 | 0 | NR |
| 410 | 17 | NR | 540 | 623 | NR | 670 | 378 | NR | 800 | 8 | NR | 930 | 0 | NR |
| 415 | 34 | NR | 545 | 645 | NR | 675 | 331 | NR | 805 | 7 | NR | 935 | 0 | NR |
| 420 | 68 | NR | 550 | 667 | NR | 680 | 290 | NR | 810 | 6 | NR | 940 | 0 | NR |
| 425 | 128 | NR | 555 | 693 | NR | 685 | 251 | NR | 815 | 5 | NR | 945 | 0 | NR |
| 430 | 214 | NR | 560 | 719 | NR | 690 | 218 | NR | 820 | 4 | NR | 950 | 0 | NR |
| 435 | 339 | NR | 565 | 754 | NR | 695 | 188 | NR | 825 | 4 | NR | 955 | 0 | NR |
| 440 | 507 | NR | 570 | 791 | NR | 700 | 162 | NR | 830 | 3 | NR | 960 | 0 | NR |
| 445 | 573 | NR | 575 | 830 | NR | 705 | 139 | NR | 835 | 3 | NR | 965 | 0 | NR |
| 450 | 356 | NR | 580 | 873 | NR | 710 | 119 | NR | 840 | 3 | NR | 970 | 0 | NR |
| 455 | 217 | NR | 585 | 913 | NR | 715 | 102 | NR | 845 | 2 | NR | 975 | 0 | NR |
| 460 | 168 | NR | 590 | 948 | NR | 720 | 88 | NR | 850 | 2 | NR | 980 | 0 | NR |
| 465 | 113 | NR | 595 | 974 | NR | 725 | 76 | NR | 855 | 2 | NR | 985 | 0 | NR |
| 470 | 85 | NR | 600 | 994 | NR | 730 | 65 | NR | 860 | 1 | NR | 990 | 0 | NR |
| 475 | 85 | NR | 605 | 998 | NR | 735 | 55 | NR | 865 | 1 | NR | 995 | 0 | NR |
| 480 | 94 | NR | 610 | 994 | NR | 740 | 47 | NR | 870 | 1 | NR | 1000 | 0 | NR |
| 485 | 120 | NR | 615 | 973 | NR | 745 | 41 | NR | 875 | 1 | NR | | | |

REPORT NUMBER: SP1-2408-195-9

Melanopic Flux vs. Wavelength



Melanopic Lumens: NR

M/P: 2.32


| λ (nm) | Power W [^] /nm | Lumens (φ/nm) | λ (nm) | Power W [^] /nm | Lumens (φ/nm) | λ (nm) | Power W [^] /nm | Lumens (φ/nm) | λ (nm) | Power W [^] /nm | Lumens (φ/nm) | λ (nm) | Power W [^] /nm | Lumens (φ/nm) |
|--------|--------------------------|---------------|--------|--------------------------|---------------|--------|--------------------------|---------------|--------|--------------------------|---------------|--------|--------------------------|---------------|
| 360 | 0 | NR | 490 | 168 | NR | 620 | 940 | NR | 750 | 35 | NR | 880 | 1 | NR |
| 365 | 0 | NR | 495 | 233 | NR | 625 | 897 | NR | 755 | 30 | NR | 885 | 1 | NR |
| 370 | 0 | NR | 500 | 300 | NR | 630 | 847 | NR | 760 | 26 | NR | 890 | 1 | NR |
| 375 | 0 | NR | 505 | 372 | NR | 635 | 790 | NR | 765 | 22 | NR | 895 | 1 | NR |
| 380 | 0 | NR | 510 | 430 | NR | 640 | 730 | NR | 770 | 19 | NR | 900 | 1 | NR |
| 385 | 0 | NR | 515 | 483 | NR | 645 | 668 | NR | 775 | 16 | NR | 905 | 1 | NR |
| 390 | 0 | NR | 520 | 524 | NR | 650 | 605 | NR | 780 | 14 | NR | 910 | 0 | NR |
| 395 | 2 | NR | 525 | 555 | NR | 655 | 545 | NR | 785 | 12 | NR | 915 | 0 | NR |
| 400 | 4 | NR | 530 | 581 | NR | 660 | 485 | NR | 790 | 10 | NR | 920 | 0 | NR |
| 405 | 7 | NR | 535 | 604 | NR | 665 | 430 | NR | 795 | 9 | NR | 925 | 0 | NR |
| 410 | 17 | NR | 540 | 623 | NR | 670 | 378 | NR | 800 | 8 | NR | 930 | 0 | NR |
| 415 | 34 | NR | 545 | 645 | NR | 675 | 331 | NR | 805 | 7 | NR | 935 | 0 | NR |
| 420 | 68 | NR | 550 | 667 | NR | 680 | 290 | NR | 810 | 6 | NR | 940 | 0 | NR |
| 425 | 128 | NR | 555 | 693 | NR | 685 | 251 | NR | 815 | 5 | NR | 945 | 0 | NR |
| 430 | 214 | NR | 560 | 719 | NR | 690 | 218 | NR | 820 | 4 | NR | 950 | 0 | NR |
| 435 | 339 | NR | 565 | 754 | NR | 695 | 188 | NR | 825 | 4 | NR | 955 | 0 | NR |
| 440 | 507 | NR | 570 | 791 | NR | 700 | 162 | NR | 830 | 3 | NR | 960 | 0 | NR |
| 445 | 573 | NR | 575 | 830 | NR | 705 | 139 | NR | 835 | 3 | NR | 965 | 0 | NR |
| 450 | 356 | NR | 580 | 873 | NR | 710 | 119 | NR | 840 | 3 | NR | 970 | 0 | NR |
| 455 | 217 | NR | 585 | 913 | NR | 715 | 102 | NR | 845 | 2 | NR | 975 | 0 | NR |
| 460 | 168 | NR | 590 | 948 | NR | 720 | 88 | NR | 850 | 2 | NR | 980 | 0 | NR |
| 465 | 113 | NR | 595 | 974 | NR | 725 | 76 | NR | 855 | 2 | NR | 985 | 0 | NR |
| 470 | 85 | NR | 600 | 994 | NR | 730 | 65 | NR | 860 | 1 | NR | 990 | 0 | NR |
| 475 | 85 | NR | 605 | 998 | NR | 735 | 55 | NR | 865 | 1 | NR | 995 | 0 | NR |
| 480 | 94 | NR | 610 | 994 | NR | 740 | 47 | NR | 870 | 1 | NR | 1000 | 0 | NR |
| 485 | 120 | NR | 615 | 973 | NR | 745 | 41 | NR | 875 | 1 | NR | | | |

Summary

$R_f = 81.5$
 $R_g = 99.2$
 $CIE R_a = 81.0$
 $R_9 = 7.1$



Color Vector Graphics

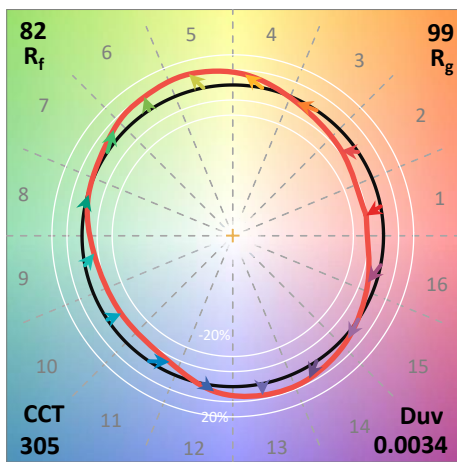

Individual Sample Fidelity Index ($R_{f,i}$)

| | | | |
|------------|------------|------------|------------|
| CES01 = 86 | CES26 = 74 | CES51 = 89 | CES76 = 70 |
| CES02 = 63 | CES27 = 88 | CES52 = 92 | CES77 = 86 |
| CES03 = 31 | CES28 = 89 | CES53 = 81 | CES78 = 72 |
| CES04 = 70 | CES29 = 67 | CES54 = 87 | CES79 = 90 |
| CES05 = 50 | CES30 = 68 | CES55 = 85 | CES80 = 88 |
| CES06 = 51 | CES31 = 71 | CES56 = 78 | CES81 = 78 |
| CES07 = 42 | CES32 = 70 | CES57 = 76 | CES82 = 95 |
| CES08 = 41 | CES33 = 71 | CES58 = 78 | CES83 = 90 |
| CES09 = 29 | CES34 = 82 | CES59 = 92 | CES84 = 94 |
| CES10 = 76 | CES35 = 90 | CES60 = 95 | CES85 = 86 |
| CES11 = 59 | CES36 = 93 | CES61 = 93 | CES86 = 72 |
| CES12 = 65 | CES37 = 87 | CES62 = 83 | CES87 = 85 |
| CES13 = 43 | CES38 = 75 | CES63 = 77 | CES88 = 83 |
| CES14 = 74 | CES39 = 94 | CES64 = 83 | CES89 = 75 |
| CES15 = 71 | CES40 = 89 | CES65 = 77 | CES90 = 81 |
| CES16 = 47 | CES41 = 85 | CES66 = 80 | CES91 = 96 |
| CES17 = 50 | CES42 = 86 | CES67 = 79 | CES92 = 73 |
| CES18 = 56 | CES43 = 81 | CES68 = 84 | CES93 = 84 |
| CES19 = 72 | CES44 = 99 | CES69 = 91 | CES94 = 64 |
| CES20 = 66 | CES45 = 87 | CES70 = 78 | CES95 = 80 |
| CES21 = 87 | CES46 = 82 | CES71 = 76 | CES96 = 84 |
| CES22 = 79 | CES47 = 77 | CES72 = 92 | CES97 = 87 |
| CES23 = 92 | CES48 = 71 | CES73 = 71 | CES98 = 81 |
| CES24 = 91 | CES49 = 81 | CES74 = 93 | CES99 = 74 |
| CES25 = 72 | CES50 = 89 | CES75 = 74 | |



Color Rendition by Hue-Angle Bin



Measure Comparisons



(END OF REPORT)