

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: McGRAW-EDISON

Report Number: P640450

Luminaire Tested: GWS-SA5D-830-U-SL2-W-GRSWH

Issue Date: 1/10/2023

Test Information

Test Method: LM-79-2019
Report Number: P640450
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2209-782-29)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/10/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: McGRAW-EDISON
Catalog Number: GWS-SA5D-830-U-SL2-W-GRSWH
Description: GALLEON WALL SLIM LUMINAIRE. (5) LIGHTSQUARES WITH 16 LEDS EACH AND TYPE II SPILL LIGHT ELIMINATOR OPTICS W/ FACTORY INSTALLED GLARE SHIELD, WH
Light Source: (80) 3000K CCT, 80 CRI LEDS
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 20325.5 lumens
Efficiency: N/A
Efficacy: 99.3 lumens/watt
Luminous Opening: Rectangular (W 1.5' x L: 1' x H: 0')
IES Classification: Type II - Short
BUG Rating: B3 - U0 - G3


Input Watts (W): 204.6
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 0
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT



REPORT NUMBER: P640450
 CATALOG NUMBER: GWS-SA5D-830-U-SL2-W-GRSWH

Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd
 - - - 1/2 Max cd

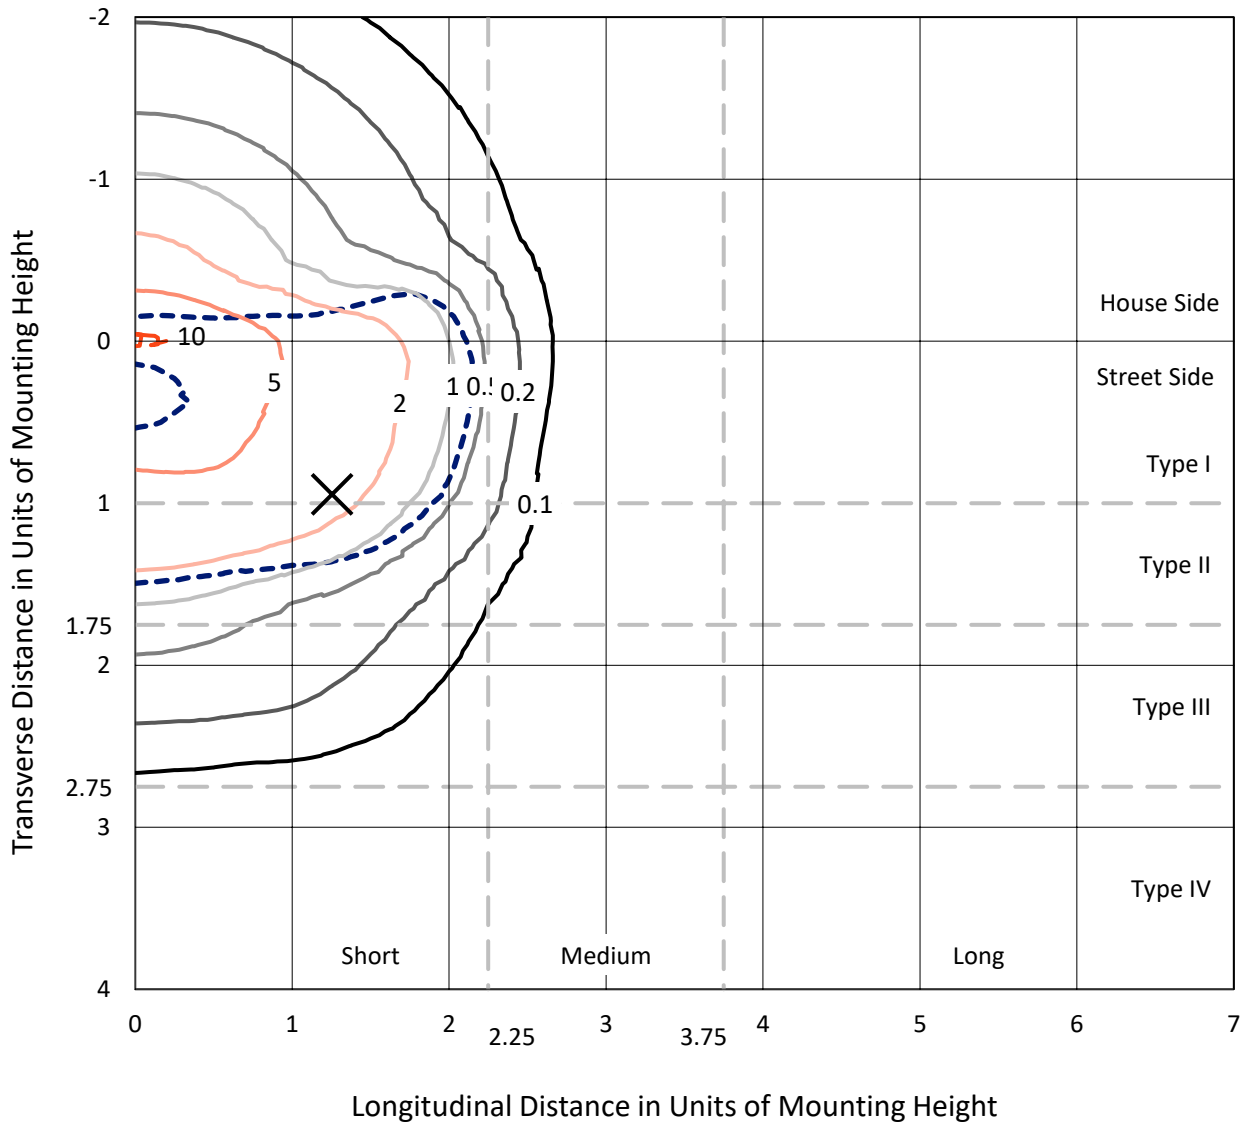

Based on 25 foot mounting height. Maximum calculated value = 10.4 fc
 Type II - Short - N/A

REPORT NUMBER: P640450
CATALOG NUMBER: GWS-SA5D-830-U-SL2-W-GRSWH

Luminous Intensity Polar Plot

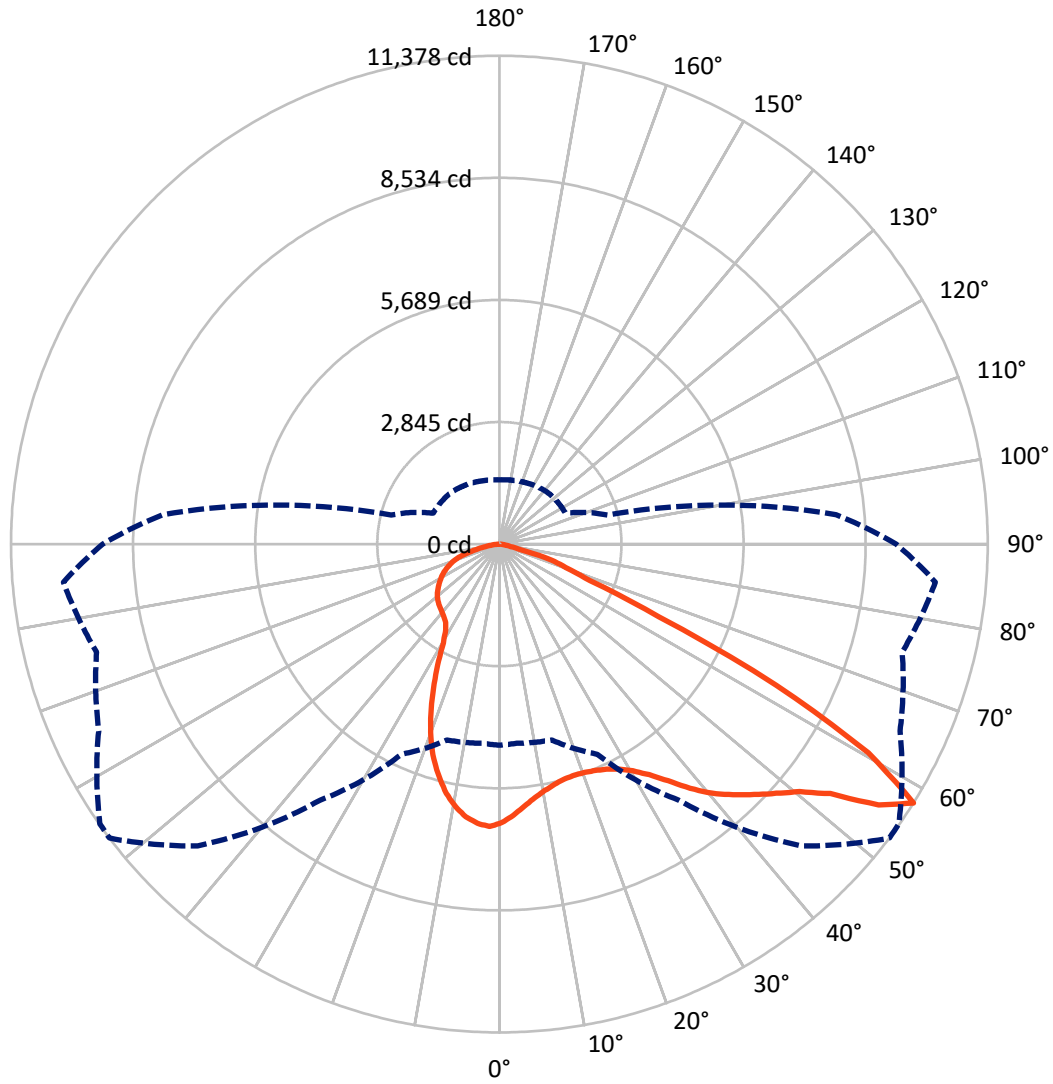

— Vertical Plane Through 53-Deg Lateral - - - Horizontal Cone Through 57.5-Deg Vertical

REPORT NUMBER: P640450

CATALOG NUMBER: GWS-SA5D-830-U-SL2-W-GRSWH

FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	6355.0	0.0	6355.0
	% Fixture	31.3	0.0	31.3
Street Side	Lumens	13970.5	0.0	13970.5
	% Fixture	68.7	0.0	68.7
Total	Lumens	20325.5	0.0	20325.5
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	586.9	2.9
10°-20°	1539.8	7.6
20°-30°	2268.7	11.2
30°-40°	3175.6	15.6
40°-50°	4174.6	20.5
50°-60°	4894.7	24.1
60°-70°	2883.5	14.2
70°-80°	717.3	3.5
80°-90°	84.2	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	20325.5	100.0
0°-180°	20325.5	100.0

Coefficient of Utilization



REPORT NUMBER: P640450


CATALOG NUMBER: GWS-SA5D-830-U-SL2-W-GRSWH

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	2471.2	12.2			
FM (30°-60°)	9093.8	44.7			
FH (60°-80°)	2377.3	11.7			G2/5000
FVH (80°-90°)	28.2	0.1			G1/100
BL (0°-30°)	1924.3	9.5	B3/2500		
BM (30°-60°)	3151.2	15.5	B3/5000		
BH (60°-80°)	1223.5	6.0	B3/2500		G3/2500
BVH (80°-90°)	56.0	0.3			G1/100
UL (90°-100°)	0.0	0.0		U0/0	
UH (100°-180°)	0.0	0.0		U0/0	

BUG Rating: B3-U0-G3

Type II Short

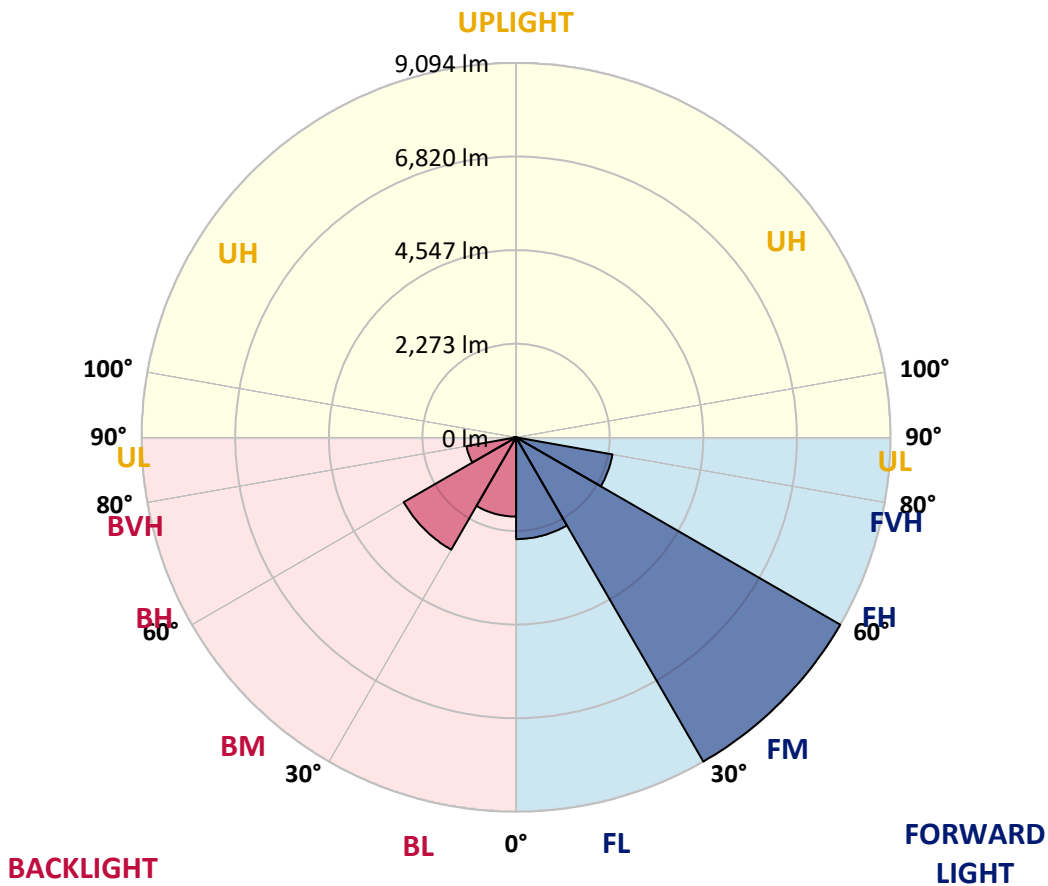



REPORT NUMBER: P640450

CATALOG NUMBER: GWS-SA5D-830-U-SL2-W-GRSWH

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	45°	53°	55°	65°	75°	85°
0°	6490.5	6490.5	6490.5	6490.5	6490.5	6490.5	6490.5	6490.5	6490.5	6490.5	6490.5
2.5°	6117.5	6134.7	6138.1	6191.1	6194.5	6271.5	6322.8	6312.6	6365.6	6430.6	6481.9
5°	5825.0	5826.7	5843.8	5907.1	5941.3	6042.3	6127.8	6127.8	6230.5	6363.9	6478.5
7.5°	5583.8	5582.1	5597.5	5667.6	5724.1	5845.5	5961.9	5975.6	6119.3	6314.3	6500.7
10°	5359.7	5371.7	5388.8	5474.3	5546.2	5696.7	5835.3	5857.5	6038.9	6280.1	6531.5
12.5°	5216.0	5217.7	5243.4	5339.2	5431.5	5592.4	5737.8	5765.1	5973.8	6247.6	6553.8
15°	5123.6	5125.3	5152.7	5258.8	5366.5	5529.1	5677.9	5708.7	5936.2	6242.4	6596.5
17.5°	5082.6	5080.8	5106.5	5212.6	5330.6	5500.0	5659.1	5696.7	5953.3	6281.8	6671.8
20°	5082.6	5084.3	5098.0	5193.8	5313.5	5493.1	5677.9	5724.1	6020.0	6370.7	6788.1
22.5°	5154.4	5161.2	5168.1	5233.1	5327.2	5503.4	5727.5	5789.1	6163.7	6519.6	6940.4
25°	5294.7	5296.4	5303.2	5356.3	5399.0	5532.5	5809.6	5902.0	6387.8	6736.8	7132.0
27.5°	5482.9	5506.8	5513.7	5547.9	5547.9	5604.3	5937.9	6071.4	6690.6	7049.9	7376.6
30°	5746.3	5754.9	5766.8	5804.5	5763.4	5739.5	6126.1	6297.2	7041.3	7428.0	7670.9
32.5°	5977.3	5996.1	6061.1	6122.7	6049.1	5973.8	6403.2	6605.1	7378.3	7821.4	7983.9
35°	6174.0	6220.2	6345.1	6481.9	6430.6	6355.3	6771.0	6981.5	7655.5	8103.7	8261.1
37.5°	6411.8	6447.7	6618.8	6841.2	6887.4	6851.4	7219.2	7369.8	7840.2	8175.5	8411.6
40°	6653.0	6707.7	6928.4	7236.4	7412.6	7438.2	7633.2	7734.2	7903.5	8035.3	8382.5
42.5°	6899.3	6993.4	7296.2	7655.5	7968.5	8026.7	7982.2	8025.0	7883.0	7842.0	8247.4
45°	7200.4	7311.6	7653.8	8112.2	8524.5	8615.2	8324.4	8285.0	7879.6	7768.4	8163.6
47.5°	7556.3	7667.5	7994.2	8528.0	9054.9	9121.6	8675.1	8603.2	7999.3	7881.3	8276.5
50°	7871.0	7948.0	8240.6	8837.6	9549.3	9588.6	9061.7	8974.5	8297.0	8194.4	8628.9
52.5°	7551.1	7542.6	7850.5	8586.1	9805.9	10279.7	9657.0	9573.2	8871.8	8714.4	9174.6
55°	6406.7	6309.1	6584.6	7308.2	9089.1	10893.9	10724.5	10556.9	9638.2	9237.9	9686.1
57.5°	4684.0	4656.6	4723.3	5402.5	7280.8	9942.7	11378.0	11362.6	10300.3	9716.9	10195.9
60°	3662.7	3621.6	3443.7	3462.5	4962.8	7766.7	9874.3	10327.6	10710.8	10004.3	10551.7
62.5°	3252.1	3221.3	3128.9	2874.0	2956.1	5207.4	7238.1	7653.8	9359.4	8835.9	9063.4
65°	2692.7	2684.1	2761.1	2750.8	2477.1	2875.7	4085.2	4504.3	5884.9	5958.4	5884.9
67.5°	1957.1	1941.7	2136.7	2521.6	2384.7	2170.9	2277.0	2422.4	3017.7	2709.8	2439.5
70°	1272.8	1250.5	1363.4	1821.9	2135.0	1892.1	1640.6	1616.6	1659.4	1031.6	1115.4
72.5°	853.7	828.0	826.3	1002.5	1289.9	1274.5	1271.1	1259.1	1123.9	814.3	903.3
75°	475.6	455.1	449.9	432.8	461.9	470.4	501.2	518.3	561.1	617.6	684.3
77.5°	80.4	78.7	99.2	126.6	174.5	224.1	277.1	292.5	361.0	427.7	470.4
80°	44.5	46.2	59.9	73.6	97.5	133.4	171.1	181.3	222.4	258.3	292.5
82.5°	24.0	24.0	30.8	39.3	53.0	70.1	92.4	100.9	128.3	150.5	174.5
85°	8.6	8.6	12.0	15.4	22.2	29.1	35.9	41.1	56.5	77.0	87.2
87.5°	0.0	0.0	0.0	0.0	1.7	3.4	6.8	6.8	8.6	15.4	22.2
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P640450

CATALOG NUMBER: GWS-SA5D-830-U-SL2-W-GRSWH

CANDELA DISTRIBUTION (continued):

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	6490.5	6490.5	6490.5	6490.5	6490.5	6490.5	6490.5	6490.5	6490.5	6490.5	6490.5
2.5°	6524.7	6478.5	6541.8	6570.9	6581.1	6588.0	6543.5	6512.7	6502.5	6470.0	6451.1
5°	6548.6	6517.9	6577.7	6577.7	6535.0	6490.5	6399.8	6336.5	6292.0	6239.0	6230.5
7.5°	6589.7	6567.5	6600.0	6533.2	6425.5	6305.7	6148.3	6025.2	5925.9	5860.9	5862.6
10°	6644.4	6617.1	6591.4	6442.6	6245.8	6025.2	5784.0	5604.3	5440.1	5364.8	5323.8
12.5°	6680.4	6641.0	6533.2	6286.9	5997.8	5701.8	5361.4	5094.5	4856.7	4749.0	4740.4
15°	6724.9	6653.0	6437.4	6085.0	5683.0	5279.3	4841.3	4470.1	4148.5	3980.9	3972.3
17.5°	6783.0	6665.0	6322.8	5854.1	5351.1	4755.8	4205.0	3737.9	3395.8	3265.8	3288.0
20°	6865.1	6678.7	6192.8	5597.5	4938.9	4160.5	3474.5	3045.1	2913.4	2904.8	2887.7
22.5°	6957.5	6687.2	6049.1	5310.1	4439.3	3525.8	2870.6	2687.5	2685.8	2728.6	2738.9
25°	7061.9	6694.1	5886.6	4974.8	3898.7	2892.8	2538.7	2484.0	2526.7	2607.1	2617.4
27.5°	7195.3	6707.7	5689.9	4607.0	3323.9	2499.4	2355.7	2342.0	2393.3	2468.6	2465.2
30°	7392.0	6757.4	5481.2	4184.4	2733.7	2312.9	2244.5	2246.2	2266.7	2302.6	2307.8
32.5°	7592.2	6834.3	5277.6	3708.8	2395.0	2206.8	2176.0	2172.6	2172.6	2188.0	2191.4
35°	7782.1	6921.6	5056.9	3212.7	2230.8	2145.2	2124.7	2114.5	2109.3	2105.9	2100.8
37.5°	7888.1	6964.4	4841.3	2723.5	2143.5	2104.2	2083.7	2070.0	2051.2	2037.5	2034.0
40°	7842.0	6914.7	4591.6	2357.4	2090.5	2064.8	2040.9	2022.1	1996.4	1984.4	1977.6
42.5°	7688.0	6760.8	4319.6	2184.6	2047.7	2022.1	1993.0	1962.2	1945.1	1934.8	1933.1
45°	7525.5	6574.3	3991.1	2083.7	2006.7	1975.9	1941.7	1907.5	1888.6	1883.5	1881.8
47.5°	7520.3	6481.9	3642.1	2003.3	1957.1	1926.3	1883.5	1849.3	1828.8	1821.9	1815.1
50°	7746.2	6576.0	3248.7	1933.1	1905.7	1873.2	1825.3	1787.7	1762.0	1753.5	1751.8
52.5°	8214.9	6930.1	2896.3	1863.0	1837.3	1799.7	1760.3	1722.7	1691.9	1676.5	1674.8
55°	8721.3	7380.1	2677.3	1791.1	1756.9	1724.4	1688.5	1647.4	1613.2	1589.3	1585.8
57.5°	9244.7	7871.0	2610.6	1700.5	1674.8	1652.6	1609.8	1565.3	1526.0	1503.7	1498.6
60°	9675.8	8293.6	2735.4	1604.7	1591.0	1561.9	1522.5	1479.8	1452.4	1435.3	1431.9
62.5°	8100.3	6752.2	2208.5	1500.3	1500.3	1469.5	1425.0	1394.2	1375.4	1363.4	1360.0
65°	5140.7	4181.0	1507.1	1395.9	1394.2	1353.2	1315.5	1295.0	1286.5	1267.6	1264.2
67.5°	2239.3	1910.9	1288.2	1289.9	1283.0	1238.6	1200.9	1185.5	1168.4	1147.9	1146.2
70°	1161.6	1183.8	1153.0	1171.8	1159.9	1106.8	1070.9	1047.0	1011.0	990.5	992.2
72.5°	937.5	961.4	995.6	1024.7	999.1	956.3	899.8	870.8	824.6	802.3	804.0
75°	715.1	740.7	773.2	804.0	783.5	730.5	694.6	665.5	612.4	586.8	591.9
77.5°	492.7	506.4	545.7	544.0	537.2	521.8	468.7	434.5	379.8	349.0	352.4
80°	306.2	314.8	333.6	342.1	338.7	318.2	275.4	249.8	217.3	198.4	200.2
82.5°	184.8	189.9	207.0	208.7	207.0	191.6	159.1	140.3	119.8	109.5	109.5
85°	94.1	97.5	107.8	107.8	97.5	82.1	73.6	65.0	53.0	47.9	47.9
87.5°	25.7	25.7	32.5	27.4	22.2	20.5	10.3	8.6	3.4	1.7	1.7
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)