

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: McGRAW-EDISON

Report Number: P640454

Luminaire Tested: GWS-SA5D-830-U-SL3-W-GRSWH

Issue Date: 1/10/2023

Test Information

Test Method: LM-79-2019
Report Number: P640454
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2209-782-33)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/10/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: McGRAW-EDISON
Catalog Number: GWS-SA5D-830-U-SL3-W-GRSWH
Description: GALLEON WALL SLIM LUMINAIRE. (5) LIGHTSQUARES WITH 16 LEDS EACH AND TYPE III SPILL LIGHT ELIMINATOR OPTICS W/ FACTORY INSTALLED GLARE SHIELD, WH
Light Source: (80) 3000K CCT, 80 CRI LEDS
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 19985 lumens
Efficiency: N/A
Efficacy: 97.7 lumens/watt
Luminous Opening: Rectangular (W 1.5' x L: 1' x H: 0')
IES Classification: Type II - Short
BUG Rating: B3 - U0 - G3


Input Watts (W): 204.6
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 0
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 28.75 FT



REPORT NUMBER: P640454
 CATALOG NUMBER: GWS-SA5D-830-U-SL3-W-GRSWH

Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd
 - - - 1/2 Max cd

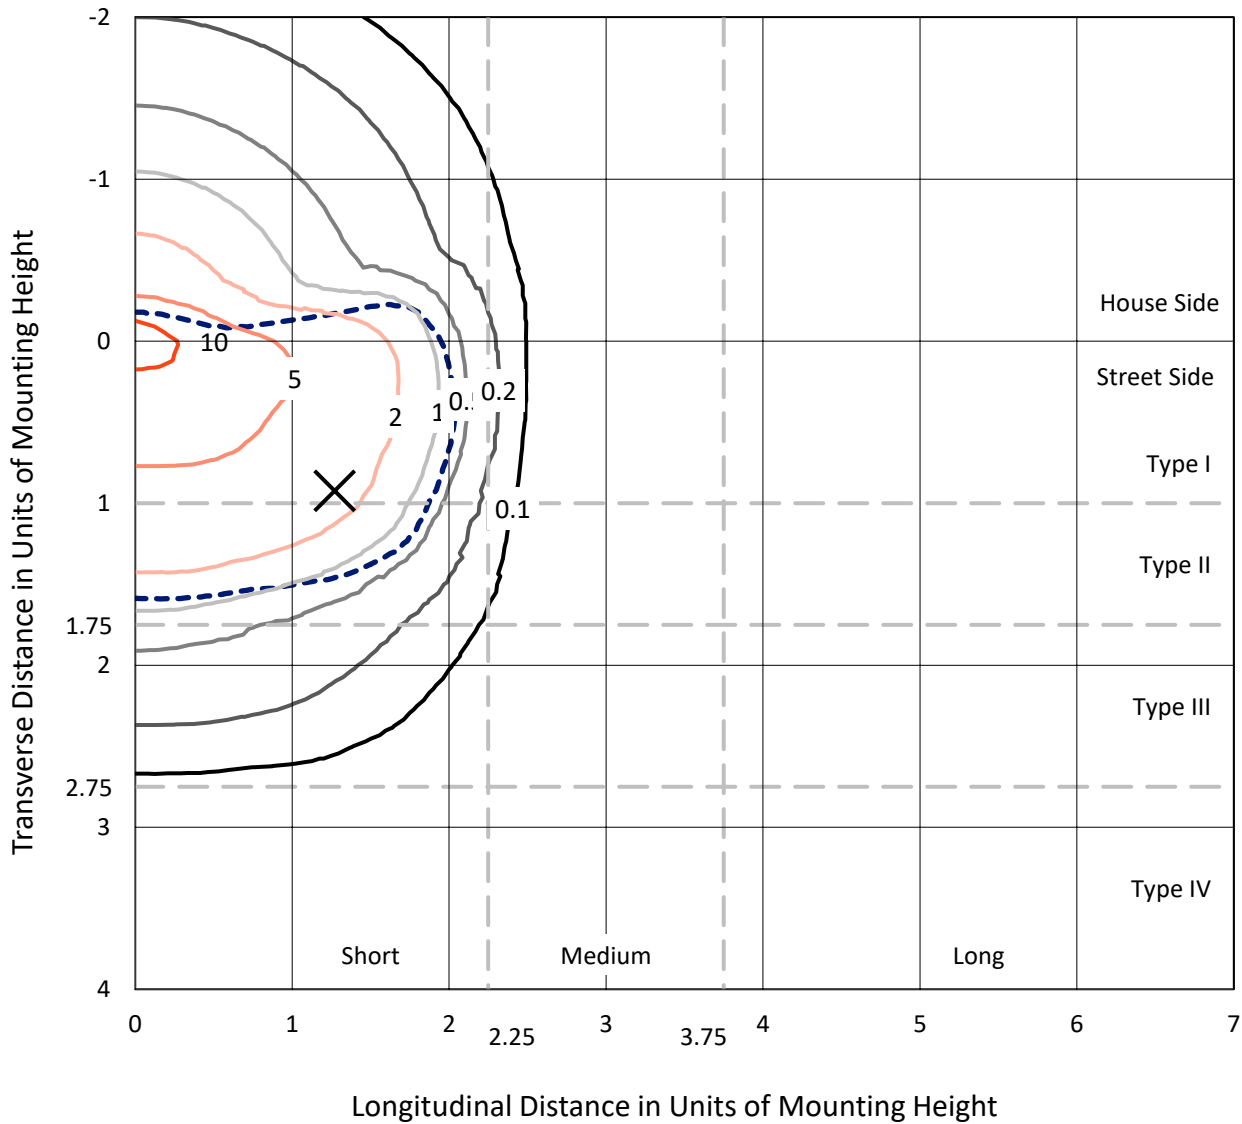

Based on 25 foot mounting height. Maximum calculated value = 12.3 fc
 Type II - Short - N/A

REPORT NUMBER: P640454
CATALOG NUMBER: GWS-SA5D-830-U-SL3-W-GRSWH

Luminous Intensity Polar Plot

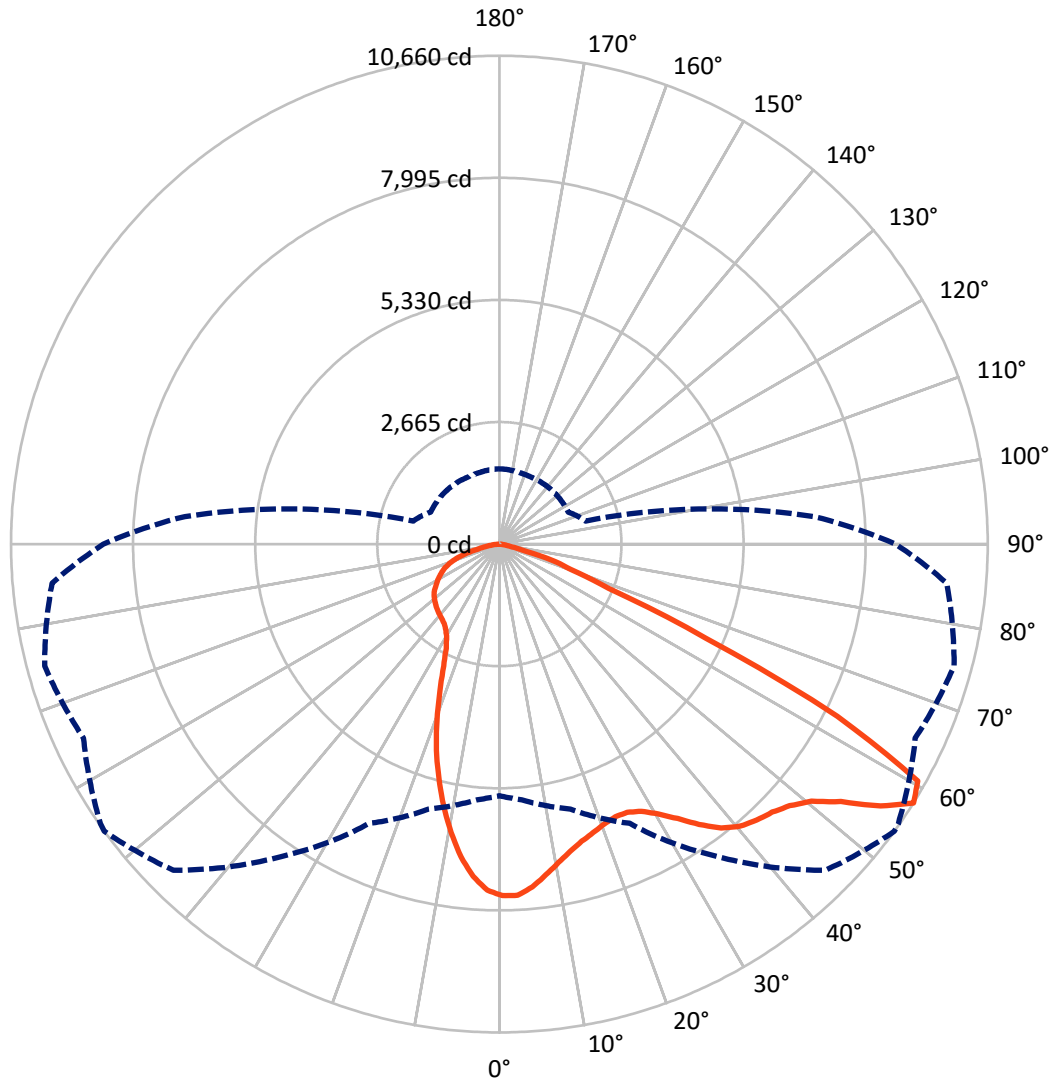

— Vertical Plane Through 54-Deg Lateral - - - Horizontal Cone Through 57.5-Deg Vertical

REPORT NUMBER: P640454

CATALOG NUMBER: GWS-SA5D-830-U-SL3-W-GRSWH

FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	5809.9	0.0	5809.9
	% Fixture	29.1	0.0	29.1
Street Side	Lumens	14175.1	0.0	14175.1
	% Fixture	70.9	0.0	70.9
Total	Lumens	19985.0	0.0	19985.0
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	674.4	3.4
10°-20°	1609.3	8.1
20°-30°	2227.0	11.1
30°-40°	3094.4	15.5
40°-50°	4086.7	20.4
50°-60°	4856.5	24.3
60°-70°	2690.6	13.5
70°-80°	670.0	3.4
80°-90°	76.2	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	19985.0	100.0
0°-180°	19985.0	100.0

Coefficient of Utilization



REPORT NUMBER: P640454


CATALOG NUMBER: GWS-SA5D-830-U-SL3-W-GRSWH

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	2720.3	13.6			
FM (30°-60°)	9171.4	45.9			
FH (60°-80°)	2259.6	11.3			G2/5000
FVH (80°-90°)	23.8	0.1			G1/100
BL (0°-30°)	1790.4	9.0	B3/2500		
BM (30°-60°)	2866.2	14.3	B3/5000		
BH (60°-80°)	1101.0	5.5	B3/2500		G3/2500
BVH (80°-90°)	52.4	0.3			G1/100
UL (90°-100°)	0.0	0.0		U0/0	
UH (100°-180°)	0.0	0.0		U0/0	

BUG Rating: B3-U0-G3

Type II Short

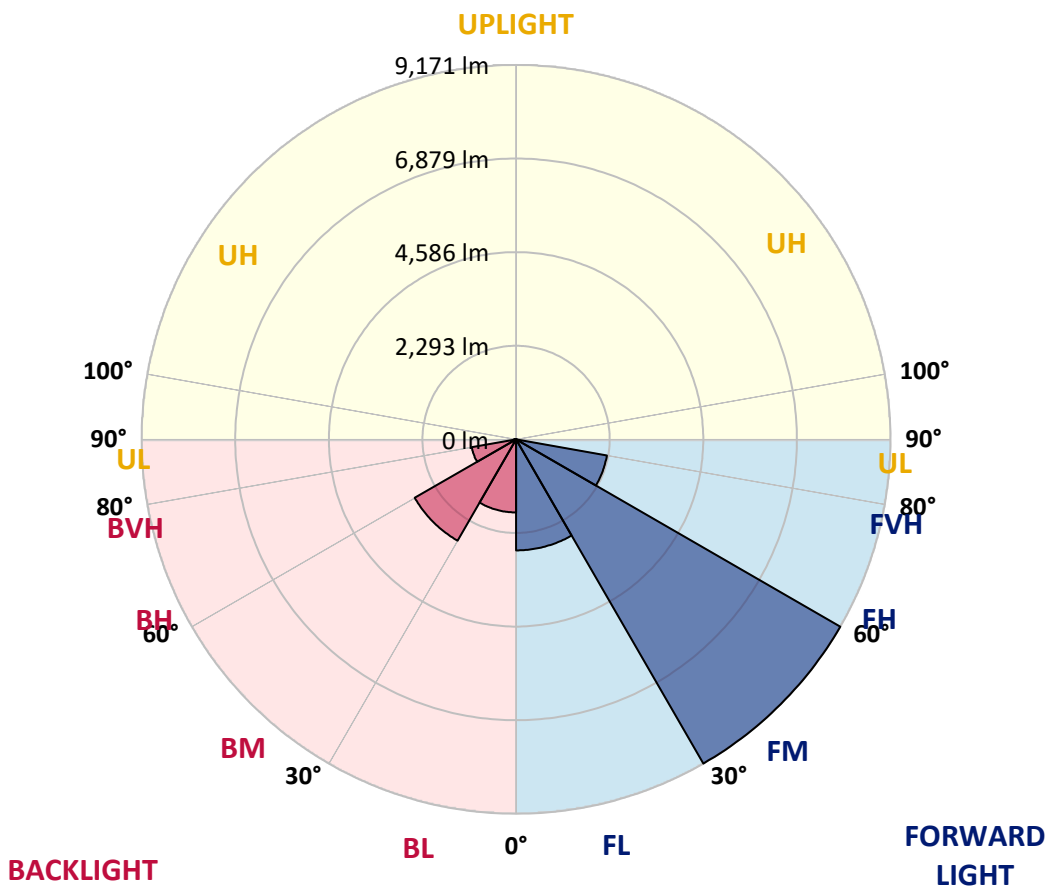



REPORT NUMBER: P640454

CATALOG NUMBER: GWS-SA5D-830-U-SL3-W-GRSWH

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	45°	54°	55°	65°	75°	85°
0°	7672.7	7672.7	7672.7	7672.7	7672.7	7672.7	7672.7	7672.7	7672.7	7672.7	7672.7
2.5°	7529.0	7544.4	7554.7	7590.6	7621.4	7648.7	7677.8	7677.8	7676.1	7671.0	7660.7
5°	7231.3	7248.4	7272.4	7322.0	7388.7	7436.6	7515.3	7522.1	7556.4	7570.1	7563.2
7.5°	6885.8	6890.9	6921.7	6986.7	7092.8	7178.3	7291.2	7304.9	7387.0	7434.9	7426.3
10°	6507.7	6490.6	6545.3	6641.1	6779.7	6923.4	7068.8	7080.8	7212.5	7303.2	7296.3
12.5°	6162.1	6163.8	6218.6	6334.9	6507.7	6685.6	6880.6	6908.0	7070.5	7186.8	7174.9
15°	5873.0	5879.8	5946.6	6078.3	6275.0	6487.1	6730.1	6755.7	6961.0	7115.0	7080.8
17.5°	5642.0	5648.9	5707.0	5857.6	6068.0	6324.6	6620.6	6646.2	6901.1	7084.2	7014.1
20°	5482.9	5479.5	5536.0	5679.7	5896.9	6175.8	6524.8	6562.4	6882.3	7096.2	6969.6
22.5°	5417.9	5416.2	5457.3	5575.3	5778.9	6061.2	6466.6	6517.9	6902.9	7149.2	6942.2
25°	5450.4	5443.6	5479.5	5566.8	5729.3	6016.7	6483.7	6538.5	6990.1	7258.7	6947.3
27.5°	5551.4	5542.8	5573.6	5652.3	5775.5	6062.9	6603.5	6666.8	7174.9	7458.9	7015.8
30°	5705.3	5700.2	5731.0	5806.3	5914.0	6216.9	6832.7	6904.6	7460.6	7770.2	7164.6
32.5°	5885.0	5876.4	5931.2	6018.4	6143.3	6497.4	7140.7	7234.7	7799.3	8170.5	7414.4
35°	6086.8	6080.0	6155.3	6281.9	6461.5	6887.5	7513.6	7616.2	8144.9	8623.9	7746.3
37.5°	6283.6	6283.6	6429.0	6617.2	6843.0	7311.7	7864.3	7929.3	8384.4	9025.9	8102.1
40°	6458.1	6468.3	6687.3	6969.6	7257.0	7694.9	8095.2	8150.0	8490.4	9303.0	8411.7
42.5°	6651.4	6659.9	6914.8	7284.4	7626.5	8004.6	8235.5	8262.9	8511.0	9441.6	8630.7
45°	6805.3	6817.3	7133.8	7529.0	7948.1	8237.2	8346.7	8370.7	8540.0	9516.9	8789.8
47.5°	6885.8	6902.9	7265.5	7725.7	8165.4	8446.0	8529.8	8540.0	8659.8	9648.6	8981.4
50°	6872.1	6906.3	7315.1	7823.2	8326.2	8656.4	8824.0	8841.1	8904.4	9841.9	9205.5
52.5°	6993.5	7008.9	7421.2	7939.6	8555.4	9044.7	9335.5	9359.5	9330.4	9987.3	9339.0
55°	6791.7	6865.2	7289.5	7922.5	8904.4	9645.2	10093.4	10081.4	9717.0	10149.9	9561.4
57.5°	5493.2	5601.0	5989.3	6724.9	8329.6	10066.0	10659.7	10630.6	10016.4	10274.7	9802.6
60°	3803.0	3820.1	4170.8	4692.6	6429.0	8892.5	10493.7	10557.0	10071.2	10117.4	9356.1
62.5°	3041.7	3036.6	3069.1	3082.8	4088.7	6251.1	8283.4	8514.4	8367.3	7883.1	6630.9
65°	2596.9	2615.7	2711.5	2661.9	2668.8	3520.7	4949.2	4981.7	4879.0	4704.6	3507.0
67.5°	2032.4	2064.9	2234.2	2427.5	2366.0	2266.7	2567.8	2552.4	2011.8	1556.8	1286.5
70°	1272.8	1293.3	1474.7	1905.8	2059.7	1861.3	1650.9	1644.0	1077.8	886.2	971.7
72.5°	742.5	745.9	797.2	1062.4	1366.9	1272.8	1214.6	1170.2	692.9	706.5	775.0
75°	408.9	408.9	407.2	458.5	538.9	477.3	461.9	449.9	463.6	525.2	576.5
77.5°	85.5	87.2	92.4	121.5	157.4	191.6	241.2	242.9	302.8	350.7	391.8
80°	39.3	41.1	51.3	65.0	83.8	111.2	147.1	148.8	183.0	220.7	248.1
82.5°	20.5	22.2	27.4	34.2	44.5	58.2	82.1	82.1	109.5	130.0	147.1
85°	6.8	6.8	10.3	13.7	18.8	24.0	32.5	32.5	47.9	63.3	73.6
87.5°	0.0	0.0	0.0	0.0	1.7	3.4	6.8	6.8	8.6	10.3	17.1
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P640454

CATALOG NUMBER: GWS-SA5D-830-U-SL3-W-GRSWH

CANDELA DISTRIBUTION (continued):

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	7672.7	7672.7	7672.7	7672.7	7672.7	7672.7	7672.7	7672.7	7672.7	7672.7	7672.7
2.5°	7638.5	7585.4	7587.2	7597.4	7564.9	7515.3	7482.8	7441.7	7416.1	7411.0	7429.8
5°	7529.0	7467.4	7424.6	7380.2	7287.8	7178.3	7092.8	7022.6	6976.4	6959.3	6938.8
7.5°	7378.4	7298.0	7190.3	7065.4	6897.7	6702.7	6565.8	6437.5	6348.6	6322.9	6310.9
10°	7227.9	7111.6	6920.0	6687.3	6408.5	6145.0	5896.9	5707.0	5556.5	5471.0	5498.3
12.5°	7072.2	6928.5	6629.1	6271.6	5883.3	5486.4	5161.3	4846.5	4603.6	4482.2	4446.2
15°	6935.4	6740.3	6322.9	5838.8	5322.1	4822.6	4352.1	3880.0	3572.0	3404.4	3358.2
17.5°	6819.0	6565.8	5999.6	5397.4	4779.8	4068.2	3489.9	3052.0	2841.5	2749.2	2742.3
20°	6704.4	6394.8	5679.7	4921.8	4153.7	3356.5	2839.8	2634.5	2559.3	2526.8	2525.1
22.5°	6601.8	6215.1	5342.7	4446.2	3531.0	2821.0	2537.0	2448.1	2427.5	2427.5	2424.1
25°	6514.5	6035.5	4997.1	3941.6	2968.1	2511.4	2379.6	2342.0	2350.6	2366.0	2367.7
27.5°	6478.6	5895.2	4663.5	3423.2	2579.8	2331.7	2271.9	2266.7	2290.7	2314.6	2318.1
30°	6516.2	5799.4	4321.3	2927.1	2347.1	2222.3	2194.9	2205.2	2234.2	2258.2	2258.2
32.5°	6632.6	5751.5	3972.4	2564.4	2212.0	2145.3	2136.7	2147.0	2169.2	2182.9	2184.6
35°	6829.3	5770.3	3611.4	2319.8	2124.7	2088.8	2087.1	2094.0	2102.5	2111.1	2112.8
37.5°	7077.4	5854.2	3224.8	2177.8	2068.3	2047.8	2044.3	2042.6	2044.3	2044.3	2046.1
40°	7320.3	5980.8	2879.2	2094.0	2028.9	2011.8	2003.3	1991.3	1989.6	1986.2	1984.5
42.5°	7499.9	6078.3	2603.8	2034.1	1993.0	1972.5	1962.2	1943.4	1941.7	1940.0	1938.3
45°	7635.1	6160.4	2374.5	1975.9	1955.4	1936.6	1914.3	1897.2	1900.6	1904.1	1904.1
47.5°	7787.3	6232.2	2206.9	1921.2	1909.2	1890.4	1863.0	1851.0	1863.0	1875.0	1875.0
50°	7972.1	6333.2	2070.0	1866.4	1861.3	1839.1	1815.1	1810.0	1823.7	1840.8	1840.8
52.5°	8107.2	6420.4	1972.5	1811.7	1811.7	1782.6	1762.1	1760.4	1775.8	1792.9	1794.6
55°	8360.4	6624.0	1938.3	1748.4	1741.5	1719.3	1703.9	1691.9	1710.7	1726.1	1726.1
57.5°	8646.1	6894.3	1946.8	1657.7	1649.2	1642.3	1630.3	1616.7	1621.8	1638.9	1640.6
60°	8040.5	6370.8	1852.7	1567.0	1561.9	1558.5	1543.1	1519.1	1526.0	1539.7	1541.4
62.5°	5616.4	4234.1	1498.6	1454.1	1471.2	1469.5	1449.0	1421.6	1423.3	1442.2	1442.2
65°	2915.1	2290.7	1315.6	1351.5	1377.2	1366.9	1332.7	1308.7	1305.3	1329.2	1324.1
67.5°	1257.4	1250.6	1197.5	1243.7	1271.1	1248.8	1212.9	1173.6	1177.0	1185.5	1178.7
70°	1012.8	1043.6	1065.8	1115.4	1137.6	1096.6	1057.2	1035.0	1016.2	1014.5	1002.5
72.5°	809.2	852.0	901.6	952.9	959.7	918.7	869.1	848.5	819.4	817.7	805.8
75°	609.0	645.0	684.3	725.4	725.4	686.0	653.5	643.2	609.0	598.8	588.5
77.5°	415.7	438.0	468.7	479.0	489.3	473.9	441.4	424.3	384.9	374.7	361.0
80°	261.7	277.1	296.0	302.8	313.1	294.2	268.6	249.8	222.4	213.8	207.0
82.5°	157.4	167.7	179.6	183.0	191.6	177.9	154.0	140.3	124.9	118.0	112.9
85°	80.4	85.5	92.4	94.1	92.4	78.7	70.1	63.3	53.0	51.3	47.9
87.5°	20.5	24.0	25.7	24.0	22.2	17.1	12.0	8.6	3.4	3.4	1.7
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)