

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: McGRAW-EDISON

Report Number: P642940

Luminaire Tested: GWS-SA6D-830-U-SLR-W-HSS

Issue Date: 1/10/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P642940  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2209-782-44)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/10/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: McGRAW-EDISON  
Catalog Number: GWS-SA6D-830-U-SLR-W-HSS  
Description: GALLEON WALL SLIM LUMINAIRE. (6) LIGHTSQUARES WITH 16 LEDS EACH AND  
SPILL LIGHT ELIMINATOR RIGHT OPTICS WITH HOUSE SIDE SHIELD  
Light Source: (96) 3000K CCT, 80 CRI LEDS  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 17659.9 lumens  
Efficiency: N/A  
Efficacy: 71.9 lumens/watt  
Luminous Opening: Rectangular (W 2' x L: 1' x H: 0')  
IES Classification: Type IV - Short  
BUG Rating: B2 - U0 - G4  
  
Input Watts (W): 245.7  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 0  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 28.75 FT



REPORT NUMBER: P642940  
 CATALOG NUMBER: GWS-SA6D-830-U-SLR-W-HSS

### Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd  
 - - - 1/2 Max cd

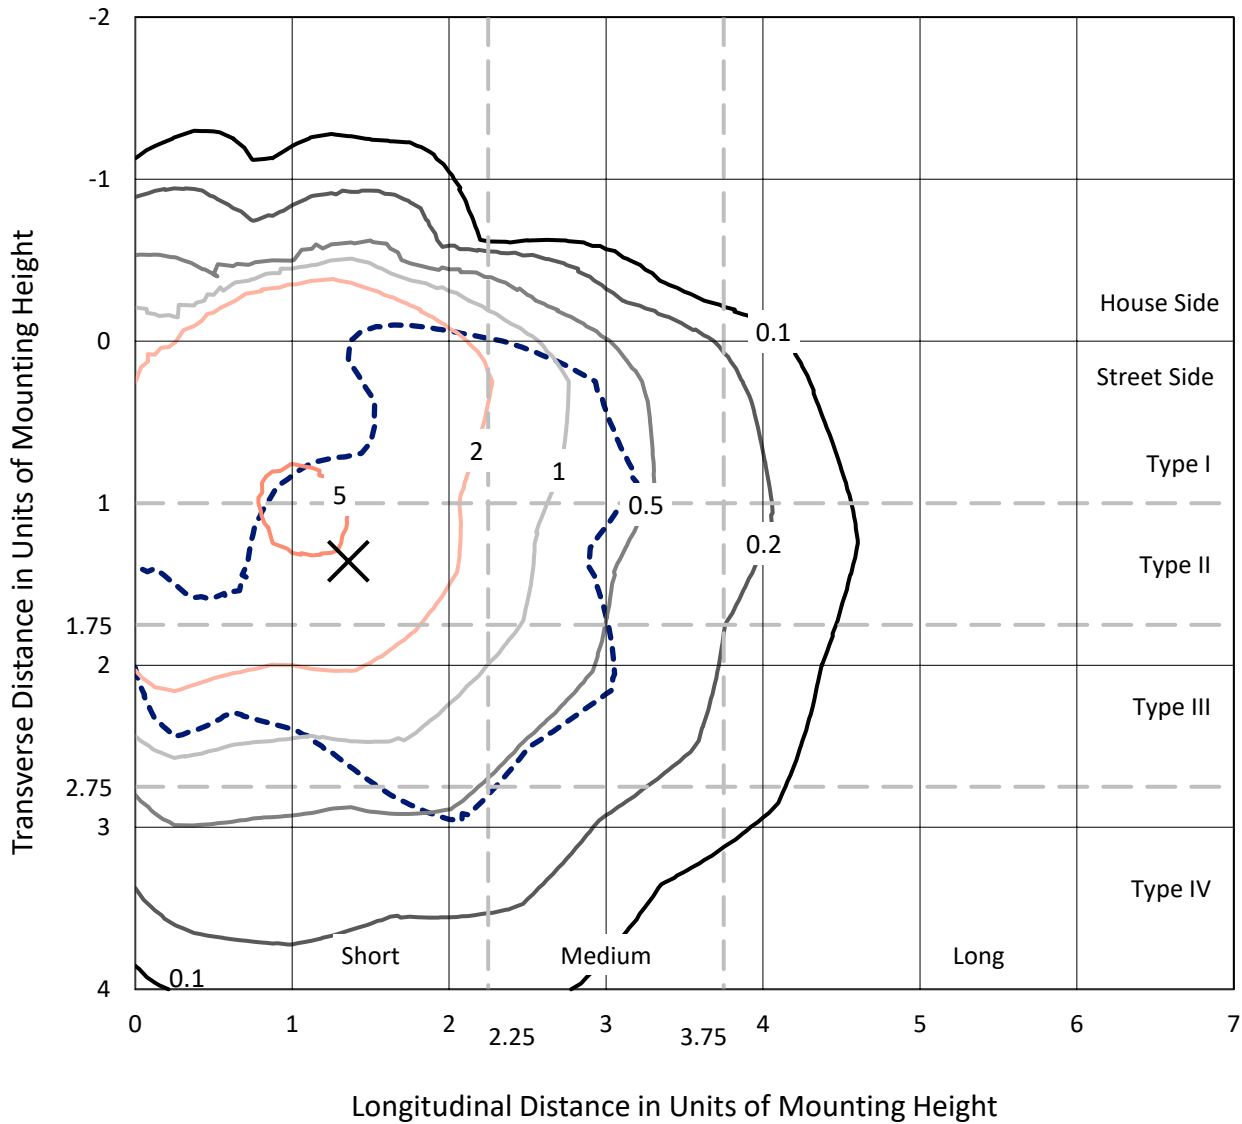

Based on 25 foot mounting height. Maximum calculated value = 5.7 fc  
 Type IV - Short - N/A

REPORT NUMBER: P642940  
CATALOG NUMBER: GWS-SA6D-830-U-SLR-W-HSS

### Luminous Intensity Polar Plot

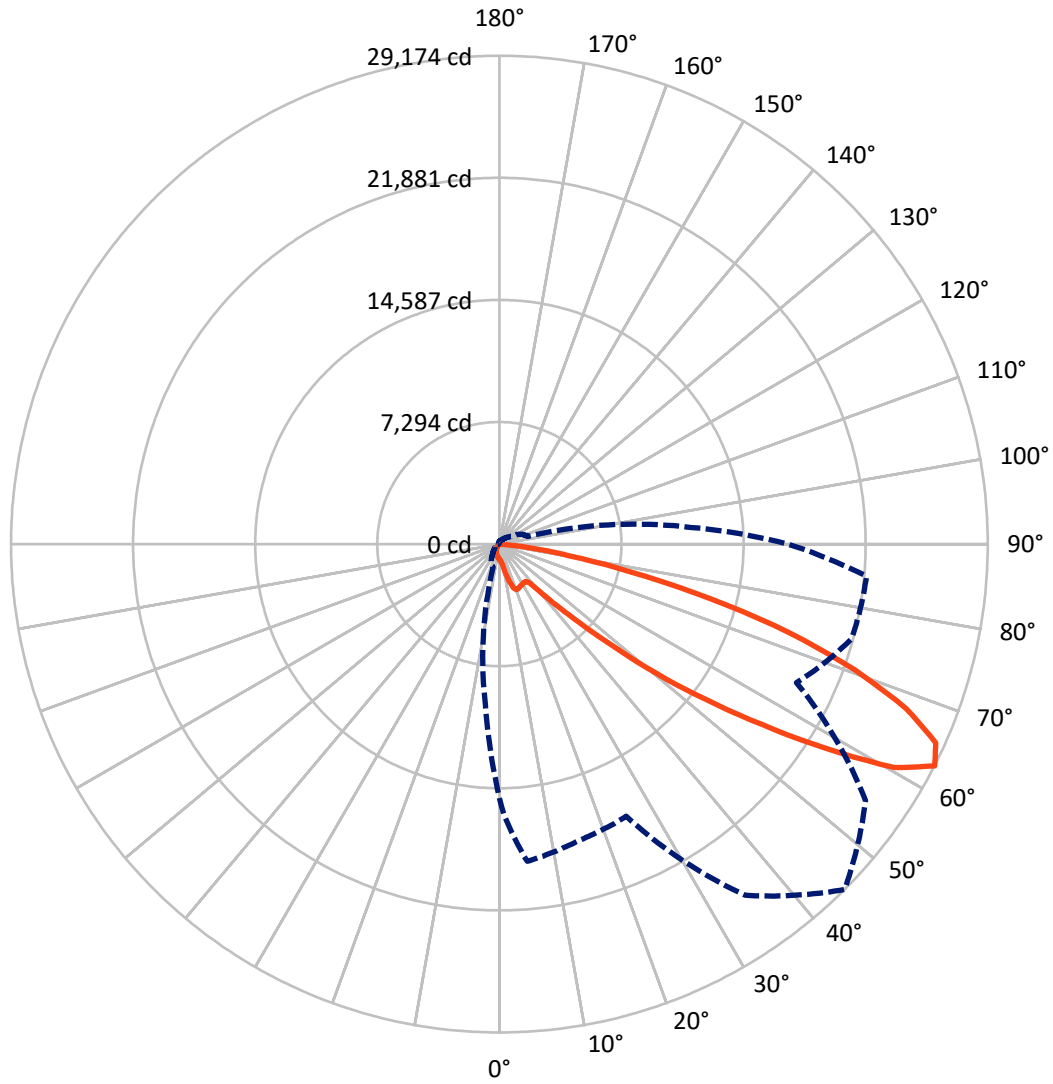

— Vertical Plane Through 45-Deg Lateral    - - - Horizontal Cone Through 62.5-Deg Vertical

REPORT NUMBER: P642940  
 CATALOG NUMBER: GWS-SA6D-830-U-SLR-W-HSS


**FLUX DISTRIBUTION:**

		Downward	Upward	Total
<b>House Side</b>	Lumens	2179.2	0.0	2179.2
	% Fixture	12.3	0.0	12.3
<b>Street Side</b>	Lumens	15480.7	0.0	15480.7
	% Fixture	87.7	0.0	87.7
<b>Total</b>	Lumens	17659.9	0.0	17659.9
	% Fixture	100.0	0.0	100.0

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	81.4	0.5
10°-20°	307.9	1.7
20°-30°	669.3	3.8
30°-40°	1098.6	6.2
40°-50°	2019.5	11.4
50°-60°	4337.0	24.6
60°-70°	5825.3	33.0
70°-80°	3033.3	17.2
80°-90°	287.6	1.6
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	17659.9	100.0
0°-180°	17659.9	100.0

**Coefficient of Utilization**

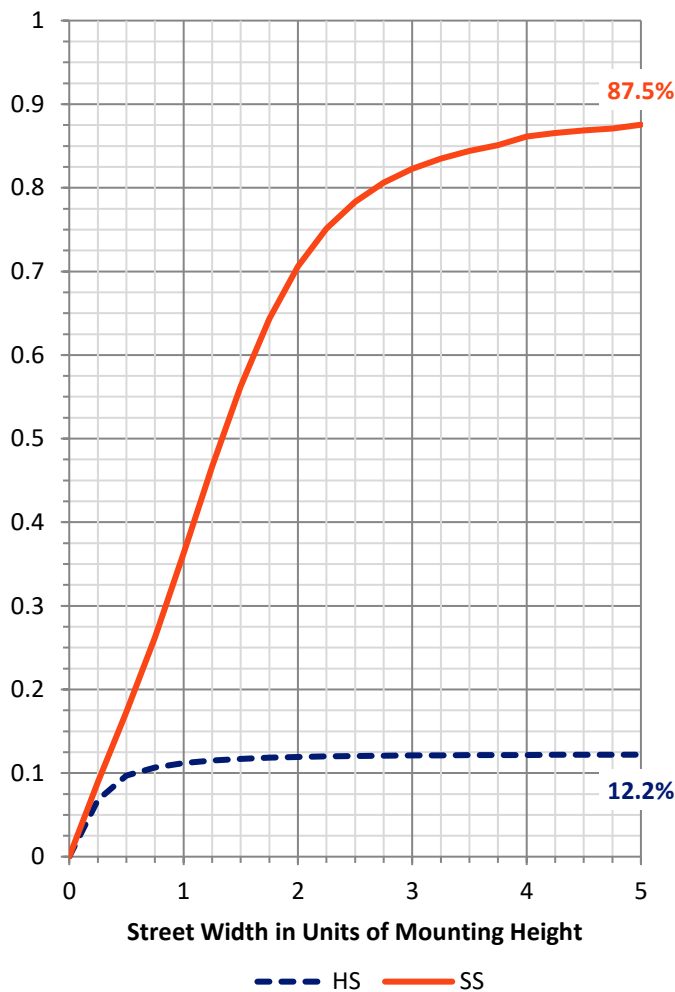

REPORT NUMBER: P642940


CATALOG NUMBER: GWS-SA6D-830-U-SLR-W-HSS

**LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:**

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	746.0	4.2			
FM (30°-60°)	6198.4	35.1			
FH (60°-80°)	8261.4	46.8			G4/12000
FVH (80°-90°)	274.8	1.6			G3/500
BL (0°-30°)	312.6	1.8	B1/500		
BM (30°-60°)	1256.7	7.1	B2/2500		
BH (60°-80°)	597.1	3.4	B2/1000		G2/1000
BVH (80°-90°)	12.8	0.1			G1/100
UL (90°-100°)	0.0	0.0		U0/0	
UH (100°-180°)	0.0	0.0		U0/0	

**BUG Rating: B2-U0-G4**

Type IV Short

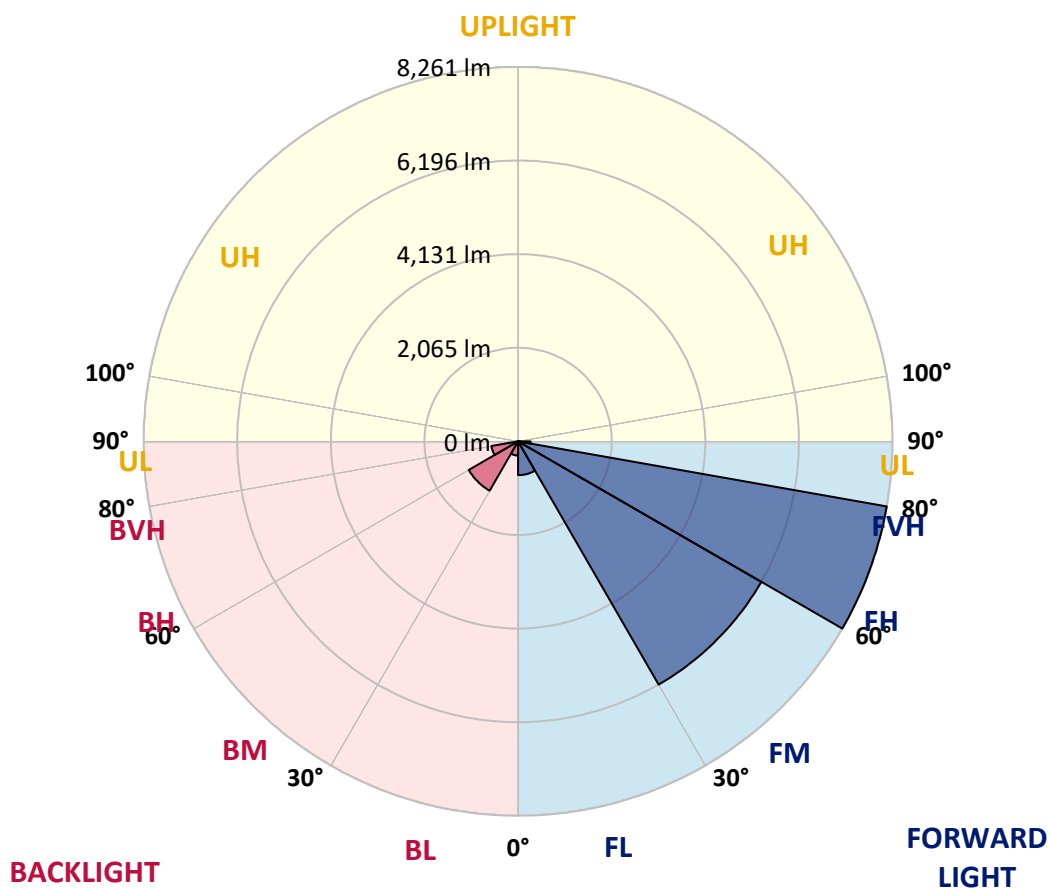



REPORT NUMBER: P642940

CATALOG NUMBER: GWS-SA6D-830-U-SLR-W-HSS

**CANDELA DISTRIBUTION (FULL):**

	0°	1°	5°	15°	25°	35°	45°	55°	65°	75°	85°
0°	917.9	917.9	917.9	917.9	917.9	917.9	917.9	917.9	917.9	917.9	917.9
2.5°	936.3	940.4	944.5	958.7	968.9	977.1	979.1	973.0	958.7	944.5	924.1
5°	907.7	911.8	926.1	964.9	1003.6	1034.2	1044.4	1038.3	1003.6	958.7	911.8
7.5°	905.7	913.9	948.5	1030.1	1113.8	1177.0	1193.3	1179.0	1113.8	1024.0	928.1
10°	979.1	993.4	1044.4	1191.3	1344.3	1456.5	1501.4	1440.2	1336.1	1172.9	1015.9
12.5°	1170.9	1195.4	1293.3	1507.5	1744.1	1893.0	1954.2	1878.7	1715.5	1478.9	1230.0
15°	1472.8	1509.5	1656.4	1976.6	2256.1	2388.7	2409.1	2366.3	2176.5	1915.4	1580.9
17.5°	1899.1	1952.2	2180.6	2507.0	2709.0	2755.9	2749.8	2704.9	2566.2	2386.7	2070.5
20°	2409.1	2472.3	2696.7	2966.0	2986.4	2931.3	2900.7	2874.2	2827.3	2796.7	2549.8
22.5°	2923.1	3000.7	3235.2	3302.6	3119.0	2959.9	2884.4	2904.8	2974.1	3125.1	3025.1
25°	3435.2	3508.6	3728.9	3547.3	3180.2	2915.0	2819.1	2868.1	3033.3	3359.7	3488.2
27.5°	4032.8	4087.9	4218.5	3714.6	3190.4	2878.3	2784.4	2859.9	3061.9	3506.6	3996.1
30°	4655.0	4687.6	4624.4	3759.5	3155.7	2823.2	2749.8	2859.9	3110.8	3604.5	4377.6
32.5°	5111.9	5118.1	4912.0	3763.6	3137.3	2778.3	2717.1	2847.7	3157.7	3686.1	4746.8
35°	5583.1	5552.5	5187.4	3824.8	3186.3	2794.6	2741.6	2882.3	3231.2	3781.9	5071.1
37.5°	6060.5	6005.4	5495.4	3924.7	3312.8	2972.1	2939.5	3059.8	3349.5	3914.5	5428.1
40°	6550.0	6474.6	5815.7	4075.7	3594.3	3575.9	3688.1	3673.8	3673.8	4083.8	5795.3
42.5°	7147.7	7060.0	6288.9	4502.0	4251.1	4661.1	4967.1	4777.4	4426.5	4473.5	6272.6
45°	7937.2	7861.7	7109.0	5318.0	5281.2	6223.7	6635.7	6260.4	5387.3	5373.0	7070.2
47.5°	9199.9	9185.6	8416.5	6264.5	6541.9	8212.5	9008.1	8286.0	6482.7	6325.7	8579.7
50°	10974.5	10931.7	10046.4	7374.2	8041.2	10676.7	12096.5	10892.9	7806.6	7437.4	10601.2
52.5°	12973.6	13018.5	12329.0	8585.8	9634.3	13418.3	15395.0	13879.3	9244.7	8851.0	13145.0
55°	14856.4	15113.5	14931.9	10003.6	11190.8	16445.5	19017.8	17155.4	11025.5	10701.2	15996.7
57.5°	16329.2	17053.4	18326.3	12063.8	13020.5	19986.7	23062.9	20706.8	13104.2	13705.9	19878.6
60°	16410.8	17369.6	20325.3	16374.1	15374.6	23024.1	27101.8	24176.6	16372.1	18807.7	22920.1
62.5°	15180.8	16208.9	19023.9	18332.4	17938.7	25608.6	29174.3	26706.1	19586.9	21796.1	22018.4
65°	13773.3	14811.6	17571.5	16111.0	17640.9	25498.5	28648.0	26765.2	19878.6	19764.4	20404.9
67.5°	11645.7	12577.9	15076.7	14260.8	16259.9	24268.4	26216.5	25078.3	18314.0	18485.4	18771.0
70°	8500.2	9397.7	11717.1	11757.9	14199.6	22051.1	22526.4	22369.3	16865.7	17047.3	16231.3
72.5°	6140.0	6896.8	8897.9	9642.5	11335.6	18491.5	18163.1	18768.9	14470.9	15182.8	13036.9
75°	4414.3	4981.4	6527.6	8388.0	8985.7	13732.5	13002.2	14536.2	11611.0	13073.6	9801.6
77.5°	1791.0	1990.9	2568.2	5650.5	5905.4	9238.6	7959.6	10558.4	8277.8	8589.9	4750.9
80°	73.4	81.6	106.1	2917.0	4049.2	5197.6	4259.3	5644.3	5466.9	3459.6	1121.9
82.5°	8.2	8.2	18.4	840.4	1772.7	2868.1	2007.2	3251.6	2768.1	1466.7	510.0
85°	2.0	2.0	4.1	95.9	416.1	459.0	271.3	997.5	1287.2	599.7	0.0
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	10.2	18.4	20.4	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P642940

CATALOG NUMBER: GWS-SA6D-830-U-SLR-W-HSS

**CANDELA DISTRIBUTION (continued):**

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	917.9	917.9	917.9	917.9	917.9	917.9	917.9	917.9	917.9	917.9	917.9
2.5°	924.1	913.9	901.6	889.4	883.3	866.9	860.8	856.7	852.7	854.7	854.7
5°	893.5	871.0	844.5	818.0	803.7	787.4	779.2	775.2	777.2	785.4	785.4
7.5°	889.4	846.5	789.4	754.8	738.4	726.2	718.0	714.0	716.0	726.2	730.3
10°	956.7	881.2	779.2	720.1	701.7	689.5	681.3	675.2	671.1	679.3	681.3
12.5°	1101.5	997.5	828.2	716.0	683.4	667.0	660.9	648.7	642.6	646.6	648.7
15°	1401.4	1221.9	926.1	732.3	667.0	648.7	638.5	628.3	618.1	616.0	618.1
17.5°	1793.1	1536.0	1075.0	771.1	654.8	632.4	618.1	603.8	589.5	587.5	585.4
20°	2278.5	1921.6	1283.1	832.3	644.6	618.1	597.7	577.3	558.9	552.8	552.8
22.5°	2721.2	2386.7	1550.3	907.7	630.3	597.7	573.2	548.7	528.3	518.1	516.1
25°	3261.8	2880.3	1870.6	995.5	609.9	571.2	544.6	520.2	499.8	487.5	483.5
27.5°	3806.4	3400.5	2233.7	1109.7	585.4	544.6	520.2	497.7	475.3	461.0	456.9
30°	4334.7	3961.4	2641.6	1252.5	567.1	518.1	497.7	475.3	454.9	432.5	426.3
32.5°	4901.8	4534.6	3098.6	1411.6	552.8	499.8	477.3	456.9	430.4	410.0	399.8
35°	5448.5	5126.2	3602.4	1566.6	538.5	483.5	459.0	438.6	410.0	387.6	373.3
37.5°	5999.3	5728.0	4128.7	1660.5	518.1	461.0	438.6	422.3	389.6	363.1	346.8
40°	6582.7	6350.1	4697.8	1621.7	499.8	436.5	424.3	405.9	369.2	338.6	318.2
42.5°	7223.2	6943.7	5277.2	1472.8	483.5	416.1	403.9	385.5	350.9	314.1	287.6
45°	8029.0	7594.5	5752.5	1248.4	491.6	395.7	371.3	367.2	334.5	287.6	255.0
47.5°	9414.0	8594.0	6121.7	1103.6	546.7	373.3	344.7	354.9	320.3	261.1	224.4
50°	11533.5	10250.4	6466.4	1093.4	630.3	363.1	320.3	346.8	306.0	234.6	197.9
52.5°	13553.0	11933.3	6686.7	1183.1	703.8	389.6	295.8	336.6	295.8	216.2	179.5
55°	15484.7	12904.3	6293.0	1248.4	773.1	469.2	277.4	320.3	283.5	206.0	173.4
57.5°	17567.4	13336.7	4954.9	1381.0	822.1	536.5	281.5	295.8	267.2	199.9	171.3
60°	18189.6	12783.9	2990.5	1554.4	795.6	556.9	312.1	263.1	244.8	187.7	165.2
62.5°	17222.7	11472.3	1764.5	1415.7	773.1	526.3	357.0	242.7	222.3	171.3	153.0
65°	15776.4	9691.5	1150.5	1195.4	820.0	469.2	379.4	232.5	201.9	155.0	134.6
67.5°	14124.1	7806.6	805.8	705.8	756.8	422.3	320.3	230.5	181.5	130.6	110.2
70°	11896.6	5846.3	567.1	467.1	630.3	375.3	248.9	224.4	159.1	106.1	85.7
72.5°	9191.7	3659.5	422.3	301.9	448.8	306.0	197.9	189.7	128.5	87.7	65.3
75°	6778.5	2086.8	297.8	218.3	295.8	232.5	146.9	134.6	110.2	83.6	59.2
77.5°	3539.2	1044.4	185.6	167.3	169.3	144.8	106.1	97.9	102.0	83.6	55.1
80°	679.3	208.1	112.2	122.4	91.8	91.8	77.5	81.6	89.8	67.3	46.9
82.5°	283.5	44.9	61.2	69.4	57.1	63.2	63.2	65.3	63.2	49.0	34.7
85°	0.0	0.0	26.5	28.6	38.8	38.8	32.6	32.6	32.6	28.6	20.4
87.5°	0.0	0.0	0.0	0.0	2.0	6.1	12.2	14.3	16.3	12.2	8.2
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0





REPORT NUMBER: P642940

CATALOG NUMBER: GWS-SA6D-830-U-SLR-W-HSS

**CANDELA DISTRIBUTION (continued):**

	185°	195°	205°	215°	225°	235°	245°	255°	265°	270°	275°
0°	917.9	917.9	917.9	917.9	917.9	917.9	917.9	917.9	917.9	917.9	917.9
2.5°	852.7	848.6	854.7	858.8	862.9	862.9	858.8	854.7	848.6	854.7	848.6
5°	787.4	793.5	803.7	807.8	811.9	803.7	799.6	787.4	777.2	779.2	775.2
7.5°	736.4	742.5	754.8	762.9	762.9	758.8	746.6	734.4	718.0	718.0	716.0
10°	689.5	697.6	711.9	722.1	726.2	722.1	709.9	693.6	679.3	679.3	673.2
12.5°	650.7	660.9	677.2	691.5	695.6	691.5	679.3	663.0	646.6	646.6	642.6
15°	618.1	630.3	648.7	665.0	671.1	665.0	650.7	630.3	614.0	616.0	609.9
17.5°	587.5	597.7	622.2	640.5	646.6	640.5	622.2	595.6	579.3	583.4	579.3
20°	552.8	565.0	589.5	609.9	616.0	609.9	589.5	561.0	544.6	544.6	546.7
22.5°	516.1	528.3	552.8	567.1	575.2	569.1	548.7	522.2	505.9	505.9	507.9
25°	483.5	489.6	507.9	522.2	524.2	518.1	501.8	481.4	469.2	475.3	477.3
27.5°	452.9	452.9	461.0	469.2	467.1	461.0	454.9	438.6	436.5	442.7	448.8
30°	420.2	410.0	405.9	399.8	397.8	395.7	401.9	401.9	405.9	414.1	420.2
32.5°	391.7	371.3	352.9	334.5	324.3	332.5	348.8	363.1	377.4	389.6	395.7
35°	359.0	326.4	295.8	271.3	255.0	267.2	293.7	320.3	344.7	361.1	371.3
37.5°	326.4	279.5	242.7	212.1	199.9	210.1	238.7	275.4	312.1	332.5	346.8
40°	291.7	232.5	189.7	165.2	153.0	163.2	191.7	228.5	277.4	303.9	322.3
42.5°	257.0	191.7	153.0	128.5	122.4	128.5	151.0	187.7	240.7	273.3	297.8
45°	222.3	159.1	122.4	104.0	97.9	104.0	122.4	153.0	206.0	242.7	271.3
47.5°	191.7	134.6	102.0	85.7	81.6	87.7	102.0	128.5	173.4	210.1	242.7
50°	167.3	118.3	87.7	73.4	69.4	75.5	87.7	108.1	146.9	179.5	214.2
52.5°	151.0	110.2	77.5	63.2	61.2	65.3	75.5	91.8	124.4	153.0	185.6
55°	146.9	110.2	71.4	57.1	55.1	59.2	67.3	79.6	108.1	132.6	161.2
57.5°	151.0	118.3	67.3	49.0	46.9	51.0	59.2	69.4	93.8	114.2	140.8
60°	151.0	120.4	59.2	38.8	36.7	40.8	49.0	61.2	83.6	100.0	122.4
62.5°	136.7	110.2	49.0	30.6	26.5	30.6	40.8	51.0	73.4	89.8	108.1
65°	118.3	93.8	40.8	22.4	18.4	22.4	32.6	42.8	63.2	77.5	97.9
67.5°	95.9	71.4	30.6	16.3	12.2	16.3	24.5	34.7	53.0	67.3	87.7
70°	71.4	51.0	24.5	14.3	12.2	14.3	22.4	32.6	46.9	61.2	81.6
72.5°	53.0	34.7	20.4	14.3	10.2	14.3	20.4	30.6	44.9	59.2	77.5
75°	44.9	28.6	18.4	12.2	10.2	12.2	18.4	28.6	40.8	55.1	73.4
77.5°	42.8	26.5	16.3	10.2	8.2	10.2	16.3	24.5	36.7	51.0	71.4
80°	36.7	22.4	14.3	8.2	6.1	8.2	14.3	20.4	28.6	38.8	55.1
82.5°	28.6	18.4	10.2	4.1	2.0	4.1	10.2	12.2	18.4	22.4	32.6
85°	18.4	10.2	4.1	0.0	0.0	0.0	4.1	8.2	8.2	10.2	16.3
87.5°	8.2	2.0	0.0	0.0	0.0	0.0	0.0	0.0	2.0	4.1	6.1
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P642940  
 CATALOG NUMBER: GWS-SA6D-830-U-SLR-W-HSS

**CANDELA DISTRIBUTION (continued):**

	285°	295°	305°	315°	325°	335°	345°	355°	359°	360°
0°	917.9	917.9	917.9	917.9	917.9	917.9	917.9	917.9	917.9	917.9
2.5°	860.8	862.9	866.9	873.1	887.3	899.6	911.8	928.1	936.3	936.3
5°	779.2	781.3	783.3	791.5	811.9	828.2	854.7	887.3	903.7	907.7
7.5°	716.0	720.1	724.2	730.3	750.7	773.1	807.8	869.0	899.6	905.7
10°	679.3	685.4	693.6	705.8	724.2	748.6	807.8	917.9	968.9	979.1
12.5°	650.7	660.9	669.1	683.4	705.8	744.6	862.9	1056.7	1146.4	1170.9
15°	622.2	634.4	646.6	660.9	685.4	758.8	968.9	1305.5	1454.4	1472.8
17.5°	593.6	607.9	624.2	640.5	671.1	793.5	1136.2	1650.3	1858.3	1899.1
20°	561.0	579.3	601.8	622.2	656.8	848.6	1368.8	2060.3	2321.4	2409.1
22.5°	526.3	548.7	575.2	601.8	640.5	915.9	1650.3	2500.9	2866.0	2923.1
25°	497.7	520.2	544.6	571.2	614.0	997.5	1990.9	3047.6	3380.1	3435.2
27.5°	471.2	493.7	516.1	540.6	587.5	1103.6	2400.9	3628.9	3975.7	4032.8
30°	442.7	469.2	491.6	516.1	563.0	1234.1	2874.2	4273.5	4602.0	4655.0
32.5°	418.2	444.7	467.1	491.6	544.6	1376.9	3371.9	4844.7	5111.9	5111.9
35°	397.8	426.3	442.7	475.3	530.4	1468.7	3843.1	5389.4	5591.3	5583.1
37.5°	375.3	410.0	422.3	444.7	512.0	1478.9	4285.8	5964.6	6113.5	6060.5
40°	352.9	389.6	408.0	420.2	491.6	1395.3	4771.3	6492.9	6619.4	6550.0
42.5°	332.5	361.1	387.6	401.9	479.4	1248.4	5160.9	7058.0	7208.9	7147.7
45°	312.1	336.6	352.9	379.4	487.5	1146.4	5495.4	7716.9	7982.0	7937.2
47.5°	291.7	312.1	322.3	363.1	542.6	1099.5	5699.4	8736.8	9236.6	9199.9
50°	269.3	293.7	293.7	359.0	624.2	1115.8	5876.9	10213.7	10986.8	10974.5
52.5°	246.8	273.3	269.3	389.6	687.4	1191.3	6078.8	11517.2	12861.4	12973.6
55°	224.4	248.9	252.9	450.8	724.2	1256.6	5297.6	12065.9	14462.7	14856.4
57.5°	199.9	214.2	263.1	497.7	711.9	1446.3	3628.9	12165.8	15484.7	16329.2
60°	173.4	185.6	297.8	487.5	673.2	1336.1	2284.7	11268.3	15339.9	16410.8
62.5°	151.0	171.3	314.1	430.4	685.4	1158.7	1456.5	9603.7	13958.9	15180.8
65°	132.6	165.2	285.6	389.6	693.6	785.4	983.2	7812.7	12610.5	13773.3
67.5°	118.3	183.6	234.6	346.8	595.6	552.8	675.2	6070.7	10603.3	11645.7
70°	108.1	187.7	191.7	297.8	461.0	354.9	444.7	4085.9	7308.9	8500.2
72.5°	97.9	138.7	144.8	238.7	297.8	216.2	287.6	2337.7	5328.2	6140.0
75°	93.8	93.8	100.0	155.0	165.2	157.1	185.6	1395.3	3820.7	4414.3
77.5°	87.7	71.4	63.2	100.0	89.8	112.2	110.2	620.1	1656.4	1791.0
80°	69.4	51.0	42.8	63.2	61.2	75.5	65.3	51.0	75.5	73.4
82.5°	42.8	32.6	30.6	38.8	34.7	38.8	30.6	8.2	8.2	8.2
85°	20.4	18.4	16.3	16.3	18.4	16.3	12.2	4.1	2.0	2.0
87.5°	10.2	10.2	8.2	6.1	8.2	8.2	6.1	2.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)