

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P386280

Luminaire Tested: **GWC-SA1D-830-U-SLR-HSS**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P386280  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1903-205-28)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: MCGRAW-EDISON  
Catalog Number: GWC-SA1D-830-U-SLR-HSS  
Description: GALLEON WALL LUMINAIRE  
(1) 80 CRI, 3000K, 1200mA LIGHTSQUARE WITH 16 LEDS AND SPILL LIGHT  
ELIMINATOR RIGHT OPTICS WITH HOUSE SIDE SHIELD  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4882 lumens  
Efficiency: N/A  
Efficacy: 74.0 lumens/watt  
Luminous Opening: Rectangular (W 0.5' x L: 0.5' x H: 0')  
IES Classification: Type IV - Medium  
BUG Rating: B1 - U0 - G1


Input Watts (W): 66  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



REPORT NUMBER: P386280  
 CATALOG NUMBER: GWC-SA1D-830-U-SLR-HSS

### Iso-Footcandle Lines of Horizontal Illumination


× Max cd  
 - - - 1/2 Max cd

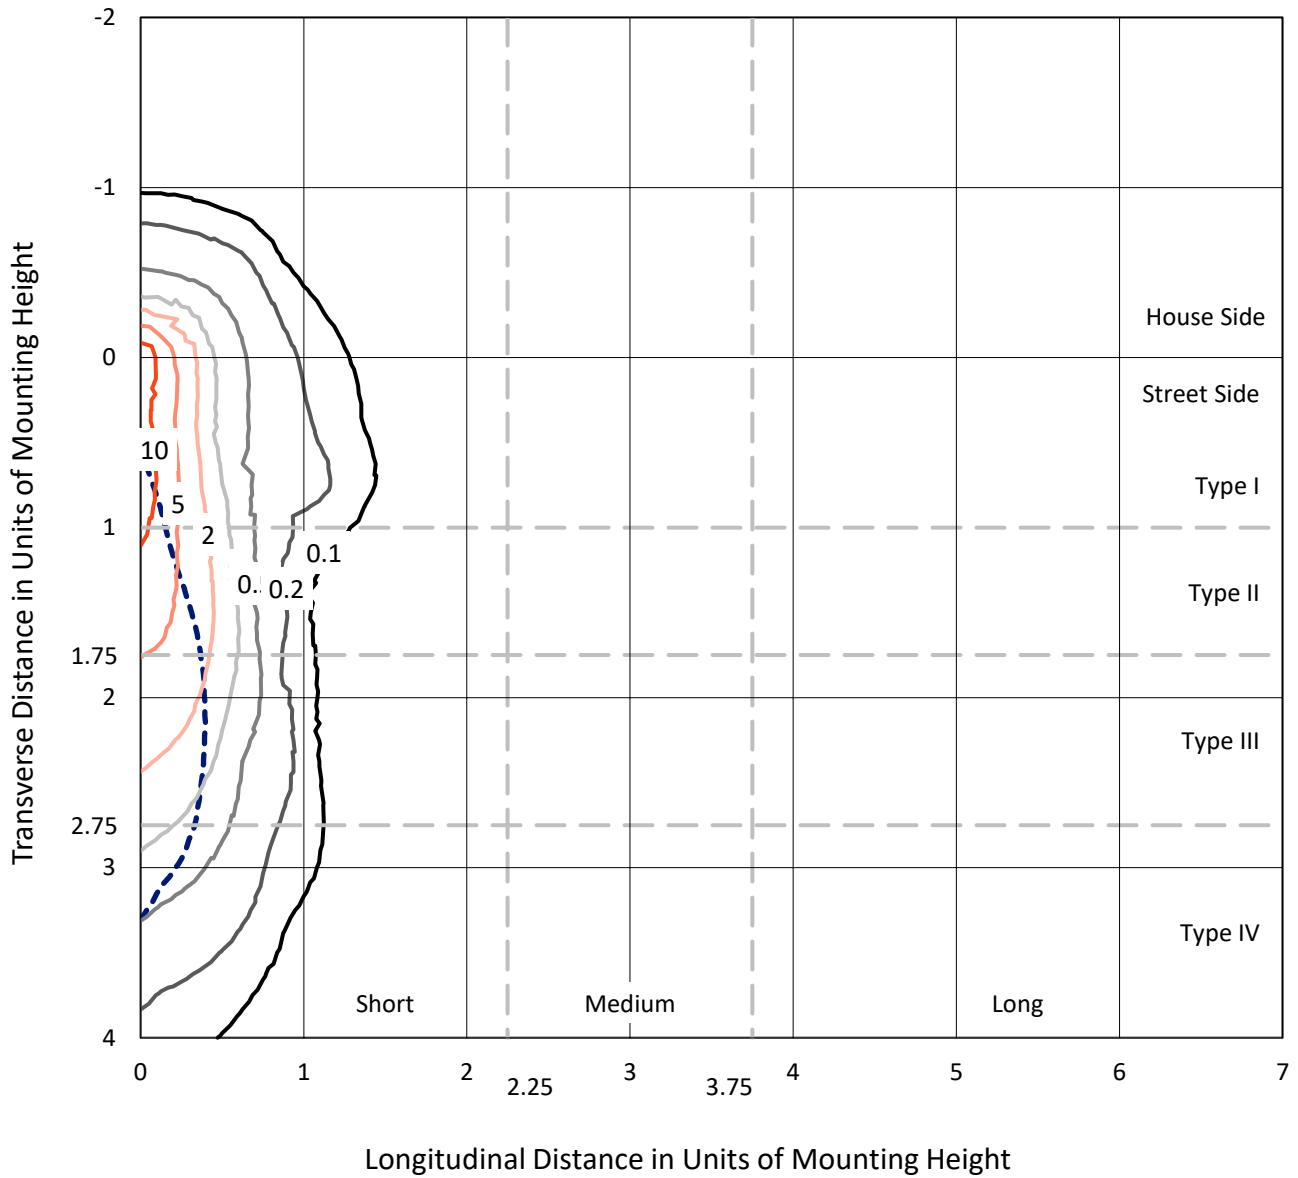

Based on 10 foot mounting height. Maximum calculated value = 15.9 fc  
 Type IV - Medium - N/A

REPORT NUMBER: P386280  
CATALOG NUMBER: GWC-SA1D-830-U-SLR-HSS

### Luminous Intensity Polar Plot

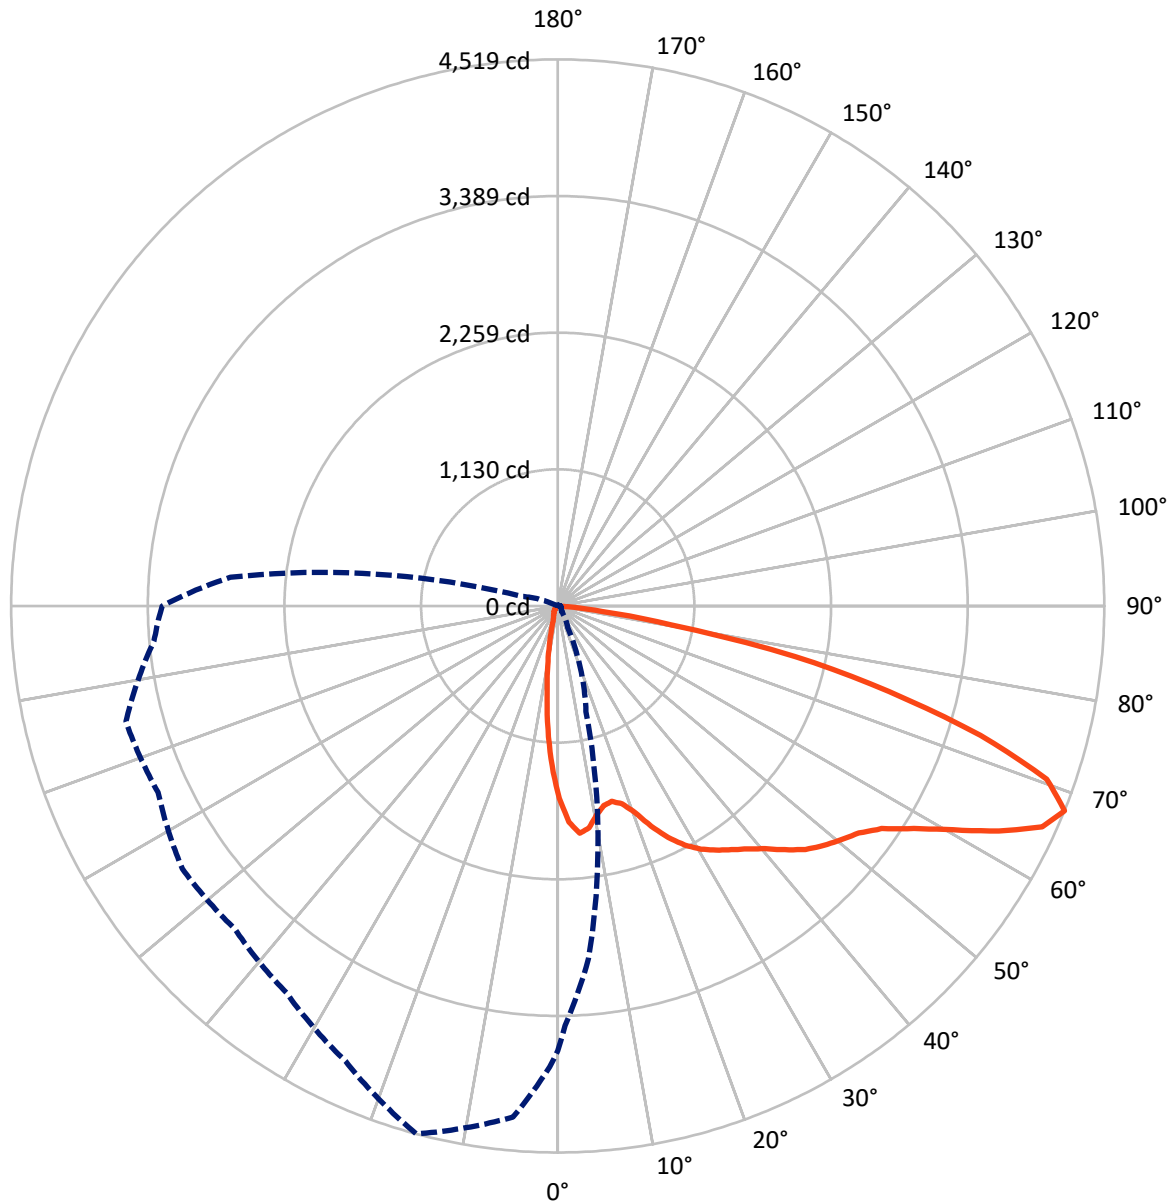

— Vertical Plane Through 345-Deg Lateral    - - - Horizontal Cone Through 67.5-Deg Vertical

REPORT NUMBER: P386280

CATALOG NUMBER: GWC-SA1D-830-U-SLR-HSS


**FLUX DISTRIBUTION:**

		Downward	Upward	Total
<b>House Side</b>	Lumens	590.9	0.0	590.9
	% Fixture	12.1	0.0	12.1
<b>Street Side</b>	Lumens	4291.1	0.0	4291.1
	% Fixture	87.9	0.0	87.9
<b>Total</b>	Lumens	4882.0	0.0	4882.0
	% Fixture	100.0	0.0	100.0

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	122.1	2.5
10°-20°	242.9	5.0
20°-30°	345.0	7.1
30°-40°	509.6	10.4
40°-50°	734.9	15.1
50°-60°	1031.6	21.1
60°-70°	1202.6	24.6
70°-80°	614.8	12.6
80°-90°	78.5	1.6
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	4882.0	100.0
0°-180°	4882.0	100.0

**Coefficient of Utilization**

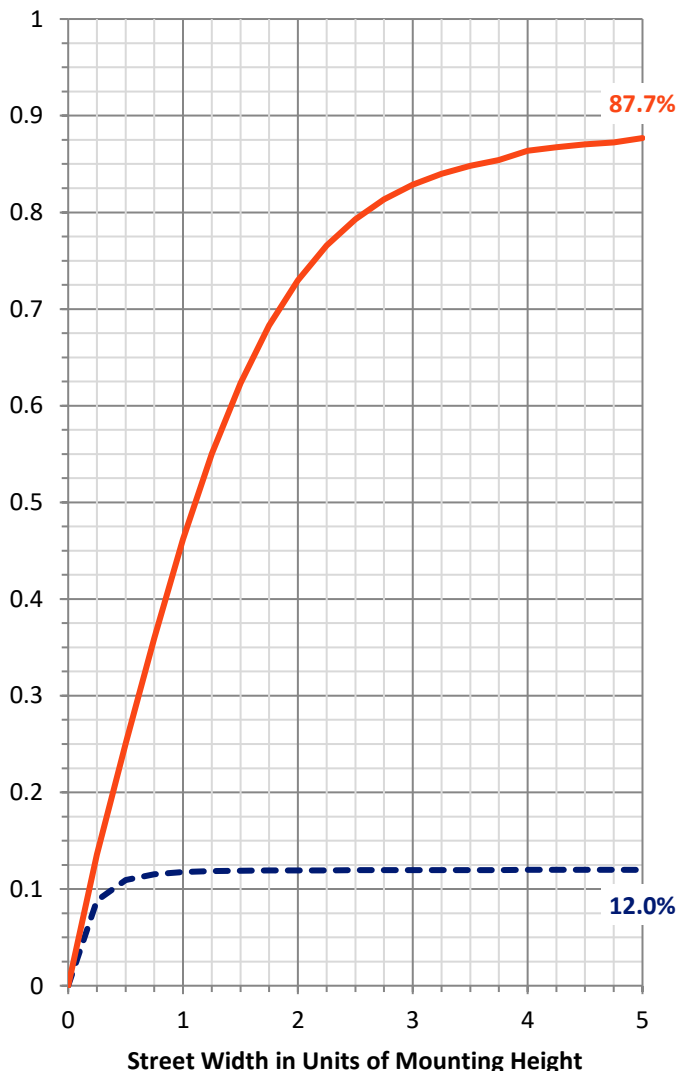

REPORT NUMBER: P386280


CATALOG NUMBER: GWC-SA1D-830-U-SLR-HSS

**LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:**

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	535.5	11.0			
FM (30°-60°)	2008.5	41.1			
FH (60°-80°)	1673.4	34.3			G1/1800
FVH (80°-90°)	73.7	1.5			G1/100
BL (0°-30°)	174.5	3.6	B1/500		
BM (30°-60°)	267.6	5.5	B1/1000		
BH (60°-80°)	144.0	2.9	B1/500		G1/500
BVH (80°-90°)	4.8	0.1			G0/10
UL (90°-100°)	0.0	0.0		U0/0	
UH (100°-180°)	0.0	0.0		U0/0	

**BUG Rating: B1-U0-G1**

Type IV Medium

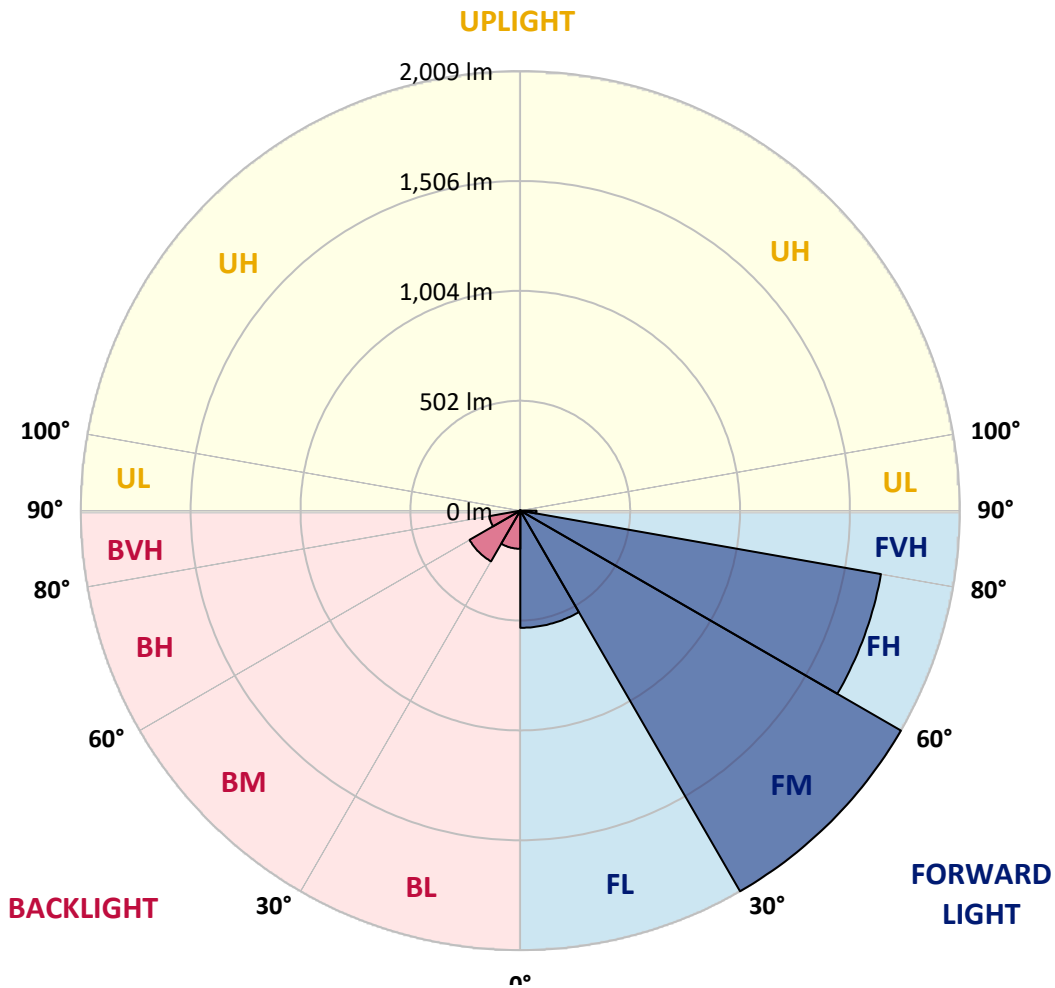



REPORT NUMBER: P386280

CATALOG NUMBER: GWC-SA1D-830-U-SLR-HSS

**CANDELA DISTRIBUTION (FULL):**

	0°	1°	5°	15°	25°	35°	45°	55°	65°	75°	85°
0°	1590.3	1590.3	1590.3	1590.3	1590.3	1590.3	1590.3	1590.3	1590.3	1590.3	1590.3
2.5°	1741.3	1727.9	1713.1	1664.8	1619.9	1568.6	1526.7	1497.6	1461.0	1413.6	1401.6
5°	1728.8	1714.5	1668.0	1560.5	1466.3	1374.7	1286.4	1234.6	1170.3	1105.1	1088.9
7.5°	1603.3	1588.2	1521.1	1373.8	1247.1	1114.8	1000.1	929.1	856.4	796.8	765.1
10°	1472.6	1456.2	1380.8	1202.0	1045.9	926.3	842.1	774.3	705.6	641.8	590.9
12.5°	1382.6	1361.1	1279.2	1076.6	940.6	859.4	780.8	699.6	606.7	538.2	482.2
15°	1344.9	1320.4	1233.9	1028.3	903.4	808.1	705.6	606.0	497.0	418.6	367.3
17.5°	1374.1	1342.1	1249.4	1025.0	856.7	726.9	597.4	480.4	362.2	282.9	246.3
20°	1473.0	1431.2	1313.5	1024.1	800.0	630.5	466.3	334.0	238.7	192.0	172.8
22.5°	1628.9	1573.7	1405.5	1031.5	741.5	529.2	336.7	226.9	179.2	155.0	143.6
25°	1817.2	1753.1	1538.0	1057.7	690.1	430.6	244.7	179.2	151.3	133.5	124.0
27.5°	1996.2	1944.2	1705.5	1095.4	650.4	351.1	198.7	152.0	129.3	117.5	109.9
30°	2175.0	2109.5	1877.3	1140.2	602.5	297.2	174.6	138.5	115.9	103.4	98.5
32.5°	2305.0	2250.6	2011.9	1172.6	551.4	262.0	156.1	126.7	108.2	95.5	88.4
35°	2457.8	2396.3	2127.3	1179.8	518.5	239.8	140.4	114.0	93.9	82.6	74.9
37.5°	2623.0	2546.4	2260.6	1164.0	492.9	229.0	128.6	108.2	87.7	76.1	68.0
40°	2805.7	2719.2	2388.5	1141.4	467.7	225.3	119.6	103.8	82.8	71.0	62.7
42.5°	2998.1	2896.1	2499.2	1117.6	451.7	212.5	118.6	99.5	79.1	66.4	58.1
45°	3159.8	3056.4	2613.0	1109.7	440.4	198.7	122.6	96.4	76.6	62.7	54.6
47.5°	3288.6	3190.8	2729.6	1127.3	433.9	186.0	111.7	100.4	75.2	59.4	51.6
50°	3442.4	3331.6	2893.8	1179.8	424.4	173.2	101.1	114.9	75.2	57.4	49.0
52.5°	3635.3	3525.7	3077.0	1261.2	405.4	155.7	90.9	115.2	75.9	54.6	45.8
55°	3877.9	3798.4	3338.6	1350.5	375.1	129.7	78.6	99.0	73.1	49.5	42.8
57.5°	4110.6	4045.6	3577.0	1411.5	334.7	101.3	68.5	79.8	66.8	43.5	38.2
59°	4174.2	4103.2	3664.4	1414.3	304.4	88.4	63.4	65.9	65.5	40.7	35.4
60°	4174.2	4098.8	3689.7	1399.5	282.4	81.2	60.1	58.7	68.2	38.9	33.8
62.5°	4098.6	3992.6	3607.8	1299.3	230.4	69.2	52.5	48.6	61.3	34.9	29.8
65°	3941.3	3787.0	3328.9	1118.3	205.4	63.4	45.3	39.8	42.6	30.8	26.1
67.5°	3679.0	3469.9	2926.7	903.4	195.4	61.8	39.1	33.8	32.1	26.4	22.9
70°	3217.1	2985.2	2438.4	710.3	186.9	61.1	32.8	28.4	25.9	22.2	19.4
72.5°	2341.5	2099.6	1731.2	555.3	181.8	62.4	26.4	23.8	21.3	17.3	15.0
75°	1339.4	1180.9	973.0	366.8	155.0	59.7	20.4	19.9	15.3	12.5	10.4
77.5°	692.0	671.0	583.1	140.9	74.2	26.1	13.4	11.6	9.0	7.6	6.2
80°	298.6	295.3	255.6	40.7	19.7	14.6	7.6	4.9	4.2	3.2	2.5
82.5°	103.2	103.2	90.9	13.6	8.8	7.2	0.9	0.0	0.0	0.0	0.0
85°	20.8	23.4	16.4	0.0	3.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P386280  
 CATALOG NUMBER: GWC-SA1D-830-U-SLR-HSS

**CANDELA DISTRIBUTION (continued):**

	90°	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	1590.3	1590.3	1590.3	1590.3	1590.3	1590.3	1590.3	1590.3	1590.3	1590.3	1590.3
2.5°	1387.0	1359.0	1357.2	1339.6	1317.6	1307.7	1301.9	1312.1	1324.6	1325.9	1344.7
5°	1076.6	1047.2	1059.5	1028.3	1034.5	1028.3	1018.1	1020.0	1025.5	1008.2	1029.7
7.5°	756.1	733.9	748.0	739.6	750.7	755.1	748.9	739.6	712.4	709.1	727.8
10°	569.9	544.7	529.6	513.9	517.4	524.6	522.2	515.5	498.2	499.1	517.1
12.5°	457.9	429.7	399.9	361.3	351.8	357.1	351.8	347.8	331.2	332.6	348.5
15°	347.4	324.3	293.0	262.0	245.2	246.8	232.0	221.6	211.2	198.7	208.4
17.5°	234.5	220.4	211.2	201.9	181.8	177.2	158.4	138.3	130.4	124.7	128.8
20°	166.1	158.4	154.7	154.3	142.7	136.9	118.6	106.2	102.2	101.1	103.6
22.5°	138.8	133.2	127.9	124.9	119.1	112.4	98.5	92.3	89.5	88.1	90.0
25°	120.7	116.6	111.0	105.9	103.6	96.4	86.5	81.9	80.0	78.6	79.6
27.5°	107.3	103.6	97.1	93.9	92.1	85.8	77.2	73.5	71.9	71.5	71.2
30°	96.7	93.2	87.2	83.5	80.3	74.7	69.6	65.9	64.3	63.8	63.4
32.5°	86.0	83.3	79.3	75.6	72.2	67.1	62.7	59.7	57.1	56.7	56.4
35°	72.6	69.8	67.8	67.5	64.3	59.4	56.2	52.3	50.2	49.5	49.7
37.5°	64.5	60.8	56.2	57.8	56.9	53.4	49.0	45.1	43.0	42.6	42.6
40°	59.4	55.5	50.2	47.4	50.2	49.5	42.6	38.6	36.5	36.3	35.8
42.5°	54.6	50.7	44.6	40.0	41.4	43.5	36.8	33.1	31.0	30.5	29.8
45°	51.1	47.0	40.2	34.9	32.1	36.5	31.5	26.8	25.7	24.7	24.3
47.5°	47.9	43.9	36.3	30.3	25.7	26.4	25.2	22.0	20.6	19.7	19.4
50°	45.1	40.9	32.8	25.9	21.3	19.4	20.4	17.3	16.2	15.3	14.8
52.5°	41.9	37.9	29.1	22.4	17.8	15.3	15.5	13.6	12.5	11.8	11.6
55°	39.3	35.4	26.1	19.7	15.7	12.5	11.1	10.6	9.9	9.5	9.3
57.5°	35.8	32.1	23.1	16.7	13.4	10.2	8.6	8.6	8.3	7.9	7.6
59°	33.8	30.5	21.3	15.0	12.3	8.8	7.6	7.9	7.6	7.2	6.9
60°	32.1	29.1	19.9	13.9	11.6	8.1	6.9	7.4	7.2	6.7	6.5
62.5°	28.4	26.4	17.1	11.6	10.2	6.5	5.8	6.2	6.2	6.0	5.8
65°	25.0	22.7	14.6	9.7	9.5	5.6	4.6	5.6	5.8	5.3	4.9
67.5°	21.7	19.4	12.7	7.9	8.8	4.4	3.5	4.6	6.2	4.9	4.4
70°	18.5	16.2	9.9	6.2	9.3	3.0	2.8	4.2	7.4	5.3	4.2
72.5°	14.3	12.5	6.9	4.6	9.9	2.1	2.1	3.5	8.3	5.8	3.9
75°	9.9	8.1	4.2	2.8	8.1	1.4	1.4	3.2	7.9	5.3	3.7
77.5°	5.8	4.4	1.4	0.2	4.2	0.0	0.2	2.3	5.6	3.2	1.6
80°	2.1	0.9	0.0	0.0	2.5	0.0	0.0	0.0	0.5	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0





REPORT NUMBER: P386280  
 CATALOG NUMBER: GWC-SA1D-830-U-SLR-HSS

**CANDELA DISTRIBUTION (continued):**

	185°	195°	205°	215°	225°	235°	245°	255°	265°	270°	275°
0°	1590.3	1590.3	1590.3	1590.3	1590.3	1590.3	1590.3	1590.3	1590.3	1590.3	1590.3
2.5°	1349.5	1380.8	1408.7	1451.1	1501.3	1559.1	1608.8	1662.2	1712.4	1733.2	1747.6
5°	1034.1	1072.7	1117.8	1180.0	1262.8	1364.8	1460.3	1568.3	1684.4	1742.5	1797.1
7.5°	731.1	770.4	826.4	892.5	992.7	1114.1	1239.0	1388.2	1545.4	1637.3	1727.7
10°	525.7	574.0	626.3	716.7	818.5	933.7	1062.3	1228.8	1404.1	1505.9	1614.8
12.5°	357.8	412.8	491.9	593.2	712.8	825.7	937.4	1096.3	1299.8	1400.7	1517.4
15°	214.6	245.2	328.9	446.1	592.8	733.4	855.7	1015.1	1232.0	1355.6	1477.0
17.5°	132.3	146.4	192.0	288.2	442.2	620.1	787.8	987.6	1241.8	1392.1	1522.1
20°	105.5	111.0	125.6	170.2	293.0	495.2	711.2	982.0	1321.1	1506.1	1645.6
22.5°	91.6	96.9	106.6	123.7	184.3	370.7	638.6	987.1	1434.9	1677.0	1839.9
25°	80.7	85.3	94.6	108.7	135.1	261.1	560.9	1009.8	1583.1	1889.1	2062.1
27.5°	72.2	76.1	84.6	97.6	115.9	182.3	472.7	1037.3	1758.9	2106.1	2276.8
30°	64.3	67.8	75.4	87.4	100.6	140.2	376.1	1056.0	1934.9	2276.8	2430.1
32.5°	57.6	60.1	67.1	77.2	87.4	111.7	285.9	1053.0	2065.6	2418.8	2540.4
35°	50.7	53.2	59.2	68.0	76.1	92.3	224.8	996.8	2179.4	2566.1	2666.7
37.5°	43.0	46.3	52.0	59.9	65.5	81.2	181.8	929.1	2294.8	2734.5	2807.5
40°	36.5	39.8	44.9	53.4	56.9	77.0	139.7	846.5	2424.5	2922.7	2962.0
42.5°	30.3	33.3	38.6	46.0	53.7	66.4	103.4	752.1	2549.2	3083.7	3102.9
45°	24.5	27.5	33.1	40.5	57.4	55.0	80.0	651.1	2649.8	3217.6	3223.9
47.5°	19.4	22.2	28.0	38.2	53.4	43.9	57.1	571.7	2734.2	3322.2	3305.7
50°	15.0	17.3	23.4	43.7	46.7	36.3	43.2	545.4	2809.9	3386.9	3344.4
52.5°	11.8	13.9	19.2	40.9	36.3	30.1	36.3	570.1	2913.5	3440.6	3366.1
55°	9.5	11.6	15.0	23.4	24.7	25.4	31.0	593.2	3092.3	3566.4	3494.5
57.5°	7.9	9.9	12.3	16.4	18.7	21.5	27.5	595.8	3303.0	3775.5	3707.5
59°	7.2	9.0	11.1	14.6	16.4	19.7	25.9	581.9	3377.2	3851.6	3817.6
60°	6.7	8.6	10.4	13.4	15.3	18.5	25.0	568.7	3380.4	3848.8	3864.5
62.5°	5.8	7.6	9.3	11.3	13.0	15.7	22.4	519.9	3243.5	3722.7	3836.3
65°	5.1	6.7	8.3	9.7	11.1	14.1	20.4	430.9	3009.7	3519.4	3643.2
67.5°	4.6	5.8	7.6	8.6	9.9	12.5	18.0	307.1	2717.6	3270.8	3351.1
70°	4.2	5.6	6.9	7.9	9.0	10.9	15.5	176.5	2294.8	2906.8	2963.9
72.5°	3.9	5.3	6.2	7.4	8.1	9.7	14.1	83.0	1680.3	2328.6	2477.7
75°	3.5	4.9	5.8	6.9	7.6	8.8	12.0	39.8	1117.6	1685.1	1854.7
77.5°	2.1	3.9	5.3	6.2	6.7	7.6	9.9	22.9	713.3	1166.4	1373.8
80°	0.0	1.4	3.9	5.3	5.8	6.5	7.6	18.0	381.6	666.3	799.8
82.5°	0.0	0.0	2.8	4.2	3.9	4.4	5.8	11.3	172.1	435.5	490.8
85°	0.0	0.0	0.9	3.2	2.8	2.1	3.9	3.9	37.7	220.4	275.0
87.5°	0.0	0.0	0.0	0.2	1.4	0.9	1.6	0.5	0.2	16.4	66.6
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



REPORT NUMBER: P386280

CATALOG NUMBER: GWC-SA1D-830-U-SLR-HSS

**CANDELA DISTRIBUTION (continued):**

	285°	295°	305°	315°	325°	335°	345°	355°	359°	360°
0°	1590.3	1590.3	1590.3	1590.3	1590.3	1590.3	1590.3	1590.3	1590.3	1590.3
2.5°	1797.8	1814.9	1843.8	1857.4	1850.7	1822.3	1788.3	1753.6	1733.2	1741.3
5°	1908.3	1996.4	2047.3	2064.2	2036.0	1972.2	1888.7	1778.6	1739.5	1728.8
7.5°	1908.3	2074.1	2179.1	2197.7	2134.7	2009.6	1853.0	1681.2	1624.1	1603.3
10°	1841.2	2067.0	2213.4	2242.8	2154.9	1967.8	1758.0	1561.9	1494.1	1472.6
12.5°	1765.6	2008.7	2163.0	2203.4	2131.3	1926.1	1692.1	1481.1	1401.3	1382.6
15°	1719.1	1937.0	2064.7	2094.0	2063.5	1901.8	1676.3	1456.9	1363.0	1344.9
17.5°	1735.8	1881.5	1927.5	1944.6	1965.2	1893.3	1719.1	1510.0	1391.2	1374.1
20°	1798.5	1823.0	1799.2	1820.7	1876.2	1901.6	1821.1	1638.6	1495.9	1473.0
22.5°	1904.8	1792.7	1725.8	1734.4	1801.9	1929.1	1977.0	1822.3	1657.6	1628.9
25°	2028.8	1817.2	1685.1	1677.5	1746.9	1965.4	2119.5	2022.1	1848.9	1817.2
27.5°	2184.7	1872.2	1676.8	1669.2	1727.7	1999.4	2237.9	2219.6	2050.3	1996.2
30°	2305.0	1926.4	1701.5	1684.0	1746.9	2023.0	2333.0	2387.3	2210.8	2175.0
32.5°	2391.2	1990.2	1741.8	1716.4	1801.0	2063.7	2406.3	2540.9	2359.3	2305.0
35°	2456.9	2059.6	1806.8	1764.9	1875.5	2125.5	2475.0	2704.4	2517.3	2457.8
37.5°	2518.4	2156.9	1908.3	1858.4	1992.3	2224.9	2547.6	2889.9	2694.0	2623.0
40°	2604.2	2267.3	2064.9	2020.5	2188.6	2360.5	2638.2	3083.2	2895.0	2805.7
42.5°	2690.1	2385.7	2225.2	2237.2	2433.6	2525.1	2755.3	3287.7	3093.4	2998.1
45°	2768.5	2507.8	2453.5	2509.0	2660.9	2705.8	2871.6	3405.9	3251.8	3159.8
47.5°	2838.3	2660.4	2680.3	2828.1	2919.5	2869.3	2958.6	3507.9	3369.8	3288.6
50°	2919.5	2858.0	2979.4	3188.5	3217.1	3017.3	3037.7	3628.6	3507.6	3442.4
52.5°	3008.3	3066.1	3310.6	3494.9	3485.7	3178.1	3117.2	3763.9	3696.6	3635.3
55°	3109.1	3234.3	3602.2	3781.7	3773.8	3357.5	3249.1	3931.1	3933.4	3877.9
57.5°	3258.8	3379.0	3800.2	4013.7	4026.9	3564.8	3472.5	4118.5	4147.6	4110.6
59°	3366.1	3472.9	3878.6	4110.6	4164.3	3725.0	3635.8	4227.2	4208.0	4174.2
60°	3445.7	3532.6	3917.5	4161.2	4244.0	3833.7	3756.3	4291.0	4215.1	4174.2
62.5°	3642.5	3662.6	3987.6	4218.6	4335.9	4075.2	4095.3	4399.7	4165.4	4098.6
65°	3734.3	3744.7	3986.6	4115.9	4247.1	4263.2	4402.9	4402.9	4044.0	3941.3
67.5°	3695.9	3645.7	3788.9	3775.5	3906.4	4151.5	4518.6	4241.5	3811.8	3679.0
70°	3383.7	3190.6	3126.9	3132.7	3232.9	3611.0	4289.6	3766.4	3372.3	3217.1
72.5°	2815.4	2352.1	2195.1	2374.4	2400.5	2775.2	3655.7	2836.5	2487.0	2341.5
75°	2264.5	1658.1	1402.7	1591.9	1636.3	2030.9	2827.9	1766.5	1452.7	1339.4
77.5°	1626.8	1190.2	1006.5	993.4	1050.7	1288.0	2006.6	889.1	741.5	692.0
80°	924.2	783.4	843.5	795.8	824.8	805.3	953.3	389.9	319.4	298.6
82.5°	557.9	463.0	501.4	417.5	528.3	460.0	367.3	124.9	108.5	103.2
85°	362.9	253.0	131.8	88.4	182.0	294.0	82.1	34.0	26.1	20.8
87.5°	125.1	64.5	6.5	2.8	19.4	54.8	3.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245982

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



--- HS — SS

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



u



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)