

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P271473

Luminaire Tested: **ISC-AF-1000-LED-E1-SL3-7027-ULG**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P271473
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P29762)-DOWNLIGHT AND
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: MCGRAW-EDISON
Catalog Number: ISC-AF-1000-LED-E1-SL3-7027-ULG
Description: IMPACT ELITE LED CYLINDER LUMINAIRE WITH UPLIGHT
LIGHT SQUARE WITH ACCULED OPTICS-TYPE III W/SPILL CONTROL, WITH UPLIGHT
GLOW
Light Source: (16) 2700K CCT, 70 CRI LEDs and (1) UPLIGHT LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6073.6 lumens
Efficiency: N/A
Efficacy: 85.2 lumens/watt
Luminous Opening: Rectangular w/ Sides (W: 0.5' x L: 0.5' x H: 0.54')
IES Classification: Type III - Medium - Non-Cutoff
BUG Rating: B1 - U5 - G2

Input Watts (W): 71.3
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT




REPORT NUMBER: P271473

CATALOG NUMBER: ISC-AF-1000-LED-E1-SL3-7027-ULG

Iso-Footcandle Lines of Horizontal Illumination


× Max cd
 - - - 1/2 Max cd

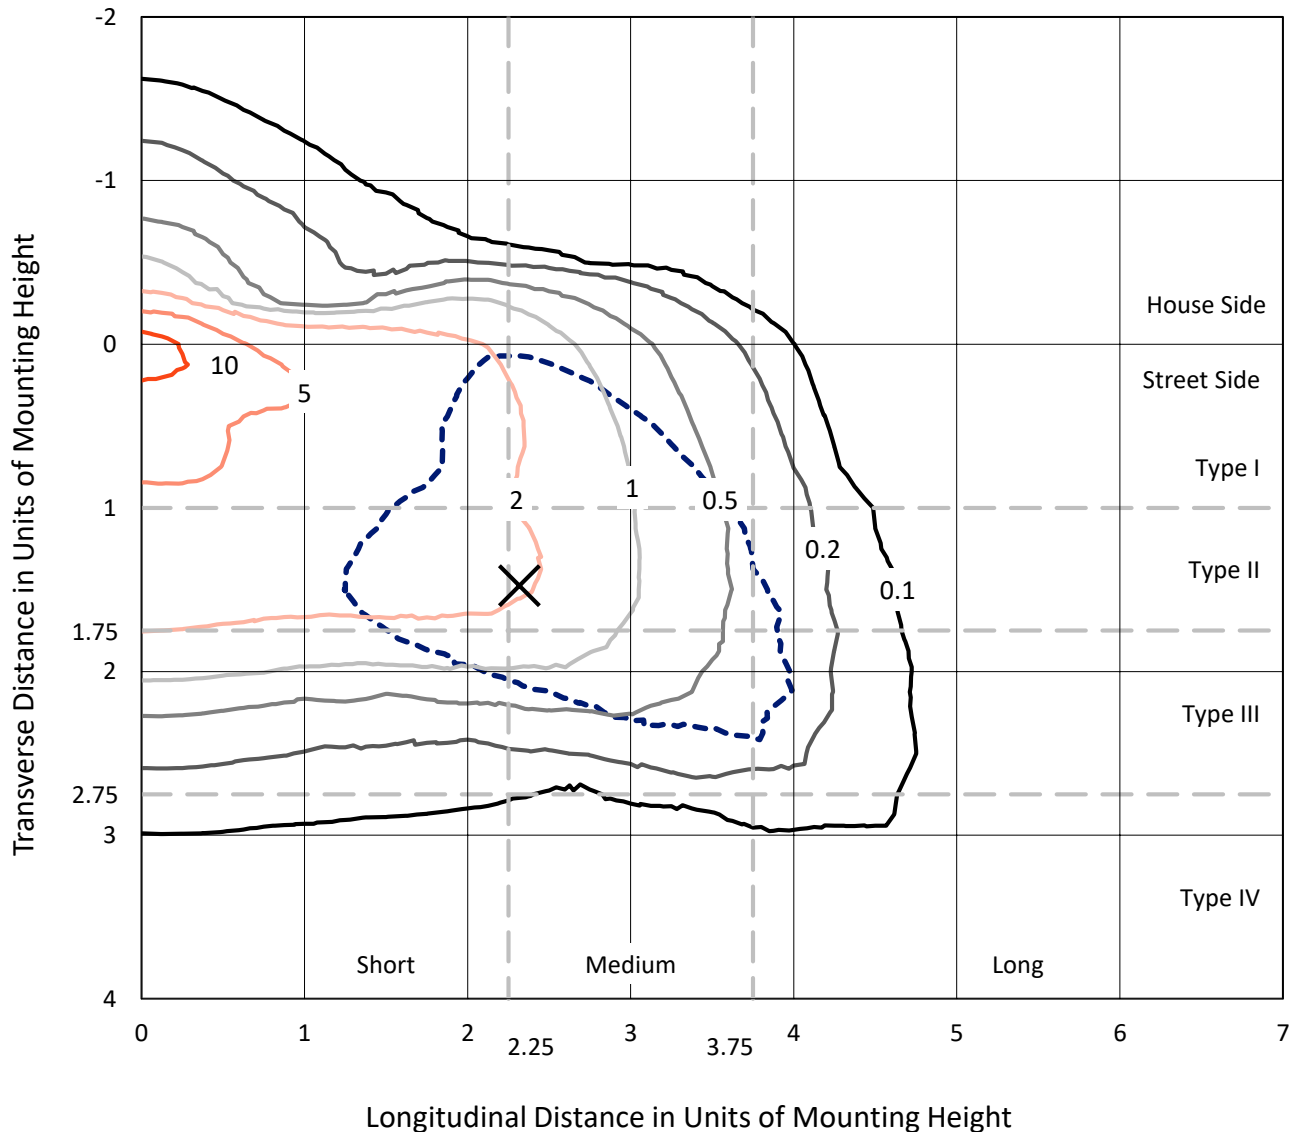

Based on 10 foot mounting height. Maximum calculated value = 12.4 fc
 Type III - Medium - Non-Cutoff

REPORT NUMBER: P271473
CATALOG NUMBER: ISC-AF-1000-LED-E1-SL3-7027-ULG

Luminous Intensity Polar Plot

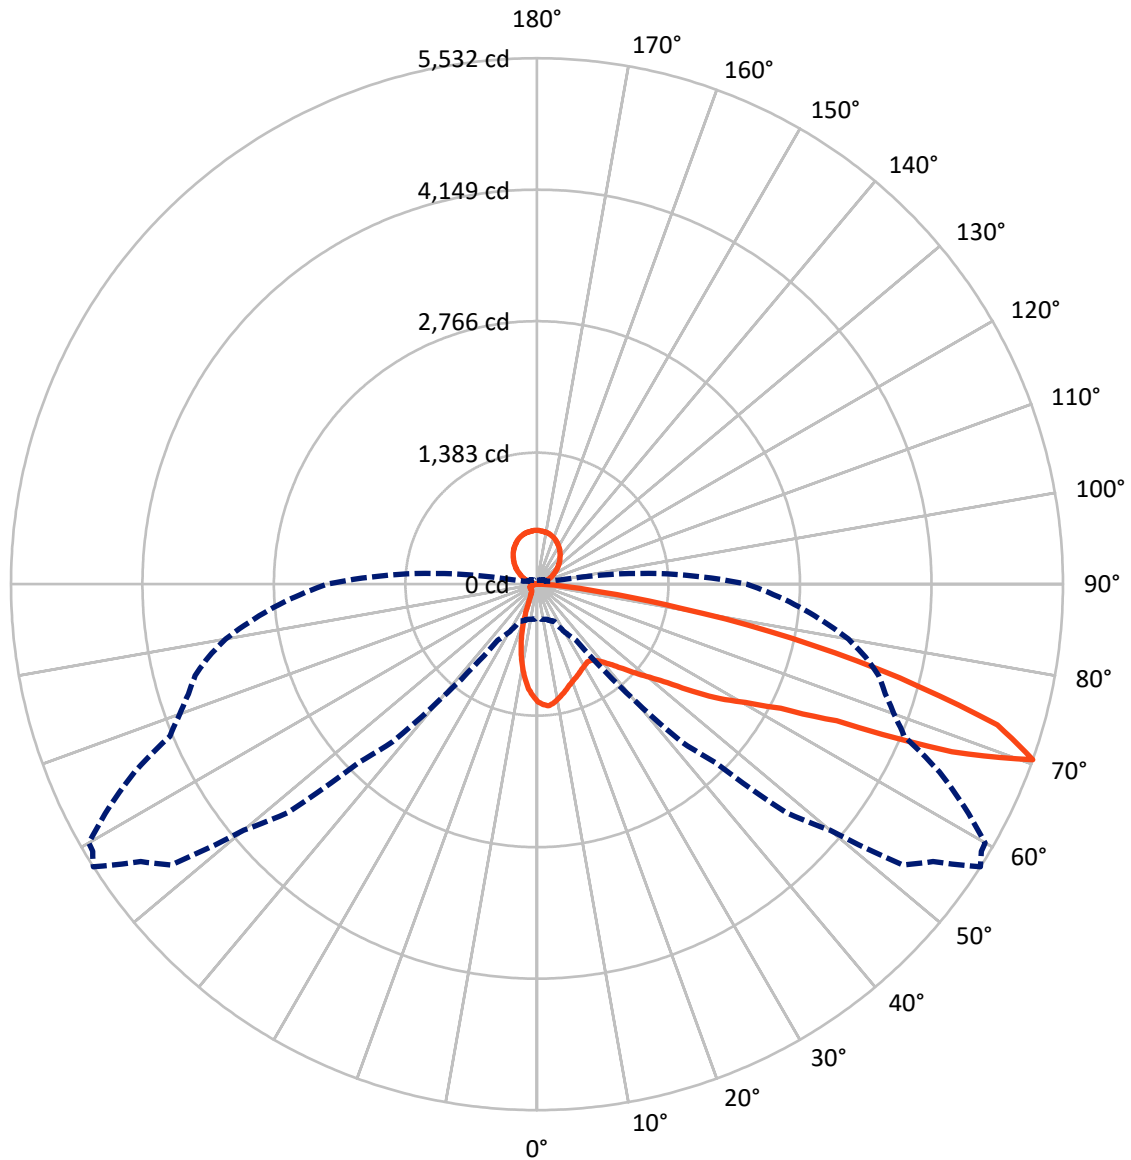

— Vertical Plane Through 57.5-Deg Lateral - - - Horizontal Cone Through 70-Deg Vertical

REPORT NUMBER: P271473

CATALOG NUMBER: ISC-AF-1000-LED-E1-SL3-7027-ULG


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	578.4	699.9	1278.3
	% Fixture	9.5	11.5	21.0
Street Side	Lumens	4095.4	699.9	4795.3
	% Fixture	67.4	11.5	79.0
Total	Lumens	4673.8	1399.8	6073.6
	% Fixture	77.0	23.0	100.0

Coefficient of Utilization

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	106.8	1.8
10°-20°	231.9	3.8
20°-30°	291.4	4.8
30°-40°	380.9	6.3
40°-50°	571.4	9.4
50°-60°	903.4	14.9
60°-70°	1302.1	21.4
70°-80°	805.9	13.3
80°-90°	79.9	1.3
90°-100°	4.7	0.1
100°-110°	67.7	1.1
110°-120°	150.2	2.5
120°-130°	219.7	3.6
130°-140°	260.7	4.3
140°-150°	264.3	4.4
150°-160°	226.8	3.7
160°-170°	152.2	2.5
170°-180°	53.3	0.9
0°-90°	4673.8	77.0
0°-180°	6073.6	100.0

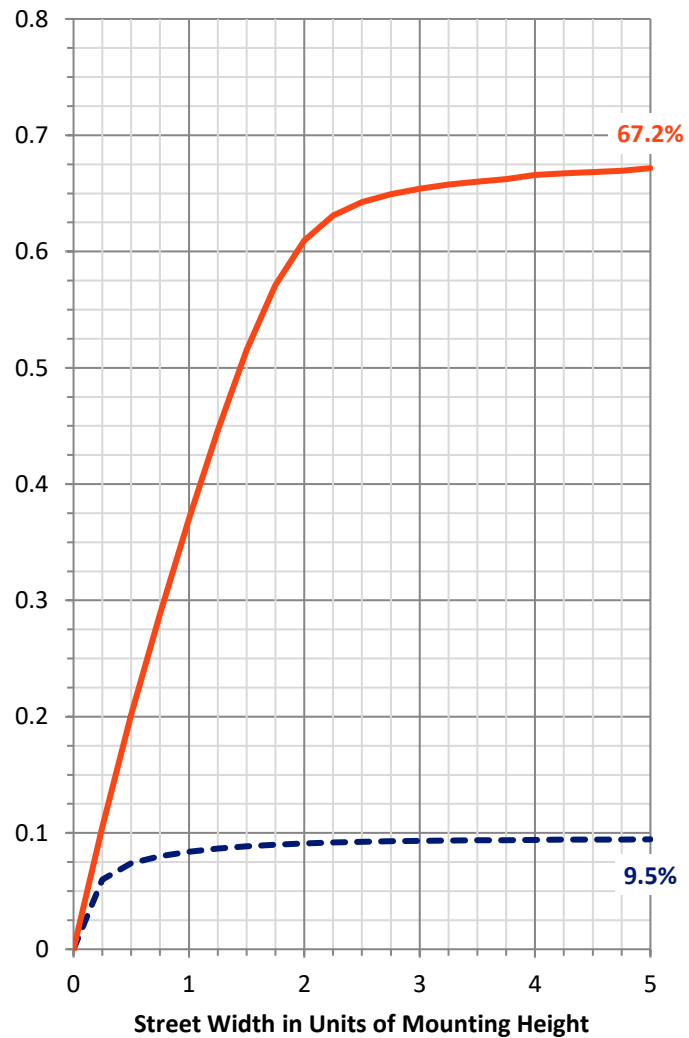

REPORT NUMBER: P271473


CATALOG NUMBER: ISC-AF-1000-LED-E1-SL3-7027-ULG

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	434.1	7.1			
FM	(30°-60°)	1656.8	27.3			
FH	(60°-80°)	1931.0	31.8			G2/5000
FVH	(80°-90°)	73.6	1.2			G1/100
BL	(0°-30°)	196.1	3.2	B1/500		
BM	(30°-60°)	198.9	3.3	B0/220		
BH	(60°-80°)	177.0	2.9	B1/500		G1/500
BVH	(80°-90°)	6.4	0.1			G0/10
UL	(90°-100°)	4.7	0.1		U1/10	
UH	(100°-180°)	699.9	11.5		U4/1000	

BUG Rating: B1-U5-G2

Type III Medium

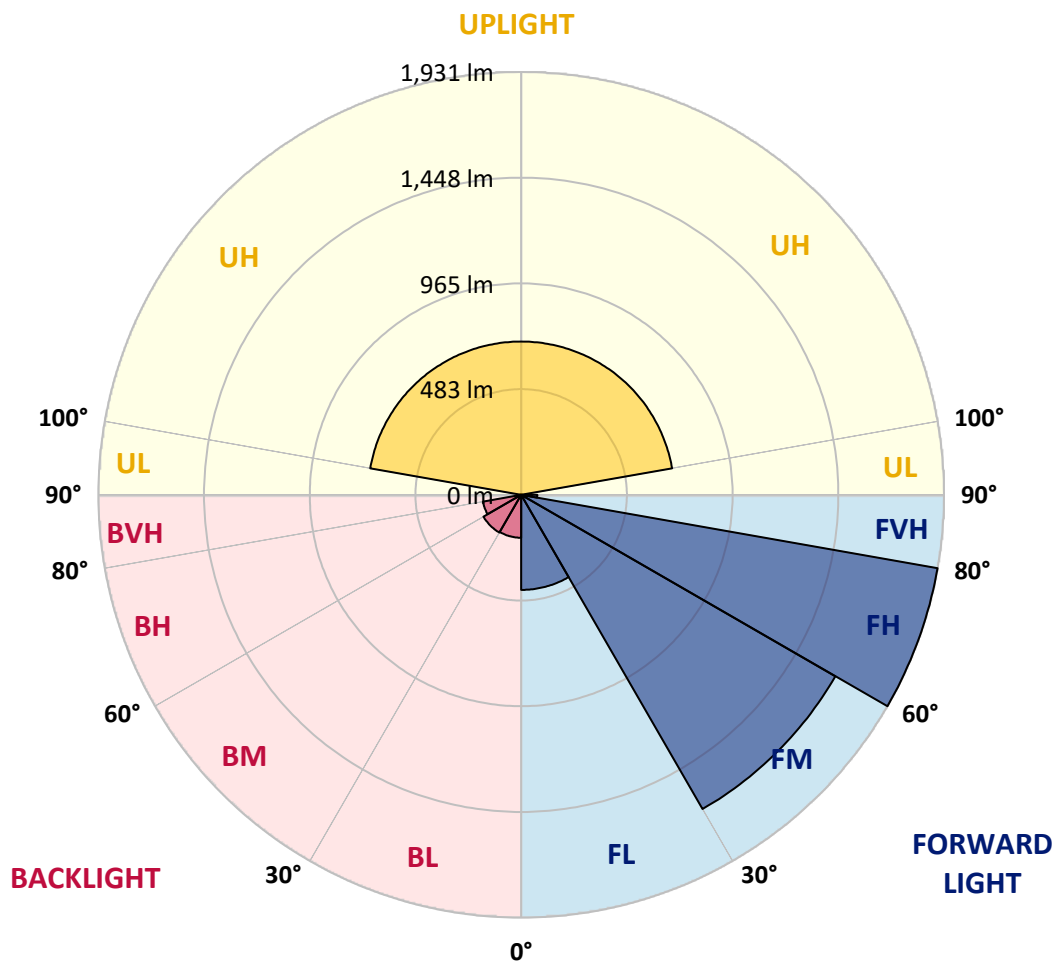



REPORT NUMBER: P271473

CATALOG NUMBER: ISC-AF-1000-LED-E1-SL3-7027-ULG

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	37.5°	40°	42.5°	45°	47.5°	50°
0°	1237.1	1237.1	1237.1	1237.1	1237.1	1237.1	1237.1	1237.1	1237.1	1237.1	1237.1
2.5°	1298.4	1296.7	1293.5	1286.8	1283.5	1286.8	1283.5	1278.6	1271.9	1276.9	1273.5
5°	1295.2	1298.4	1291.9	1286.8	1295.2	1298.4	1291.9	1291.9	1285.1	1291.9	1288.5
7.5°	1230.5	1232.1	1233.7	1232.1	1253.7	1253.7	1250.4	1253.7	1255.3	1258.6	1260.3
10°	1149.2	1150.9	1154.1	1159.2	1185.7	1189.0	1190.6	1193.9	1199.0	1202.2	1212.3
12.5°	1067.9	1071.3	1077.9	1094.5	1122.6	1125.9	1131.0	1136.0	1144.2	1149.2	1167.4
15°	999.9	1001.6	1008.3	1026.4	1067.9	1076.2	1079.5	1086.2	1102.8	1102.8	1122.6
17.5°	936.9	940.3	945.3	966.8	1008.3	1021.6	1031.4	1034.8	1056.4	1061.3	1084.5
20°	888.9	890.5	892.2	912.0	950.1	970.1	978.3	991.7	1008.3	1021.6	1041.5
22.5°	862.4	864.0	860.7	868.9	902.1	927.1	936.9	950.1	956.9	980.1	991.7
25°	864.0	865.7	857.3	852.3	868.9	895.5	903.8	917.0	913.8	946.8	946.8
27.5°	880.6	883.8	875.6	860.7	862.4	883.8	888.9	893.8	883.8	917.0	910.4
30°	913.8	917.0	907.1	895.5	877.3	890.5	890.5	890.5	872.3	900.4	888.9
32.5°	948.5	951.8	948.5	940.3	917.0	920.3	913.8	910.4	885.5	908.7	890.5
35°	999.9	1001.6	1003.2	1003.2	970.1	976.7	958.5	948.5	925.3	943.6	918.7
37.5°	1061.3	1061.3	1072.9	1077.9	1041.5	1041.5	1021.6	1008.3	986.7	993.3	968.5
40°	1116.1	1121.1	1147.6	1162.5	1129.3	1116.1	1099.4	1087.8	1071.3	1071.3	1046.3
42.5°	1179.0	1189.0	1220.4	1248.6	1230.5	1210.6	1193.9	1182.3	1174.1	1172.4	1145.9
45°	1257.0	1268.6	1303.4	1329.9	1334.9	1320.0	1306.8	1295.2	1288.5	1285.1	1262.0
47.5°	1344.9	1356.5	1388.0	1419.5	1442.7	1439.4	1424.4	1412.9	1417.9	1414.5	1399.6
50°	1442.7	1449.3	1469.3	1505.6	1558.8	1570.3	1567.0	1558.8	1568.7	1568.7	1555.4
52.5°	1520.7	1525.6	1540.5	1583.6	1671.6	1698.1	1719.6	1736.2	1752.9	1762.7	1754.5
55°	1592.0	1592.0	1593.6	1648.3	1779.4	1822.4	1870.5	1905.3	1927.0	1966.7	1983.3
57.5°	1708.0	1699.8	1698.1	1756.2	1908.7	1953.5	2023.2	2072.9	2102.8	2184.0	2182.3
60°	1674.9	1678.1	1738.0	1908.7	2174.0	2213.9	2276.8	2329.8	2386.3	2445.9	2450.9
62.5°	1444.4	1452.6	1542.2	1797.6	2343.2	2550.5	2744.4	2892.0	2975.0	3028.1	2955.1
65°	1011.5	1031.4	1152.5	1464.2	2157.4	2477.4	2784.3	3125.8	3387.9	3794.1	3911.8
67.5°	504.1	519.0	538.9	767.8	1611.9	2061.3	2484.2	2950.0	3298.4	3895.3	4228.6
70°	361.5	368.1	383.0	431.2	721.4	1079.5	1577.1	2243.7	2653.2	3553.8	4024.7
72.5°	280.2	286.9	306.8	374.8	477.6	527.3	626.8	1024.9	1524.0	2454.3	3091.1
75°	217.2	227.2	255.4	338.3	459.3	487.5	492.5	529.0	603.6	1089.5	1732.9
77.5°	152.5	154.1	182.4	291.9	446.1	500.9	492.5	492.5	502.4	555.5	741.2
80°	101.1	102.9	121.0	202.3	391.3	456.0	504.1	481.0	482.6	490.8	504.1
82.5°	53.1	56.3	71.3	122.7	228.9	308.5	419.6	437.7	431.2	439.5	436.1
85°	14.9	14.9	24.8	46.4	112.7	119.4	185.7	253.7	258.7	293.6	313.4
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	5.0	6.6	14.9	16.6
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
97.5°	2.0	2.0	2.0	3.0	4.0	5.1	6.4	7.6	8.8	9.8	10.8
100°	7.8	7.8	9.8	13.7	21.6	23.5	25.5	27.5	29.5	29.9	30.5
102.5°	27.5	27.5	31.4	37.3	44.2	45.4	46.6	47.9	49.0	49.2	49.6
105°	53.0	53.0	55.0	59.8	64.8	65.8	66.7	67.7	68.7	68.9	69.2
107.5°	76.5	75.5	78.5	82.5	86.3	87.1	87.9	88.6	89.3	89.8	90.3
110°	99.2	100.1	101.1	104.0	108.0	108.4	109.0	109.4	110.0	110.4	110.9



REPORT NUMBER: P271473

CATALOG NUMBER: ISC-AF-1000-LED-E1-SL3-7027-ULG

CANDELA DISTRIBUTION (continued):

	0°	5°	15°	25°	35°	37.5°	40°	42.5°	45°	47.5°	50°
112.5°	121.7	121.7	123.7	126.6	129.5	130.1	130.5	131.1	131.5	132.1	132.5
115°	143.3	144.3	146.2	148.2	151.2	151.6	152.2	152.6	153.1	153.6	154.1
117.5°	165.8	166.8	168.8	170.8	173.7	174.2	174.7	175.2	175.7	175.9	176.2
120°	189.5	191.4	192.3	194.3	197.3	197.4	197.8	198.1	198.3	198.7	199.2
122.5°	215.0	216.0	216.9	218.8	221.8	222.0	222.3	222.6	222.8	223.0	223.3
125°	239.5	241.5	242.5	243.4	246.3	246.6	246.9	247.1	247.3	247.6	247.8
127.5°	262.0	264.0	265.0	267.0	269.0	269.4	269.9	270.4	270.9	271.4	271.8
130°	284.7	286.6	287.5	288.5	292.5	292.7	292.9	293.3	293.5	293.9	294.5
132.5°	307.2	308.2	311.2	312.1	315.0	315.2	315.6	315.8	316.0	316.8	317.6
135°	329.8	330.8	332.7	334.7	338.6	338.6	338.6	338.6	338.6	339.4	340.1
137.5°	352.3	353.3	356.3	357.3	360.2	360.2	360.2	360.2	360.2	360.7	361.2
140°	375.0	375.9	377.8	378.8	380.8	381.0	381.3	381.6	381.8	382.0	382.3
142.5°	396.5	398.5	400.5	399.5	402.4	402.4	402.4	402.4	402.4	402.9	403.4
145°	417.2	418.1	420.0	420.0	423.0	423.2	423.6	423.8	424.0	424.4	425.0
147.5°	435.8	435.8	438.7	439.7	443.7	443.9	444.1	444.4	444.6	444.8	445.1
150°	452.5	453.5	455.4	456.4	460.3	460.5	460.8	461.1	461.3	461.5	461.8
152.5°	470.2	471.1	474.0	473.0	476.0	476.2	476.6	476.8	477.0	477.2	477.4
155°	489.8	490.7	492.7	491.7	493.7	493.7	493.7	493.7	493.7	493.9	494.2
157.5°	503.5	505.5	507.5	506.5	509.4	509.4	509.4	509.4	509.4	509.4	509.4
160°	515.3	517.2	519.2	519.2	522.2	522.2	522.2	522.2	522.2	522.2	522.2
162.5°	525.1	526.0	529.0	528.0	531.0	531.0	531.0	531.0	531.0	531.2	531.4
165°	535.9	536.8	538.8	537.8	541.8	541.8	541.8	541.8	541.8	541.9	542.3
167.5°	544.7	545.7	548.7	547.7	550.6	550.4	550.1	549.9	549.7	549.7	549.7
170°	551.6	552.5	555.5	554.5	556.5	556.3	556.1	555.7	555.5	555.3	555.1
172.5°	554.5	555.5	558.5	556.5	558.5	558.3	557.9	557.7	557.5	557.7	557.9
175°	556.5	558.5	559.5	558.5	561.4	561.4	561.4	561.4	561.4	561.6	561.9
177.5°	561.4	562.4	564.3	563.3	567.3	567.1	566.8	566.5	566.3	566.3	566.3
180°	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3



REPORT NUMBER: P271473

CATALOG NUMBER: ISC-AF-1000-LED-E1-SL3-7027-ULG

CANDELA DISTRIBUTION (continued):

	52.5°	55°	57.5°	59°	60°	62.5°	65°	67.5°	70°	72.5°	75°
0°	1237.1	1237.1	1237.1	1237.1	1237.1	1237.1	1237.1	1237.1	1237.1	1237.1	1237.1
2.5°	1276.9	1270.2	1268.6	1265.3	1266.9	1262.0	1260.3	1253.7	1253.7	1250.4	1247.0
5°	1285.1	1278.6	1285.1	1273.5	1275.2	1270.2	1262.0	1262.0	1255.3	1250.4	1240.4
7.5°	1262.0	1262.0	1263.6	1257.0	1258.6	1257.0	1247.0	1245.4	1235.3	1235.3	1223.9
10°	1218.8	1218.8	1225.5	1220.4	1222.1	1220.4	1215.6	1213.9	1210.6	1210.6	1192.3
12.5°	1169.1	1179.0	1189.0	1184.1	1184.1	1187.3	1187.3	1189.0	1187.3	1185.7	1170.7
15°	1127.6	1142.6	1152.5	1150.9	1152.5	1160.8	1164.1	1165.8	1170.7	1169.1	1155.8
17.5°	1089.5	1106.0	1114.3	1121.1	1125.9	1132.7	1142.6	1147.6	1154.1	1152.5	1139.2
20°	1054.7	1069.6	1084.5	1092.8	1094.5	1107.7	1119.4	1134.3	1137.5	1140.8	1124.3
22.5°	1018.2	1031.4	1061.3	1056.4	1067.9	1092.8	1099.4	1121.1	1121.1	1132.7	1109.4
25°	986.7	988.3	1034.8	1026.4	1036.5	1081.2	1086.2	1124.3	1114.3	1131.0	1104.5
27.5°	955.2	953.6	1009.9	999.9	1011.5	1072.9	1076.2	1129.3	1119.4	1139.2	1104.5
30°	931.9	927.1	991.7	971.8	988.3	1064.6	1066.3	1134.3	1125.9	1152.5	1116.1
32.5°	927.1	918.7	975.1	960.2	976.7	1056.4	1066.3	1152.5	1142.6	1175.7	1129.3
35°	948.5	935.2	983.4	970.1	983.4	1059.6	1074.6	1180.7	1169.1	1207.2	1160.8
37.5°	988.3	978.3	1018.2	1004.9	1014.8	1082.9	1096.1	1217.1	1215.6	1262.0	1208.8
40°	1057.9	1048.1	1079.5	1061.3	1069.6	1132.7	1139.2	1268.6	1273.5	1329.9	1276.9
42.5°	1152.5	1136.0	1160.8	1139.2	1150.9	1207.2	1200.6	1331.6	1346.5	1424.4	1363.1
45°	1273.5	1252.0	1266.9	1243.7	1252.0	1300.0	1281.8	1416.2	1431.1	1527.3	1472.5
47.5°	1406.3	1379.7	1397.9	1368.1	1373.1	1424.4	1391.4	1517.3	1540.5	1661.7	1608.5
50°	1565.5	1530.6	1537.2	1509.1	1512.4	1563.8	1527.3	1641.7	1669.9	1804.2	1757.7
52.5°	1769.4	1719.6	1719.6	1681.4	1683.2	1734.5	1689.8	1789.2	1820.8	1956.8	1925.2
55°	2038.1	1998.2	1989.9	1950.1	1936.8	1946.9	1883.8	1953.5	1988.3	2116.0	2091.1
57.5°	2251.9	2247.0	2271.8	2215.5	2202.3	2205.5	2125.9	2130.9	2170.7	2270.2	2278.6
60°	2512.3	2520.6	2523.9	2477.4	2472.6	2426.1	2344.8	2331.6	2381.2	2449.3	2475.8
62.5°	2926.9	2918.5	2877.1	2842.2	2810.8	2686.4	2641.6	2568.6	2638.3	2676.5	2731.2
65°	3817.3	3731.1	3465.8	3489.1	3406.1	3135.8	3097.6	2950.0	3059.5	3061.2	3164.0
67.5°	4699.6	4868.7	4706.2	4709.5	4522.2	4032.9	3915.3	3621.7	3683.1	3611.7	3664.8
70°	4850.5	5087.6	5532.0	5452.4	5442.5	5066.0	4669.7	4180.5	3996.5	3843.8	3721.2
72.5°	4174.0	4411.0	5062.8	4882.0	4950.0	5064.5	4651.4	4285.1	3873.7	3679.7	3414.4
75°	2936.8	3278.5	3940.1	3845.6	3895.3	4084.3	3729.4	3686.4	3210.5	3081.1	2673.2
77.5°	1573.7	1996.6	2737.9	2621.7	2643.4	2751.1	2381.2	2305.1	1845.7	1718.0	1255.3
80°	708.0	981.7	1537.2	1407.8	1369.7	1308.4	963.4	759.4	464.3	308.5	214.0
82.5°	469.3	487.5	681.5	590.4	552.2	456.0	295.1	174.1	137.6	116.2	111.1
85°	315.0	288.5	286.9	253.7	235.4	185.7	137.6	86.2	71.3	59.6	54.8
87.5°	18.2	11.6	16.6	18.2	13.3	11.6	8.3	0.0	1.7	0.0	1.7
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
97.5°	11.8	12.8	11.3	10.4	9.8	8.4	6.8	6.4	5.9	5.4	4.9
100°	30.9	31.4	30.9	30.6	30.5	29.9	29.5	28.7	27.9	27.3	26.5
102.5°	49.9	50.0	49.9	49.7	49.6	49.2	49.0	48.6	48.1	47.6	47.1
105°	69.5	69.7	69.7	69.7	69.7	69.7	69.7	69.2	68.7	68.2	67.7
107.5°	90.8	91.3	91.1	90.9	90.8	90.5	90.3	90.1	89.8	89.5	89.3
110°	111.4	111.9	111.9	111.9	111.9	111.9	111.9	111.7	111.4	111.1	110.9



REPORT NUMBER: P271473

CATALOG NUMBER: ISC-AF-1000-LED-E1-SL3-7027-ULG

CANDELA DISTRIBUTION (continued):

	52.5°	55°	57.5°	59°	60°	62.5°	65°	67.5°	70°	72.5°	75°
112.5°	132.9	133.5	133.5	133.5	133.5	133.5	133.5	133.3	132.9	132.7	132.5
115°	154.6	155.0	155.0	155.0	155.0	155.0	155.0	155.0	155.0	155.0	155.0
117.5°	176.4	176.7	176.9	177.1	177.1	177.4	177.7	177.4	177.1	176.9	176.7
120°	199.7	200.2	200.2	200.2	200.2	200.2	200.2	200.2	200.2	200.2	200.2
122.5°	223.6	223.8	223.8	223.8	223.8	223.8	223.8	223.9	224.3	224.6	224.8
125°	248.1	248.3	248.5	248.7	248.8	249.1	249.3	249.3	249.3	249.3	249.3
127.5°	272.4	272.8	272.6	272.5	272.4	272.1	271.8	272.1	272.4	272.6	272.8
130°	294.9	295.5	295.5	295.5	295.5	295.5	295.5	295.6	295.9	296.2	296.4
132.5°	318.2	319.0	319.0	319.0	319.0	319.0	319.0	319.2	319.4	319.8	320.0
135°	340.7	341.5	341.5	341.5	341.5	341.5	341.5	341.7	342.1	342.3	342.5
137.5°	361.7	362.2	362.2	362.2	362.2	362.2	362.2	362.4	362.6	362.9	363.2
140°	382.6	382.8	382.8	382.8	382.8	382.8	382.8	383.3	383.8	384.3	384.7
142.5°	403.9	404.3	404.3	404.3	404.3	404.3	404.3	404.6	404.9	405.1	405.3
145°	425.4	426.0	425.8	425.5	425.4	425.2	425.0	425.2	425.4	425.8	426.0
147.5°	445.4	445.6	445.1	444.8	444.6	444.1	443.7	443.9	444.1	444.4	444.6
150°	462.1	462.3	461.8	461.5	461.3	460.8	460.3	460.3	460.3	460.3	460.3
152.5°	477.8	478.0	477.8	477.6	477.4	477.2	477.0	477.0	477.0	477.0	477.0
155°	494.4	494.7	494.4	494.2	494.2	493.9	493.7	493.9	494.2	494.4	494.7
157.5°	509.4	509.4	508.9	508.6	508.4	507.9	507.5	507.6	507.9	508.2	508.4
160°	522.2	522.2	521.6	521.4	521.2	520.7	520.2	520.2	520.2	520.2	520.2
162.5°	531.8	532.0	531.4	531.2	531.0	530.4	530.0	529.6	529.0	528.6	528.0
165°	542.6	542.8	541.9	541.6	541.3	540.6	539.8	539.3	538.8	538.4	537.8
167.5°	549.7	549.7	549.1	548.9	548.7	548.1	547.7	547.9	548.1	548.4	548.7
170°	554.7	554.5	554.3	554.2	554.1	553.7	553.5	554.1	554.5	555.1	555.5
172.5°	558.3	558.5	557.9	557.7	557.5	556.9	556.5	556.7	556.9	557.3	557.5
175°	562.2	562.4	561.6	561.2	560.9	560.3	559.5	558.9	558.5	557.9	557.5
177.5°	566.3	566.3	565.6	565.1	564.9	564.1	563.3	563.3	563.3	563.3	563.3
180°	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3



REPORT NUMBER: P271473

CATALOG NUMBER: ISC-AF-1000-LED-E1-SL3-7027-ULG

CANDELA DISTRIBUTION (continued):

	77.5°	80°	85°	90°	95°	100°	102.5°	105°	107.5°	110°	112.5°
0°	1237.1	1237.1	1237.1	1237.1	1237.1	1237.1	1237.1	1237.1	1237.1	1237.1	1237.1
2.5°	1238.8	1238.8	1237.1	1225.5	1218.8	1215.6	1203.9	1202.2	1197.4	1195.6	1195.6
5°	1237.1	1230.5	1222.1	1205.5	1189.0	1174.1	1169.1	1157.5	1149.2	1139.2	1139.2
7.5°	1213.9	1207.2	1189.0	1164.1	1142.6	1121.1	1109.4	1092.8	1079.5	1066.3	1063.0
10°	1187.3	1177.4	1152.5	1119.4	1091.1	1053.0	1038.1	1016.5	1001.6	981.7	961.8
12.5°	1159.2	1152.5	1122.6	1084.5	1041.5	993.3	970.1	940.3	920.3	897.1	867.2
15°	1147.6	1134.3	1096.1	1048.1	995.0	936.9	903.8	872.3	842.4	815.9	776.0
17.5°	1132.7	1116.1	1072.9	1016.5	950.1	880.6	837.4	802.6	762.8	734.6	689.9
20°	1116.1	1091.1	1044.7	976.7	902.1	819.2	764.5	729.6	676.5	648.4	595.4
22.5°	1102.8	1071.3	1014.8	938.5	849.1	756.1	691.5	651.7	592.1	558.8	492.5
25°	1099.4	1061.3	993.3	907.1	804.3	694.7	616.9	577.1	502.4	464.3	386.5
27.5°	1101.1	1056.4	980.1	880.6	764.5	640.1	547.2	500.9	406.2	366.5	276.9
30°	1102.8	1057.9	966.8	857.3	728.0	583.7	474.2	419.6	306.8	272.0	192.3
32.5°	1119.4	1064.6	963.4	839.1	694.7	527.3	391.3	341.6	217.2	197.4	142.7
35°	1139.2	1086.2	970.1	835.7	670.0	470.9	306.8	255.4	155.9	150.9	116.2
37.5°	1180.7	1119.4	996.6	844.0	655.0	413.0	228.9	195.7	122.7	126.0	101.1
40°	1243.7	1175.7	1039.8	868.9	653.3	354.9	169.2	152.5	106.1	109.4	92.9
42.5°	1328.2	1253.7	1106.0	922.0	661.6	300.1	135.9	131.1	97.8	101.1	89.5
45°	1439.4	1363.1	1199.0	990.0	684.9	255.4	119.4	119.4	94.5	97.8	87.9
47.5°	1580.4	1495.8	1313.3	1081.2	721.4	230.5	112.7	114.4	92.9	97.8	87.9
50°	1739.6	1646.6	1459.3	1199.0	777.8	223.9	114.4	114.4	94.5	97.8	87.9
52.5°	1905.3	1819.2	1616.8	1333.3	855.6	238.8	117.8	116.2	94.5	97.8	86.2
55°	2074.5	1996.6	1791.0	1490.7	963.4	291.9	126.0	121.0	94.5	97.8	87.9
57.5°	2243.7	2188.9	1973.4	1660.0	1097.8	388.1	159.2	140.9	104.5	106.1	89.5
60°	2434.4	2394.5	2179.0	1882.2	1288.5	537.3	233.8	177.4	124.3	117.8	96.2
62.5°	2681.4	2671.5	2500.7	2202.3	1595.3	752.9	331.7	215.5	134.4	122.7	102.9
65°	3117.6	3144.1	2981.6	2577.0	1799.2	757.8	323.4	189.0	126.0	116.2	101.1
67.5°	3555.3	3477.4	3059.5	2520.6	1623.5	504.1	205.6	147.6	111.1	107.8	94.5
70°	3538.7	3326.5	2774.3	2203.8	1281.8	273.6	149.3	122.7	99.5	99.5	89.5
72.5°	3173.9	2858.9	2268.5	1744.5	855.6	174.1	126.0	107.8	91.2	89.5	82.9
75°	2389.6	2018.1	1457.6	1004.9	381.4	112.7	96.2	87.9	79.6	79.6	72.9
77.5°	1124.3	633.5	351.6	233.8	127.6	76.3	66.4	66.4	64.7	66.4	59.6
80°	152.5	137.6	117.8	102.9	78.0	53.1	48.1	49.8	48.1	49.8	44.7
82.5°	92.9	82.9	68.0	64.7	48.1	36.5	34.9	36.5	33.1	34.9	26.5
85°	44.7	39.7	31.5	29.8	24.8	21.6	18.2	21.6	16.6	18.2	11.6
87.5°	0.0	3.3	1.7	3.3	3.3	3.3	0.0	3.3	0.0	3.3	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
97.5°	4.7	4.4	4.0	4.0	4.0	4.4	4.7	4.9	5.4	5.9	6.4
100°	26.3	26.1	25.5	24.5	25.5	26.1	26.3	26.5	27.3	27.9	28.7
102.5°	47.3	47.6	48.1	47.1	48.1	47.6	47.3	47.1	47.6	48.1	48.6
105°	68.2	68.7	69.7	67.7	69.7	68.7	68.2	67.7	68.2	68.7	69.2
107.5°	89.5	89.8	90.3	89.3	90.3	89.8	89.5	89.3	89.5	89.8	90.1
110°	111.1	111.4	111.9	110.9	111.9	111.4	111.1	110.9	111.1	111.4	111.7



REPORT NUMBER: P271473
 CATALOG NUMBER: ISC-AF-1000-LED-E1-SL3-7027-ULG

REPORT N
 CATALOG

CANDELA DISTRIBUTION (continued):

CANDELA

	77.5°	80°	85°	90°	95°	100°	102.5°	105°	107.5°	110°	112.5°	
112.5°	132.9	133.5	134.5	132.5	134.5	133.5	132.9	132.5	132.7	132.9	133.3	0°
115°	155.6	156.0	157.0	156.0	157.0	156.0	155.6	155.0	155.0	155.0	155.0	2.5°
117.5°	177.1	177.7	178.7	176.7	178.7	177.7	177.1	176.7	176.9	177.1	177.4	5°
120°	200.7	201.2	202.2	200.2	202.2	201.2	200.7	200.2	200.2	200.2	200.2	7.5°
122.5°	225.7	226.7	228.7	227.7	228.7	226.7	225.7	224.8	224.6	224.3	223.9	10°
125°	250.1	250.8	252.2	251.3	252.2	250.8	250.1	249.3	249.3	249.3	249.3	12.5°
127.5°	273.6	274.3	275.8	272.8	275.8	274.3	273.6	272.8	272.6	272.4	272.1	15°
130°	297.2	297.9	299.3	297.4	299.3	297.9	297.2	296.4	296.2	295.9	295.6	17.5°
132.5°	320.8	321.4	322.9	321.0	322.9	321.4	320.8	320.0	319.8	319.4	319.2	20°
135°	343.1	343.5	344.5	343.5	344.5	343.5	343.1	342.5	342.3	342.1	341.7	22.5°
137.5°	364.2	365.1	367.0	365.1	367.0	365.1	364.2	363.2	362.9	362.6	362.4	25°
140°	385.7	386.7	388.7	386.7	388.7	386.7	385.7	384.7	384.3	383.8	383.3	27.5°
142.5°	406.1	406.8	408.3	407.3	408.3	406.8	406.1	405.3	405.1	404.9	404.6	30°
145°	426.8	427.4	428.9	427.0	428.9	427.4	426.8	426.0	425.8	425.4	425.2	32.5°
147.5°	445.4	446.1	447.5	444.6	447.5	446.1	445.4	444.6	444.4	444.1	443.9	35°
150°	461.3	462.3	464.2	461.3	464.2	462.3	461.3	460.3	460.3	460.3	460.3	37.5°
152.5°	477.8	478.4	480.0	477.0	480.0	478.4	477.8	477.0	477.0	477.0	477.0	40°
155°	495.4	496.1	497.6	495.7	497.6	496.1	495.4	494.7	494.4	494.2	493.9	42.5°
157.5°	509.6	510.9	513.3	510.3	513.3	510.9	509.6	508.4	508.2	507.9	507.6	45°
160°	520.9	521.6	523.2	521.2	523.2	521.6	520.9	520.2	520.2	520.2	520.2	47.5°
162.5°	528.6	529.0	530.0	527.0	530.0	529.0	528.6	528.0	528.6	529.0	529.6	50°
165°	538.4	538.8	539.8	537.8	539.8	538.8	538.4	537.8	538.4	538.8	539.3	52.5°
167.5°	549.7	550.6	552.5	550.6	552.5	550.6	549.7	548.7	548.4	548.1	547.9	55°
170°	556.7	557.9	560.5	558.5	560.5	557.9	556.7	555.5	555.1	554.5	554.1	57.5°
172.5°	558.3	558.9	560.5	557.5	560.5	558.9	558.3	557.5	557.3	556.9	556.7	60°
175°	558.3	558.9	560.5	557.5	560.5	558.9	558.3	557.5	557.9	558.5	558.9	62.5°
177.5°	564.1	564.9	566.3	563.3	566.3	564.9	564.1	563.3	563.3	563.3	563.3	65°
180°	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	67.5°
												70°
												72.5°
												75°
												77.5°
												80°
												82.5°
												85°
												87.5°
												90°
												92.5°
												95°
												97.5°
												100°
												102.5°
												105°
												107.5°
												110°



NUMBER: P271473
 NUMBER: ISC-AF-1000-LED-E1-SL3-7027-ULG

REPORT NUMBER: P
 CATALOG NUMBER:

DISTRIBUTION (continued):

CANDELA DISTRIBUTION

115°	117.5°	120°	122.5°	125°	127.5°	130°	135°	145°	155°	165°	115°	115°
1237.1	1237.1	1237.1	1237.1	1237.1	1237.1	1237.1	1237.1	1237.1	1237.1	1237.1	112.5°	133.5
1187.3	1182.3	1180.7	1174.1	1172.4	1165.8	1164.1	1157.5	1145.9	1140.8	1132.7	115°	155.0
1124.3	1116.1	1109.4	1106.0	1092.8	1086.2	1076.2	1063.0	1038.1	1026.4	1006.6	117.5°	177.7
1036.5	1034.8	1014.8	1008.3	991.7	980.1	965.0	943.6	907.1	885.5	854.0	120°	200.2
940.3	933.6	910.4	897.1	875.6	859.0	839.1	807.6	751.3	706.4	658.4	122.5°	223.8
850.8	830.8	804.3	784.4	757.8	734.6	711.4	663.3	573.7	500.9	434.5	125°	249.3
757.8	728.0	699.8	666.6	638.4	602.0	575.5	512.4	394.6	305.2	263.7	127.5°	271.8
663.3	621.9	590.4	545.6	514.1	464.3	436.1	359.8	258.7	218.8	205.6	130°	295.5
563.9	509.1	474.2	419.6	388.1	325.1	303.4	248.7	199.0	184.1	180.8	132.5°	319.0
457.7	391.3	353.2	293.6	272.0	233.8	217.2	190.7	167.4	160.9	164.2	135°	341.5
346.6	275.3	250.4	207.3	199.0	179.1	172.5	159.2	147.6	147.6	152.5	137.5°	362.2
247.0	192.3	185.7	159.2	157.6	147.6	142.7	135.9	132.7	135.9	142.7	140°	382.8
180.8	146.0	146.0	131.1	131.1	124.3	122.7	119.4	119.4	126.0	132.7	142.5°	404.3
142.7	119.4	122.7	111.1	112.7	107.8	109.4	107.8	109.4	114.4	119.4	145°	425.0
119.4	102.9	107.8	97.8	101.1	96.2	99.5	99.5	102.9	104.5	106.1	147.5°	443.7
106.1	94.5	97.8	91.2	94.5	89.5	94.5	94.5	96.2	96.2	96.2	150°	460.3
97.8	87.9	92.9	86.2	91.2	86.2	91.2	91.2	89.5	87.9	89.5	152.5°	477.0
92.9	86.2	91.2	84.6	89.5	84.6	87.9	86.2	82.9	82.9	82.9	155°	493.7
91.2	84.6	87.9	82.9	86.2	81.3	84.6	82.9	78.0	76.3	79.6	157.5°	507.5
91.2	82.9	87.9	81.3	84.6	79.6	82.9	78.0	72.9	72.9	78.0	160°	520.2
91.2	82.9	87.9	81.3	84.6	78.0	79.6	74.6	68.0	69.7	76.3	162.5°	530.0
92.9	86.2	89.5	82.9	84.6	74.6	78.0	71.3	66.4	68.0	72.9	165°	539.8
94.5	86.2	89.5	79.6	81.3	74.6	74.6	71.3	66.4	66.4	71.3	167.5°	547.7
94.5	84.6	86.2	78.0	79.6	71.3	72.9	69.7	64.7	63.0	66.4	170°	553.5
97.8	87.9	87.9	76.3	78.0	69.7	71.3	68.0	63.0	59.6	61.4	172.5°	556.5
101.1	89.5	91.2	79.6	79.6	71.3	72.9	66.4	59.6	56.3	58.0	175°	559.5
101.1	89.5	91.2	81.3	81.3	72.9	72.9	66.4	56.3	53.1	53.1	177.5°	563.3
96.2	87.9	89.5	81.3	81.3	72.9	72.9	64.7	54.8	49.8	48.1	180°	565.3
92.9	84.6	86.2	76.3	78.0	69.7	69.7	61.4	51.5	46.4	43.1		
84.6	78.0	78.0	71.3	69.7	61.4	61.4	56.3	48.1	41.4	38.2		
72.9	66.4	64.7	58.0	58.0	53.1	51.5	46.4	39.7	34.9	33.1		
59.6	51.5	51.5	43.1	43.1	38.2	39.7	34.9	29.8	28.2	26.5		
43.1	34.9	34.9	28.2	28.2	23.3	24.8	23.3	21.6	21.6	19.9		
26.5	18.2	19.9	14.9	18.2	13.3	14.9	13.3	13.3	11.6	11.6		
13.3	6.6	9.9	5.0	8.3	1.7	5.0	3.3	3.3	3.3	3.3		
1.7	0.0	1.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0		
6.8	8.4	9.8	11.3	12.8	11.8	10.8	8.8	4.0	3.0	2.0		
29.5	29.9	30.5	30.9	31.4	30.9	30.5	29.5	21.6	13.7	9.8		
49.0	49.2	49.6	49.9	50.0	49.9	49.6	49.0	44.2	37.3	31.4		
69.7	69.7	69.7	69.7	69.7	69.5	69.2	68.7	64.8	59.8	55.0		
90.3	90.5	90.8	91.1	91.3	90.8	90.3	89.3	86.3	82.5	78.5		
111.9	111.9	111.9	111.9	111.9	111.4	110.9	110.0	108.0	104.0	101.1		

271473
 ISC-AF-1000-LED-E1-SL3-7027-ULG

REPORT NUMBER: P271473
 CATALOG NUMBER: ISC-AF-10

TION (continued):

CANDELA DISTRIBUTION (con

117.5°	120°	122.5°	125°	127.5°	130°	135°	145°	155°	165°		175°	180°
133.5	133.5	133.5	133.5	132.9	132.5	131.5	129.5	126.6	123.7	0°	1237.1	1237.1
155.0	155.0	155.0	155.0	154.6	154.1	153.1	151.2	148.2	146.2	2.5°	1124.3	1129.3
177.4	177.1	176.9	176.7	176.4	176.2	175.7	173.7	170.8	168.8	5°	999.9	1001.6
200.2	200.2	200.2	200.2	199.7	199.2	198.3	197.3	194.3	192.3	7.5°	849.1	845.8
223.8	223.8	223.8	223.8	223.6	223.3	222.8	221.8	218.8	216.9	10°	648.4	640.1
249.1	248.8	248.5	248.3	248.1	247.8	247.3	246.3	243.4	242.5	12.5°	417.9	406.2
272.1	272.4	272.6	272.8	272.4	271.8	270.9	269.0	267.0	265.0	15°	252.1	248.7
295.5	295.5	295.5	295.5	294.9	294.5	293.5	292.5	288.5	287.5	17.5°	202.3	202.3
319.0	319.0	319.0	319.0	318.2	317.6	316.0	315.0	312.1	311.2	20°	180.8	180.8
341.5	341.5	341.5	341.5	340.7	340.1	338.6	338.6	334.7	332.7	22.5°	167.4	167.4
362.2	362.2	362.2	362.2	361.7	361.2	360.2	360.2	357.3	356.3	25°	157.6	159.2
382.8	382.8	382.8	382.8	382.6	382.3	381.8	380.8	378.8	377.8	27.5°	149.3	149.3
404.3	404.3	404.3	404.3	403.9	403.4	402.4	402.4	399.5	400.5	30°	139.2	139.2
425.2	425.4	425.8	426.0	425.4	425.0	424.0	423.0	420.0	420.0	32.5°	122.7	122.7
444.1	444.6	445.1	445.6	445.4	445.1	444.6	443.7	439.7	438.7	35°	109.4	107.8
460.8	461.3	461.8	462.3	462.1	461.8	461.3	460.3	456.4	455.4	37.5°	97.8	99.5
477.2	477.4	477.8	478.0	477.8	477.4	477.0	476.0	473.0	474.0	40°	89.5	91.2
493.9	494.2	494.4	494.7	494.4	494.2	493.7	493.7	491.7	492.7	42.5°	86.2	86.2
507.9	508.4	508.9	509.4	509.4	509.4	509.4	509.4	506.5	507.5	45°	82.9	82.9
520.7	521.2	521.6	522.2	522.2	522.2	522.2	522.2	519.2	519.2	47.5°	82.9	82.9
530.4	531.0	531.4	532.0	531.8	531.4	531.0	531.0	528.0	529.0	50°	81.3	82.9
540.6	541.3	541.9	542.8	542.6	542.3	541.8	541.8	537.8	538.8	52.5°	79.6	79.6
548.1	548.7	549.1	549.7	549.7	549.7	549.7	550.6	547.7	548.7	55°	74.6	76.3
553.7	554.1	554.3	554.5	554.7	555.1	555.5	556.5	554.5	555.5	57.5°	69.7	71.3
556.9	557.5	557.9	558.5	558.3	557.9	557.5	558.5	556.5	558.5	60°	64.7	64.7
560.3	560.9	561.6	562.4	562.2	561.9	561.4	561.4	558.5	559.5	62.5°	58.0	58.0
564.1	564.9	565.6	566.3	566.3	566.3	566.3	567.3	563.3	564.3	65°	53.1	53.1
565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	67.5°	46.4	46.4
										70°	41.4	41.4
										72.5°	36.5	36.5
										75°	31.5	31.5
										77.5°	26.5	24.8
										80°	19.9	19.9
										82.5°	11.6	11.6
										85°	3.3	3.3
										87.5°	0.0	0.0
										90°	0.0	0.0
										92.5°	0.0	0.0
										95°	1.0	1.0
										97.5°	2.0	2.0
										100°	7.8	7.8
										102.5°	27.5	27.5
										105°	53.0	53.0
										107.5°	75.5	76.5
										110°	100.1	99.2



REPORT NUMBER: P271473

CATALOG NUMBER: ISC-AF-1000-LED-E1

CANDELA DISTRIBUTION (continued):

	175°	180°
112.5°	121.7	121.7
115°	144.3	143.3
117.5°	166.8	165.8
120°	191.4	189.5
122.5°	216.0	215.0
125°	241.5	239.5
127.5°	264.0	262.0
130°	286.6	284.7
132.5°	308.2	307.2
135°	330.8	329.8
137.5°	353.3	352.3
140°	375.9	375.0
142.5°	398.5	396.5
145°	418.1	417.2
147.5°	435.8	435.8
150°	453.5	452.5
152.5°	471.1	470.2
155°	490.7	489.8
157.5°	505.5	503.5
160°	517.2	515.3
162.5°	526.0	525.1
165°	536.8	535.9
167.5°	545.7	544.7
170°	552.5	551.6
172.5°	555.5	554.5
175°	558.5	556.5
177.5°	562.4	561.4
180°	565.3	565.3

(END OF REPORT)

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



-SL3-7027-ULG