

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P228252

Luminaire Tested: **ISC-AF-600-LED-E1-SL3-7060-ULG**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P228252  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P29762)-DOWNLIGHT AND  
Test Lab: INNOVATION CENTER-P2  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: MCGRAW-EDISON  
Catalog Number: ISC-AF-600-LED-E1-SL3-7060-ULG  
Description: IMPACT ELITE LED CYLINDER LUMINAIRE WITH UPLIGHT  
LIGHT SQUARE WITH ACCULED OPTICS-TYPE III W/SPILL CONTROL, WITH UPLIGHT  
GLOW  
Light Source: (16) 5700K CCT, 70 CRI LEDs and (1) UPLIGHT LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5062.2 lumens  
Efficiency: N/A  
Efficacy: 100.4 lumens/watt  
Luminous Opening: Rectangular w/ Sides (W: 0.5' x L: 0.5' x H: 0.54')  
IES Classification: Type III - Medium - Non-Cutoff  
BUG Rating: B1 - U5 - G1  
  
Input Watts (W): 50.4  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT




REPORT NUMBER: P228252

CATALOG NUMBER: ISC-AF-600-LED-E1-SL3-7060-ULG

### Iso-Footcandle Lines of Horizontal Illumination

× Max cd  
 - - - 1/2 Max cd

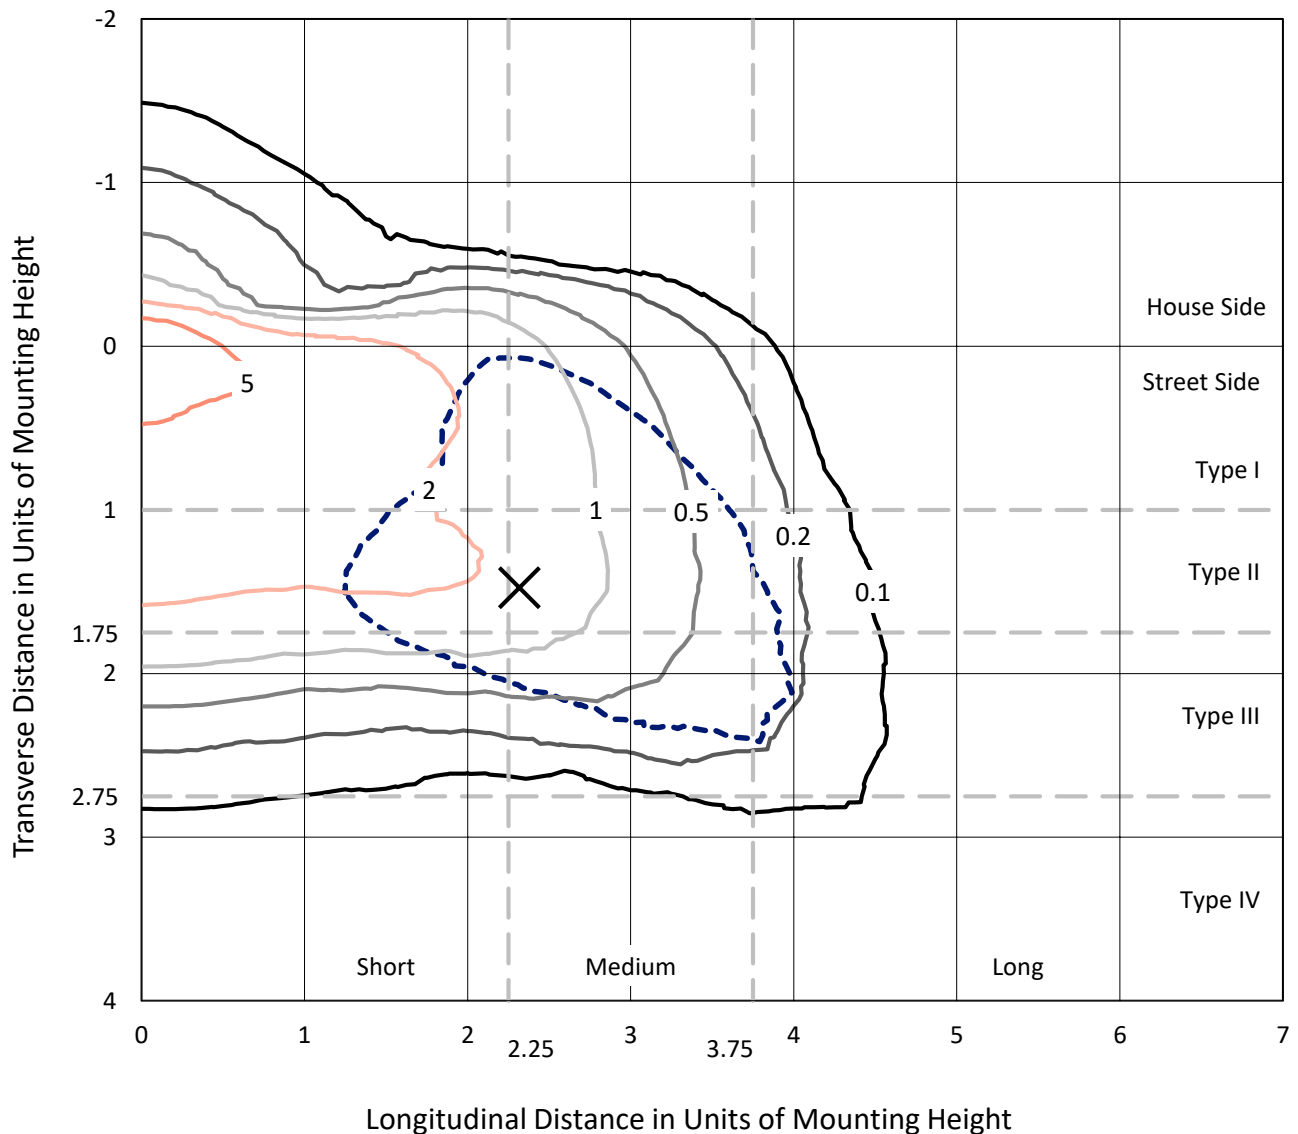


Based on 10 foot mounting height. Maximum calculated value = 9.6 fc  
 Type III - Medium - Non-Cutoff

REPORT NUMBER: P228252

CATALOG NUMBER: ISC-AF-600-LED-E1-SL3-7060-ULG

### Luminous Intensity Polar Plot

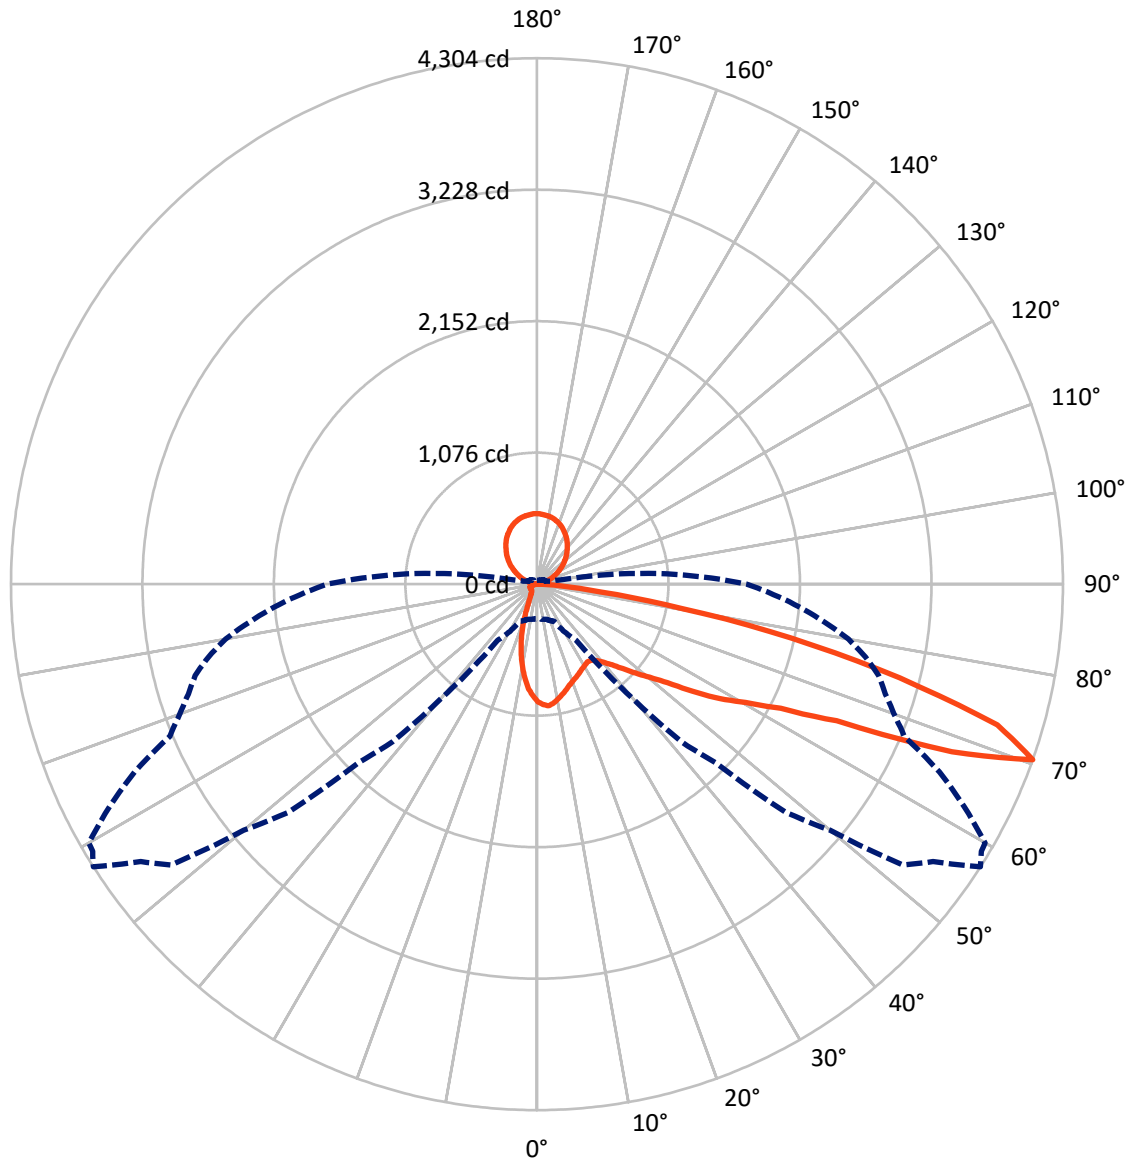

— Vertical Plane Through 57.5-Deg Lateral    - - - Horizontal Cone Through 70-Deg Vertical

REPORT NUMBER: P228252

CATALOG NUMBER: ISC-AF-600-LED-E1-SL3-7060-ULG


**FLUX DISTRIBUTION:**

		Downward	Upward	Total
<b>House Side</b>	Lumens	450.0	713.1	1163.0
	% Fixture	8.9	14.1	23.0
<b>Street Side</b>	Lumens	3186.1	713.1	3899.2
	% Fixture	62.9	14.1	77.0
<b>Total</b>	Lumens	3636.0	1426.2	5062.2
	% Fixture	71.8	28.2	100.0

**Coefficient of Utilization**

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	83.1	1.6
10°-20°	180.4	3.6
20°-30°	226.7	4.5
30°-40°	296.3	5.9
40°-50°	444.6	8.8
50°-60°	702.8	13.9
60°-70°	1013.0	20.0
70°-80°	627.0	12.4
80°-90°	62.2	1.2
90°-100°	4.7	0.1
100°-110°	69.0	1.4
110°-120°	153.0	3.0
120°-130°	223.9	4.4
130°-140°	265.6	5.2
140°-150°	269.3	5.3
150°-160°	231.1	4.6
160°-170°	155.1	3.1
170°-180°	54.3	1.1
0°-90°	3636.0	71.8
0°-180°	5062.2	100.0

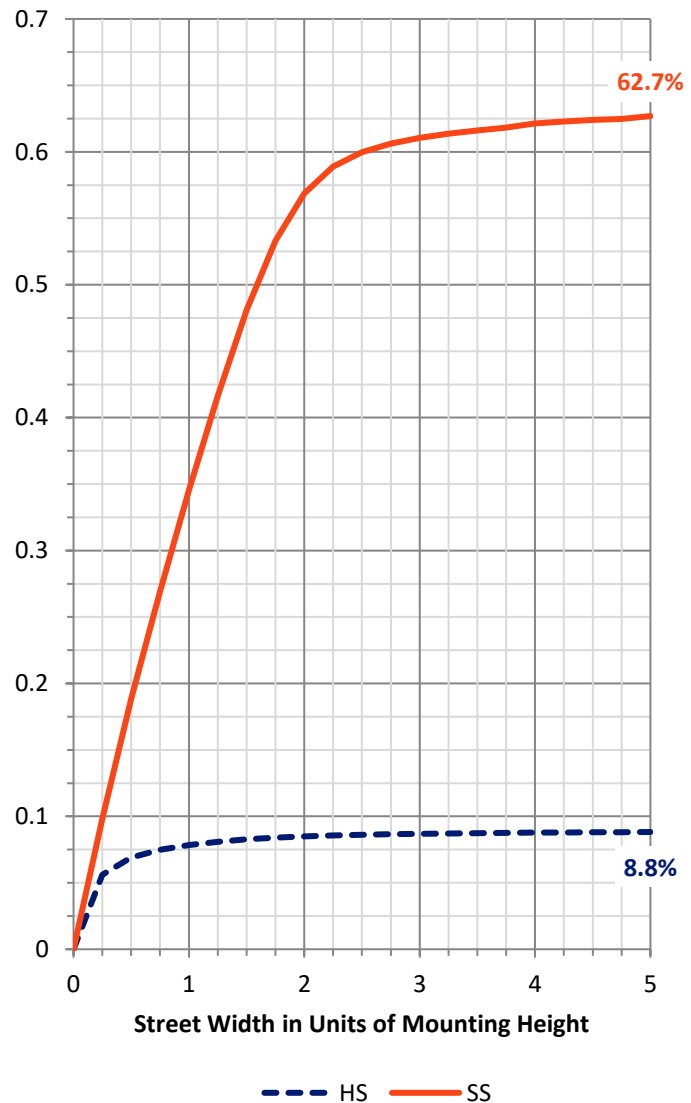

REPORT NUMBER: P228252


CATALOG NUMBER: ISC-AF-600-LED-E1-SL3-7060-ULG

**LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:**

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	337.7	6.7			
FM (30°-60°)	1288.9	25.5			
FH (60°-80°)	1502.2	29.7			G1/1800
FVH (80°-90°)	57.2	1.1			G1/100
BL (0°-30°)	152.5	3.0	B1/500		
BM (30°-60°)	154.7	3.1	B0/220		
BH (60°-80°)	137.7	2.7	B1/500		G1/500
BVH (80°-90°)	5.0	0.1			G0/10
UL (90°-100°)	4.7	0.1		U1/10	
UH (100°-180°)	713.1	14.1		U4/1000	

**BUG Rating: B1-U5-G1**

Type III Medium

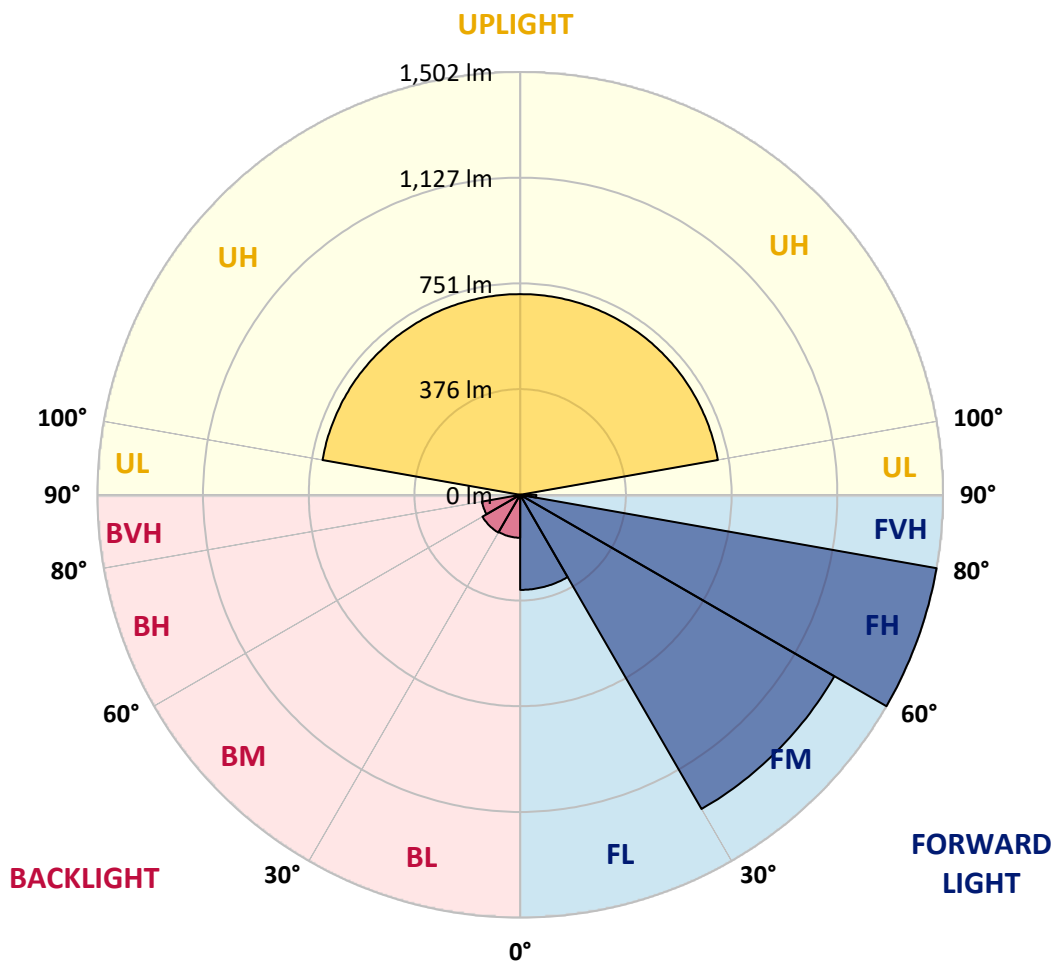



REPORT NUMBER: P228252

CATALOG NUMBER: ISC-AF-600-LED-E1-SL3-7060-ULG

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	15°	25°	35°	37.5°	40°	42.5°	45°	47.5°	50°
0°	962.4	962.4	962.4	962.4	962.4	962.4	962.4	962.4	962.4	962.4	962.4
2.5°	1010.1	1008.8	1006.2	1001.1	998.5	1001.1	998.5	994.6	989.5	993.3	990.8
5°	1007.5	1010.1	1005.0	1001.1	1007.5	1010.1	1005.0	1005.0	999.8	1005.0	1002.4
7.5°	957.2	958.5	959.8	958.5	975.3	975.3	972.7	975.3	976.6	979.2	980.4
10°	894.0	895.3	897.9	901.8	922.4	925.0	926.3	928.8	932.7	935.3	943.0
12.5°	830.8	833.4	838.5	851.4	873.4	876.0	879.8	883.7	890.1	894.0	908.2
15°	777.9	779.2	784.4	798.5	830.8	837.3	839.8	845.0	857.9	857.9	873.4
17.5°	728.9	731.5	735.3	752.1	784.4	794.7	802.4	805.0	821.8	825.6	843.7
20°	691.5	692.8	694.1	709.5	739.2	754.7	761.1	771.5	784.4	794.7	810.2
22.5°	670.8	672.1	669.5	676.0	701.8	721.1	728.9	739.2	744.4	762.4	771.5
25°	672.1	673.4	667.0	663.1	676.0	696.6	703.1	713.4	710.8	736.6	736.6
27.5°	685.0	687.6	681.2	669.5	670.8	687.6	691.5	695.3	687.6	713.4	708.2
30°	710.8	713.4	705.7	696.6	682.4	692.8	692.8	692.8	678.6	700.5	691.5
32.5°	737.9	740.5	737.9	731.5	713.4	716.0	710.8	708.2	688.9	707.0	692.8
35°	777.9	779.2	780.5	780.5	754.7	759.8	745.7	737.9	719.9	734.0	714.7
37.5°	825.6	825.6	834.7	838.5	810.2	810.2	794.7	784.4	767.6	772.7	753.4
40°	868.2	872.1	892.7	904.3	878.5	868.2	855.3	846.3	833.4	833.4	814.0
42.5°	917.2	925.0	949.5	971.4	957.2	941.7	928.8	919.8	913.4	912.1	891.4
45°	977.9	986.9	1014.0	1034.6	1038.5	1026.9	1016.6	1007.5	1002.4	999.8	981.7
47.5°	1046.2	1055.3	1079.8	1104.3	1122.4	1119.8	1108.2	1099.1	1103.0	1100.4	1088.8
50°	1122.4	1127.5	1143.0	1171.4	1212.7	1221.7	1219.1	1212.7	1220.4	1220.4	1210.1
52.5°	1183.0	1186.9	1198.5	1232.0	1300.4	1321.0	1337.8	1350.7	1363.6	1371.3	1364.9
55°	1238.5	1238.5	1239.8	1282.3	1384.2	1417.8	1455.2	1482.3	1499.1	1530.0	1542.9
57.5°	1328.8	1322.3	1321.0	1366.2	1484.9	1519.7	1573.9	1612.6	1635.8	1699.0	1697.7
60°	1303.0	1305.5	1352.0	1484.9	1691.3	1722.2	1771.3	1812.5	1856.4	1902.8	1906.7
62.5°	1123.6	1130.1	1199.8	1398.4	1822.9	1984.1	2135.1	2249.9	2314.4	2355.7	2298.9
65°	786.9	802.4	896.6	1139.1	1678.4	1927.4	2166.0	2431.8	2635.6	2951.7	3043.3
67.5°	392.2	403.8	419.3	597.3	1253.9	1603.5	1932.5	2295.0	2565.9	3030.4	3289.7
70°	281.2	286.4	298.0	335.4	561.2	839.8	1226.9	1745.5	2064.1	2764.6	3131.0
72.5°	218.0	223.2	238.7	291.6	371.5	410.2	487.6	797.3	1185.6	1909.3	2404.7
75°	169.0	176.7	198.7	263.2	357.3	379.3	383.1	411.5	469.6	847.6	1348.1
77.5°	118.7	120.0	141.9	227.1	347.0	389.6	383.1	383.1	390.9	432.2	576.7
80°	78.7	80.0	94.2	157.4	304.5	354.8	392.2	374.1	375.4	381.9	392.2
82.5°	41.3	43.9	55.5	95.5	178.0	240.0	326.4	340.6	335.4	341.9	339.3
85°	11.6	11.6	19.4	36.1	87.7	92.9	144.5	197.4	201.2	228.3	243.8
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	3.9	5.2	11.6	12.9
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
97.5°	2.0	2.0	2.0	3.0	4.0	5.2	6.5	7.8	9.0	10.0	11.0
100°	8.0	8.0	10.0	14.0	22.0	24.0	26.0	28.0	30.0	30.5	31.0
102.5°	28.0	28.0	32.0	38.0	45.0	46.2	47.5	48.8	50.0	50.2	50.5
105°	54.0	54.0	56.0	61.0	66.0	67.0	68.0	69.0	70.0	70.2	70.5
107.5°	78.0	77.0	80.0	84.0	88.0	88.8	89.5	90.2	91.0	91.5	92.0
110°	101.0	102.0	103.0	106.0	110.0	110.5	111.0	111.5	112.0	112.5	113.0



REPORT NUMBER: P228252

CATALOG NUMBER: ISC-AF-600-LED-E1-SL3-7060-ULG

**CANDELA DISTRIBUTION (continued):**

	0°	5°	15°	25°	35°	37.5°	40°	42.5°	45°	47.5°	50°
112.5°	124.0	124.0	126.0	129.0	132.0	132.5	133.0	133.5	134.0	134.5	135.0
115°	146.0	147.0	149.0	151.0	154.0	154.5	155.0	155.5	156.0	156.5	157.0
117.5°	169.0	170.0	172.0	174.0	177.0	177.5	178.0	178.5	179.0	179.2	179.5
120°	193.0	195.0	196.0	198.0	201.0	201.2	201.5	201.8	202.0	202.5	203.0
122.5°	219.0	220.0	221.0	223.0	226.0	226.2	226.5	226.8	227.0	227.2	227.5
125°	244.0	246.0	247.0	248.0	251.0	251.2	251.5	251.8	252.0	252.2	252.5
127.5°	267.0	269.0	270.0	272.0	274.0	274.5	275.0	275.5	276.0	276.5	277.0
130°	290.0	292.0	293.0	294.0	298.0	298.2	298.5	298.8	299.0	299.5	300.0
132.5°	313.0	314.0	317.0	318.0	321.0	321.2	321.5	321.8	322.0	322.8	323.5
135°	336.0	337.0	339.0	341.0	345.0	345.0	345.0	345.0	345.0	345.8	346.5
137.5°	359.0	360.0	363.0	364.0	367.0	367.0	367.0	367.0	367.0	367.5	368.0
140°	382.0	383.0	385.0	386.0	388.0	388.2	388.5	388.8	389.0	389.2	389.5
142.5°	404.0	406.0	408.0	407.0	410.0	410.0	410.0	410.0	410.0	410.5	411.0
145°	425.0	426.0	428.0	428.0	431.0	431.2	431.5	431.8	432.0	432.5	433.0
147.5°	444.0	444.0	447.0	448.0	452.0	452.2	452.5	452.8	453.0	453.2	453.5
150°	461.0	462.0	464.0	465.0	469.0	469.2	469.5	469.8	470.0	470.2	470.5
152.5°	479.0	480.0	483.0	482.0	485.0	485.2	485.5	485.8	486.0	486.2	486.5
155°	499.0	500.0	502.0	501.0	503.0	503.0	503.0	503.0	503.0	503.2	503.5
157.5°	513.0	515.0	517.0	516.0	519.0	519.0	519.0	519.0	519.0	519.0	519.0
160°	525.0	527.0	529.0	529.0	532.0	532.0	532.0	532.0	532.0	532.0	532.0
162.5°	535.0	536.0	539.0	538.0	541.0	541.0	541.0	541.0	541.0	541.2	541.5
165°	546.0	547.0	549.0	548.0	552.0	552.0	552.0	552.0	552.0	552.2	552.5
167.5°	555.0	556.0	559.0	558.0	561.0	560.8	560.5	560.2	560.0	560.0	560.0
170°	562.0	563.0	566.0	565.0	567.0	566.8	566.5	566.2	566.0	565.8	565.5
172.5°	565.0	566.0	569.0	567.0	569.0	568.8	568.5	568.2	568.0	568.2	568.5
175°	567.0	569.0	570.0	569.0	572.0	572.0	572.0	572.0	572.0	572.2	572.5
177.5°	572.0	573.0	575.0	574.0	578.0	577.8	577.5	577.2	577.0	577.0	577.0
180°	576.0	576.0	576.0	576.0	576.0	576.0	576.0	576.0	576.0	576.0	576.0



REPORT NUMBER: P228252

CATALOG NUMBER: ISC-AF-600-LED-E1-SL3-7060-ULG

**CANDELA DISTRIBUTION (continued):**

	52.5°	55°	57.5°	59°	60°	62.5°	65°	67.5°	70°	72.5°	75°
0°	962.4	962.4	962.4	962.4	962.4	962.4	962.4	962.4	962.4	962.4	962.4
2.5°	993.3	988.2	986.9	984.3	985.6	981.7	980.4	975.3	975.3	972.7	970.1
5°	999.8	994.6	999.8	990.8	992.1	988.2	981.7	981.7	976.6	972.7	965.0
7.5°	981.7	981.7	983.0	977.9	979.2	977.9	970.1	968.8	961.1	961.1	952.1
10°	948.2	948.2	953.4	949.5	950.8	949.5	945.6	944.3	941.7	941.7	927.6
12.5°	909.5	917.2	925.0	921.1	921.1	923.7	923.7	925.0	923.7	922.4	910.8
15°	877.2	888.9	896.6	895.3	896.6	903.0	905.6	906.9	910.8	909.5	899.2
17.5°	847.6	860.5	866.9	872.1	876.0	881.1	888.9	892.7	897.9	896.6	886.3
20°	820.5	832.1	843.7	850.2	851.4	861.8	870.8	882.4	885.0	887.6	874.7
22.5°	792.1	802.4	825.6	821.8	830.8	850.2	855.3	872.1	872.1	881.1	863.1
25°	767.6	768.9	805.0	798.5	806.3	841.1	845.0	874.7	866.9	879.8	859.2
27.5°	743.1	741.8	785.6	777.9	786.9	834.7	837.3	878.5	870.8	886.3	859.2
30°	725.0	721.1	771.5	756.0	768.9	828.2	829.5	882.4	876.0	896.6	868.2
32.5°	721.1	714.7	758.6	746.9	759.8	821.8	829.5	896.6	888.9	914.7	878.5
35°	737.9	727.6	765.0	754.7	765.0	824.4	836.0	918.5	909.5	939.2	903.0
37.5°	768.9	761.1	792.1	781.8	789.5	842.4	852.7	946.9	945.6	981.7	940.5
40°	823.1	815.3	839.8	825.6	832.1	881.1	886.3	986.9	990.8	1034.6	993.3
42.5°	896.6	883.7	903.0	886.3	895.3	939.2	934.0	1035.9	1047.5	1108.2	1060.4
45°	990.8	974.0	985.6	967.5	974.0	1011.4	997.2	1101.7	1113.3	1188.1	1145.6
47.5°	1094.0	1073.3	1087.5	1064.3	1068.2	1108.2	1082.4	1180.4	1198.5	1292.6	1251.4
50°	1217.8	1190.7	1195.9	1174.0	1176.5	1216.5	1188.1	1277.2	1299.1	1403.6	1367.5
52.5°	1376.5	1337.8	1337.8	1308.1	1309.4	1349.4	1314.6	1392.0	1416.5	1522.3	1497.8
55°	1585.5	1554.5	1548.1	1517.1	1506.8	1514.5	1465.5	1519.7	1546.8	1646.1	1626.8
57.5°	1751.9	1748.0	1767.4	1723.5	1713.2	1715.8	1653.9	1657.7	1688.7	1766.1	1772.5
60°	1954.4	1960.9	1963.5	1927.4	1923.5	1887.4	1824.1	1813.8	1852.5	1905.4	1926.1
62.5°	2277.0	2270.5	2238.3	2211.2	2186.7	2089.9	2055.1	1998.3	2052.5	2082.2	2124.7
65°	2969.7	2902.6	2696.2	2714.3	2649.8	2439.5	2409.8	2295.0	2380.2	2381.5	2461.4
67.5°	3656.0	3787.6	3661.2	3663.8	3518.0	3137.4	3045.8	2817.5	2865.2	2809.8	2851.0
70°	3773.4	3957.9	4303.7	4241.7	4234.0	3941.1	3632.8	3252.3	3109.1	2990.4	2894.9
72.5°	3247.1	3431.6	3938.6	3797.9	3850.8	3939.9	3618.6	3333.5	3013.6	2862.7	2656.2
75°	2284.7	2550.5	3065.2	2991.7	3030.4	3177.4	2901.4	2867.8	2497.6	2396.9	2079.6
77.5°	1224.3	1553.2	2129.9	2039.6	2056.4	2140.2	1852.5	1793.2	1435.8	1336.5	976.6
80°	550.9	763.7	1195.9	1095.3	1065.6	1017.9	749.5	590.8	361.2	240.0	166.4
82.5°	365.1	379.3	530.2	459.3	429.6	354.8	229.6	135.5	107.1	90.3	86.4
85°	245.1	224.5	223.2	197.4	183.2	144.5	107.1	67.1	55.5	46.4	42.6
87.5°	14.2	9.0	12.9	14.2	10.3	9.0	6.5	0.0	1.3	0.0	1.3
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
97.5°	12.0	13.0	11.5	10.6	10.0	8.5	7.0	6.5	6.0	5.5	5.0
100°	31.5	32.0	31.5	31.2	31.0	30.5	30.0	29.2	28.5	27.8	27.0
102.5°	50.8	51.0	50.8	50.6	50.5	50.2	50.0	49.5	49.0	48.5	48.0
105°	70.8	71.0	71.0	71.0	71.0	71.0	71.0	70.5	70.0	69.5	69.0
107.5°	92.5	93.0	92.8	92.6	92.5	92.2	92.0	91.8	91.5	91.2	91.0
110°	113.5	114.0	114.0	114.0	114.0	114.0	114.0	113.8	113.5	113.2	113.0



REPORT NUMBER: P228252

CATALOG NUMBER: ISC-AF-600-LED-E1-SL3-7060-ULG

**CANDELA DISTRIBUTION (continued):**

	52.5°	55°	57.5°	59°	60°	62.5°	65°	67.5°	70°	72.5°	75°
112.5°	135.5	136.0	136.0	136.0	136.0	136.0	136.0	135.8	135.5	135.2	135.0
115°	157.5	158.0	158.0	158.0	158.0	158.0	158.0	158.0	158.0	158.0	158.0
117.5°	179.8	180.0	180.2	180.4	180.5	180.8	181.0	180.8	180.5	180.2	180.0
120°	203.5	204.0	204.0	204.0	204.0	204.0	204.0	204.0	204.0	204.0	204.0
122.5°	227.8	228.0	228.0	228.0	228.0	228.0	228.0	228.2	228.5	228.8	229.0
125°	252.8	253.0	253.2	253.4	253.5	253.8	254.0	254.0	254.0	254.0	254.0
127.5°	277.5	278.0	277.8	277.6	277.5	277.2	277.0	277.2	277.5	277.8	278.0
130°	300.5	301.0	301.0	301.0	301.0	301.0	301.0	301.2	301.5	301.8	302.0
132.5°	324.2	325.0	325.0	325.0	325.0	325.0	325.0	325.2	325.5	325.8	326.0
135°	347.2	348.0	348.0	348.0	348.0	348.0	348.0	348.2	348.5	348.8	349.0
137.5°	368.5	369.0	369.0	369.0	369.0	369.0	369.0	369.2	369.5	369.8	370.0
140°	389.8	390.0	390.0	390.0	390.0	390.0	390.0	390.5	391.0	391.5	392.0
142.5°	411.5	412.0	412.0	412.0	412.0	412.0	412.0	412.2	412.5	412.8	413.0
145°	433.5	434.0	433.8	433.6	433.5	433.2	433.0	433.2	433.5	433.8	434.0
147.5°	453.8	454.0	453.5	453.2	453.0	452.5	452.0	452.2	452.5	452.8	453.0
150°	470.8	471.0	470.5	470.2	470.0	469.5	469.0	469.0	469.0	469.0	469.0
152.5°	486.8	487.0	486.8	486.6	486.5	486.2	486.0	486.0	486.0	486.0	486.0
155°	503.8	504.0	503.8	503.6	503.5	503.2	503.0	503.2	503.5	503.8	504.0
157.5°	519.0	519.0	518.5	518.2	518.0	517.5	517.0	517.2	517.5	517.8	518.0
160°	532.0	532.0	531.5	531.2	531.0	530.5	530.0	530.0	530.0	530.0	530.0
162.5°	541.8	542.0	541.5	541.2	541.0	540.5	540.0	539.5	539.0	538.5	538.0
165°	552.8	553.0	552.2	551.8	551.5	550.8	550.0	549.5	549.0	548.5	548.0
167.5°	560.0	560.0	559.5	559.2	559.0	558.5	558.0	558.2	558.5	558.8	559.0
170°	565.2	565.0	564.8	564.6	564.5	564.2	564.0	564.5	565.0	565.5	566.0
172.5°	568.8	569.0	568.5	568.2	568.0	567.5	567.0	567.2	567.5	567.8	568.0
175°	572.8	573.0	572.2	571.8	571.5	570.8	570.0	569.5	569.0	568.5	568.0
177.5°	577.0	577.0	576.2	575.8	575.5	574.8	574.0	574.0	574.0	574.0	574.0
180°	576.0	576.0	576.0	576.0	576.0	576.0	576.0	576.0	576.0	576.0	576.0



REPORT NUMBER: P228252

CATALOG NUMBER: ISC-AF-600-LED-E1-SL3-7060-ULG

**CANDELA DISTRIBUTION (continued):**

	77.5°	80°	85°	90°	95°	100°	102.5°	105°	107.5°	110°	112.5°
0°	962.4	962.4	962.4	962.4	962.4	962.4	962.4	962.4	962.4	962.4	962.4
2.5°	963.7	963.7	962.4	953.4	948.2	945.6	936.6	935.3	931.4	930.1	930.1
5°	962.4	957.2	950.8	937.9	925.0	913.4	909.5	900.5	894.0	886.3	886.3
7.5°	944.3	939.2	925.0	905.6	888.9	872.1	863.1	850.2	839.8	829.5	826.9
10°	923.7	915.9	896.6	870.8	848.9	819.2	807.6	790.8	779.2	763.7	748.2
12.5°	901.8	896.6	873.4	843.7	810.2	772.7	754.7	731.5	716.0	697.9	674.7
15°	892.7	882.4	852.7	815.3	774.0	728.9	703.1	678.6	655.4	634.7	603.7
17.5°	881.1	868.2	834.7	790.8	739.2	685.0	651.5	624.4	593.4	571.5	536.7
20°	868.2	848.9	812.7	759.8	701.8	637.3	594.7	567.6	526.3	504.4	463.1
22.5°	857.9	833.4	789.5	730.2	660.5	588.3	538.0	507.0	460.6	434.8	383.1
25°	855.3	825.6	772.7	705.7	625.7	540.5	479.9	448.9	390.9	361.2	300.6
27.5°	856.6	821.8	762.4	685.0	594.7	498.0	425.7	389.6	316.1	285.1	215.4
30°	857.9	823.1	752.1	667.0	566.3	454.1	369.0	326.4	238.7	211.6	149.6
32.5°	870.8	828.2	749.5	652.8	540.5	410.2	304.5	265.8	169.0	153.5	110.9
35°	886.3	845.0	754.7	650.2	521.2	366.4	238.7	198.7	121.3	117.4	90.3
37.5°	918.5	870.8	775.3	656.6	509.6	321.2	178.0	152.2	95.5	98.0	78.7
40°	967.5	914.7	808.9	676.0	508.3	276.1	131.6	118.7	82.6	85.1	72.2
42.5°	1033.3	975.3	860.5	717.3	514.7	233.5	105.8	101.9	76.1	78.7	69.7
45°	1119.8	1060.4	932.7	770.2	532.8	198.7	92.9	92.9	73.5	76.1	68.4
47.5°	1229.4	1163.6	1021.7	841.1	561.2	179.3	87.7	89.0	72.2	76.1	68.4
50°	1353.3	1281.0	1135.3	932.7	605.0	174.2	89.0	89.0	73.5	76.1	68.4
52.5°	1482.3	1415.2	1257.8	1037.2	665.7	185.8	91.6	90.3	73.5	76.1	67.1
55°	1613.9	1553.2	1393.3	1159.8	749.5	227.1	98.0	94.2	73.5	76.1	68.4
57.5°	1745.5	1702.9	1535.2	1291.4	854.0	301.9	123.8	109.7	81.3	82.6	69.7
60°	1893.8	1862.9	1695.1	1464.2	1002.4	418.0	181.9	138.0	96.8	91.6	74.8
62.5°	2086.0	2078.3	1945.4	1713.2	1241.0	585.7	258.0	167.7	104.5	95.5	80.0
65°	2425.3	2446.0	2319.5	2004.8	1399.7	589.6	251.6	147.1	98.0	90.3	78.7
67.5°	2765.9	2705.3	2380.2	1960.9	1263.0	392.2	160.0	114.8	86.4	83.9	73.5
70°	2753.0	2587.9	2158.3	1714.5	997.2	212.9	116.1	95.5	77.4	77.4	69.7
72.5°	2469.2	2224.1	1764.8	1357.1	665.7	135.5	98.0	83.9	71.0	69.7	64.5
75°	1859.0	1570.0	1134.0	781.8	296.7	87.7	74.8	68.4	61.9	61.9	56.8
77.5°	874.7	492.8	273.5	181.9	99.3	59.3	51.6	51.6	50.3	51.6	46.4
80°	118.7	107.1	91.6	80.0	60.6	41.3	37.4	38.7	37.4	38.7	34.8
82.5°	72.2	64.5	52.9	50.3	37.4	28.4	27.1	28.4	25.8	27.1	20.6
85°	34.8	31.0	24.5	23.2	19.4	16.8	14.2	16.8	12.9	14.2	9.0
87.5°	0.0	2.6	1.3	2.6	2.6	2.6	0.0	2.6	0.0	2.6	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
97.5°	4.8	4.5	4.0	4.0	4.0	4.5	4.8	5.0	5.5	6.0	6.5
100°	26.8	26.5	26.0	25.0	26.0	26.5	26.8	27.0	27.8	28.5	29.2
102.5°	48.2	48.5	49.0	48.0	49.0	48.5	48.2	48.0	48.5	49.0	49.5
105°	69.5	70.0	71.0	69.0	71.0	70.0	69.5	69.0	69.5	70.0	70.5
107.5°	91.2	91.5	92.0	91.0	92.0	91.5	91.2	91.0	91.2	91.5	91.8
110°	113.2	113.5	114.0	113.0	114.0	113.5	113.2	113.0	113.2	113.5	113.8



REPORT NUMBER: P228252  
 CATALOG NUMBER: ISC-AF-600-LED-E1-SL3-7060-ULG

REPORT N  
 CATALOG

**CANDELA DISTRIBUTION (continued):**

**CANDELA**

	77.5°	80°	85°	90°	95°	100°	102.5°	105°	107.5°	110°	112.5°	
112.5°	135.5	136.0	137.0	135.0	137.0	136.0	135.5	135.0	135.2	135.5	135.8	0°
115°	158.5	159.0	160.0	159.0	160.0	159.0	158.5	158.0	158.0	158.0	158.0	2.5°
117.5°	180.5	181.0	182.0	180.0	182.0	181.0	180.5	180.0	180.2	180.5	180.8	5°
120°	204.5	205.0	206.0	204.0	206.0	205.0	204.5	204.0	204.0	204.0	204.0	7.5°
122.5°	230.0	231.0	233.0	232.0	233.0	231.0	230.0	229.0	228.8	228.5	228.2	10°
125°	254.8	255.5	257.0	256.0	257.0	255.5	254.8	254.0	254.0	254.0	254.0	12.5°
127.5°	278.8	279.5	281.0	278.0	281.0	279.5	278.8	278.0	277.8	277.5	277.2	15°
130°	302.8	303.5	305.0	303.0	305.0	303.5	302.8	302.0	301.8	301.5	301.2	17.5°
132.5°	326.8	327.5	329.0	327.0	329.0	327.5	326.8	326.0	325.8	325.5	325.2	20°
135°	349.5	350.0	351.0	350.0	351.0	350.0	349.5	349.0	348.8	348.5	348.2	22.5°
137.5°	371.0	372.0	374.0	372.0	374.0	372.0	371.0	370.0	369.8	369.5	369.2	25°
140°	393.0	394.0	396.0	394.0	396.0	394.0	393.0	392.0	391.5	391.0	390.5	27.5°
142.5°	413.8	414.5	416.0	415.0	416.0	414.5	413.8	413.0	412.8	412.5	412.2	30°
145°	434.8	435.5	437.0	435.0	437.0	435.5	434.8	434.0	433.8	433.5	433.2	32.5°
147.5°	453.8	454.5	456.0	453.0	456.0	454.5	453.8	453.0	452.8	452.5	452.2	35°
150°	470.0	471.0	473.0	470.0	473.0	471.0	470.0	469.0	469.0	469.0	469.0	37.5°
152.5°	486.8	487.5	489.0	486.0	489.0	487.5	486.8	486.0	486.0	486.0	486.0	40°
155°	504.8	505.5	507.0	505.0	507.0	505.5	504.8	504.0	503.8	503.5	503.2	42.5°
157.5°	519.2	520.5	523.0	520.0	523.0	520.5	519.2	518.0	517.8	517.5	517.2	45°
160°	530.8	531.5	533.0	531.0	533.0	531.5	530.8	530.0	530.0	530.0	530.0	47.5°
162.5°	538.5	539.0	540.0	537.0	540.0	539.0	538.5	538.0	538.5	539.0	539.5	50°
165°	548.5	549.0	550.0	548.0	550.0	549.0	548.5	548.0	548.5	549.0	549.5	52.5°
167.5°	560.0	561.0	563.0	561.0	563.0	561.0	560.0	559.0	558.8	558.5	558.2	55°
170°	567.2	568.5	571.0	569.0	571.0	568.5	567.2	566.0	565.5	565.0	564.5	57.5°
172.5°	568.8	569.5	571.0	568.0	571.0	569.5	568.8	568.0	567.8	567.5	567.2	60°
175°	568.8	569.5	571.0	568.0	571.0	569.5	568.8	568.0	568.5	569.0	569.5	62.5°
177.5°	574.8	575.5	577.0	574.0	577.0	575.5	574.8	574.0	574.0	574.0	574.0	65°
180°	576.0	576.0	576.0	576.0	576.0	576.0	576.0	576.0	576.0	576.0	576.0	67.5°
												70°
												72.5°
												75°
												77.5°
												80°
												82.5°
												85°
												87.5°
												90°
												92.5°
												95°
												97.5°
												100°
												102.5°
												105°
												107.5°
												110°



NUMBER: P228252  
 NUMBER: ISC-AF-600-LED-E1-SL3-7060-ULG

REPORT NUMBER: P  
 CATALOG NUMBER:

**DISTRIBUTION (continued):**

**CANDELA DISTRIBUTION**

115°	117.5°	120°	122.5°	125°	127.5°	130°	135°	145°	155°	165°	115°	115°
962.4	962.4	962.4	962.4	962.4	962.4	962.4	962.4	962.4	962.4	962.4	112.5°	136.0
923.7	919.8	918.5	913.4	912.1	906.9	905.6	900.5	891.4	887.6	881.1	115°	158.0
874.7	868.2	863.1	860.5	850.2	845.0	837.3	826.9	807.6	798.5	783.1	117.5°	181.0
806.3	805.0	789.5	784.4	771.5	762.4	750.8	734.0	705.7	688.9	664.4	120°	204.0
731.5	726.3	708.2	697.9	681.2	668.3	652.8	628.3	584.4	549.6	512.2	122.5°	228.0
661.8	646.3	625.7	610.2	589.6	571.5	553.4	516.0	446.4	389.6	338.0	125°	254.0
589.6	566.3	544.4	518.6	496.7	468.3	447.7	398.6	307.0	237.4	205.1	127.5°	277.0
516.0	483.8	459.3	424.4	399.9	361.2	339.3	279.9	201.2	170.3	160.0	130°	301.0
438.6	396.0	369.0	326.4	301.9	252.9	236.1	193.5	154.8	143.2	140.6	132.5°	325.0
356.1	304.5	274.8	228.3	211.6	181.9	169.0	148.4	130.3	125.1	127.7	135°	348.0
269.6	214.2	194.8	161.3	154.8	139.3	134.2	123.8	114.8	114.8	118.7	137.5°	369.0
192.2	149.6	144.5	123.8	122.6	114.8	110.9	105.8	103.2	105.8	110.9	140°	390.0
140.6	113.5	113.5	101.9	101.9	96.8	95.5	92.9	92.9	98.0	103.2	142.5°	412.0
110.9	92.9	95.5	86.4	87.7	83.9	85.1	83.9	85.1	89.0	92.9	145°	433.0
92.9	80.0	83.9	76.1	78.7	74.8	77.4	77.4	80.0	81.3	82.6	147.5°	452.0
82.6	73.5	76.1	71.0	73.5	69.7	73.5	73.5	74.8	74.8	74.8	150°	469.0
76.1	68.4	72.2	67.1	71.0	67.1	71.0	71.0	69.7	68.4	69.7	152.5°	486.0
72.2	67.1	71.0	65.8	69.7	65.8	68.4	67.1	64.5	64.5	64.5	155°	503.0
71.0	65.8	68.4	64.5	67.1	63.2	65.8	64.5	60.6	59.3	61.9	157.5°	517.0
71.0	64.5	68.4	63.2	65.8	61.9	64.5	60.6	56.8	56.8	60.6	160°	530.0
71.0	64.5	68.4	63.2	65.8	60.6	61.9	58.1	52.9	54.2	59.3	162.5°	540.0
72.2	67.1	69.7	64.5	65.8	58.1	60.6	55.5	51.6	52.9	56.8	165°	550.0
73.5	67.1	69.7	61.9	63.2	58.1	58.1	55.5	51.6	51.6	55.5	167.5°	558.0
73.5	65.8	67.1	60.6	61.9	55.5	56.8	54.2	50.3	49.0	51.6	170°	564.0
76.1	68.4	68.4	59.3	60.6	54.2	55.5	52.9	49.0	46.4	47.7	172.5°	567.0
78.7	69.7	71.0	61.9	61.9	55.5	56.8	51.6	46.4	43.9	45.2	175°	570.0
78.7	69.7	71.0	63.2	63.2	56.8	56.8	51.6	43.9	41.3	41.3	177.5°	574.0
74.8	68.4	69.7	63.2	63.2	56.8	56.8	50.3	42.6	38.7	37.4	180°	576.0
72.2	65.8	67.1	59.3	60.6	54.2	54.2	47.7	40.0	36.1	33.5		
65.8	60.6	60.6	55.5	54.2	47.7	47.7	43.9	37.4	32.3	29.7		
56.8	51.6	50.3	45.2	45.2	41.3	40.0	36.1	31.0	27.1	25.8		
46.4	40.0	40.0	33.5	33.5	29.7	31.0	27.1	23.2	21.9	20.6		
33.5	27.1	27.1	21.9	21.9	18.1	19.4	18.1	16.8	16.8	15.5		
20.6	14.2	15.5	11.6	14.2	10.3	11.6	10.3	10.3	9.0	9.0		
10.3	5.2	7.7	3.9	6.5	1.3	3.9	2.6	2.6	2.6	2.6		
1.3	0.0	1.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0		
7.0	8.5	10.0	11.5	13.0	12.0	11.0	9.0	4.0	3.0	2.0		
30.0	30.5	31.0	31.5	32.0	31.5	31.0	30.0	22.0	14.0	10.0		
50.0	50.2	50.5	50.8	51.0	50.8	50.5	50.0	45.0	38.0	32.0		
71.0	71.0	71.0	71.0	71.0	70.8	70.5	70.0	66.0	61.0	56.0		
92.0	92.2	92.5	92.8	93.0	92.5	92.0	91.0	88.0	84.0	80.0		
114.0	114.0	114.0	114.0	114.0	113.5	113.0	112.0	110.0	106.0	103.0		

'228252  
 ISC-AF-600-LED-E1-SL3-7060-ULG

REPORT NUMBER: P228252  
 CATALOG NUMBER: ISC-AF-60

**TION (continued):**

**CANDELA DISTRIBUTION (con**

117.5°	120°	122.5°	125°	127.5°	130°	135°	145°	155°	165°		175°	180°
136.0	136.0	136.0	136.0	135.5	135.0	134.0	132.0	129.0	126.0	0°	962.4	962.4
158.0	158.0	158.0	158.0	157.5	157.0	156.0	154.0	151.0	149.0	2.5°	874.7	878.5
180.8	180.5	180.2	180.0	179.8	179.5	179.0	177.0	174.0	172.0	5°	777.9	779.2
204.0	204.0	204.0	204.0	203.5	203.0	202.0	201.0	198.0	196.0	7.5°	660.5	657.9
228.0	228.0	228.0	228.0	227.8	227.5	227.0	226.0	223.0	221.0	10°	504.4	498.0
253.8	253.5	253.2	253.0	252.8	252.5	252.0	251.0	248.0	247.0	12.5°	325.1	316.1
277.2	277.5	277.8	278.0	277.5	277.0	276.0	274.0	272.0	270.0	15°	196.1	193.5
301.0	301.0	301.0	301.0	300.5	300.0	299.0	298.0	294.0	293.0	17.5°	157.4	157.4
325.0	325.0	325.0	325.0	324.2	323.5	322.0	321.0	318.0	317.0	20°	140.6	140.6
348.0	348.0	348.0	348.0	347.2	346.5	345.0	345.0	341.0	339.0	22.5°	130.3	130.3
369.0	369.0	369.0	369.0	368.5	368.0	367.0	367.0	364.0	363.0	25°	122.6	123.8
390.0	390.0	390.0	390.0	389.8	389.5	389.0	388.0	386.0	385.0	27.5°	116.1	116.1
412.0	412.0	412.0	412.0	411.5	411.0	410.0	410.0	407.0	408.0	30°	108.4	108.4
433.2	433.5	433.8	434.0	433.5	433.0	432.0	431.0	428.0	428.0	32.5°	95.5	95.5
452.5	453.0	453.5	454.0	453.8	453.5	453.0	452.0	448.0	447.0	35°	85.1	83.9
469.5	470.0	470.5	471.0	470.8	470.5	470.0	469.0	465.0	464.0	37.5°	76.1	77.4
486.2	486.5	486.8	487.0	486.8	486.5	486.0	485.0	482.0	483.0	40°	69.7	71.0
503.2	503.5	503.8	504.0	503.8	503.5	503.0	503.0	501.0	502.0	42.5°	67.1	67.1
517.5	518.0	518.5	519.0	519.0	519.0	519.0	519.0	516.0	517.0	45°	64.5	64.5
530.5	531.0	531.5	532.0	532.0	532.0	532.0	532.0	529.0	529.0	47.5°	64.5	64.5
540.5	541.0	541.5	542.0	541.8	541.5	541.0	541.0	538.0	539.0	50°	63.2	64.5
550.8	551.5	552.2	553.0	552.8	552.5	552.0	552.0	548.0	549.0	52.5°	61.9	61.9
558.5	559.0	559.5	560.0	560.0	560.0	560.0	561.0	558.0	559.0	55°	58.1	59.3
564.2	564.5	564.8	565.0	565.2	565.5	566.0	567.0	565.0	566.0	57.5°	54.2	55.5
567.5	568.0	568.5	569.0	568.8	568.5	568.0	569.0	567.0	569.0	60°	50.3	50.3
570.8	571.5	572.2	573.0	572.8	572.5	572.0	572.0	569.0	570.0	62.5°	45.2	45.2
574.8	575.5	576.2	577.0	577.0	577.0	577.0	578.0	574.0	575.0	65°	41.3	41.3
576.0	576.0	576.0	576.0	576.0	576.0	576.0	576.0	576.0	576.0	67.5°	36.1	36.1
										70°	32.3	32.3
										72.5°	28.4	28.4
										75°	24.5	24.5
										77.5°	20.6	19.4
										80°	15.5	15.5
										82.5°	9.0	9.0
										85°	2.6	2.6
										87.5°	0.0	0.0
										90°	0.0	0.0
										92.5°	0.0	0.0
										95°	1.0	1.0
										97.5°	2.0	2.0
										100°	8.0	8.0
										102.5°	28.0	28.0
										105°	54.0	54.0
										107.5°	77.0	78.0
										110°	102.0	101.0



REPORT NUMBER: P228252

CATALOG NUMBER: ISC-AF-600-LED-E1-S

**CANDELA DISTRIBUTION (continued):**

	175°	180°
112.5°	124.0	124.0
115°	147.0	146.0
117.5°	170.0	169.0
120°	195.0	193.0
122.5°	220.0	219.0
125°	246.0	244.0
127.5°	269.0	267.0
130°	292.0	290.0
132.5°	314.0	313.0
135°	337.0	336.0
137.5°	360.0	359.0
140°	383.0	382.0
142.5°	406.0	404.0
145°	426.0	425.0
147.5°	444.0	444.0
150°	462.0	461.0
152.5°	480.0	479.0
155°	500.0	499.0
157.5°	515.0	513.0
160°	527.0	525.0
162.5°	536.0	535.0
165°	547.0	546.0
167.5°	556.0	555.0
170°	563.0	562.0
172.5°	566.0	565.0
175°	569.0	567.0
177.5°	573.0	572.0
180°	576.0	576.0

(END OF REPORT)

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report

