

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P271458

Luminaire Tested: **ISC-AF-600-LED-E1-T3-7027-ULG**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P271458
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P29759)-DOWNLIGHT AND
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: MCGRAW-EDISON
Catalog Number: ISC-AF-600-LED-E1-T3-7027-ULG
Description: IMPACT ELITE LED CYLINDER LUMINAIRE WITH UPLIGHT
LIGHT SQUARE WITH ACCULED OPTICS-TYPE III, WITH UPLIGHT GLOW
Light Source: (16) 2700K CCT, 70 CRI LEDs and (1) UPLIGHT LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4792.7 lumens
Efficiency: N/A
Efficacy: 95.1 lumens/watt
Luminous Opening: Rectangular w/ Sides (W: 0.5' x L: 0.5' x H: 0.54')
IES Classification: Type III - Medium - Non-Cutoff
BUG Rating: B1 - U5 - G1


Input Watts (W): 50.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



REPORT NUMBER: P271458
 CATALOG NUMBER: ISC-AF-600-LED-E1-T3-7027-ULG

Iso-Footcandle Lines of Horizontal Illumination


× Max cd
 - - - 1/2 Max cd

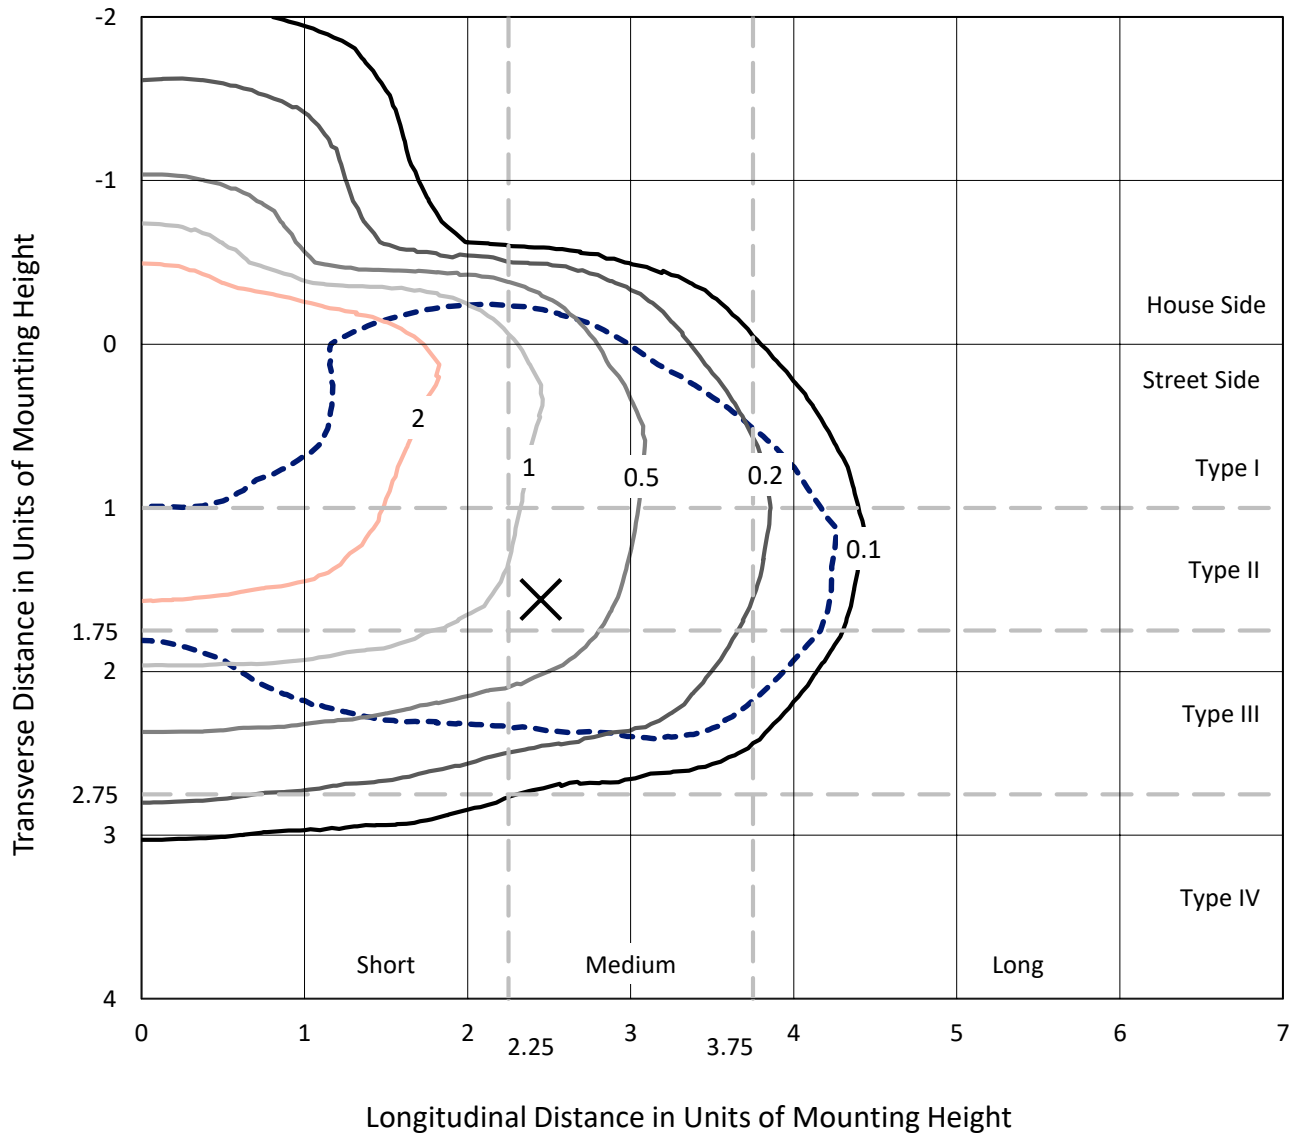

Based on 10 foot mounting height. Maximum calculated value = 4.4 fc
 Type III - Medium - Non-Cutoff

REPORT NUMBER: P271458
CATALOG NUMBER: ISC-AF-600-LED-E1-T3-7027-ULG

Luminous Intensity Polar Plot

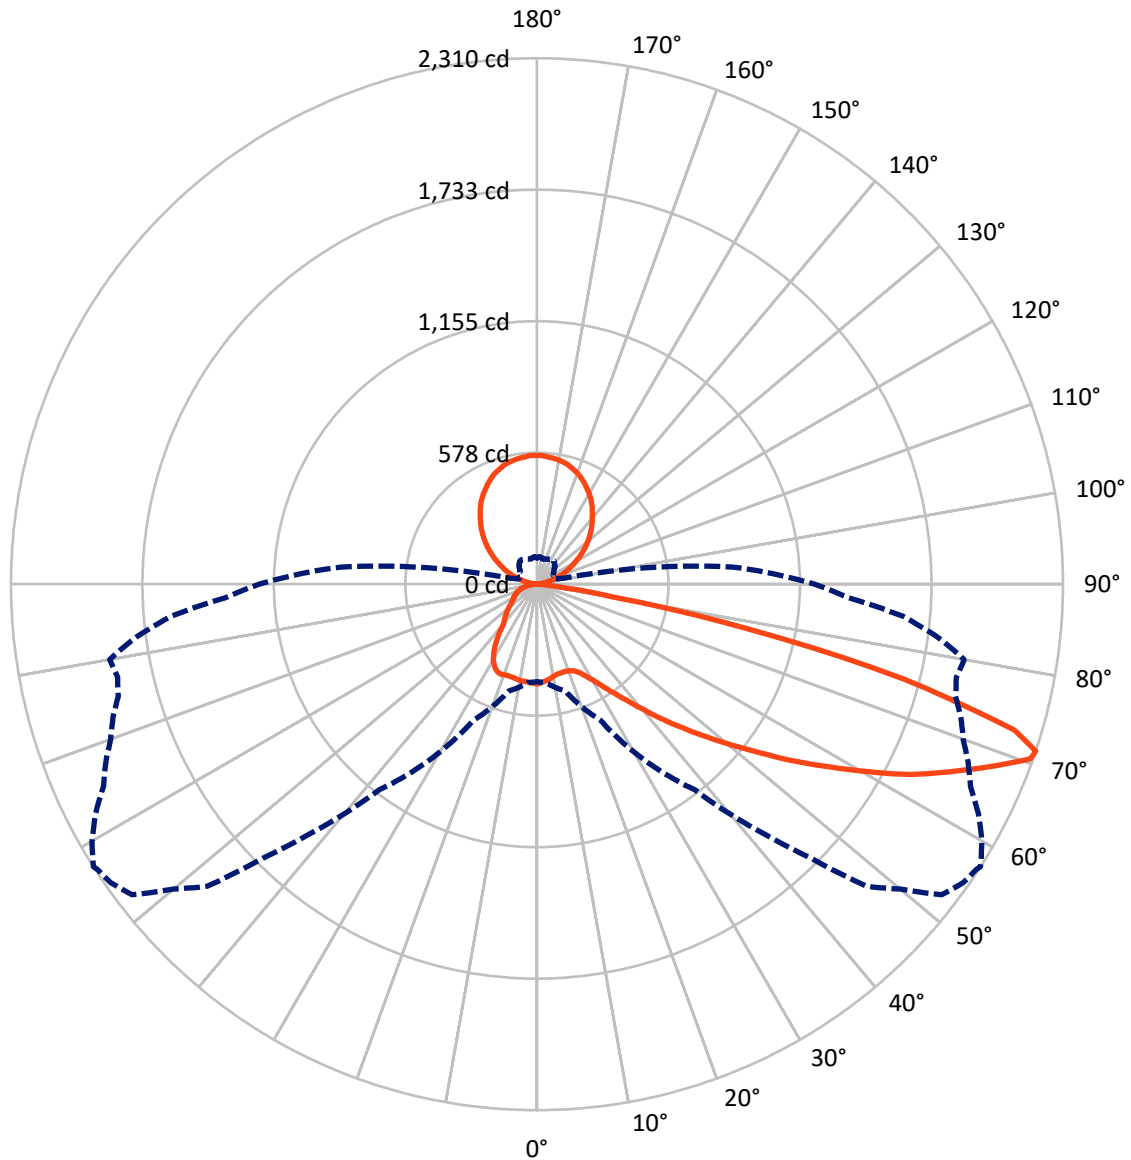

— Vertical Plane Through 57.5-Deg Lateral - - - Horizontal Cone Through 71-Deg Vertical

REPORT NUMBER: P271458

CATALOG NUMBER: ISC-AF-600-LED-E1-T3-7027-ULG


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	738.7	699.9	1438.5
	% Fixture	15.4	14.6	30.0
Street Side	Lumens	2654.3	699.9	3354.2
	% Fixture	55.4	14.6	70.0
Total	Lumens	3393.0	1399.8	4792.7
	% Fixture	70.8	29.2	100.0

Coefficient of Utilization

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	41.3	0.9
10°-20°	118.9	2.5
20°-30°	197.3	4.1
30°-40°	314.1	6.6
40°-50°	510.3	10.6
50°-60°	765.1	16.0
60°-70°	912.8	19.0
70°-80°	493.0	10.3
80°-90°	40.1	0.8
90°-100°	4.7	0.1
100°-110°	67.7	1.4
110°-120°	150.2	3.1
120°-130°	219.7	4.6
130°-140°	260.7	5.4
140°-150°	264.3	5.5
150°-160°	226.8	4.7
160°-170°	152.2	3.2
170°-180°	53.3	1.1
0°-90°	3393.0	70.8
0°-180°	4792.7	100.0

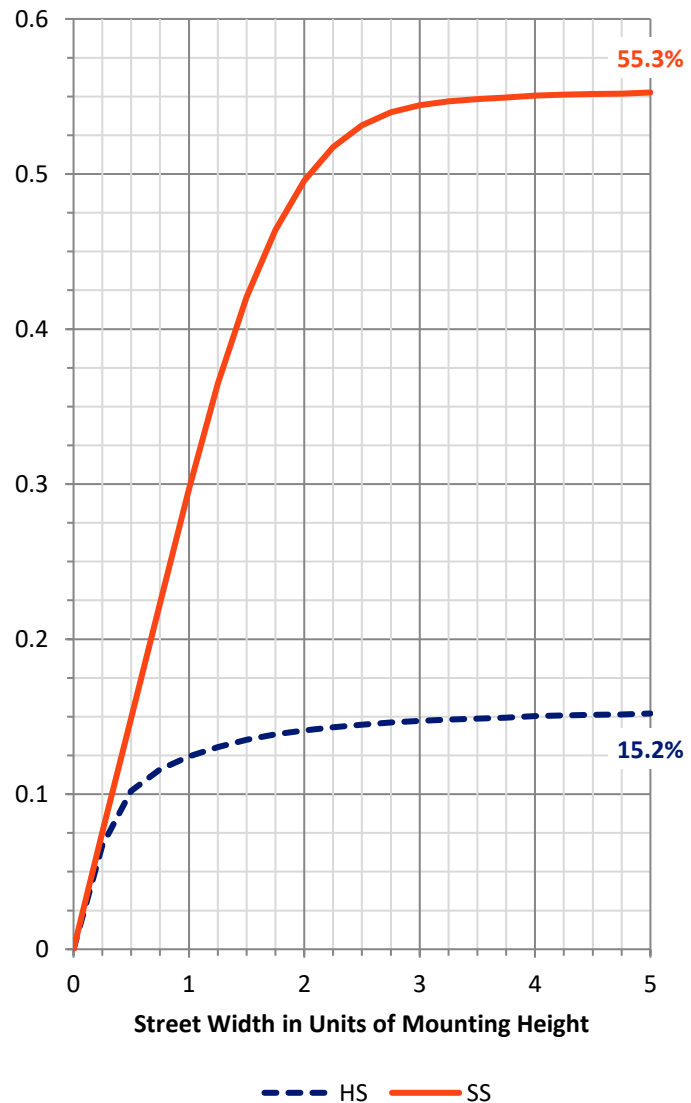

REPORT NUMBER: P271458


CATALOG NUMBER: ISC-AF-600-LED-E1-T3-7027-ULG

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	188.2	3.9			
FM	(30°-60°)	1231.4	25.7			
FH	(60°-80°)	1208.2	25.2			G1/1800
FVH	(80°-90°)	26.4	0.6			G1/100
BL	(0°-30°)	169.2	3.5	B1/500		
BM	(30°-60°)	358.2	7.5	B1/1000		
BH	(60°-80°)	197.6	4.1	B1/500		G1/500
BVH	(80°-90°)	13.7	0.3			G1/100
UL	(90°-100°)	4.7	0.1		U1/10	
UH	(100°-180°)	699.9	14.6		U4/1000	

BUG Rating: B1-U5-G1

Type III Medium

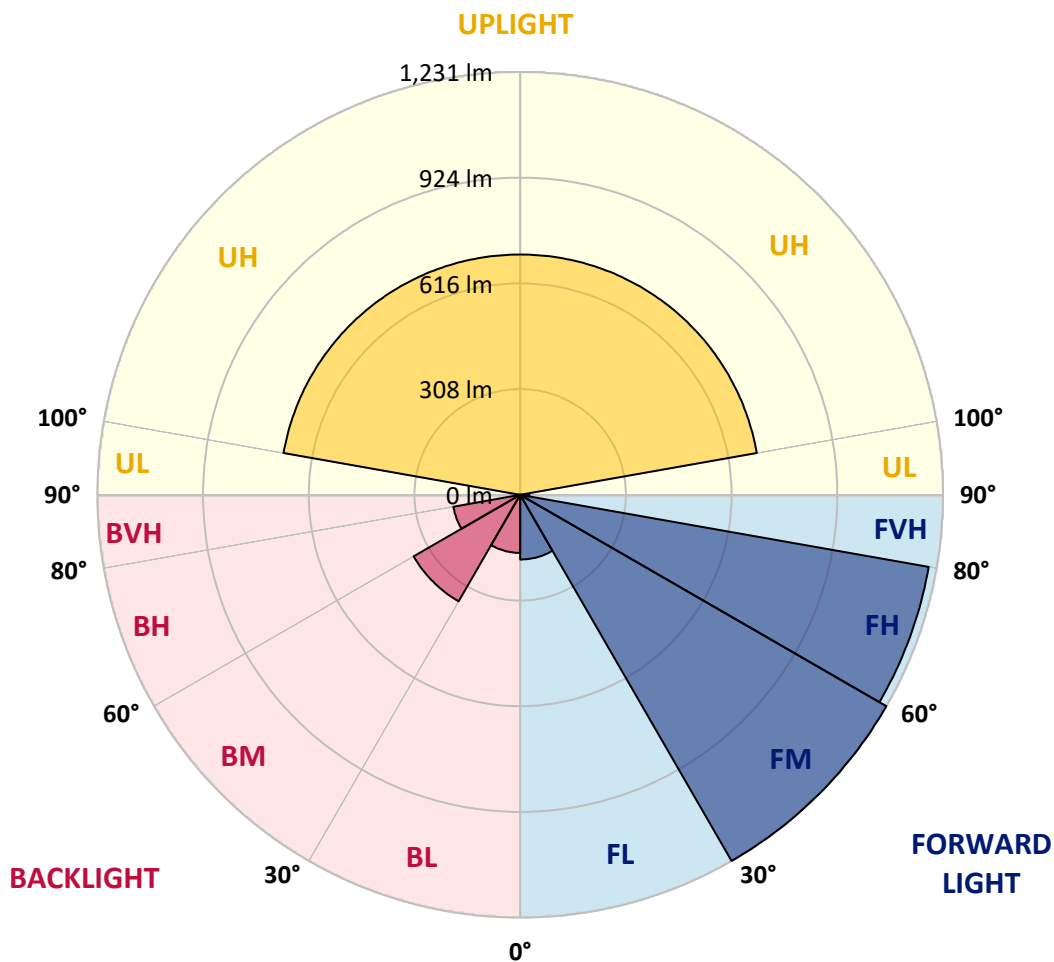



REPORT NUMBER: P271458

CATALOG NUMBER: ISC-AF-600-LED-E1-T3-7027-ULG

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	37.5°	40°	42.5°	45°	47.5°	50°
0°	438.4	438.4	438.4	438.4	438.4	438.4	438.4	438.4	438.4	438.4	438.4
2.5°	438.4	437.1	436.0	436.0	436.0	435.0	431.5	432.7	436.0	433.8	437.1
5°	437.1	435.0	433.8	433.8	433.8	430.5	429.4	428.2	435.0	429.4	433.8
7.5°	424.9	424.9	422.7	424.9	427.1	423.7	421.6	422.7	428.2	422.7	428.2
10°	415.8	413.7	412.5	412.5	414.7	410.3	408.1	410.3	417.0	410.3	418.1
12.5°	412.5	413.7	410.3	410.3	409.2	403.6	403.6	403.6	409.2	403.6	410.3
15°	418.1	417.0	413.7	411.4	408.1	403.6	402.4	403.6	408.1	401.4	409.2
17.5°	426.0	426.0	420.4	414.7	411.4	406.9	406.9	404.7	408.1	403.6	409.2
20°	446.2	442.9	435.0	426.0	417.0	414.7	410.3	410.3	412.5	408.1	411.4
22.5°	481.0	477.6	464.2	447.3	432.7	427.1	424.9	423.7	421.6	419.3	419.3
25°	526.9	521.3	505.6	485.4	460.7	456.2	451.8	448.4	440.6	440.6	435.0
27.5°	576.3	570.6	553.7	531.3	501.2	494.3	488.8	484.3	470.8	470.8	460.7
30°	632.2	625.5	605.4	580.7	545.9	543.7	535.9	529.1	511.1	510.1	496.7
32.5°	697.3	688.3	668.1	635.6	598.6	599.8	587.4	582.9	559.4	560.5	542.6
35°	771.3	761.1	741.0	698.4	660.3	663.7	652.3	644.6	615.5	615.5	596.4
37.5°	849.8	849.8	823.9	774.6	728.6	736.5	723.0	715.2	686.0	690.5	660.3
40°	937.2	942.8	914.7	858.7	811.6	815.0	804.9	795.9	761.1	768.9	736.5
42.5°	1029.1	1039.2	1014.5	956.2	903.5	914.7	897.9	889.0	852.0	868.8	830.8
45°	1162.5	1164.7	1118.7	1062.8	1018.9	1029.1	1005.6	1002.1	956.2	974.2	936.0
47.5°	1246.6	1241.0	1207.3	1173.7	1147.9	1168.2	1146.8	1141.2	1088.6	1100.9	1047.1
50°	1303.8	1307.1	1281.3	1278.0	1282.5	1320.6	1317.3	1306.0	1243.3	1234.2	1167.0
52.5°	1355.4	1340.7	1336.3	1367.7	1415.9	1460.7	1478.6	1464.1	1395.7	1371.0	1306.0
55°	1346.4	1325.1	1348.5	1424.8	1520.1	1589.6	1591.9	1581.7	1520.1	1510.1	1439.4
57.5°	1285.8	1290.2	1338.6	1447.3	1608.7	1680.4	1692.8	1680.4	1630.0	1639.0	1580.7
60°	1201.8	1210.7	1286.9	1427.0	1679.3	1740.9	1746.6	1761.1	1727.5	1751.1	1710.7
62.5°	1076.2	1088.6	1186.0	1376.7	1630.0	1721.9	1773.4	1807.1	1800.3	1854.2	1832.9
65°	988.8	988.8	1084.1	1318.4	1581.7	1702.8	1780.2	1843.0	1851.9	1937.1	1929.3
67.5°	826.2	831.8	913.7	1155.8	1523.4	1660.2	1776.8	1883.4	1937.1	2071.6	2078.4
70°	571.7	576.3	630.0	825.0	1230.9	1347.5	1519.0	1692.8	1854.2	2057.1	2162.5
71°	428.2	433.8	486.5	658.1	1042.6	1139.1	1317.3	1497.7	1700.6	1964.1	2082.9
72.5°	209.7	213.0	264.6	422.7	725.3	848.6	951.8	1124.4	1339.6	1641.2	1809.4
75°	97.6	98.6	109.9	152.4	276.9	329.6	375.5	486.5	619.9	884.5	1088.6
77.5°	71.8	71.8	78.5	99.8	143.5	145.7	143.5	146.9	177.1	253.3	381.2
80°	52.7	52.7	57.2	67.2	95.3	95.3	92.0	93.1	89.7	93.1	105.4
82.5°	34.8	34.8	37.0	40.3	58.3	58.3	56.1	56.1	53.8	52.7	57.2
85°	20.2	21.3	22.4	19.0	24.6	23.5	21.3	23.5	22.4	20.2	24.6
87.5°	0.0	0.0	0.0	0.0	1.1	0.0	0.0	0.0	1.1	0.0	1.1
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
97.5°	2.0	2.0	2.0	3.0	4.0	5.1	6.4	7.6	8.8	9.8	10.8
100°	7.8	7.8	9.8	13.7	21.6	23.5	25.5	27.5	29.5	29.9	30.5
102.5°	27.5	27.5	31.4	37.3	44.2	45.4	46.6	47.9	49.0	49.2	49.6
105°	53.0	53.0	55.0	59.8	64.8	65.8	66.7	67.7	68.7	68.9	69.2
107.5°	76.5	75.5	78.5	82.5	86.3	87.1	87.9	88.6	89.3	89.8	90.3



REPORT NUMBER: P271458

CATALOG NUMBER: ISC-AF-600-LED-E1-T3-7027-ULG

CANDELA DISTRIBUTION (continued):

	0°	5°	15°	25°	35°	37.5°	40°	42.5°	45°	47.5°	50°
110°	99.2	100.1	101.1	104.0	108.0	108.4	109.0	109.4	110.0	110.4	110.9
112.5°	121.7	121.7	123.7	126.6	129.5	130.1	130.5	131.1	131.5	132.1	132.5
115°	143.3	144.3	146.2	148.2	151.2	151.6	152.2	152.6	153.1	153.6	154.1
117.5°	165.8	166.8	168.8	170.8	173.7	174.2	174.7	175.2	175.7	175.9	176.2
120°	189.5	191.4	192.3	194.3	197.3	197.4	197.8	198.1	198.3	198.7	199.2
122.5°	215.0	216.0	216.9	218.8	221.8	222.0	222.3	222.6	222.8	223.0	223.3
125°	239.5	241.5	242.5	243.4	246.3	246.6	246.9	247.1	247.3	247.6	247.8
127.5°	262.0	264.0	265.0	267.0	269.0	269.4	269.9	270.4	270.9	271.4	271.8
130°	284.7	286.6	287.5	288.5	292.5	292.7	292.9	293.3	293.5	293.9	294.5
132.5°	307.2	308.2	311.2	312.1	315.0	315.2	315.6	315.8	316.0	316.8	317.6
135°	329.8	330.8	332.7	334.7	338.6	338.6	338.6	338.6	338.6	339.4	340.1
137.5°	352.3	353.3	356.3	357.3	360.2	360.2	360.2	360.2	360.2	360.7	361.2
140°	375.0	375.9	377.8	378.8	380.8	381.0	381.3	381.6	381.8	382.0	382.3
142.5°	396.5	398.5	400.5	399.5	402.4	402.4	402.4	402.4	402.4	402.9	403.4
145°	417.2	418.1	420.0	420.0	423.0	423.2	423.6	423.8	424.0	424.4	425.0
147.5°	435.8	435.8	438.7	439.7	443.7	443.9	444.1	444.4	444.6	444.8	445.1
150°	452.5	453.5	455.4	456.4	460.3	460.5	460.8	461.1	461.3	461.5	461.8
152.5°	470.2	471.1	474.0	473.0	476.0	476.2	476.6	476.8	477.0	477.2	477.4
155°	489.8	490.7	492.7	491.7	493.7	493.7	493.7	493.7	493.7	493.9	494.2
157.5°	503.5	505.5	507.5	506.5	509.4	509.4	509.4	509.4	509.4	509.4	509.4
160°	515.3	517.2	519.2	519.2	522.2	522.2	522.2	522.2	522.2	522.2	522.2
162.5°	525.1	526.0	529.0	528.0	531.0	531.0	531.0	531.0	531.0	531.2	531.4
165°	535.9	536.8	538.8	537.8	541.8	541.8	541.8	541.8	541.8	541.9	542.3
167.5°	544.7	545.7	548.7	547.7	550.6	550.4	550.1	549.9	549.7	549.7	549.7
170°	551.6	552.5	555.5	554.5	556.5	556.3	556.1	555.7	555.5	555.3	555.1
172.5°	554.5	555.5	558.5	556.5	558.5	558.3	557.9	557.7	557.5	557.7	557.9
175°	556.5	558.5	559.5	558.5	561.4	561.4	561.4	561.4	561.4	561.6	561.9
177.5°	561.4	562.4	564.3	563.3	567.3	567.1	566.8	566.5	566.3	566.3	566.3
180°	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3



REPORT NUMBER: P271458

CATALOG NUMBER: ISC-AF-600-LED-E1-T3-7027-ULG

CANDELA DISTRIBUTION (continued):

	52.5°	55°	57°	57.5°	60°	62.5°	65°	67.5°	70°	72.5°	75°
0°	438.4	438.4	438.4	438.4	438.4	438.4	438.4	438.4	438.4	438.4	438.4
2.5°	432.7	436.0	436.0	431.5	435.0	431.5	433.8	430.5	433.8	428.2	435.0
5°	429.4	432.7	432.7	426.0	432.7	426.0	431.5	423.7	431.5	422.7	431.5
7.5°	420.4	428.2	428.2	419.3	427.1	420.4	427.1	419.3	426.0	415.8	427.1
10°	410.3	418.1	419.3	410.3	419.3	411.4	421.6	411.4	421.6	410.3	422.7
12.5°	403.6	412.5	414.7	404.7	415.8	405.9	418.1	406.9	418.1	405.9	420.4
15°	402.4	410.3	412.5	403.6	413.7	402.4	417.0	403.6	418.1	404.7	421.6
17.5°	403.6	410.3	412.5	402.4	412.5	403.6	415.8	404.7	418.1	405.9	421.6
20°	406.9	411.4	411.4	405.9	413.7	405.9	415.8	404.7	419.3	408.1	422.7
22.5°	417.0	418.1	418.1	413.7	418.1	412.5	420.4	412.5	422.7	413.7	427.1
25°	433.8	432.7	430.5	429.4	430.5	427.1	431.5	426.0	436.0	428.2	441.7
27.5°	463.0	458.6	456.2	456.2	455.1	456.2	456.2	454.0	458.6	456.2	465.2
30°	498.9	491.0	487.6	491.0	486.5	491.0	489.8	488.8	493.3	491.0	498.9
32.5°	545.9	532.4	530.3	537.0	528.0	535.9	529.1	532.4	535.9	538.1	542.6
35°	600.9	585.2	582.9	589.6	579.6	590.7	582.9	587.4	589.6	595.3	598.6
37.5°	665.9	646.8	643.5	652.3	639.0	651.3	640.1	653.6	650.2	658.1	661.4
40°	744.3	722.0	714.2	726.4	710.6	720.8	709.6	724.1	720.8	736.5	739.8
42.5°	840.7	808.3	800.4	812.8	789.3	792.6	783.6	800.4	798.1	819.4	822.8
45°	940.5	901.3	890.1	902.4	875.5	882.2	868.8	886.8	885.5	902.4	915.9
47.5°	1051.6	1003.4	988.8	1002.1	969.7	977.5	964.2	983.1	984.3	1003.4	1016.8
50°	1167.0	1116.5	1097.5	1109.9	1079.5	1085.2	1071.7	1095.2	1094.1	1119.8	1130.0
52.5°	1292.5	1241.0	1226.4	1232.0	1196.1	1202.9	1191.6	1220.8	1214.1	1229.8	1249.9
55°	1431.6	1372.1	1355.4	1372.1	1329.5	1338.6	1323.9	1350.8	1339.6	1359.9	1365.4
57.5°	1573.9	1515.6	1502.1	1514.5	1474.2	1480.9	1461.8	1484.2	1475.3	1488.7	1497.7
60°	1725.3	1672.6	1659.1	1672.6	1633.4	1634.5	1601.9	1625.6	1612.1	1628.9	1625.6
62.5°	1869.9	1825.1	1821.7	1840.8	1791.4	1785.8	1746.6	1763.4	1744.3	1755.6	1742.0
65°	1993.2	1967.4	1971.9	1987.6	1943.8	1930.4	1885.5	1894.5	1866.5	1866.5	1849.7
67.5°	2154.7	2126.6	2126.6	2140.0	2085.1	2050.3	1988.7	1980.9	1934.9	1926.0	1886.7
70°	2289.2	2297.0	2288.1	2299.2	2234.3	2163.6	2081.7	2042.6	1982.0	1952.8	1906.8
71°	2240.9	2285.7	2301.5	2310.4	2256.6	2185.9	2100.8	2050.3	1992.1	1952.8	1903.5
72.5°	2022.4	2131.0	2192.8	2192.8	2199.5	2154.7	2072.7	2017.9	1951.7	1900.2	1854.2
75°	1417.0	1594.1	1673.7	1664.6	1722.9	1743.3	1749.9	1726.5	1689.4	1615.4	1582.9
77.5°	631.1	831.8	951.8	952.9	1015.6	1070.6	1114.3	1160.3	1143.5	1107.6	1105.4
80°	143.5	260.1	332.9	336.3	393.5	443.9	474.1	520.2	525.8	474.1	445.0
82.5°	61.6	72.9	82.9	81.8	100.9	121.1	143.5	155.9	150.3	124.4	117.7
85°	25.8	33.7	35.8	33.7	41.5	45.9	53.8	55.0	63.9	57.2	60.5
87.5°	0.0	1.1	1.1	0.0	2.2	0.0	2.2	1.1	5.6	2.2	6.7
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
97.5°	11.8	12.8	11.6	11.3	9.8	8.4	6.8	6.4	5.9	5.4	4.9
100°	30.9	31.4	31.0	30.9	30.5	29.9	29.5	28.7	27.9	27.3	26.5
102.5°	49.9	50.0	49.9	49.9	49.6	49.2	49.0	48.6	48.1	47.6	47.1
105°	69.5	69.7	69.7	69.7	69.7	69.7	69.7	69.2	68.7	68.2	67.7
107.5°	90.8	91.3	91.1	91.1	90.8	90.5	90.3	90.1	89.8	89.5	89.3



REPORT NUMBER: P271458

CATALOG NUMBER: ISC-AF-600-LED-E1-T3-7027-ULG

CANDELA DISTRIBUTION (continued):

	52.5°	55°	57°	57.5°	60°	62.5°	65°	67.5°	70°	72.5°	75°
110°	111.4	111.9	111.9	111.9	111.9	111.9	111.9	111.7	111.4	111.1	110.9
112.5°	132.9	133.5	133.5	133.5	133.5	133.5	133.5	133.3	132.9	132.7	132.5
115°	154.6	155.0	155.0	155.0	155.0	155.0	155.0	155.0	155.0	155.0	155.0
117.5°	176.4	176.7	176.9	176.9	177.1	177.4	177.7	177.4	177.1	176.9	176.7
120°	199.7	200.2	200.2	200.2	200.2	200.2	200.2	200.2	200.2	200.2	200.2
122.5°	223.6	223.8	223.8	223.8	223.8	223.8	223.8	223.9	224.3	224.6	224.8
125°	248.1	248.3	248.5	248.5	248.8	249.1	249.3	249.3	249.3	249.3	249.3
127.5°	272.4	272.8	272.6	272.6	272.4	272.1	271.8	272.1	272.4	272.6	272.8
130°	294.9	295.5	295.5	295.5	295.5	295.5	295.5	295.6	295.9	296.2	296.4
132.5°	318.2	319.0	319.0	319.0	319.0	319.0	319.0	319.2	319.4	319.8	320.0
135°	340.7	341.5	341.5	341.5	341.5	341.5	341.5	341.7	342.1	342.3	342.5
137.5°	361.7	362.2	362.2	362.2	362.2	362.2	362.2	362.4	362.6	362.9	363.2
140°	382.6	382.8	382.8	382.8	382.8	382.8	382.8	383.3	383.8	384.3	384.7
142.5°	403.9	404.3	404.3	404.3	404.3	404.3	404.3	404.6	404.9	405.1	405.3
145°	425.4	426.0	425.8	425.8	425.4	425.2	425.0	425.2	425.4	425.8	426.0
147.5°	445.4	445.6	445.2	445.1	444.6	444.1	443.7	443.9	444.1	444.4	444.6
150°	462.1	462.3	461.9	461.8	461.3	460.8	460.3	460.3	460.3	460.3	460.3
152.5°	477.8	478.0	477.8	477.8	477.4	477.2	477.0	477.0	477.0	477.0	477.0
155°	494.4	494.7	494.4	494.4	494.2	493.9	493.7	493.9	494.2	494.4	494.7
157.5°	509.4	509.4	509.0	508.9	508.4	507.9	507.5	507.6	507.9	508.2	508.4
160°	522.2	522.2	521.7	521.6	521.2	520.7	520.2	520.2	520.2	520.2	520.2
162.5°	531.8	532.0	531.5	531.4	531.0	530.4	530.0	529.6	529.0	528.6	528.0
165°	542.6	542.8	542.1	541.9	541.3	540.6	539.8	539.3	538.8	538.4	537.8
167.5°	549.7	549.7	549.2	549.1	548.7	548.1	547.7	547.9	548.1	548.4	548.7
170°	554.7	554.5	554.3	554.3	554.1	553.7	553.5	554.1	554.5	555.1	555.5
172.5°	558.3	558.5	558.0	557.9	557.5	556.9	556.5	556.7	556.9	557.3	557.5
175°	562.2	562.4	561.8	561.6	560.9	560.3	559.5	558.9	558.5	557.9	557.5
177.5°	566.3	566.3	565.8	565.6	564.9	564.1	563.3	563.3	563.3	563.3	563.3
180°	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3



REPORT NUMBER: P271458

CATALOG NUMBER: ISC-AF-600-LED-E1-T3-7027-ULG

CANDELA DISTRIBUTION (continued):

	77.5°	80°	82.5°	85°	87.5°	90°	95°	100°	102.5°	105°	107.5°
0°	438.4	438.4	438.4	438.4	438.4	438.4	438.4	438.4	438.4	438.4	438.4
2.5°	430.5	436.0	430.5	436.0	432.7	436.0	435.0	436.0	430.5	436.0	429.4
5°	422.7	431.5	423.7	430.5	423.7	431.5	431.5	431.5	423.7	432.7	424.9
7.5°	415.8	426.0	415.8	426.0	419.3	427.1	427.1	430.5	421.6	431.5	420.4
10°	409.2	421.6	409.2	423.7	412.5	424.9	426.0	428.2	415.8	429.4	418.1
12.5°	405.9	421.6	406.9	421.6	408.1	424.9	426.0	428.2	414.7	431.5	417.0
15°	405.9	422.7	406.9	422.7	408.1	424.9	427.1	429.4	414.7	432.7	417.0
17.5°	405.9	422.7	409.2	423.7	410.3	426.0	428.2	430.5	417.0	432.7	419.3
20°	409.2	424.9	411.4	427.1	413.7	429.4	430.5	433.8	419.3	433.8	421.6
22.5°	417.0	430.5	419.3	433.8	423.7	436.0	437.1	440.6	429.4	441.7	431.5
25°	430.5	445.0	436.0	447.3	441.7	451.8	454.0	454.0	449.5	457.3	454.0
27.5°	458.6	469.7	463.0	473.0	469.7	477.6	477.6	478.7	482.0	484.3	487.6
30°	494.3	502.2	500.0	505.6	506.7	511.1	511.1	518.0	531.3	518.0	516.7
32.5°	542.6	547.1	548.1	550.4	555.0	558.3	562.8	570.6	581.8	550.4	540.3
35°	602.0	603.1	606.4	609.8	617.7	619.9	634.6	628.9	628.9	579.6	558.3
37.5°	667.0	667.0	676.0	676.0	695.1	696.2	710.6	681.5	664.7	600.9	569.4
40°	748.8	747.7	757.8	760.1	785.8	786.9	784.7	720.8	685.0	606.4	563.9
42.5°	835.2	838.6	852.0	856.4	875.5	882.2	854.2	747.7	693.9	603.1	544.8
45°	929.4	936.0	952.9	965.2	985.4	977.5	910.3	760.1	683.8	582.9	507.8
47.5°	1032.4	1039.2	1052.6	1076.2	1085.2	1076.2	956.2	764.5	668.1	551.6	454.0
50°	1136.7	1147.9	1167.0	1200.7	1205.1	1182.7	1012.3	781.3	655.9	519.0	392.4
52.5°	1254.4	1265.6	1288.1	1344.1	1332.9	1286.9	1078.4	812.8	659.2	498.9	339.6
55°	1378.9	1394.6	1438.3	1493.3	1468.5	1396.9	1151.3	858.7	672.7	477.6	281.3
57.5°	1510.1	1526.8	1584.0	1649.0	1600.8	1504.4	1225.3	894.6	679.4	433.8	217.5
60°	1640.0	1663.6	1737.6	1791.4	1716.3	1596.4	1291.4	918.1	661.4	350.9	168.2
62.5°	1758.9	1797.0	1880.0	1909.1	1789.2	1654.7	1327.2	901.3	588.5	242.1	135.6
65°	1843.0	1892.3	1946.1	1942.8	1775.7	1635.5	1300.4	823.9	438.4	160.3	115.4
67.5°	1878.8	1924.8	1937.1	1880.0	1679.3	1551.6	1204.0	663.7	252.2	119.9	100.9
70°	1892.3	1931.5	1862.1	1724.2	1491.0	1345.2	984.3	422.7	137.9	97.6	87.5
71°	1886.7	1905.8	1773.4	1612.1	1371.0	1218.6	863.2	321.8	117.7	90.8	82.9
72.5°	1810.4	1783.6	1579.5	1400.2	1162.5	1007.8	671.6	202.8	96.4	81.8	77.3
75°	1479.8	1358.7	1162.5	993.3	791.5	633.3	364.4	104.2	77.3	70.7	67.2
77.5°	967.5	862.0	700.7	569.4	432.7	328.5	149.1	71.8	61.6	59.4	58.3
80°	345.3	276.9	209.7	183.8	139.0	114.4	72.9	55.0	48.1	49.4	48.1
82.5°	97.6	89.7	77.3	71.8	62.8	61.6	47.1	41.5	38.1	40.3	39.3
85°	48.1	41.5	30.3	29.1	22.4	25.8	23.5	28.0	24.6	25.8	23.5
87.5°	3.3	4.5	1.1	3.3	0.0	3.3	4.5	5.6	1.1	4.5	3.3
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
97.5°	4.7	4.4	4.1	4.0	4.0	4.0	4.0	4.4	4.7	4.9	5.4
100°	26.3	26.1	25.7	25.5	25.1	24.5	25.5	26.1	26.3	26.5	27.3
102.5°	47.3	47.6	47.9	48.1	47.6	47.1	48.1	47.6	47.3	47.1	47.6
105°	68.2	68.7	69.2	69.7	68.7	67.7	69.7	68.7	68.2	67.7	68.2
107.5°	89.5	89.8	90.1	90.3	89.8	89.3	90.3	89.8	89.5	89.3	89.5



REPORT NUMBER: P271458
 CATALOG NUMBER: ISC-AF-600-LED-E1-T3-7027-ULG

REPORT N
 CATALOG

CANDELA DISTRIBUTION (continued):

CANDELA

	77.5°	80°	82.5°	85°	87.5°	90°	95°	100°	102.5°	105°	107.5°	
110°	111.1	111.4	111.7	111.9	111.4	110.9	111.9	111.4	111.1	110.9	111.1	0°
112.5°	132.9	133.5	133.9	134.5	133.5	132.5	134.5	133.5	132.9	132.5	132.7	2.5°
115°	155.6	156.0	156.6	157.0	156.6	156.0	157.0	156.0	155.6	155.0	155.0	5°
117.5°	177.1	177.7	178.1	178.7	177.7	176.7	178.7	177.7	177.1	176.7	176.9	7.5°
120°	200.7	201.2	201.7	202.2	201.2	200.2	202.2	201.2	200.7	200.2	200.2	10°
122.5°	225.7	226.7	227.7	228.7	228.2	227.7	228.7	226.7	225.7	224.8	224.6	12.5°
125°	250.1	250.8	251.4	252.2	251.7	251.3	252.2	250.8	250.1	249.3	249.3	15°
127.5°	273.6	274.3	275.0	275.8	274.3	272.8	275.8	274.3	273.6	272.8	272.6	17.5°
130°	297.2	297.9	298.6	299.3	298.3	297.4	299.3	297.9	297.2	296.4	296.2	20°
132.5°	320.8	321.4	322.1	322.9	322.0	321.0	322.9	321.4	320.8	320.0	319.8	22.5°
135°	343.1	343.5	344.1	344.5	344.1	343.5	344.5	343.5	343.1	342.5	342.3	25°
137.5°	364.2	365.1	366.1	367.0	366.1	365.1	367.0	365.1	364.2	363.2	362.9	27.5°
140°	385.7	386.7	387.7	388.7	387.7	386.7	388.7	386.7	385.7	384.7	384.3	30°
142.5°	406.1	406.8	407.5	408.3	407.8	407.3	408.3	406.8	406.1	405.3	405.1	32.5°
145°	426.8	427.4	428.1	428.9	428.0	427.0	428.9	427.4	426.8	426.0	425.8	35°
147.5°	445.4	446.1	446.7	447.5	446.1	444.6	447.5	446.1	445.4	444.6	444.4	37.5°
150°	461.3	462.3	463.3	464.2	462.8	461.3	464.2	462.3	461.3	460.3	460.3	40°
152.5°	477.8	478.4	479.2	480.0	478.4	477.0	480.0	478.4	477.8	477.0	477.0	42.5°
155°	495.4	496.1	496.9	497.6	496.7	495.7	497.6	496.1	495.4	494.7	494.4	45°
157.5°	509.6	510.9	512.1	513.3	511.9	510.3	513.3	510.9	509.6	508.4	508.2	47.5°
160°	520.9	521.6	522.4	523.2	522.2	521.2	523.2	521.6	520.9	520.2	520.2	50°
162.5°	528.6	529.0	529.6	530.0	528.6	527.0	530.0	529.0	528.6	528.0	528.6	52.5°
165°	538.4	538.8	539.3	539.8	538.8	537.8	539.8	538.8	538.4	537.8	538.4	55°
167.5°	549.7	550.6	551.6	552.5	551.6	550.6	552.5	550.6	549.7	548.7	548.4	57.5°
170°	556.7	557.9	559.3	560.5	559.5	558.5	560.5	557.9	556.7	555.5	555.1	60°
172.5°	558.3	558.9	559.6	560.5	558.9	557.5	560.5	558.9	558.3	557.5	557.3	62.5°
175°	558.3	558.9	559.6	560.5	558.9	557.5	560.5	558.9	558.3	557.5	557.9	65°
177.5°	564.1	564.9	565.6	566.3	564.9	563.3	566.3	564.9	564.1	563.3	563.3	67.5°
180°	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	70°
												71°
												72.5°
												75°
												77.5°
												80°
												82.5°
												85°
												87.5°
												90°
												92.5°
												95°
												97.5°
												100°
												102.5°
												105°
												107.5°

NUMBER: P271458
 NUMBER: ISC-AF-600-LED-E1-T3-7027-ULG

REPORT NUMBER: P
 CATALOG NUMBER:

DISTRIBUTION (continued):

CANDELA DISTRIBUTION

110°	112.5°	115°	117.5°	120°	122.5°	125°	127.5°	130°	135°	145°	110°	110°
438.4	438.4	438.4	438.4	438.4	438.4	438.4	438.4	438.4	438.4	438.4	110°	111.4
437.1	432.7	438.4	432.7	438.4	435.0	438.4	435.0	438.4	440.6	440.6	112.5°	132.9
435.0	427.1	437.1	431.5	438.4	432.7	437.1	433.8	439.5	441.7	443.9	115°	155.0
433.8	426.0	436.0	428.2	438.4	430.5	437.1	432.7	439.5	441.7	446.2	117.5°	177.1
432.7	422.7	436.0	424.9	437.1	429.4	437.1	430.5	438.4	440.6	441.7	120°	200.2
432.7	421.6	436.0	423.7	437.1	426.0	436.0	426.0	437.1	436.0	432.7	122.5°	224.3
433.8	419.3	436.0	421.6	436.0	422.7	435.0	421.6	432.7	429.4	427.1	125°	249.3
433.8	419.3	435.0	420.4	433.8	421.6	431.5	419.3	429.4	428.2	424.9	127.5°	272.4
436.0	421.6	435.0	424.9	435.0	422.7	430.5	419.3	427.1	420.4	406.9	130°	295.9
442.9	432.7	442.9	432.7	437.1	426.0	429.4	415.8	414.7	403.6	382.3	132.5°	319.4
458.6	454.0	451.8	439.5	436.0	421.6	417.0	401.4	395.7	378.9	349.8	135°	342.1
478.7	468.6	455.1	440.6	426.0	408.1	395.7	383.4	371.1	349.8	312.8	137.5°	362.6
492.1	477.6	449.5	429.4	402.4	387.9	366.6	353.1	335.2	308.3	272.4	140°	383.8
501.2	478.7	436.0	412.5	376.7	357.6	329.6	315.0	289.3	263.5	237.6	142.5°	404.9
503.3	474.1	418.1	392.4	345.3	324.0	287.0	271.3	246.7	228.7	218.6	145°	425.4
494.3	458.6	390.1	356.4	305.0	280.2	245.5	234.3	219.7	213.0	208.5	147.5°	444.1
476.4	428.2	346.4	307.2	254.5	235.4	217.5	217.5	209.7	206.3	198.4	150°	460.3
443.9	383.4	290.3	252.2	216.3	213.0	202.8	207.4	201.8	199.5	188.4	152.5°	477.0
393.5	319.4	234.3	211.9	195.0	197.3	190.6	195.0	191.7	190.6	177.1	155°	494.2
328.5	254.5	197.3	189.5	178.2	181.5	176.0	181.5	178.2	179.3	169.3	157.5°	507.9
262.3	206.3	174.9	170.4	162.5	164.7	161.4	167.1	165.8	170.4	164.7	160°	520.2
209.7	176.0	155.9	152.4	148.0	149.1	148.0	153.6	154.7	163.7	163.7	162.5°	529.0
173.7	151.4	140.1	139.0	134.6	135.6	136.7	142.4	146.9	158.0	163.7	165°	538.8
149.1	135.6	127.8	126.8	124.4	125.5	127.8	134.6	139.0	153.6	165.8	167.5°	548.1
131.2	123.2	117.7	117.7	115.4	117.7	119.9	126.8	132.3	149.1	161.4	170°	554.5
117.7	112.1	108.8	109.9	108.8	111.0	113.3	119.9	126.8	142.4	154.7	172.5°	556.9
105.4	102.0	99.8	100.9	100.9	104.2	106.4	113.3	118.8	133.4	149.1	175°	558.5
95.3	93.1	92.0	93.1	94.1	97.6	100.9	105.4	109.9	123.2	141.2	177.5°	563.3
87.5	85.2	85.2	85.2	86.2	89.7	94.1	96.4	100.9	115.4	132.3	180°	565.3
82.9	81.8	81.8	81.8	82.9	86.2	90.8	93.1	97.6	112.1	127.8		
77.3	77.3	78.5	77.3	79.6	80.7	85.2	87.5	93.1	107.5	122.2		
68.5	68.5	69.5	69.5	71.8	71.8	75.1	77.3	84.1	96.4	109.9		
60.5	60.5	62.8	61.6	61.6	59.4	63.9	66.1	71.8	84.1	97.6		
51.6	50.5	52.7	49.4	48.1	45.9	49.4	52.7	61.6	69.5	71.8		
40.3	37.0	38.1	34.8	34.8	32.5	35.8	37.0	42.6	50.5	55.0		
24.6	20.2	22.4	19.0	21.3	19.0	20.2	21.3	25.8	31.4	30.3		
5.6	3.3	4.5	1.1	3.3	0.0	3.3	1.1	3.3	1.1	0.0		
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0		
5.9	6.4	6.8	8.4	9.8	11.3	12.8	11.8	10.8	8.8	4.0		
27.9	28.7	29.5	29.9	30.5	30.9	31.4	30.9	30.5	29.5	21.6		
48.1	48.6	49.0	49.2	49.6	49.9	50.0	49.9	49.6	49.0	44.2		
68.7	69.2	69.7	69.7	69.7	69.7	69.7	69.5	69.2	68.7	64.8		
89.8	90.1	90.3	90.5	90.8	91.1	91.3	90.8	90.3	89.3	86.3		

271458
 ISC-AF-600-LED-E1-T3-7027-ULG

REPORT NUMBER: P271458
 CATALOG NUMBER: ISC-AF-60

TION (continued):

CANDELA DISTRIBUTION (con

112.5°	115°	117.5°	120°	122.5°	125°	127.5°	130°	135°	145°		155°	165°
111.7	111.9	111.9	111.9	111.9	111.9	111.4	110.9	110.0	108.0	0°	438.4	438.4
133.3	133.5	133.5	133.5	133.5	133.5	132.9	132.5	131.5	129.5	2.5°	442.9	441.7
155.0	155.0	155.0	155.0	155.0	155.0	154.6	154.1	153.1	151.2	5°	448.4	448.4
177.4	177.7	177.4	177.1	176.9	176.7	176.4	176.2	175.7	173.7	7.5°	449.5	451.8
200.2	200.2	200.2	200.2	200.2	200.2	199.7	199.2	198.3	197.3	10°	441.7	439.5
223.9	223.8	223.8	223.8	223.8	223.8	223.6	223.3	222.8	221.8	12.5°	429.4	427.1
249.3	249.3	249.1	248.8	248.5	248.3	248.1	247.8	247.3	246.3	15°	428.2	427.1
272.1	271.8	272.1	272.4	272.6	272.8	272.4	271.8	270.9	269.0	17.5°	420.4	414.7
295.6	295.5	295.5	295.5	295.5	295.5	294.9	294.5	293.5	292.5	20°	397.9	387.9
319.2	319.0	319.0	319.0	319.0	319.0	318.2	317.6	316.0	315.0	22.5°	366.6	352.0
341.7	341.5	341.5	341.5	341.5	341.5	340.7	340.1	338.6	338.6	25°	328.5	308.3
362.4	362.2	362.2	362.2	362.2	362.2	361.7	361.2	360.2	360.2	27.5°	287.0	266.8
383.3	382.8	382.8	382.8	382.8	382.8	382.6	382.3	381.8	380.8	30°	254.5	238.8
404.6	404.3	404.3	404.3	404.3	404.3	403.9	403.4	402.4	402.4	32.5°	231.0	222.0
425.2	425.0	425.2	425.4	425.8	426.0	425.4	425.0	424.0	423.0	35°	211.9	206.3
443.9	443.7	444.1	444.6	445.1	445.6	445.4	445.1	444.6	443.7	37.5°	199.5	190.6
460.3	460.3	460.8	461.3	461.8	462.3	462.1	461.8	461.3	460.3	40°	187.2	176.0
477.0	477.0	477.2	477.4	477.8	478.0	477.8	477.4	477.0	476.0	42.5°	176.0	164.7
493.9	493.7	493.9	494.2	494.4	494.7	494.4	494.2	493.7	493.7	45°	164.7	156.9
507.6	507.5	507.9	508.4	508.9	509.4	509.4	509.4	509.4	509.4	47.5°	159.2	152.4
520.2	520.2	520.7	521.2	521.6	522.2	522.2	522.2	522.2	522.2	50°	156.9	150.3
529.6	530.0	530.4	531.0	531.4	532.0	531.8	531.4	531.0	531.0	52.5°	159.2	153.6
539.3	539.8	540.6	541.3	541.9	542.8	542.6	542.3	541.8	541.8	55°	163.7	160.3
547.9	547.7	548.1	548.7	549.1	549.7	549.7	549.7	549.7	550.6	57.5°	159.2	153.6
554.1	553.5	553.7	554.1	554.3	554.5	554.7	555.1	555.5	556.5	60°	149.1	140.1
556.7	556.5	556.9	557.5	557.9	558.5	558.3	557.9	557.5	558.5	62.5°	142.4	133.4
558.9	559.5	560.3	560.9	561.6	562.4	562.2	561.9	561.4	561.4	65°	136.7	130.1
563.3	563.3	564.1	564.9	565.6	566.3	566.3	566.3	566.3	567.3	67.5°	131.2	124.4
565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	70°	124.4	117.7
										71°	121.1	113.3
										72.5°	115.4	106.4
										75°	104.2	95.3
										77.5°	86.2	76.3
										80°	66.1	59.4
										82.5°	49.4	43.7
										85°	25.8	20.2
										87.5°	0.0	0.0
										90°	0.0	0.0
										92.5°	0.0	0.0
										95°	1.0	1.0
										97.5°	3.0	2.0
										100°	13.7	9.8
										102.5°	37.3	31.4
										105°	59.8	55.0
										107.5°	82.5	78.5



REPORT NUMBER: P271458

CATALOG NUMBER: ISC-AF-600-LED-E1-1

0-LED-E1-T3-7027-ULG

tinued):

175°	180°
438.4	438.4
442.9	441.7
449.5	450.7
454.0	452.8
441.7	439.5
429.4	429.4
428.2	428.2
412.5	411.4
385.6	382.3
347.6	344.1
300.4	295.9
258.9	258.9
231.0	231.0
216.3	217.5
202.8	204.1
182.7	182.7
165.8	165.8
158.0	156.9
151.4	150.3
146.9	145.7
142.4	142.4
139.0	139.0
139.0	136.7
140.1	136.7
137.9	135.6
137.9	136.7
140.1	137.9
140.1	135.6
127.8	119.9
121.1	114.4
108.8	104.2
93.1	92.0
72.9	71.8
59.4	56.1
42.6	37.0
16.8	16.8
0.0	0.0
0.0	0.0
0.0	0.0
1.0	1.0
2.0	2.0
7.8	7.8
27.5	27.5
53.0	53.0
75.5	76.5

CANDELA DISTRIBUTION (continued):

	155°	165°	175°
110°	104.0	101.1	100.1
112.5°	126.6	123.7	121.7
115°	148.2	146.2	144.3
117.5°	170.8	168.8	166.8
120°	194.3	192.3	191.4
122.5°	218.8	216.9	216.0
125°	243.4	242.5	241.5
127.5°	267.0	265.0	264.0
130°	288.5	287.5	286.6
132.5°	312.1	311.2	308.2
135°	334.7	332.7	330.8
137.5°	357.3	356.3	353.3
140°	378.8	377.8	375.9
142.5°	399.5	400.5	398.5
145°	420.0	420.0	418.1
147.5°	439.7	438.7	435.8
150°	456.4	455.4	453.5
152.5°	473.0	474.0	471.1
155°	491.7	492.7	490.7
157.5°	506.5	507.5	505.5
160°	519.2	519.2	517.2
162.5°	528.0	529.0	526.0
165°	537.8	538.8	536.8
167.5°	547.7	548.7	545.7
170°	554.5	555.5	552.5
172.5°	556.5	558.5	555.5
175°	558.5	559.5	558.5
177.5°	563.3	564.3	562.4
180°	565.3	565.3	565.3



F3-7027-ULG

<u>180°</u>
99.2
121.7
143.3
165.8
189.5
215.0
239.5
262.0
284.7
307.2
329.8
352.3
375.0
396.5
417.2
435.8
452.5
470.2
489.8
503.5
515.3
525.1
535.9
544.7
551.6
554.5
556.5
561.4
565.3

(END OF REPORT)