

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P271613

Luminaire Tested: **ISS-AF-1200-LED-E1-SL3-7027-ULG**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P271613  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P29762)-DOWNLIGHT AND  
Test Lab: INNOVATION CENTER-P2  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: MCGRAW-EDISON  
Catalog Number: ISS-AF-1200-LED-E1-SL3-7027-ULG  
Description: IMPACT ELITE LED QUATER SPHERE LUMINAIRE WITH UPLIGHT  
LIGHT SQUARE WITH ACCULED OPTICS-TYPE III W/SPILL CONTROL, WITH UPLIGHT  
GLOW  
Light Source: (16) 2700K CCT, 70 CRI LEDs and (1) UPLIGHT LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 6719.4 lumens  
Efficiency: N/A  
Efficacy: 81.3 lumens/watt  
Luminous Opening: Rectangular w/ Sides (W: 0.5' x L: 0.5' x H: 0.54')  
IES Classification: Type III - Medium - Non-Cutoff  
BUG Rating: B1 - U5 - G2  
  
Input Watts (W): 82.7  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



REPORT NUMBER: P271613  
 CATALOG NUMBER: ISS-AF-1200-LED-E1-SL3-7027-ULG

### Iso-Footcandle Lines of Horizontal Illumination


✕ Max cd  
 - - - 1/2 Max cd

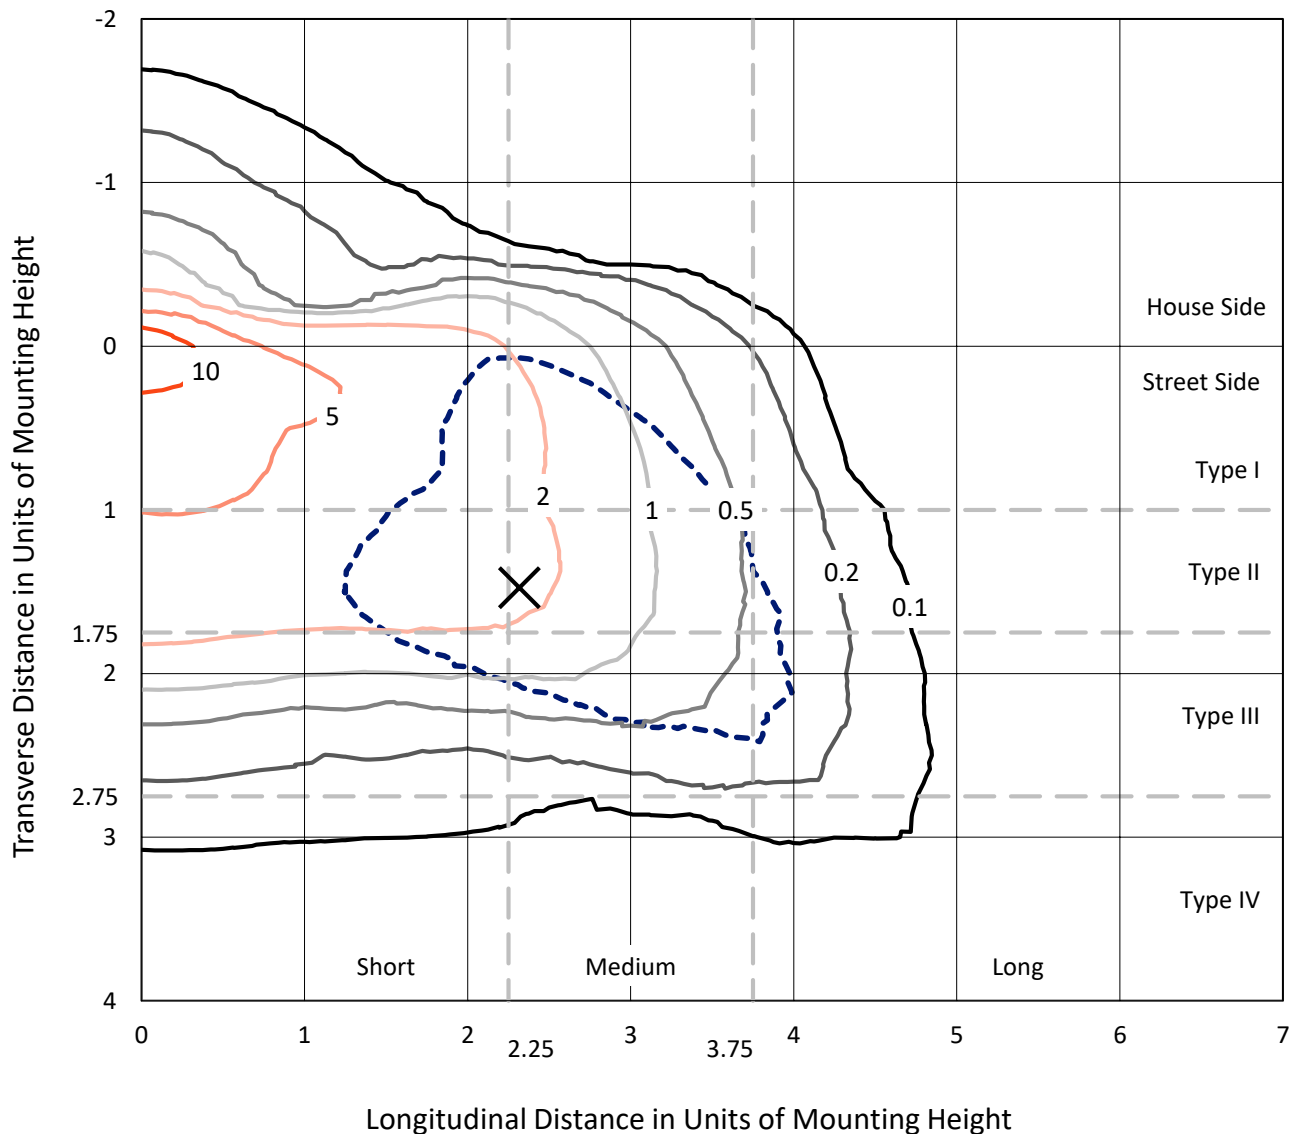

Based on 10 foot mounting height. Maximum calculated value = 14.1 fc  
 Type III - Medium - Non-Cutoff

REPORT NUMBER: P271613  
CATALOG NUMBER: ISS-AF-1200-LED-E1-SL3-7027-ULG

### Luminous Intensity Polar Plot

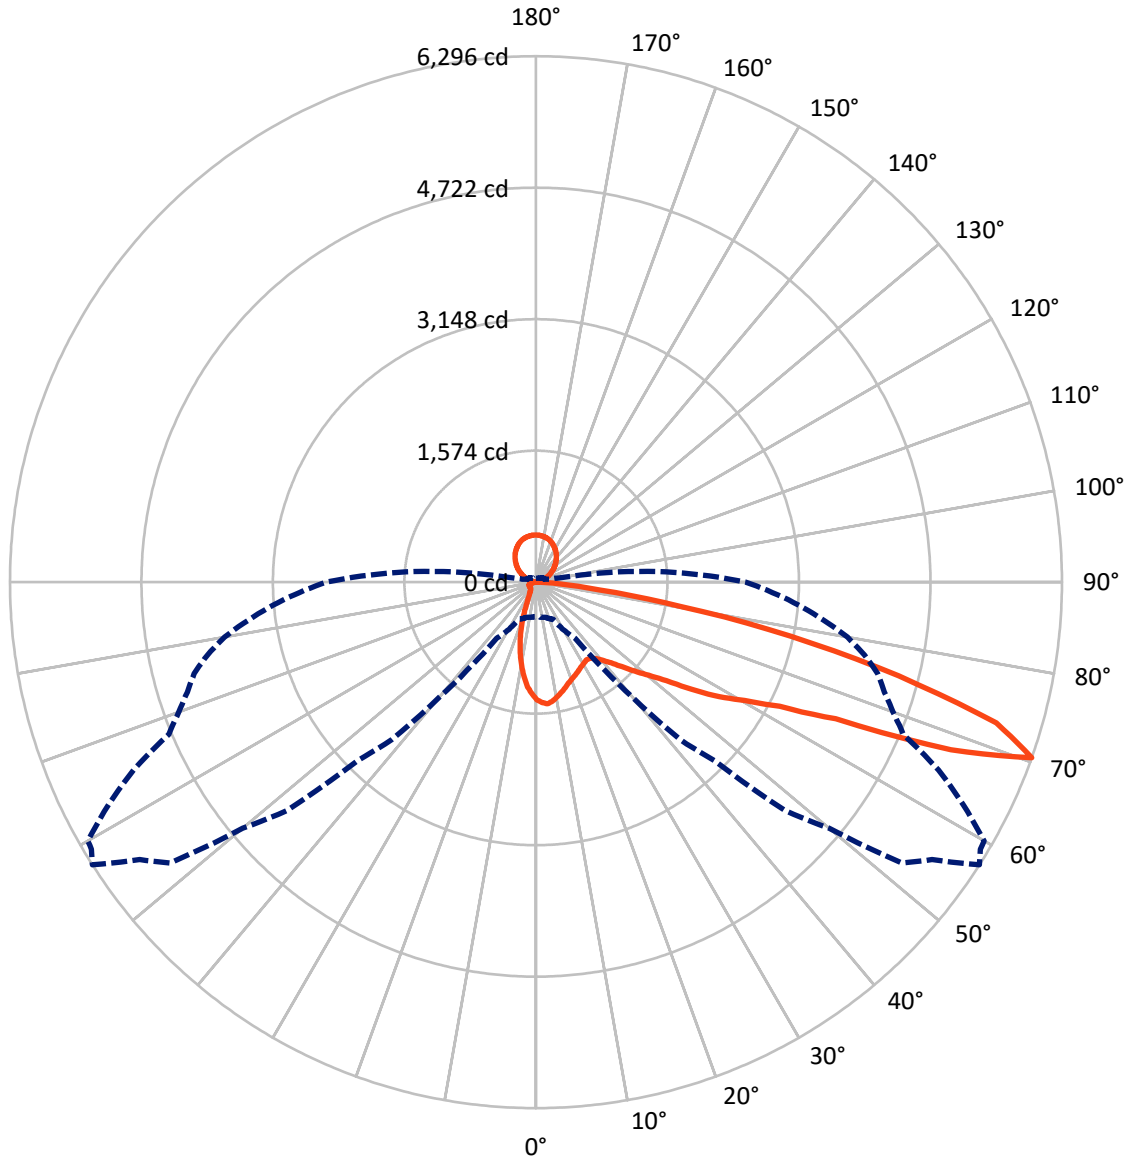

— Vertical Plane Through 57.5-Deg Lateral    - - - Horizontal Cone Through 70-Deg Vertical

REPORT NUMBER: P271613

CATALOG NUMBER: ISS-AF-1200-LED-E1-SL3-7027-ULG


**FLUX DISTRIBUTION:**

		Downward	Upward	Total
<b>House Side</b>	Lumens	658.3	699.9	1358.2
	% Fixture	9.8	10.4	20.2
<b>Street Side</b>	Lumens	4661.3	699.9	5361.2
	% Fixture	69.4	10.4	79.8
<b>Total</b>	Lumens	5319.6	1399.8	6719.4
	% Fixture	79.2	20.8	100.0

**Coefficient of Utilization**

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	121.6	1.8
10°-20°	264.0	3.9
20°-30°	331.7	4.9
30°-40°	433.5	6.5
40°-50°	650.4	9.7
50°-60°	1028.2	15.3
60°-70°	1482.0	22.1
70°-80°	917.3	13.7
80°-90°	91.0	1.4
90°-100°	4.7	0.1
100°-110°	67.7	1.0
110°-120°	150.2	2.2
120°-130°	219.7	3.3
130°-140°	260.7	3.9
140°-150°	264.3	3.9
150°-160°	226.8	3.4
160°-170°	152.2	2.3
170°-180°	53.3	0.8
0°-90°	5319.6	79.2
0°-180°	6719.4	100.0

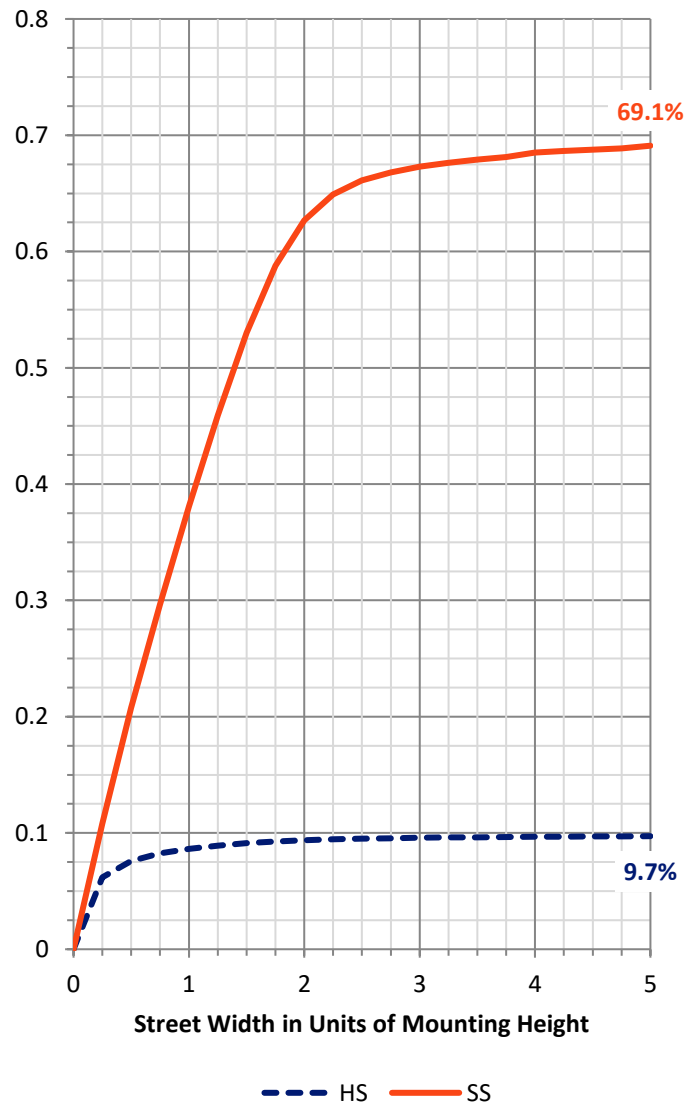

REPORT NUMBER: P271613


CATALOG NUMBER: ISS-AF-1200-LED-E1-SL3-7027-ULG

**LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:**

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	494.1	7.4			
FM (30°-60°)	1885.7	28.1			
FH (60°-80°)	2197.8	32.7			G2/5000
FVH (80°-90°)	83.7	1.2			G1/100
BL (0°-30°)	223.2	3.3	B1/500		
BM (30°-60°)	226.4	3.4	B1/1000		
BH (60°-80°)	201.5	3.0	B1/500		G1/500
BVH (80°-90°)	7.3	0.1			G0/10
UL (90°-100°)	4.7	0.1		U1/10	
UH (100°-180°)	699.9	10.4		U4/1000	

**BUG Rating: B1-U5-G2**

Type III Medium

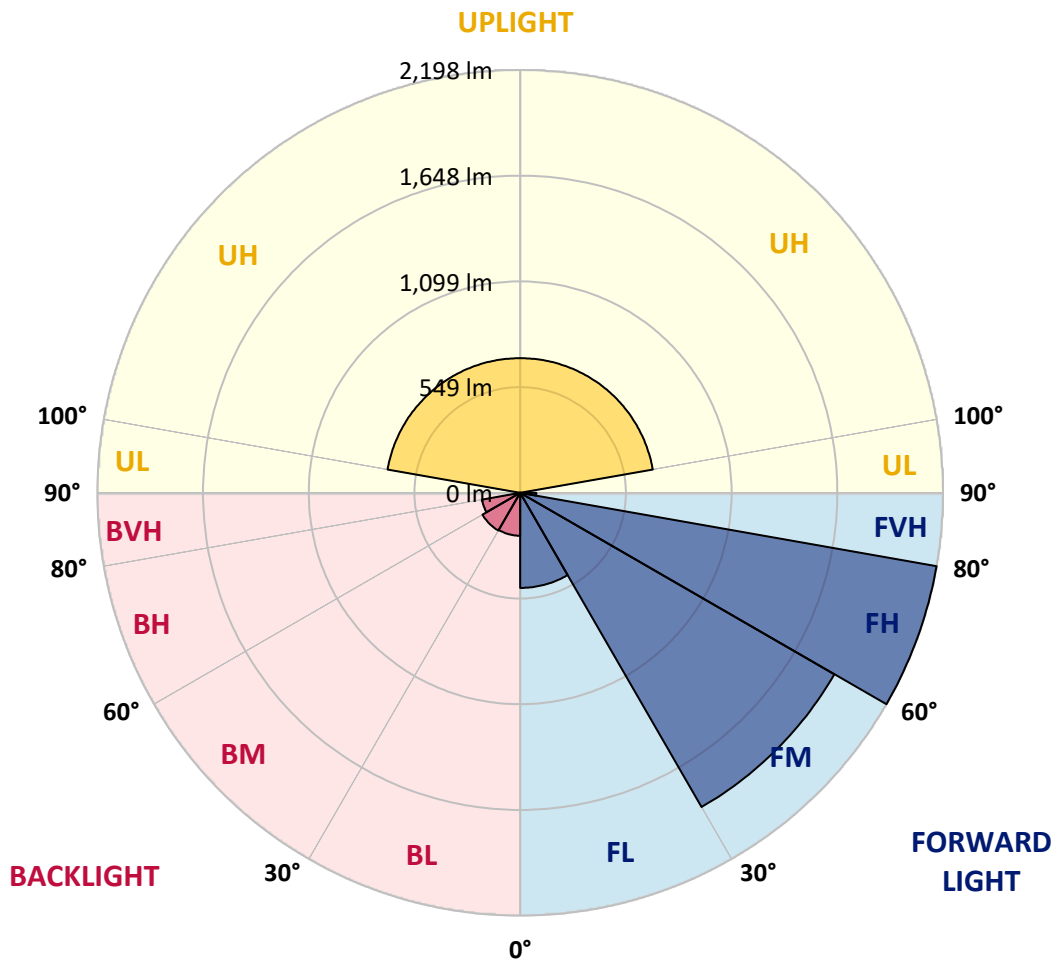



REPORT NUMBER: P271613

CATALOG NUMBER: ISS-AF-1200-LED-E1-SL3-7027-ULG

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	15°	25°	35°	37.5°	40°	42.5°	45°	47.5°	50°
0°	1408.0	1408.0	1408.0	1408.0	1408.0	1408.0	1408.0	1408.0	1408.0	1408.0	1408.0
2.5°	1477.8	1475.9	1472.2	1464.7	1460.8	1464.7	1460.8	1455.3	1447.7	1453.3	1449.5
5°	1474.1	1477.8	1470.3	1464.7	1474.1	1477.8	1470.3	1470.3	1462.7	1470.3	1466.6
7.5°	1400.5	1402.3	1404.2	1402.3	1426.9	1426.9	1423.2	1426.9	1428.8	1432.5	1434.4
10°	1308.0	1309.9	1313.6	1319.3	1349.5	1353.3	1355.1	1359.0	1364.6	1368.4	1379.7
12.5°	1215.5	1219.3	1226.8	1245.7	1277.7	1281.5	1287.2	1292.9	1302.4	1308.0	1328.8
15°	1138.2	1139.9	1147.6	1168.3	1215.5	1224.9	1228.7	1236.2	1255.1	1255.1	1277.7
17.5°	1066.4	1070.2	1075.8	1100.3	1147.6	1162.7	1173.9	1177.8	1202.3	1208.0	1234.5
20°	1011.6	1013.6	1015.4	1038.1	1081.5	1104.2	1113.6	1128.7	1147.6	1162.7	1185.3
22.5°	981.5	983.4	979.6	989.0	1026.8	1055.1	1066.4	1081.5	1089.0	1115.4	1128.7
25°	983.4	985.2	975.8	970.1	989.0	1019.1	1028.6	1043.7	1040.0	1077.8	1077.8
27.5°	1002.1	1006.0	996.6	979.6	981.5	1006.0	1011.6	1017.3	1006.0	1043.7	1036.1
30°	1040.0	1043.7	1032.4	1019.1	998.5	1013.6	1013.6	1013.6	992.8	1024.9	1011.6
32.5°	1079.7	1083.4	1079.7	1070.2	1043.7	1047.5	1040.0	1036.1	1007.9	1034.3	1013.6
35°	1138.2	1139.9	1141.8	1141.8	1104.2	1111.7	1090.9	1079.7	1053.3	1073.9	1045.6
37.5°	1208.0	1208.0	1221.2	1226.8	1185.3	1185.3	1162.7	1147.6	1123.0	1130.6	1102.3
40°	1270.2	1276.0	1306.0	1323.0	1285.4	1270.2	1251.4	1238.1	1219.3	1219.3	1191.0
42.5°	1342.0	1353.3	1389.2	1421.2	1400.5	1377.8	1359.0	1345.8	1336.3	1334.4	1304.2
45°	1430.7	1443.8	1483.6	1513.7	1519.3	1502.3	1487.2	1474.1	1466.6	1462.7	1436.3
47.5°	1530.7	1543.8	1579.8	1615.6	1642.0	1638.3	1621.4	1608.1	1613.7	1609.9	1593.0
50°	1642.0	1649.6	1672.3	1713.8	1774.2	1787.4	1783.7	1774.2	1785.5	1785.5	1770.4
52.5°	1730.8	1736.4	1753.4	1802.4	1902.5	1932.7	1957.2	1976.1	1995.0	2006.4	1996.9
55°	1811.9	1811.9	1813.8	1876.1	2025.2	2074.3	2129.1	2168.7	2193.2	2238.5	2257.4
57.5°	1944.0	1934.6	1932.7	1998.8	2172.4	2223.3	2302.6	2359.3	2393.3	2485.7	2483.8
60°	1906.3	1910.1	1978.0	2172.4	2474.4	2519.7	2591.4	2651.9	2715.9	2783.9	2789.6
62.5°	1644.0	1653.4	1755.3	2046.0	2666.9	2902.9	3123.7	3291.7	3386.0	3446.4	3363.3
65°	1151.3	1173.9	1311.7	1666.5	2455.6	2819.8	3169.0	3557.7	3856.1	4318.4	4452.4
67.5°	573.7	590.7	613.5	873.9	1834.6	2346.0	2827.3	3357.8	3754.1	4433.6	4812.8
70°	411.4	419.0	435.9	490.7	821.1	1228.7	1794.9	2553.7	3019.9	4044.8	4580.7
72.5°	319.0	326.5	349.2	426.5	543.6	600.2	713.4	1166.4	1734.5	2793.4	3518.1
75°	247.2	258.6	290.6	385.0	522.8	555.0	560.5	602.0	687.0	1240.0	1972.4
77.5°	173.6	175.5	207.6	332.2	507.7	570.1	560.5	560.5	572.0	632.2	843.7
80°	115.2	117.0	137.8	230.2	445.4	519.0	573.7	547.3	549.2	558.7	573.7
82.5°	60.4	64.2	81.2	139.7	260.5	351.1	477.4	498.3	490.7	500.2	496.4
85°	17.0	17.0	28.3	52.8	128.4	135.9	211.4	288.7	294.5	334.1	356.8
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	5.7	7.5	17.0	18.9
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
97.5°	2.0	2.0	2.0	3.0	4.0	5.1	6.4	7.6	8.8	9.8	10.8
100°	7.8	7.8	9.8	13.7	21.6	23.5	25.5	27.5	29.5	29.9	30.5
102.5°	27.5	27.5	31.4	37.3	44.2	45.4	46.6	47.9	49.0	49.2	49.6
105°	53.0	53.0	55.0	59.8	64.8	65.8	66.7	67.7	68.7	68.9	69.2
107.5°	76.5	75.5	78.5	82.5	86.3	87.1	87.9	88.6	89.3	89.8	90.3
110°	99.2	100.1	101.1	104.0	108.0	108.4	109.0	109.4	110.0	110.4	110.9



REPORT NUMBER: P271613

CATALOG NUMBER: ISS-AF-1200-LED-E1-SL3-7027-ULG

**CANDELA DISTRIBUTION (continued):**

	0°	5°	15°	25°	35°	37.5°	40°	42.5°	45°	47.5°	50°
112.5°	121.7	121.7	123.7	126.6	129.5	130.1	130.5	131.1	131.5	132.1	132.5
115°	143.3	144.3	146.2	148.2	151.2	151.6	152.2	152.6	153.1	153.6	154.1
117.5°	165.8	166.8	168.8	170.8	173.7	174.2	174.7	175.2	175.7	175.9	176.2
120°	189.5	191.4	192.3	194.3	197.3	197.4	197.8	198.1	198.3	198.7	199.2
122.5°	215.0	216.0	216.9	218.8	221.8	222.0	222.3	222.6	222.8	223.0	223.3
125°	239.5	241.5	242.5	243.4	246.3	246.6	246.9	247.1	247.3	247.6	247.8
127.5°	262.0	264.0	265.0	267.0	269.0	269.4	269.9	270.4	270.9	271.4	271.8
130°	284.7	286.6	287.5	288.5	292.5	292.7	292.9	293.3	293.5	293.9	294.5
132.5°	307.2	308.2	311.2	312.1	315.0	315.2	315.6	315.8	316.0	316.8	317.6
135°	329.8	330.8	332.7	334.7	338.6	338.6	338.6	338.6	338.6	339.4	340.1
137.5°	352.3	353.3	356.3	357.3	360.2	360.2	360.2	360.2	360.2	360.7	361.2
140°	375.0	375.9	377.8	378.8	380.8	381.0	381.3	381.6	381.8	382.0	382.3
142.5°	396.5	398.5	400.5	399.5	402.4	402.4	402.4	402.4	402.4	402.9	403.4
145°	417.2	418.1	420.0	420.0	423.0	423.2	423.6	423.8	424.0	424.4	425.0
147.5°	435.8	435.8	438.7	439.7	443.7	443.9	444.1	444.4	444.6	444.8	445.1
150°	452.5	453.5	455.4	456.4	460.3	460.5	460.8	461.1	461.3	461.5	461.8
152.5°	470.2	471.1	474.0	473.0	476.0	476.2	476.6	476.8	477.0	477.2	477.4
155°	489.8	490.7	492.7	491.7	493.7	493.7	493.7	493.7	493.7	493.9	494.2
157.5°	503.5	505.5	507.5	506.5	509.4	509.4	509.4	509.4	509.4	509.4	509.4
160°	515.3	517.2	519.2	519.2	522.2	522.2	522.2	522.2	522.2	522.2	522.2
162.5°	525.1	526.0	529.0	528.0	531.0	531.0	531.0	531.0	531.0	531.2	531.4
165°	535.9	536.8	538.8	537.8	541.8	541.8	541.8	541.8	541.8	541.9	542.3
167.5°	544.7	545.7	548.7	547.7	550.6	550.4	550.1	549.9	549.7	549.7	549.7
170°	551.6	552.5	555.5	554.5	556.5	556.3	556.1	555.7	555.5	555.3	555.1
172.5°	554.5	555.5	558.5	556.5	558.5	558.3	557.9	557.7	557.5	557.7	557.9
175°	556.5	558.5	559.5	558.5	561.4	561.4	561.4	561.4	561.4	561.6	561.9
177.5°	561.4	562.4	564.3	563.3	567.3	567.1	566.8	566.5	566.3	566.3	566.3
180°	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3





REPORT NUMBER: P271613

CATALOG NUMBER: ISS-AF-1200-LED-E1-SL3-7027-ULG

**CANDELA DISTRIBUTION (continued):**

	52.5°	55°	57.5°	59°	60°	62.5°	65°	67.5°	70°	72.5°	75°
0°	1408.0	1408.0	1408.0	1408.0	1408.0	1408.0	1408.0	1408.0	1408.0	1408.0	1408.0
2.5°	1453.3	1445.7	1443.8	1440.2	1442.0	1436.3	1434.4	1426.9	1426.9	1423.2	1419.3
5°	1462.7	1455.3	1462.7	1449.5	1451.4	1445.7	1436.3	1436.3	1428.8	1423.2	1411.8
7.5°	1436.3	1436.3	1438.3	1430.7	1432.5	1430.7	1419.3	1417.4	1406.2	1406.2	1392.9
10°	1387.3	1387.3	1394.8	1389.2	1391.0	1389.2	1383.5	1381.6	1377.8	1377.8	1357.1
12.5°	1330.6	1342.0	1353.3	1347.5	1347.5	1351.4	1351.4	1353.3	1351.4	1349.5	1332.5
15°	1283.5	1300.5	1311.7	1309.9	1311.7	1321.1	1325.0	1326.9	1332.5	1330.6	1315.6
17.5°	1240.0	1259.0	1268.4	1276.0	1281.5	1289.1	1300.5	1306.0	1313.6	1311.7	1296.6
20°	1200.3	1217.5	1234.5	1243.8	1245.7	1260.8	1274.0	1291.0	1294.7	1298.5	1279.6
22.5°	1158.8	1173.9	1208.0	1202.3	1215.5	1243.8	1251.4	1276.0	1276.0	1289.1	1262.7
25°	1123.0	1124.9	1177.8	1168.3	1179.7	1230.6	1236.2	1279.6	1268.4	1287.2	1257.0
27.5°	1087.2	1085.2	1149.4	1138.2	1151.3	1221.2	1224.9	1285.4	1274.0	1296.6	1257.0
30°	1060.7	1055.1	1128.7	1106.0	1124.9	1211.7	1213.6	1291.0	1281.5	1311.7	1270.2
32.5°	1055.1	1045.6	1109.8	1092.8	1111.7	1202.3	1213.6	1311.7	1300.5	1338.1	1285.4
35°	1079.7	1064.5	1119.3	1104.2	1119.3	1206.1	1223.0	1343.9	1330.6	1374.0	1321.1
37.5°	1124.9	1113.6	1158.8	1143.8	1155.1	1232.5	1247.6	1385.4	1383.5	1436.3	1375.9
40°	1204.2	1192.9	1228.7	1208.0	1217.5	1289.1	1296.6	1443.8	1449.5	1513.7	1453.3
42.5°	1311.7	1292.9	1321.1	1296.6	1309.9	1374.0	1366.5	1515.6	1532.6	1621.4	1551.5
45°	1449.5	1425.0	1442.0	1415.5	1425.0	1479.8	1458.9	1611.9	1628.9	1738.3	1676.1
47.5°	1600.5	1570.3	1591.1	1557.1	1562.8	1621.4	1583.5	1727.0	1753.4	1891.2	1830.7
50°	1781.7	1742.2	1749.7	1717.6	1721.3	1779.8	1738.3	1868.6	1900.6	2053.5	2000.6
52.5°	2013.9	1957.2	1957.2	1913.9	1915.7	1974.3	1923.3	2036.5	2072.4	2227.2	2191.2
55°	2319.6	2274.4	2264.9	2219.6	2204.5	2215.8	2144.2	2223.3	2263.0	2408.4	2380.0
57.5°	2563.1	2557.5	2585.8	2521.6	2506.5	2510.2	2419.7	2425.3	2470.6	2583.9	2593.2
60°	2859.5	2868.8	2872.7	2819.8	2814.1	2761.3	2668.9	2653.8	2710.4	2787.7	2817.9
62.5°	3331.4	3321.8	3274.7	3235.1	3199.1	3057.7	3006.6	2923.6	3002.9	3046.3	3108.6
65°	4344.8	4246.6	3944.6	3971.1	3876.7	3569.1	3525.7	3357.8	3482.3	3484.2	3601.1
67.5°	5349.0	5541.5	5356.5	5360.3	5147.0	4590.2	4456.2	4122.1	4192.0	4110.8	4171.2
70°	5520.7	5790.7	6296.4	6205.9	6194.5	5766.1	5315.0	4758.2	4548.7	4375.0	4235.4
72.5°	4750.7	5020.5	5762.3	5556.6	5634.0	5764.2	5294.3	4877.1	4409.0	4188.2	3886.2
75°	3342.6	3731.4	4484.5	4376.9	4433.6	4648.7	4244.9	4195.7	3654.0	3506.8	3042.5
77.5°	1791.2	2272.4	3116.1	2984.0	3008.5	3131.2	2710.4	2623.5	2100.7	1955.4	1428.8
80°	805.9	1117.3	1749.7	1602.5	1559.0	1489.2	1096.7	864.3	528.5	351.1	243.5
82.5°	534.1	555.0	775.8	671.9	628.5	519.0	336.0	198.2	156.7	132.1	126.4
85°	358.6	328.4	326.5	288.7	268.1	211.4	156.7	98.2	81.2	67.9	62.3
87.5°	20.8	13.3	18.9	20.8	15.1	13.3	9.4	0.0	1.9	0.0	1.9
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
97.5°	11.8	12.8	11.3	10.4	9.8	8.4	6.8	6.4	5.9	5.4	4.9
100°	30.9	31.4	30.9	30.6	30.5	29.9	29.5	28.7	27.9	27.3	26.5
102.5°	49.9	50.0	49.9	49.7	49.6	49.2	49.0	48.6	48.1	47.6	47.1
105°	69.5	69.7	69.7	69.7	69.7	69.7	69.7	69.2	68.7	68.2	67.7
107.5°	90.8	91.3	91.1	90.9	90.8	90.5	90.3	90.1	89.8	89.5	89.3
110°	111.4	111.9	111.9	111.9	111.9	111.9	111.9	111.7	111.4	111.1	110.9



REPORT NUMBER: P271613

CATALOG NUMBER: ISS-AF-1200-LED-E1-SL3-7027-ULG

**CANDELA DISTRIBUTION (continued):**

	52.5°	55°	57.5°	59°	60°	62.5°	65°	67.5°	70°	72.5°	75°
112.5°	132.9	133.5	133.5	133.5	133.5	133.5	133.5	133.3	132.9	132.7	132.5
115°	154.6	155.0	155.0	155.0	155.0	155.0	155.0	155.0	155.0	155.0	155.0
117.5°	176.4	176.7	176.9	177.1	177.1	177.4	177.7	177.4	177.1	176.9	176.7
120°	199.7	200.2	200.2	200.2	200.2	200.2	200.2	200.2	200.2	200.2	200.2
122.5°	223.6	223.8	223.8	223.8	223.8	223.8	223.8	223.9	224.3	224.6	224.8
125°	248.1	248.3	248.5	248.7	248.8	249.1	249.3	249.3	249.3	249.3	249.3
127.5°	272.4	272.8	272.6	272.5	272.4	272.1	271.8	272.1	272.4	272.6	272.8
130°	294.9	295.5	295.5	295.5	295.5	295.5	295.5	295.6	295.9	296.2	296.4
132.5°	318.2	319.0	319.0	319.0	319.0	319.0	319.0	319.2	319.4	319.8	320.0
135°	340.7	341.5	341.5	341.5	341.5	341.5	341.5	341.7	342.1	342.3	342.5
137.5°	361.7	362.2	362.2	362.2	362.2	362.2	362.2	362.4	362.6	362.9	363.2
140°	382.6	382.8	382.8	382.8	382.8	382.8	382.8	383.3	383.8	384.3	384.7
142.5°	403.9	404.3	404.3	404.3	404.3	404.3	404.3	404.6	404.9	405.1	405.3
145°	425.4	426.0	425.8	425.5	425.4	425.2	425.0	425.2	425.4	425.8	426.0
147.5°	445.4	445.6	445.1	444.8	444.6	444.1	443.7	443.9	444.1	444.4	444.6
150°	462.1	462.3	461.8	461.5	461.3	460.8	460.3	460.3	460.3	460.3	460.3
152.5°	477.8	478.0	477.8	477.6	477.4	477.2	477.0	477.0	477.0	477.0	477.0
155°	494.4	494.7	494.4	494.2	494.2	493.9	493.7	493.9	494.2	494.4	494.7
157.5°	509.4	509.4	508.9	508.6	508.4	507.9	507.5	507.6	507.9	508.2	508.4
160°	522.2	522.2	521.6	521.4	521.2	520.7	520.2	520.2	520.2	520.2	520.2
162.5°	531.8	532.0	531.4	531.2	531.0	530.4	530.0	529.6	529.0	528.6	528.0
165°	542.6	542.8	541.9	541.6	541.3	540.6	539.8	539.3	538.8	538.4	537.8
167.5°	549.7	549.7	549.1	548.9	548.7	548.1	547.7	547.9	548.1	548.4	548.7
170°	554.7	554.5	554.3	554.2	554.1	553.7	553.5	554.1	554.5	555.1	555.5
172.5°	558.3	558.5	557.9	557.7	557.5	556.9	556.5	556.7	556.9	557.3	557.5
175°	562.2	562.4	561.6	561.2	560.9	560.3	559.5	558.9	558.5	557.9	557.5
177.5°	566.3	566.3	565.6	565.1	564.9	564.1	563.3	563.3	563.3	563.3	563.3
180°	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3



REPORT NUMBER: P271613

CATALOG NUMBER: ISS-AF-1200-LED-E1-SL3-7027-ULG

**CANDELA DISTRIBUTION (continued):**

	77.5°	80°	85°	90°	95°	100°	102.5°	105°	107.5°	110°	112.5°
0°	1408.0	1408.0	1408.0	1408.0	1408.0	1408.0	1408.0	1408.0	1408.0	1408.0	1408.0
2.5°	1409.9	1409.9	1408.0	1394.8	1387.3	1383.5	1370.3	1368.4	1362.7	1360.8	1360.8
5°	1408.0	1400.5	1391.0	1372.1	1353.3	1336.3	1330.6	1317.5	1308.0	1296.6	1296.6
7.5°	1381.6	1374.0	1353.3	1325.0	1300.5	1276.0	1262.7	1243.8	1228.7	1213.6	1209.8
10°	1351.4	1340.1	1311.7	1274.0	1242.0	1198.5	1181.5	1156.9	1139.9	1117.3	1094.8
12.5°	1319.3	1311.7	1277.7	1234.5	1185.3	1130.6	1104.2	1070.2	1047.5	1021.1	987.1
15°	1306.0	1291.0	1247.6	1192.9	1132.4	1066.4	1028.6	992.8	958.9	928.6	883.3
17.5°	1289.1	1270.2	1221.2	1156.9	1081.5	1002.1	953.1	913.5	868.2	836.1	785.2
20°	1270.2	1242.0	1189.1	1111.7	1026.8	932.4	870.1	830.4	770.0	738.0	677.6
22.5°	1255.1	1219.3	1155.1	1068.3	966.4	860.7	787.1	741.8	673.8	636.1	560.5
25°	1251.4	1208.0	1130.6	1032.4	915.5	790.9	702.1	656.8	572.0	528.5	439.8
27.5°	1253.2	1202.3	1115.4	1002.1	870.1	728.5	622.9	570.1	462.4	417.2	315.1
30°	1255.1	1204.2	1100.3	975.8	828.6	664.4	539.8	477.4	349.2	309.6	219.0
32.5°	1274.0	1211.7	1096.7	955.1	790.9	600.2	445.4	388.8	247.2	224.6	162.3
35°	1296.6	1236.2	1104.2	951.2	762.5	536.0	349.2	290.6	177.4	171.8	132.1
37.5°	1343.9	1274.0	1134.3	960.6	745.5	469.9	260.5	222.7	139.7	143.5	115.2
40°	1415.5	1338.1	1183.3	989.0	743.7	403.9	192.5	173.6	120.8	124.5	105.7
42.5°	1511.8	1426.9	1259.0	1049.4	753.0	341.6	154.8	149.1	111.4	115.2	101.9
45°	1638.3	1551.5	1364.6	1126.8	779.5	290.6	135.9	135.9	107.5	111.4	100.0
47.5°	1798.7	1702.5	1494.8	1230.6	821.1	262.3	128.4	130.3	105.7	111.4	100.0
50°	1980.0	1874.2	1661.0	1364.6	885.2	254.8	130.3	130.3	107.5	111.4	100.0
52.5°	2168.7	2070.5	1840.3	1517.5	973.9	271.7	133.9	132.1	107.5	111.4	98.2
55°	2361.1	2272.4	2038.4	1696.8	1096.7	332.2	143.5	137.8	107.5	111.4	100.0
57.5°	2553.7	2491.4	2246.0	1889.3	1249.5	441.7	181.2	160.4	118.9	120.8	101.9
60°	2770.7	2725.5	2480.1	2142.2	1466.6	611.6	266.1	202.0	141.6	133.9	109.4
62.5°	3051.9	3040.7	2846.2	2506.5	1815.7	856.9	377.5	245.3	152.9	139.7	117.0
65°	3548.3	3578.6	3393.5	2933.1	2047.9	862.6	368.0	215.1	143.5	132.1	115.2
67.5°	4046.7	3957.9	3482.3	2868.8	1847.7	573.7	234.1	167.9	126.4	122.7	107.5
70°	4027.8	3786.2	3157.6	2508.3	1458.9	311.4	169.9	139.7	113.3	113.3	101.9
72.5°	3612.5	3253.9	2582.0	1985.5	973.9	198.2	143.5	122.7	103.8	101.9	94.4
75°	2719.8	2297.0	1659.0	1143.8	434.2	128.4	109.4	100.0	90.5	90.5	83.0
77.5°	1279.6	721.0	400.1	266.1	145.3	86.9	75.5	75.5	73.6	75.5	67.9
80°	173.6	156.7	133.9	117.0	88.8	60.4	54.8	56.6	54.8	56.6	50.9
82.5°	105.7	94.4	77.3	73.6	54.8	41.5	39.6	41.5	37.8	39.6	30.3
85°	50.9	45.4	35.8	34.0	28.3	24.5	20.8	24.5	18.9	20.8	13.3
87.5°	0.0	3.8	1.9	3.8	3.8	3.8	0.0	3.8	0.0	3.8	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
97.5°	4.7	4.4	4.0	4.0	4.0	4.4	4.7	4.9	5.4	5.9	6.4
100°	26.3	26.1	25.5	24.5	25.5	26.1	26.3	26.5	27.3	27.9	28.7
102.5°	47.3	47.6	48.1	47.1	48.1	47.6	47.3	47.1	47.6	48.1	48.6
105°	68.2	68.7	69.7	67.7	69.7	68.7	68.2	67.7	68.2	68.7	69.2
107.5°	89.5	89.8	90.3	89.3	90.3	89.8	89.5	89.3	89.5	89.8	90.1
110°	111.1	111.4	111.9	110.9	111.9	111.4	111.1	110.9	111.1	111.4	111.7



REPORT NUMBER: P271613  
 CATALOG NUMBER: ISS-AF-1200-LED-E1-SL3-7027-ULG

REPORT N  
 CATALOG

**CANDELA DISTRIBUTION (continued):**

**CANDELA**

	77.5°	80°	85°	90°	95°	100°	102.5°	105°	107.5°	110°	112.5°	
112.5°	132.9	133.5	134.5	132.5	134.5	133.5	132.9	132.5	132.7	132.9	133.3	0°
115°	155.6	156.0	157.0	156.0	157.0	156.0	155.6	155.0	155.0	155.0	155.0	2.5°
117.5°	177.1	177.7	178.7	176.7	178.7	177.7	177.1	176.7	176.9	177.1	177.4	5°
120°	200.7	201.2	202.2	200.2	202.2	201.2	200.7	200.2	200.2	200.2	200.2	7.5°
122.5°	225.7	226.7	228.7	227.7	228.7	226.7	225.7	224.8	224.6	224.3	223.9	10°
125°	250.1	250.8	252.2	251.3	252.2	250.8	250.1	249.3	249.3	249.3	249.3	12.5°
127.5°	273.6	274.3	275.8	272.8	275.8	274.3	273.6	272.8	272.6	272.4	272.1	15°
130°	297.2	297.9	299.3	297.4	299.3	297.9	297.2	296.4	296.2	295.9	295.6	17.5°
132.5°	320.8	321.4	322.9	321.0	322.9	321.4	320.8	320.0	319.8	319.4	319.2	20°
135°	343.1	343.5	344.5	343.5	344.5	343.5	343.1	342.5	342.3	342.1	341.7	22.5°
137.5°	364.2	365.1	367.0	365.1	367.0	365.1	364.2	363.2	362.9	362.6	362.4	25°
140°	385.7	386.7	388.7	386.7	388.7	386.7	385.7	384.7	384.3	383.8	383.3	27.5°
142.5°	406.1	406.8	408.3	407.3	408.3	406.8	406.1	405.3	405.1	404.9	404.6	30°
145°	426.8	427.4	428.9	427.0	428.9	427.4	426.8	426.0	425.8	425.4	425.2	32.5°
147.5°	445.4	446.1	447.5	444.6	447.5	446.1	445.4	444.6	444.4	444.1	443.9	35°
150°	461.3	462.3	464.2	461.3	464.2	462.3	461.3	460.3	460.3	460.3	460.3	37.5°
152.5°	477.8	478.4	480.0	477.0	480.0	478.4	477.8	477.0	477.0	477.0	477.0	40°
155°	495.4	496.1	497.6	495.7	497.6	496.1	495.4	494.7	494.4	494.2	493.9	42.5°
157.5°	509.6	510.9	513.3	510.3	513.3	510.9	509.6	508.4	508.2	507.9	507.6	45°
160°	520.9	521.6	523.2	521.2	523.2	521.6	520.9	520.2	520.2	520.2	520.2	47.5°
162.5°	528.6	529.0	530.0	527.0	530.0	529.0	528.6	528.0	528.6	529.0	529.6	50°
165°	538.4	538.8	539.8	537.8	539.8	538.8	538.4	537.8	538.4	538.8	539.3	52.5°
167.5°	549.7	550.6	552.5	550.6	552.5	550.6	549.7	548.7	548.4	548.1	547.9	55°
170°	556.7	557.9	560.5	558.5	560.5	557.9	556.7	555.5	555.1	554.5	554.1	57.5°
172.5°	558.3	558.9	560.5	557.5	560.5	558.9	558.3	557.5	557.3	556.9	556.7	60°
175°	558.3	558.9	560.5	557.5	560.5	558.9	558.3	557.5	557.9	558.5	558.9	62.5°
177.5°	564.1	564.9	566.3	563.3	566.3	564.9	564.1	563.3	563.3	563.3	563.3	65°
180°	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	67.5°
												70°
												72.5°
												75°
												77.5°
												80°
												82.5°
												85°
												87.5°
												90°
												92.5°
												95°
												97.5°
												100°
												102.5°
												105°
												107.5°
												110°

NUMBER: P271613  
 NUMBER: ISS-AF-1200-LED-E1-SL3-7027-ULG

REPORT NUMBER: P  
 CATALOG NUMBER:

**DISTRIBUTION (continued):**

**CANDELA DISTRIBUTION**

115°	117.5°	120°	122.5°	125°	127.5°	130°	135°	145°	155°	165°	115°	
1408.0	1408.0	1408.0	1408.0	1408.0	1408.0	1408.0	1408.0	1408.0	1408.0	1408.0	112.5°	133.5
1351.4	1345.8	1343.9	1336.3	1334.4	1326.9	1325.0	1317.5	1304.2	1298.5	1289.1	115°	155.0
1279.6	1270.2	1262.7	1259.0	1243.8	1236.2	1224.9	1209.8	1181.5	1168.3	1145.7	117.5°	177.7
1179.7	1177.8	1155.1	1147.6	1128.7	1115.4	1098.4	1073.9	1032.4	1007.9	972.1	120°	200.2
1070.2	1062.7	1036.1	1021.1	996.6	977.6	955.1	919.1	855.0	804.1	749.3	122.5°	223.8
968.2	945.6	915.5	892.7	862.6	836.1	809.7	754.9	653.1	570.1	494.4	125°	249.3
862.6	828.6	796.4	758.8	726.7	685.1	655.0	583.2	449.2	347.3	300.1	127.5°	271.8
754.9	707.8	671.9	621.0	585.1	528.5	496.4	409.5	294.5	249.1	234.1	130°	295.5
641.7	579.5	539.8	477.4	441.7	369.9	345.4	283.1	226.6	209.6	205.7	132.5°	319.0
520.9	445.4	402.0	334.1	309.6	266.1	247.2	217.0	190.6	183.1	186.8	135°	341.5
394.4	313.3	285.0	236.0	226.6	203.8	196.3	181.2	167.9	167.9	173.6	137.5°	362.2
281.2	219.0	211.4	181.2	179.3	167.9	162.3	154.8	150.9	154.8	162.3	140°	382.8
205.7	166.1	166.1	149.1	149.1	141.6	139.7	135.9	135.9	143.5	150.9	142.5°	404.3
162.3	135.9	139.7	126.4	128.4	122.7	124.5	122.7	124.5	130.3	135.9	145°	425.0
135.9	117.0	122.7	111.4	115.2	109.4	113.3	113.3	117.0	118.9	120.8	147.5°	443.7
120.8	107.5	111.4	103.8	107.5	101.9	107.5	107.5	109.4	109.4	109.4	150°	460.3
111.4	100.0	105.7	98.2	103.8	98.2	103.8	103.8	101.9	100.0	101.9	152.5°	477.0
105.7	98.2	103.8	96.3	101.9	96.3	100.0	98.2	94.4	94.4	94.4	155°	493.7
103.8	96.3	100.0	94.4	98.2	92.4	96.3	94.4	88.8	86.9	90.5	157.5°	507.5
103.8	94.4	100.0	92.4	96.3	90.5	94.4	88.8	83.0	83.0	88.8	160°	520.2
103.8	94.4	100.0	92.4	96.3	88.8	90.5	84.9	77.3	79.3	86.9	162.5°	530.0
105.7	98.2	101.9	94.4	96.3	84.9	88.8	81.2	75.5	77.3	83.0	165°	539.8
107.5	98.2	101.9	90.5	92.4	84.9	84.9	81.2	75.5	75.5	81.2	167.5°	547.7
107.5	96.3	98.2	88.8	90.5	81.2	83.0	79.3	73.6	71.8	75.5	170°	553.5
111.4	100.0	100.0	86.9	88.8	79.3	81.2	77.3	71.8	67.9	69.9	172.5°	556.5
115.2	101.9	103.8	90.5	90.5	81.2	83.0	75.5	67.9	64.2	66.0	175°	559.5
115.2	101.9	103.8	92.4	92.4	83.0	83.0	75.5	64.2	60.4	60.4	177.5°	563.3
109.4	100.0	101.9	92.4	92.4	83.0	83.0	73.6	62.3	56.6	54.8	180°	565.3
105.7	96.3	98.2	86.9	88.8	79.3	79.3	69.9	58.5	52.8	49.0		
96.3	88.8	88.8	81.2	79.3	69.9	69.9	64.2	54.8	47.3	43.4		
83.0	75.5	73.6	66.0	66.0	60.4	58.5	52.8	45.4	39.6	37.8		
67.9	58.5	58.5	49.0	49.0	43.4	45.4	39.6	34.0	32.1	30.3		
49.0	39.6	39.6	32.1	32.1	26.4	28.3	26.4	24.5	24.5	22.6		
30.3	20.8	22.6	17.0	20.8	15.1	17.0	15.1	15.1	13.3	13.3		
15.1	7.5	11.3	5.7	9.4	1.9	5.7	3.8	3.8	3.8	3.8		
1.9	0.0	1.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0		
6.8	8.4	9.8	11.3	12.8	11.8	10.8	8.8	4.0	3.0	2.0		
29.5	29.9	30.5	30.9	31.4	30.9	30.5	29.5	21.6	13.7	9.8		
49.0	49.2	49.6	49.9	50.0	49.9	49.6	49.0	44.2	37.3	31.4		
69.7	69.7	69.7	69.7	69.7	69.5	69.2	68.7	64.8	59.8	55.0		
90.3	90.5	90.8	91.1	91.3	90.8	90.3	89.3	86.3	82.5	78.5		
111.9	111.9	111.9	111.9	111.9	111.4	110.9	110.0	108.0	104.0	101.1		

271613  
 ISS-AF-1200-LED-E1-SL3-7027-ULG

REPORT NUMBER: P271613  
 CATALOG NUMBER: ISS-AF-12

**TION (continued):**

**CANDELA DISTRIBUTION (con**

117.5°	120°	122.5°	125°	127.5°	130°	135°	145°	155°	165°		175°	180°
133.5	133.5	133.5	133.5	132.9	132.5	131.5	129.5	126.6	123.7	0°	1408.0	1408.0
155.0	155.0	155.0	155.0	154.6	154.1	153.1	151.2	148.2	146.2	2.5°	1279.6	1285.4
177.4	177.1	176.9	176.7	176.4	176.2	175.7	173.7	170.8	168.8	5°	1138.2	1139.9
200.2	200.2	200.2	200.2	199.7	199.2	198.3	197.3	194.3	192.3	7.5°	966.4	962.5
223.8	223.8	223.8	223.8	223.6	223.3	222.8	221.8	218.8	216.9	10°	738.0	728.5
249.1	248.8	248.5	248.3	248.1	247.8	247.3	246.3	243.4	242.5	12.5°	475.7	462.4
272.1	272.4	272.6	272.8	272.4	271.8	270.9	269.0	267.0	265.0	15°	286.9	283.1
295.5	295.5	295.5	295.5	294.9	294.5	293.5	292.5	288.5	287.5	17.5°	230.2	230.2
319.0	319.0	319.0	319.0	318.2	317.6	316.0	315.0	312.1	311.2	20°	205.7	205.7
341.5	341.5	341.5	341.5	340.7	340.1	338.6	338.6	334.7	332.7	22.5°	190.6	190.6
362.2	362.2	362.2	362.2	361.7	361.2	360.2	360.2	357.3	356.3	25°	179.3	181.2
382.8	382.8	382.8	382.8	382.6	382.3	381.8	380.8	378.8	377.8	27.5°	169.9	169.9
404.3	404.3	404.3	404.3	403.9	403.4	402.4	402.4	399.5	400.5	30°	158.6	158.6
425.2	425.4	425.8	426.0	425.4	425.0	424.0	423.0	420.0	420.0	32.5°	139.7	139.7
444.1	444.6	445.1	445.6	445.4	445.1	444.6	443.7	439.7	438.7	35°	124.5	122.7
460.8	461.3	461.8	462.3	462.1	461.8	461.3	460.3	456.4	455.4	37.5°	111.4	113.3
477.2	477.4	477.8	478.0	477.8	477.4	477.0	476.0	473.0	474.0	40°	101.9	103.8
493.9	494.2	494.4	494.7	494.4	494.2	493.7	493.7	491.7	492.7	42.5°	98.2	98.2
507.9	508.4	508.9	509.4	509.4	509.4	509.4	509.4	506.5	507.5	45°	94.4	94.4
520.7	521.2	521.6	522.2	522.2	522.2	522.2	522.2	519.2	519.2	47.5°	94.4	94.4
530.4	531.0	531.4	532.0	531.8	531.4	531.0	531.0	528.0	529.0	50°	92.4	94.4
540.6	541.3	541.9	542.8	542.6	542.3	541.8	541.8	537.8	538.8	52.5°	90.5	90.5
548.1	548.7	549.1	549.7	549.7	549.7	549.7	550.6	547.7	548.7	55°	84.9	86.9
553.7	554.1	554.3	554.5	554.7	555.1	555.5	556.5	554.5	555.5	57.5°	79.3	81.2
556.9	557.5	557.9	558.5	558.3	557.9	557.5	558.5	556.5	558.5	60°	73.6	73.6
560.3	560.9	561.6	562.4	562.2	561.9	561.4	561.4	558.5	559.5	62.5°	66.0	66.0
564.1	564.9	565.6	566.3	566.3	566.3	566.3	567.3	563.3	564.3	65°	60.4	60.4
565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	67.5°	52.8	52.8
										70°	47.3	47.3
										72.5°	41.5	41.5
										75°	35.8	35.8
										77.5°	30.3	28.3
										80°	22.6	22.6
										82.5°	13.3	13.3
										85°	3.8	3.8
										87.5°	0.0	0.0
										90°	0.0	0.0
										92.5°	0.0	0.0
										95°	1.0	1.0
										97.5°	2.0	2.0
										100°	7.8	7.8
										102.5°	27.5	27.5
										105°	53.0	53.0
										107.5°	75.5	76.5
										110°	100.1	99.2



REPORT NUMBER: P271613

CATALOG NUMBER: ISS-AF-1200-LED-E1

**CANDELA DISTRIBUTION (continued):**

	175°	180°
112.5°	121.7	121.7
115°	144.3	143.3
117.5°	166.8	165.8
120°	191.4	189.5
122.5°	216.0	215.0
125°	241.5	239.5
127.5°	264.0	262.0
130°	286.6	284.7
132.5°	308.2	307.2
135°	330.8	329.8
137.5°	353.3	352.3
140°	375.9	375.0
142.5°	398.5	396.5
145°	418.1	417.2
147.5°	435.8	435.8
150°	453.5	452.5
152.5°	471.1	470.2
155°	490.7	489.8
157.5°	505.5	503.5
160°	517.2	515.3
162.5°	526.0	525.1
165°	536.8	535.9
167.5°	545.7	544.7
170°	552.5	551.6
172.5°	555.5	554.5
175°	558.5	556.5
177.5°	562.4	561.4
180°	565.3	565.3

(END OF REPORT)

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report

