

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P271564

Luminaire Tested: **ISS-AF-350-LED-E1-SL4-7027-ULG**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P271564  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P29763)-DOWNLIGHT AND  
Test Lab: INNOVATION CENTER-P2  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: MCGRAW-EDISON  
Catalog Number: ISS-AF-350-LED-E1-SL4-7027-ULG  
Description: IMPACT ELITE LED QUATER SPHERE LUMINAIRE WITH UPLIGHT  
LIGHT SQUARE WITH ACCULED OPTICS-TYPE IV W/SPILL CONTROL, WITH UPLIGHT  
GLOW  
Light Source: (16) 2700K CCT, 70 CRI LEDs and (1) UPLIGHT LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3232.2 lumens  
Efficiency: N/A  
Efficacy: 87.9 lumens/watt  
Luminous Opening: Rectangular w/ Sides (W: 0.5' x L: 0.5' x H: 0.54')  
IES Classification: Type IV - Short - Non-Cutoff  
BUG Rating: B0 - U5 - G1  
  
Input Watts (W): 36.79  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT




REPORT NUMBER: P271564

CATALOG NUMBER: ISS-AF-350-LED-E1-SL4-7027-ULG

### Iso-Footcandle Lines of Horizontal Illumination

× Max cd  
 - - - 1/2 Max cd

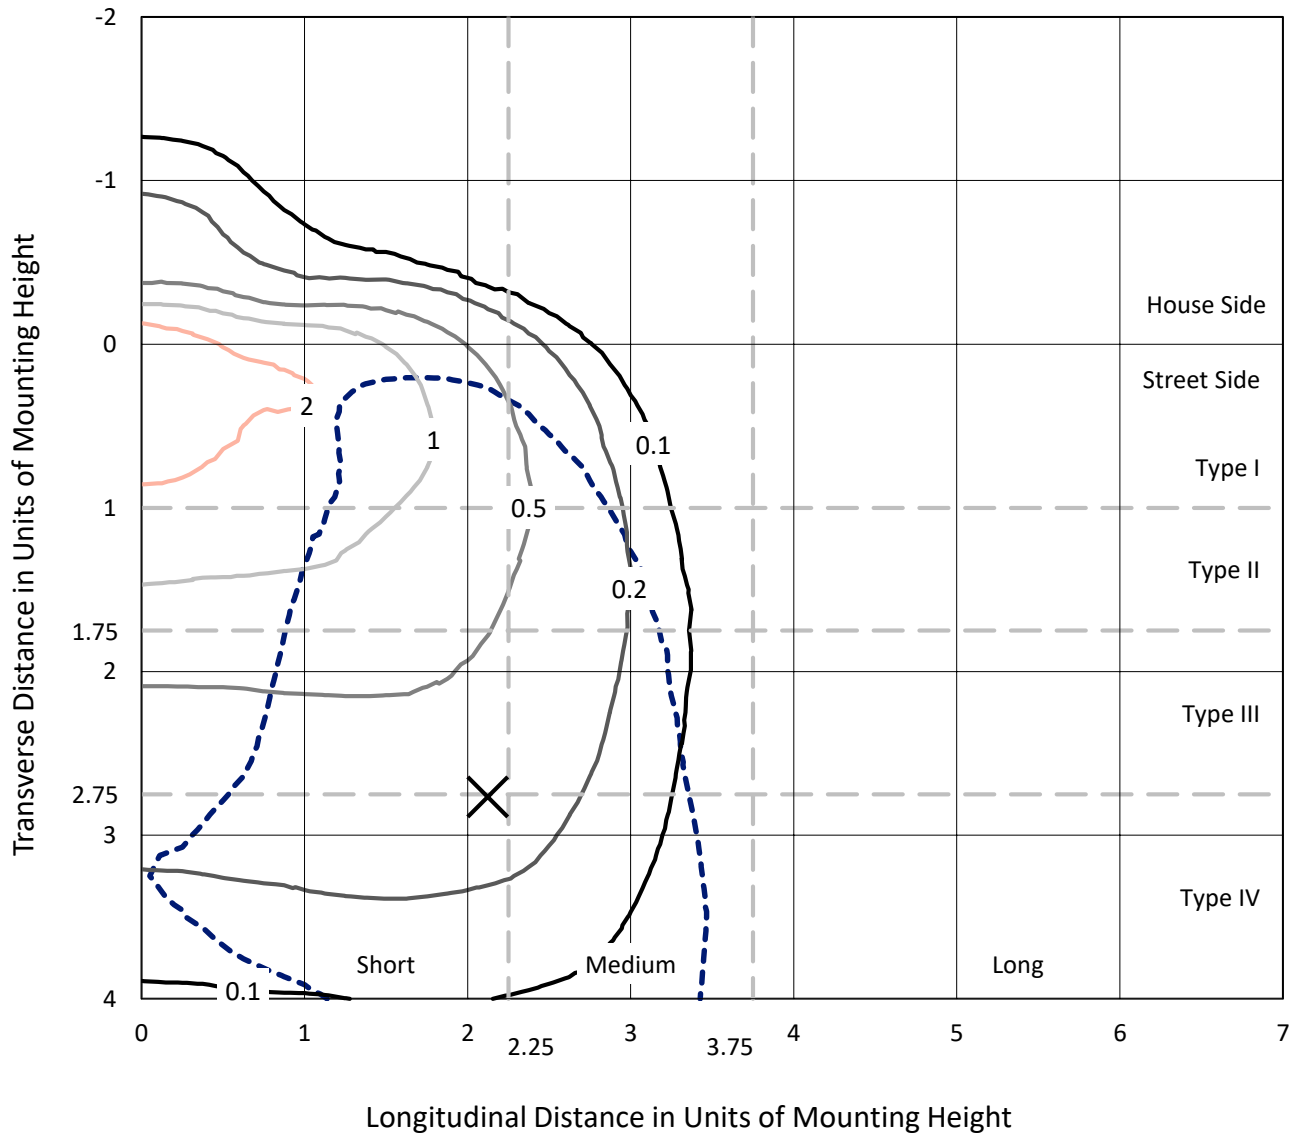


Based on 10 foot mounting height. Maximum calculated value = 3.1 fc  
 Type IV - Short - Non-Cutoff

REPORT NUMBER: P271564

CATALOG NUMBER: ISS-AF-350-LED-E1-SL4-7027-ULG

### Luminous Intensity Polar Plot

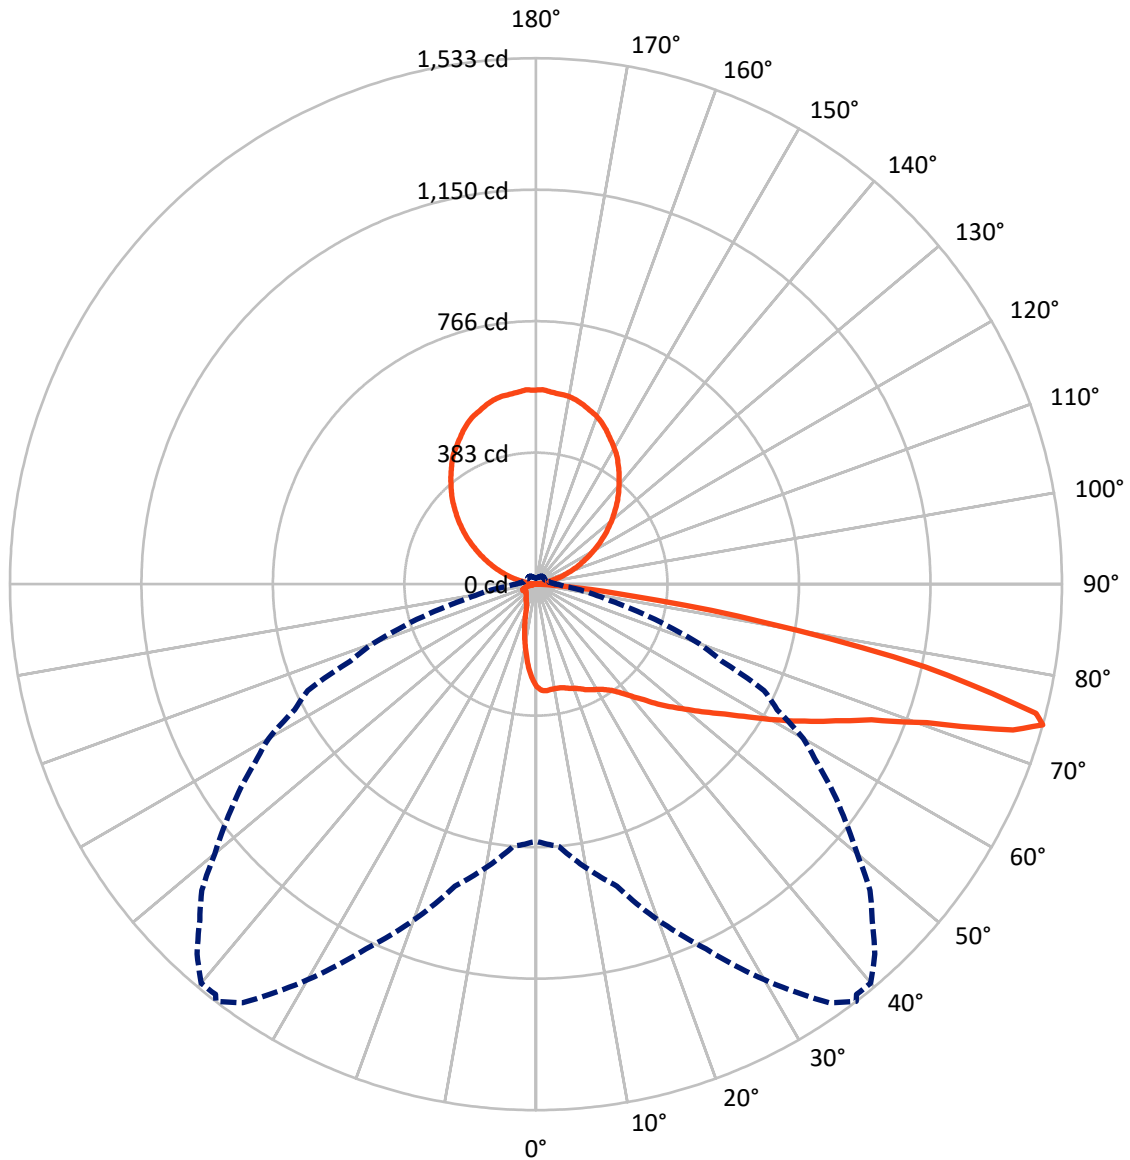

— Vertical Plane Through 37.5-Deg Lateral    - - - Horizontal Cone Through 74-Deg Vertical

REPORT NUMBER: P271564

CATALOG NUMBER: ISS-AF-350-LED-E1-SL4-7027-ULG


**FLUX DISTRIBUTION:**

		Downward	Upward	Total
<b>House Side</b>	Lumens	217.3	699.9	917.2
	% Fixture	6.7	21.7	28.4
<b>Street Side</b>	Lumens	1615.1	699.9	2315.0
	% Fixture	50.0	21.7	71.6
<b>Total</b>	Lumens	1832.4	1399.8	3232.2
	% Fixture	56.7	43.3	100.0

**Coefficient of Utilization**

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	26.0	0.8
10°-20°	66.3	2.1
20°-30°	102.8	3.2
30°-40°	152.4	4.7
40°-50°	234.5	7.3
50°-60°	346.6	10.7
60°-70°	462.0	14.3
70°-80°	398.8	12.3
80°-90°	42.9	1.3
90°-100°	4.7	0.1
100°-110°	67.7	2.1
110°-120°	150.2	4.6
120°-130°	219.7	6.8
130°-140°	260.7	8.1
140°-150°	264.3	8.2
150°-160°	226.8	7.0
160°-170°	152.2	4.7
170°-180°	53.3	1.7
0°-90°	1832.4	56.7
0°-180°	3232.2	100.0

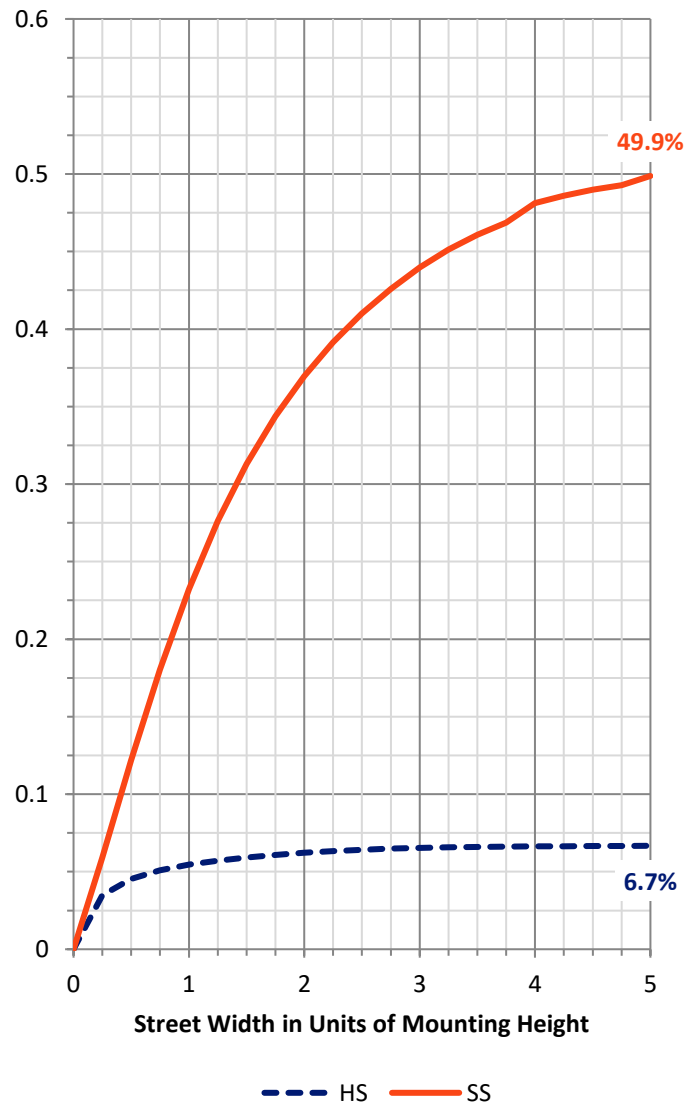

REPORT NUMBER: P271564


CATALOG NUMBER: ISS-AF-350-LED-E1-SL4-7027-ULG

**LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:**

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	135.5	4.2			
FM	(30°-60°)	631.1	19.5			
FH	(60°-80°)	808.5	25.0			G1/1800
FVH	(80°-90°)	40.1	1.2			G1/100
BL	(0°-30°)	59.7	1.8	B0/110		
BM	(30°-60°)	102.4	3.2	B0/220		
BH	(60°-80°)	52.4	1.6	B0/110		G0/110
BVH	(80°-90°)	2.8	0.1			G0/10
UL	(90°-100°)	4.7	0.1		U1/10	
UH	(100°-180°)	699.9	21.7		U4/1000	

**BUG Rating: B0-U5-G1**

Type IV Short

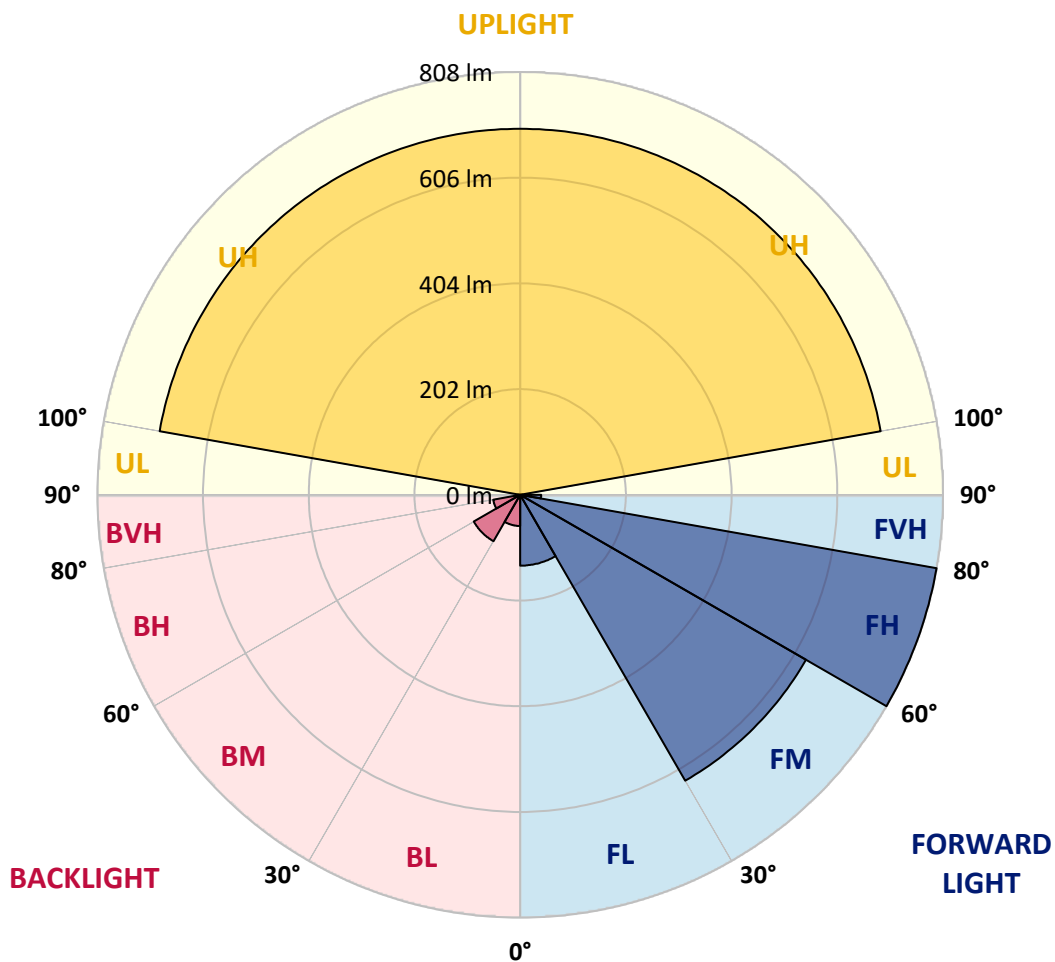



REPORT NUMBER: P271564

CATALOG NUMBER: ISS-AF-350-LED-E1-SL4-7027-ULG

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	15°	25°	35°	37.5°	38°	40°	42.5°	45°	47.5°
0°	299.0	299.0	299.0	299.0	299.0	299.0	299.0	299.0	299.0	299.0	299.0
2.5°	316.1	315.5	314.0	313.4	312.0	309.9	312.0	309.3	307.8	309.3	306.5
5°	321.6	321.0	319.5	316.8	315.5	312.0	314.0	310.6	309.9	311.4	307.8
7.5°	322.3	321.0	318.9	315.5	314.0	309.9	311.4	307.2	305.9	307.2	305.2
10°	320.2	319.5	317.6	312.0	310.6	309.3	308.6	305.9	305.2	304.4	303.8
12.5°	316.8	316.8	315.5	313.4	312.7	309.9	310.6	307.8	308.6	307.2	305.9
15°	315.5	314.8	316.1	317.6	317.6	313.4	316.1	314.0	312.7	313.4	311.4
17.5°	314.0	314.8	319.5	322.3	323.7	319.5	323.7	319.5	316.8	320.2	316.8
20°	313.4	315.5	323.7	329.8	330.5	323.7	330.5	323.7	323.7	327.7	321.6
22.5°	316.8	320.2	331.8	338.8	340.1	331.1	339.4	330.5	330.5	333.9	327.7
25°	327.7	331.1	344.2	351.7	350.4	340.7	348.4	339.4	338.8	342.8	334.6
27.5°	342.2	346.9	359.2	366.1	361.3	348.4	359.2	346.3	346.3	352.3	341.4
30°	362.6	366.1	377.0	377.6	371.6	355.8	368.1	353.8	351.7	362.6	349.0
32.5°	385.2	388.0	396.2	391.4	382.5	366.1	380.4	363.4	362.6	374.3	358.5
35°	409.2	412.0	414.7	406.4	398.3	380.4	396.2	379.1	378.4	391.4	376.3
37.5°	433.8	433.8	433.8	424.2	418.8	401.6	416.1	402.4	400.9	414.7	400.3
40°	453.6	455.0	452.9	444.1	441.3	429.0	441.3	429.0	431.1	443.4	431.7
42.5°	470.2	471.5	472.1	464.6	467.4	460.5	470.2	461.2	461.9	475.6	468.7
45°	486.5	485.8	491.4	489.3	497.4	498.1	503.6	500.2	501.5	511.9	509.8
47.5°	503.6	500.2	506.4	515.3	530.3	535.1	538.5	539.9	545.3	550.1	555.0
50°	520.1	516.6	520.7	540.6	564.6	574.7	575.5	582.3	588.5	595.3	604.9
52.5°	537.2	534.4	538.5	566.7	604.9	619.2	617.2	628.8	637.8	645.3	661.1
55°	555.0	552.2	556.3	598.0	647.9	667.8	665.7	682.3	699.3	702.0	719.8
57.5°	572.0	568.6	580.2	635.0	699.3	729.4	719.8	745.1	761.7	760.2	784.8
60°	590.5	587.9	606.3	680.2	763.6	802.6	788.3	821.8	833.4	828.7	852.0
62.5°	608.3	607.6	638.4	732.8	841.6	879.4	866.2	895.7	904.0	897.8	909.4
65°	624.7	628.8	673.3	785.6	916.9	960.0	942.2	971.7	981.2	976.5	996.3
67.5°	652.1	656.9	716.4	852.6	1010.0	1054.4	1039.4	1070.2	1084.5	1083.2	1105.1
70°	692.4	701.4	780.1	947.7	1151.5	1208.4	1200.1	1237.9	1272.7	1270.0	1291.9
72.5°	762.9	777.3	884.7	1095.6	1384.3	1453.4	1443.8	1465.0	1458.8	1408.9	1368.5
74°	749.3	767.1	910.7	1172.8	1488.9	1532.8	1517.0	1517.7	1461.6	1385.6	1320.6
75°	699.3	717.7	873.2	1163.2	1481.5	1505.4	1482.8	1454.7	1387.1	1309.7	1229.6
77.5°	479.6	503.6	641.7	939.4	1192.7	1159.8	1154.3	1101.1	1011.3	924.4	821.8
80°	245.7	262.8	331.8	491.4	707.5	674.6	685.7	642.5	568.0	504.9	400.3
82.5°	58.9	62.9	97.8	190.2	306.5	280.5	284.7	251.9	208.7	170.4	132.1
85°	30.8	34.9	47.9	52.7	80.8	83.5	81.5	78.7	64.3	54.1	47.3
87.5°	0.0	0.0	0.0	1.3	0.7	0.0	0.7	0.0	0.0	0.7	1.3
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
97.5°	2.0	2.0	2.0	3.0	4.0	5.1	5.4	6.4	7.6	8.8	9.8
100°	7.8	7.8	9.8	13.7	21.6	23.5	24.0	25.5	27.5	29.5	29.9
102.5°	27.5	27.5	31.4	37.3	44.2	45.4	45.6	46.6	47.9	49.0	49.2
105°	53.0	53.0	55.0	59.8	64.8	65.8	65.9	66.7	67.7	68.7	68.9
107.5°	76.5	75.5	78.5	82.5	86.3	87.1	87.2	87.9	88.6	89.3	89.8



REPORT NUMBER: P271564

CATALOG NUMBER: ISS-AF-350-LED-E1-SL4-7027-ULG

**CANDELA DISTRIBUTION (continued):**

	0°	5°	15°	25°	35°	37.5°	38°	40°	42.5°	45°	47.5°
110°	99.2	100.1	101.1	104.0	108.0	108.4	108.5	109.0	109.4	110.0	110.4
112.5°	121.7	121.7	123.7	126.6	129.5	130.1	130.2	130.5	131.1	131.5	132.1
115°	143.3	144.3	146.2	148.2	151.2	151.6	151.7	152.2	152.6	153.1	153.6
117.5°	165.8	166.8	168.8	170.8	173.7	174.2	174.3	174.7	175.2	175.7	175.9
120°	189.5	191.4	192.3	194.3	197.3	197.4	197.5	197.8	198.1	198.3	198.7
122.5°	215.0	216.0	216.9	218.8	221.8	222.0	222.2	222.3	222.6	222.8	223.0
125°	239.5	241.5	242.5	243.4	246.3	246.6	246.7	246.9	247.1	247.3	247.6
127.5°	262.0	264.0	265.0	267.0	269.0	269.4	269.5	269.9	270.4	270.9	271.4
130°	284.7	286.6	287.5	288.5	292.5	292.7	292.8	292.9	293.3	293.5	293.9
132.5°	307.2	308.2	311.2	312.1	315.0	315.2	315.3	315.6	315.8	316.0	316.8
135°	329.8	330.8	332.7	334.7	338.6	338.6	338.6	338.6	338.6	338.6	339.4
137.5°	352.3	353.3	356.3	357.3	360.2	360.2	360.2	360.2	360.2	360.2	360.7
140°	375.0	375.9	377.8	378.8	380.8	381.0	381.2	381.3	381.6	381.8	382.0
142.5°	396.5	398.5	400.5	399.5	402.4	402.4	402.4	402.4	402.4	402.4	402.9
145°	417.2	418.1	420.0	420.0	423.0	423.2	423.3	423.6	423.8	424.0	424.4
147.5°	435.8	435.8	438.7	439.7	443.7	443.9	443.9	444.1	444.4	444.6	444.8
150°	452.5	453.5	455.4	456.4	460.3	460.5	460.7	460.8	461.1	461.3	461.5
152.5°	470.2	471.1	474.0	473.0	476.0	476.2	476.3	476.6	476.8	477.0	477.2
155°	489.8	490.7	492.7	491.7	493.7	493.7	493.7	493.7	493.7	493.7	493.9
157.5°	503.5	505.5	507.5	506.5	509.4	509.4	509.4	509.4	509.4	509.4	509.4
160°	515.3	517.2	519.2	519.2	522.2	522.2	522.2	522.2	522.2	522.2	522.2
162.5°	525.1	526.0	529.0	528.0	531.0	531.0	531.0	531.0	531.0	531.0	531.2
165°	535.9	536.8	538.8	537.8	541.8	541.8	541.8	541.8	541.8	541.8	541.9
167.5°	544.7	545.7	548.7	547.7	550.6	550.4	550.3	550.1	549.9	549.7	549.7
170°	551.6	552.5	555.5	554.5	556.5	556.3	556.2	556.1	555.7	555.5	555.3
172.5°	554.5	555.5	558.5	556.5	558.5	558.3	558.2	557.9	557.7	557.5	557.7
175°	556.5	558.5	559.5	558.5	561.4	561.4	561.4	561.4	561.4	561.4	561.6
177.5°	561.4	562.4	564.3	563.3	567.3	567.1	567.0	566.8	566.5	566.3	566.3
180°	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3





REPORT NUMBER: P271564

CATALOG NUMBER: ISS-AF-350-LED-E1-SL4-7027-ULG

**CANDELA DISTRIBUTION (continued):**

	50°	52.5°	55°	57.5°	60°	62.5°	65°	67.5°	70°	72.5°	75°
0°	299.0	299.0	299.0	299.0	299.0	299.0	299.0	299.0	299.0	299.0	299.0
2.5°	308.6	307.2	308.6	304.4	306.5	303.1	304.4	301.1	302.5	299.8	300.4
5°	309.9	306.5	308.6	305.2	305.9	303.1	302.5	301.1	300.4	298.3	297.0
7.5°	306.5	303.8	303.1	301.8	299.8	300.4	297.7	297.0	294.9	294.9	290.8
10°	303.1	303.8	299.8	301.1	297.7	298.3	293.6	294.9	291.5	294.3	288.1
12.5°	305.9	306.5	303.1	305.2	299.0	300.4	296.4	298.3	293.6	297.0	289.4
15°	312.0	311.4	309.9	309.9	303.8	306.5	301.8	303.1	298.3	302.5	294.3
17.5°	317.6	316.8	314.8	314.0	309.9	310.6	305.9	308.6	303.1	306.5	298.3
20°	323.7	320.2	319.5	318.9	314.0	314.0	310.6	312.0	306.5	310.6	301.1
22.5°	328.4	325.7	325.1	322.3	318.9	320.2	315.5	316.1	310.6	314.8	306.5
25°	336.0	332.6	332.6	328.4	326.4	325.7	323.0	325.1	319.5	322.3	314.8
27.5°	346.3	338.8	341.4	337.3	336.0	335.2	333.9	335.2	331.1	333.2	325.7
30°	355.8	346.3	350.4	344.9	347.6	344.9	346.9	344.9	344.9	344.9	341.4
32.5°	368.8	357.2	365.4	357.2	362.6	358.5	365.4	361.3	364.0	363.4	361.9
35°	387.3	373.7	385.2	374.3	383.8	378.4	388.0	385.9	391.4	388.7	391.4
37.5°	412.0	397.6	411.2	400.9	412.6	404.3	418.1	416.7	428.3	424.2	428.3
40°	442.8	432.4	442.8	435.2	447.5	444.1	458.5	459.1	472.1	470.2	474.8
42.5°	476.9	469.5	479.6	475.6	487.9	490.7	507.0	511.1	523.4	526.9	527.6
45°	513.9	512.6	520.7	524.8	537.2	545.3	559.7	570.0	583.7	591.3	589.8
47.5°	556.9	562.5	568.0	578.1	589.2	606.3	620.5	633.7	649.4	654.1	656.2
50°	605.5	615.2	619.9	634.3	645.3	666.5	686.3	702.7	719.8	717.7	719.1
52.5°	656.9	669.1	676.1	693.1	707.5	732.2	749.3	765.0	786.3	780.8	778.7
55°	713.7	732.2	737.7	756.8	769.1	794.4	809.6	836.8	845.8	840.3	828.7
57.5°	773.9	795.8	802.0	828.0	834.2	861.5	874.5	892.9	900.6	891.6	876.6
60°	842.3	862.1	867.0	890.2	898.5	923.7	933.2	949.8	955.3	933.2	912.0
62.5°	910.7	931.4	934.0	954.6	962.7	984.6	995.6	1005.1	1002.5	970.3	943.6
65°	988.8	1008.5	1015.4	1035.9	1040.8	1057.1	1066.1	1055.1	1049.0	1000.4	970.3
67.5°	1112.6	1133.8	1136.5	1141.4	1140.7	1132.4	1128.3	1090.7	1063.3	973.8	930.6
70°	1275.4	1259.7	1228.9	1193.4	1167.3	1120.8	1093.5	1016.2	958.6	858.2	785.6
72.5°	1304.9	1253.6	1177.6	1116.8	1053.7	980.5	921.8	804.7	723.9	618.6	541.9
74°	1221.4	1138.0	1057.8	972.3	899.8	793.0	733.6	585.8	505.7	398.9	305.9
75°	1120.8	1023.0	932.6	823.8	756.1	628.2	572.0	412.6	332.6	236.7	159.4
77.5°	715.1	598.0	511.9	385.9	333.2	230.0	168.3	104.7	77.3	67.7	58.9
80°	321.0	228.6	181.4	125.2	104.7	80.1	67.7	54.8	49.9	43.7	41.7
82.5°	102.7	82.1	78.1	69.8	69.8	56.1	47.9	37.5	34.2	29.5	26.7
85°	44.5	41.7	43.1	39.6	40.3	30.8	24.6	18.4	18.4	12.9	11.7
87.5°	1.3	0.0	0.7	0.0	1.3	0.0	0.7	0.0	0.7	0.0	0.7
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
97.5°	10.8	11.8	12.8	11.3	9.8	8.4	6.8	6.4	5.9	5.4	4.9
100°	30.5	30.9	31.4	30.9	30.5	29.9	29.5	28.7	27.9	27.3	26.5
102.5°	49.6	49.9	50.0	49.9	49.6	49.2	49.0	48.6	48.1	47.6	47.1
105°	69.2	69.5	69.7	69.7	69.7	69.7	69.7	69.2	68.7	68.2	67.7
107.5°	90.3	90.8	91.3	91.1	90.8	90.5	90.3	90.1	89.8	89.5	89.3



REPORT NUMBER: P271564

CATALOG NUMBER: ISS-AF-350-LED-E1-SL4-7027-ULG

**CANDELA DISTRIBUTION (continued):**

	50°	52.5°	55°	57.5°	60°	62.5°	65°	67.5°	70°	72.5°	75°
110°	110.9	111.4	111.9	111.9	111.9	111.9	111.9	111.7	111.4	111.1	110.9
112.5°	132.5	132.9	133.5	133.5	133.5	133.5	133.5	133.3	132.9	132.7	132.5
115°	154.1	154.6	155.0	155.0	155.0	155.0	155.0	155.0	155.0	155.0	155.0
117.5°	176.2	176.4	176.7	176.9	177.1	177.4	177.7	177.4	177.1	176.9	176.7
120°	199.2	199.7	200.2	200.2	200.2	200.2	200.2	200.2	200.2	200.2	200.2
122.5°	223.3	223.6	223.8	223.8	223.8	223.8	223.8	223.9	224.3	224.6	224.8
125°	247.8	248.1	248.3	248.5	248.8	249.1	249.3	249.3	249.3	249.3	249.3
127.5°	271.8	272.4	272.8	272.6	272.4	272.1	271.8	272.1	272.4	272.6	272.8
130°	294.5	294.9	295.5	295.5	295.5	295.5	295.5	295.6	295.9	296.2	296.4
132.5°	317.6	318.2	319.0	319.0	319.0	319.0	319.0	319.2	319.4	319.8	320.0
135°	340.1	340.7	341.5	341.5	341.5	341.5	341.5	341.7	342.1	342.3	342.5
137.5°	361.2	361.7	362.2	362.2	362.2	362.2	362.2	362.4	362.6	362.9	363.2
140°	382.3	382.6	382.8	382.8	382.8	382.8	382.8	383.3	383.8	384.3	384.7
142.5°	403.4	403.9	404.3	404.3	404.3	404.3	404.3	404.6	404.9	405.1	405.3
145°	425.0	425.4	426.0	425.8	425.4	425.2	425.0	425.2	425.4	425.8	426.0
147.5°	445.1	445.4	445.6	445.1	444.6	444.1	443.7	443.9	444.1	444.4	444.6
150°	461.8	462.1	462.3	461.8	461.3	460.8	460.3	460.3	460.3	460.3	460.3
152.5°	477.4	477.8	478.0	477.8	477.4	477.2	477.0	477.0	477.0	477.0	477.0
155°	494.2	494.4	494.7	494.4	494.2	493.9	493.7	493.9	494.2	494.4	494.7
157.5°	509.4	509.4	509.4	508.9	508.4	507.9	507.5	507.6	507.9	508.2	508.4
160°	522.2	522.2	522.2	521.6	521.2	520.7	520.2	520.2	520.2	520.2	520.2
162.5°	531.4	531.8	532.0	531.4	531.0	530.4	530.0	529.6	529.0	528.6	528.0
165°	542.3	542.6	542.8	541.9	541.3	540.6	539.8	539.3	538.8	538.4	537.8
167.5°	549.7	549.7	549.7	549.1	548.7	548.1	547.7	547.9	548.1	548.4	548.7
170°	555.1	554.7	554.5	554.3	554.1	553.7	553.5	554.1	554.5	555.1	555.5
172.5°	557.9	558.3	558.5	557.9	557.5	556.9	556.5	556.7	556.9	557.3	557.5
175°	561.9	562.2	562.4	561.6	560.9	560.3	559.5	558.9	558.5	557.9	557.5
177.5°	566.3	566.3	566.3	565.6	564.9	564.1	563.3	563.3	563.3	563.3	563.3
180°	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3



REPORT NUMBER: P271564

CATALOG NUMBER: ISS-AF-350-LED-E1-SL4-7027-ULG

**CANDELA DISTRIBUTION (continued):**

	77.5°	80°	85°	90°	95°	100°	102.5°	105°	107.5°	110°	112.5°
0°	299.0	299.0	299.0	299.0	299.0	299.0	299.0	299.0	299.0	299.0	299.0
2.5°	297.7	299.0	298.3	295.6	294.9	292.8	288.1	288.7	286.0	288.1	284.7
5°	294.9	294.3	291.5	288.1	284.7	280.5	277.1	275.8	273.1	271.6	269.6
7.5°	290.8	288.1	283.2	277.8	273.1	267.5	264.8	260.0	258.6	254.0	253.2
10°	289.4	284.7	279.1	272.4	264.1	255.8	255.2	247.0	246.3	238.8	236.7
12.5°	292.2	286.0	279.1	271.0	261.4	249.8	249.8	237.4	236.7	226.6	223.0
15°	297.7	290.2	281.2	271.6	259.3	245.0	244.2	230.0	228.6	216.2	212.1
17.5°	302.5	292.2	284.0	271.0	256.6	240.2	236.7	222.4	219.6	205.4	199.9
20°	305.9	294.3	284.7	269.6	251.9	232.6	227.9	212.8	206.6	192.2	184.7
22.5°	309.9	299.0	286.0	269.0	249.1	226.6	216.2	202.6	193.7	178.7	168.3
25°	316.1	306.5	290.8	271.0	247.0	220.4	206.6	192.2	180.0	164.9	149.8
27.5°	325.7	316.1	297.7	273.7	246.3	214.2	199.2	181.4	166.3	149.8	132.8
30°	339.4	329.0	309.3	281.2	247.0	209.3	190.9	171.8	154.0	134.7	117.0
32.5°	357.2	349.0	324.4	289.4	249.8	205.4	183.3	161.4	139.6	121.1	105.4
35°	381.8	376.3	345.6	305.2	256.6	203.3	175.9	151.9	127.3	108.9	91.6
37.5°	418.1	410.5	376.3	327.7	267.5	201.8	170.4	140.2	117.0	97.2	82.8
40°	464.0	453.6	412.6	355.1	284.7	202.6	165.6	131.4	108.2	86.9	75.3
42.5°	518.7	503.6	457.1	388.7	301.8	203.9	162.9	123.2	101.3	78.7	69.8
45°	580.2	563.1	509.8	430.4	326.4	207.3	160.8	116.3	95.1	72.5	66.4
47.5°	640.5	623.3	563.9	472.1	351.7	213.4	162.1	112.2	91.0	69.1	62.3
50°	699.3	681.5	611.7	509.8	373.7	221.7	167.6	112.8	90.3	67.7	60.3
52.5°	751.3	729.4	652.8	539.3	389.3	227.2	172.5	114.9	91.0	67.0	59.6
55°	803.4	775.2	685.7	562.5	398.9	227.9	172.5	115.6	91.6	67.0	58.9
57.5°	842.3	810.2	711.0	576.2	402.4	224.5	168.3	112.2	87.6	66.4	57.5
60°	867.0	832.8	728.7	585.1	397.6	210.0	146.4	99.3	77.3	61.5	53.4
62.5°	887.4	852.6	734.3	570.0	357.2	166.9	114.3	80.8	64.3	54.8	49.2
65°	892.3	850.5	695.8	503.6	279.1	115.6	82.8	63.6	52.7	48.6	44.5
67.5°	819.7	769.8	585.1	394.2	190.2	79.4	61.5	52.0	45.2	43.1	41.7
70°	666.5	611.7	428.3	257.9	106.1	55.4	47.3	43.1	39.0	39.0	36.9
72.5°	429.7	373.0	219.6	110.1	54.1	42.4	38.3	36.9	33.6	34.2	32.2
74°	219.6	171.0	89.7	58.2	44.5	37.5	34.2	33.6	30.1	30.8	28.7
75°	111.5	88.2	62.9	48.6	41.1	35.7	31.5	31.5	27.4	28.0	26.1
77.5°	52.0	49.9	43.1	38.3	34.9	30.1	26.1	25.3	21.2	22.5	19.9
80°	36.3	36.3	33.6	32.2	28.7	24.6	19.9	19.9	15.7	16.3	14.4
82.5°	20.5	19.1	19.1	21.9	22.5	18.4	14.4	13.7	11.7	11.7	9.6
85°	8.9	10.3	12.3	15.0	16.3	14.4	10.3	9.6	6.2	6.2	3.4
87.5°	0.0	0.7	0.7	1.3	2.8	2.8	0.0	1.3	0.0	0.7	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
97.5°	4.7	4.4	4.0	4.0	4.0	4.4	4.7	4.9	5.4	5.9	6.4
100°	26.3	26.1	25.5	24.5	25.5	26.1	26.3	26.5	27.3	27.9	28.7
102.5°	47.3	47.6	48.1	47.1	48.1	47.6	47.3	47.1	47.6	48.1	48.6
105°	68.2	68.7	69.7	67.7	69.7	68.7	68.2	67.7	68.2	68.7	69.2
107.5°	89.5	89.8	90.3	89.3	90.3	89.8	89.5	89.3	89.5	89.8	90.1



REPORT NUMBER: P271564  
 CATALOG NUMBER: ISS-AF-350-LED-E1-SL4-7027-ULG

REPORT N  
 CATALOG

**CANDELA DISTRIBUTION (continued):**

**CANDELA**

	77.5°	80°	85°	90°	95°	100°	102.5°	105°	107.5°	110°	112.5°	
110°	111.1	111.4	111.9	110.9	111.9	111.4	111.1	110.9	111.1	111.4	111.7	0°
112.5°	132.9	133.5	134.5	132.5	134.5	133.5	132.9	132.5	132.7	132.9	133.3	2.5°
115°	155.6	156.0	157.0	156.0	157.0	156.0	155.6	155.0	155.0	155.0	155.0	5°
117.5°	177.1	177.7	178.7	176.7	178.7	177.7	177.1	176.7	176.9	177.1	177.4	7.5°
120°	200.7	201.2	202.2	200.2	202.2	201.2	200.7	200.2	200.2	200.2	200.2	10°
122.5°	225.7	226.7	228.7	227.7	228.7	226.7	225.7	224.8	224.6	224.3	223.9	12.5°
125°	250.1	250.8	252.2	251.3	252.2	250.8	250.1	249.3	249.3	249.3	249.3	15°
127.5°	273.6	274.3	275.8	272.8	275.8	274.3	273.6	272.8	272.6	272.4	272.1	17.5°
130°	297.2	297.9	299.3	297.4	299.3	297.9	297.2	296.4	296.2	295.9	295.6	20°
132.5°	320.8	321.4	322.9	321.0	322.9	321.4	320.8	320.0	319.8	319.4	319.2	22.5°
135°	343.1	343.5	344.5	343.5	344.5	343.5	343.1	342.5	342.3	342.1	341.7	25°
137.5°	364.2	365.1	367.0	365.1	367.0	365.1	364.2	363.2	362.9	362.6	362.4	27.5°
140°	385.7	386.7	388.7	386.7	388.7	386.7	385.7	384.7	384.3	383.8	383.3	30°
142.5°	406.1	406.8	408.3	407.3	408.3	406.8	406.1	405.3	405.1	404.9	404.6	32.5°
145°	426.8	427.4	428.9	427.0	428.9	427.4	426.8	426.0	425.8	425.4	425.2	35°
147.5°	445.4	446.1	447.5	444.6	447.5	446.1	445.4	444.6	444.4	444.1	443.9	37.5°
150°	461.3	462.3	464.2	461.3	464.2	462.3	461.3	460.3	460.3	460.3	460.3	40°
152.5°	477.8	478.4	480.0	477.0	480.0	478.4	477.8	477.0	477.0	477.0	477.0	42.5°
155°	495.4	496.1	497.6	495.7	497.6	496.1	495.4	494.7	494.4	494.2	493.9	45°
157.5°	509.6	510.9	513.3	510.3	513.3	510.9	509.6	508.4	508.2	507.9	507.6	47.5°
160°	520.9	521.6	523.2	521.2	523.2	521.6	520.9	520.2	520.2	520.2	520.2	50°
162.5°	528.6	529.0	530.0	527.0	530.0	529.0	528.6	528.0	528.6	529.0	529.6	52.5°
165°	538.4	538.8	539.8	537.8	539.8	538.8	538.4	537.8	538.4	538.8	539.3	55°
167.5°	549.7	550.6	552.5	550.6	552.5	550.6	549.7	548.7	548.4	548.1	547.9	57.5°
170°	556.7	557.9	560.5	558.5	560.5	557.9	556.7	555.5	555.1	554.5	554.1	60°
172.5°	558.3	558.9	560.5	557.5	560.5	558.9	558.3	557.5	557.3	556.9	556.7	62.5°
175°	558.3	558.9	560.5	557.5	560.5	558.9	558.3	557.5	557.9	558.5	558.9	65°
177.5°	564.1	564.9	566.3	563.3	566.3	564.9	564.1	563.3	563.3	563.3	563.3	67.5°
180°	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	70°
												72.5°
												74°
												75°
												77.5°
												80°
												82.5°
												85°
												87.5°
												90°
												92.5°
												95°
												97.5°
												100°
												102.5°
												105°
												107.5°



NUMBER: P271564  
 NUMBER: ISS-AF-350-LED-E1-SL4-7027-ULG

REPORT NUMBER: P  
 CATALOG NUMBER:

**DISTRIBUTION (continued):**

**CANDELA DISTRIBUTION**

115°	117.5°	120°	122.5°	125°	127.5°	130°	135°	145°	155°	165°	110°	115°
299.0	299.0	299.0	299.0	299.0	299.0	299.0	299.0	299.0	299.0	299.0	110°	111.9
286.0	282.6	284.7	281.2	282.6	279.1	280.5	278.5	276.5	273.7	273.1	112.5°	133.5
267.5	264.8	264.1	260.7	261.4	258.6	255.8	252.5	248.4	242.9	240.8	115°	155.0
247.0	246.3	241.6	239.5	236.7	234.0	229.2	223.8	215.5	208.0	203.3	117.5°	177.7
229.2	227.2	220.4	216.9	212.8	209.3	202.6	195.0	183.3	171.8	165.6	120°	200.2
214.2	211.4	202.6	198.4	192.2	188.1	180.0	170.4	154.0	137.5	130.1	122.5°	223.8
201.8	197.8	187.5	181.4	173.1	169.0	160.1	146.4	126.6	109.4	99.3	125°	249.3
187.5	182.0	171.0	163.5	155.4	147.8	138.9	124.5	102.0	86.1	76.0	127.5°	271.8
171.8	164.9	153.3	143.0	134.0	127.3	118.4	104.0	81.5	69.1	63.6	130°	295.5
155.4	144.4	134.0	125.2	114.9	108.2	99.3	86.1	69.1	62.3	60.3	132.5°	319.0
138.2	125.9	115.6	106.8	97.2	91.0	83.5	73.2	62.9	60.8	60.8	135°	341.5
121.1	108.9	99.3	90.3	82.1	78.1	71.1	64.3	59.6	60.3	60.8	137.5°	362.2
105.4	93.1	84.2	77.3	69.8	67.0	61.5	57.5	56.9	58.9	59.6	140°	382.8
91.6	80.8	72.5	67.0	60.8	59.6	54.8	52.7	54.8	57.5	56.9	142.5°	404.3
80.1	71.1	62.9	59.6	54.1	53.4	49.9	48.6	51.3	54.8	54.8	145°	425.0
71.1	62.9	56.9	54.1	49.9	49.2	46.5	45.2	47.3	52.0	53.4	147.5°	443.7
63.6	58.9	52.7	49.9	47.3	45.8	44.5	43.1	43.7	49.9	50.7	150°	460.3
58.9	55.4	49.9	48.6	45.2	44.5	42.4	41.1	41.7	46.5	48.6	152.5°	477.0
55.4	52.7	47.9	47.3	43.7	43.1	41.1	39.6	40.3	44.5	46.5	155°	493.7
52.7	49.9	45.8	44.5	42.4	41.7	40.3	39.0	39.0	43.1	45.2	157.5°	507.5
51.3	48.6	44.5	43.1	41.1	40.3	39.0	37.5	38.3	41.7	43.1	160°	520.2
50.7	47.3	43.7	41.7	40.3	39.0	37.5	36.3	36.9	40.3	41.7	162.5°	530.0
50.7	46.5	43.7	41.7	39.6	37.5	36.9	34.9	36.3	39.0	41.1	165°	539.8
50.7	46.5	43.7	41.7	40.3	38.3	36.9	35.7	36.3	39.0	41.1	167.5°	547.7
49.2	45.8	44.5	42.4	41.7	39.6	39.0	37.5	37.5	41.1	44.5	170°	553.5
47.3	45.2	44.5	43.1	43.1	41.7	41.7	40.3	40.3	44.5	47.9	172.5°	556.5
44.5	43.1	43.7	43.1	43.1	43.1	42.4	42.4	42.4	45.8	49.9	175°	559.5
41.7	41.1	41.7	41.7	42.4	41.7	42.4	41.7	41.7	45.2	49.2	177.5°	563.3
37.5	37.5	38.3	37.5	38.3	38.3	39.0	39.0	39.0	41.1	45.2	180°	565.3
32.9	32.2	32.9	32.2	33.6	32.2	33.6	34.2	33.6	34.2	36.3		
29.5	28.7	29.5	28.7	30.1	28.7	29.5	29.5	28.7	23.3	19.9		
26.7	26.1	26.7	26.1	27.4	26.1	27.4	26.7	25.3	17.1	16.3		
21.2	19.1	21.2	19.1	20.5	18.4	19.9	17.1	12.9	12.3	12.3		
15.7	13.7	15.0	12.9	12.3	9.6	10.3	9.6	8.9	9.6	9.6		
9.6	6.8	8.3	6.2	7.5	5.5	6.8	6.2	5.5	5.5	5.5		
4.9	3.4	4.9	2.8	4.1	2.8	3.4	3.4	2.1	2.1	2.1		
0.7	0.0	1.3	0.0	1.3	0.0	0.7	0.7	0.0	0.0	0.0		
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0		
6.8	8.4	9.8	11.3	12.8	11.8	10.8	8.8	4.0	3.0	2.0		
29.5	29.9	30.5	30.9	31.4	30.9	30.5	29.5	21.6	13.7	9.8		
49.0	49.2	49.6	49.9	50.0	49.9	49.6	49.0	44.2	37.3	31.4		
69.7	69.7	69.7	69.7	69.7	69.5	69.2	68.7	64.8	59.8	55.0		
90.3	90.5	90.8	91.1	91.3	90.8	90.3	89.3	86.3	82.5	78.5		

271564  
 ISS-AF-350-LED-E1-SL4-7027-ULG

REPORT NUMBER: P271564  
 CATALOG NUMBER: ISS-AF-350

**TION (continued):**

**CANDELA DISTRIBUTION (con**

117.5°	120°	122.5°	125°	127.5°	130°	135°	145°	155°	165°		175°	180°
111.9	111.9	111.9	111.9	111.4	110.9	110.0	108.0	104.0	101.1	0°	299.0	299.0
133.5	133.5	133.5	133.5	132.9	132.5	131.5	129.5	126.6	123.7	2.5°	271.0	271.6
155.0	155.0	155.0	155.0	154.6	154.1	153.1	151.2	148.2	146.2	5°	237.4	239.5
177.4	177.1	176.9	176.7	176.4	176.2	175.7	173.7	170.8	168.8	7.5°	200.5	201.8
200.2	200.2	200.2	200.2	199.7	199.2	198.3	197.3	194.3	192.3	10°	161.4	162.9
223.8	223.8	223.8	223.8	223.6	223.3	222.8	221.8	218.8	216.9	12.5°	124.5	125.9
249.1	248.8	248.5	248.3	248.1	247.8	247.3	246.3	243.4	242.5	15°	93.7	92.3
272.1	272.4	272.6	272.8	272.4	271.8	270.9	269.0	267.0	265.0	17.5°	71.9	70.4
295.5	295.5	295.5	295.5	294.9	294.5	293.5	292.5	288.5	287.5	20°	60.8	60.8
319.0	319.0	319.0	319.0	318.2	317.6	316.0	315.0	312.1	311.2	22.5°	59.6	58.9
341.5	341.5	341.5	341.5	340.7	340.1	338.6	338.6	334.7	332.7	25°	60.3	59.6
362.2	362.2	362.2	362.2	361.7	361.2	360.2	360.2	357.3	356.3	27.5°	60.3	59.6
382.8	382.8	382.8	382.8	382.6	382.3	381.8	380.8	378.8	377.8	30°	58.9	58.2
404.3	404.3	404.3	404.3	403.9	403.4	402.4	402.4	399.5	400.5	32.5°	56.9	56.1
425.2	425.4	425.8	426.0	425.4	425.0	424.0	423.0	420.0	420.0	35°	54.8	54.8
444.1	444.6	445.1	445.6	445.4	445.1	444.6	443.7	439.7	438.7	37.5°	53.4	54.1
460.8	461.3	461.8	462.3	462.1	461.8	461.3	460.3	456.4	455.4	40°	51.3	52.0
477.2	477.4	477.8	478.0	477.8	477.4	477.0	476.0	473.0	474.0	42.5°	49.2	49.9
493.9	494.2	494.4	494.7	494.4	494.2	493.7	493.7	491.7	492.7	45°	47.3	47.9
507.9	508.4	508.9	509.4	509.4	509.4	509.4	509.4	506.5	507.5	47.5°	45.2	45.2
520.7	521.2	521.6	522.2	522.2	522.2	522.2	522.2	519.2	519.2	50°	42.4	42.4
530.4	531.0	531.4	532.0	531.8	531.4	531.0	531.0	528.0	529.0	52.5°	41.7	41.7
540.6	541.3	541.9	542.8	542.6	542.3	541.8	541.8	537.8	538.8	55°	41.7	41.7
548.1	548.7	549.1	549.7	549.7	549.7	549.7	550.6	547.7	548.7	57.5°	43.1	43.1
553.7	554.1	554.3	554.5	554.7	555.1	555.5	556.5	554.5	555.5	60°	47.3	47.9
556.9	557.5	557.9	558.5	558.3	557.9	557.5	558.5	556.5	558.5	62.5°	55.4	56.1
560.3	560.9	561.6	562.4	562.2	561.9	561.4	561.4	558.5	559.5	65°	63.6	64.9
564.1	564.9	565.6	566.3	566.3	566.3	566.3	567.3	563.3	564.3	67.5°	64.3	66.4
565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	70°	62.3	64.3
										72.5°	43.1	43.1
										74°	19.1	18.4
										75°	16.3	15.7
										77.5°	12.3	12.3
										80°	8.9	8.3
										82.5°	4.9	4.9
										85°	1.3	1.3
										87.5°	0.0	0.0
										90°	0.0	0.0
										92.5°	0.0	0.0
										95°	1.0	1.0
										97.5°	2.0	2.0
										100°	7.8	7.8
										102.5°	27.5	27.5
										105°	53.0	53.0
										107.5°	75.5	76.5



REPORT NUMBER: P271564

CATALOG NUMBER: ISS-AF-350-LED-E1-S

**CANDELA DISTRIBUTION (continued):**

	175°	180°
110°	100.1	99.2
112.5°	121.7	121.7
115°	144.3	143.3
117.5°	166.8	165.8
120°	191.4	189.5
122.5°	216.0	215.0
125°	241.5	239.5
127.5°	264.0	262.0
130°	286.6	284.7
132.5°	308.2	307.2
135°	330.8	329.8
137.5°	353.3	352.3
140°	375.9	375.0
142.5°	398.5	396.5
145°	418.1	417.2
147.5°	435.8	435.8
150°	453.5	452.5
152.5°	471.1	470.2
155°	490.7	489.8
157.5°	505.5	503.5
160°	517.2	515.3
162.5°	526.0	525.1
165°	536.8	535.9
167.5°	545.7	544.7
170°	552.5	551.6
172.5°	555.5	554.5
175°	558.5	556.5
177.5°	562.4	561.4
180°	565.3	565.3

(END OF REPORT)

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report

