

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: McGRAW-EDISON

Report Number: P271590

Luminaire Tested: **ISS-AF-600-LED-E1-T4W-7027-ULG**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P271590
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P29757)-DOWNLIGHT AND
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: MCGRAW-EDISON
Catalog Number: ISS-AF-600-LED-E1-T4W-7027-ULG
Description: IMPACT ELITE LED QUATER SPHERE LUMINAIRE WITH UPLIGHT
LIGHT SQUARE WITH ACCULED OPTICS-TYPE IV WIDE, WITH UPLIGHT GLOW
Light Source: (16) 2700K CCT, 70 CRI LEDs and (1) UPLIGHT LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4795.7 lumens
Efficiency: N/A
Efficacy: 95.2 lumens/watt
Luminous Opening: Rectangular w/ Sides (W: 0.5' x L: 0.5' x H: 0.54')
IES Classification: Type IV - Medium - Non-Cutoff
BUG Rating: B1 - U5 - G1


Input Watts (W): 50.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



REPORT NUMBER: P271590
 CATALOG NUMBER: ISS-AF-600-LED-E1-T4W-7027-ULG

Iso-Footcandle Lines of Horizontal Illumination


× Max cd
 - - - 1/2 Max cd

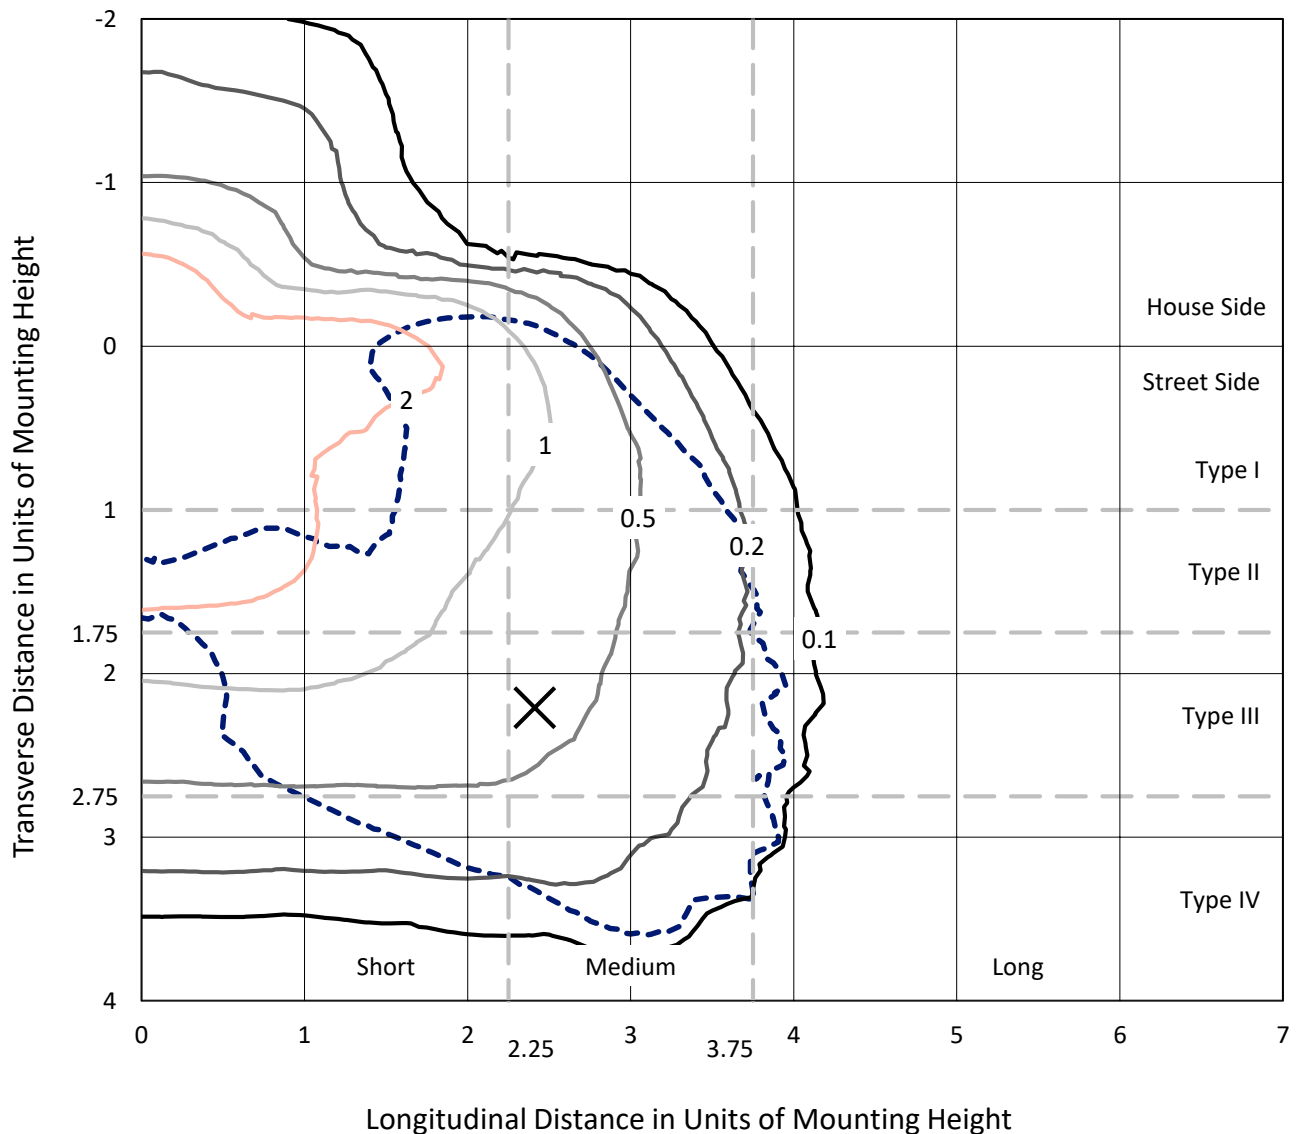

Based on 10 foot mounting height. Maximum calculated value = 4.8 fc
 Type IV - Medium - Non-Cutoff

REPORT NUMBER: P271590
CATALOG NUMBER: ISS-AF-600-LED-E1-T4W-7027-ULG

Luminous Intensity Polar Plot

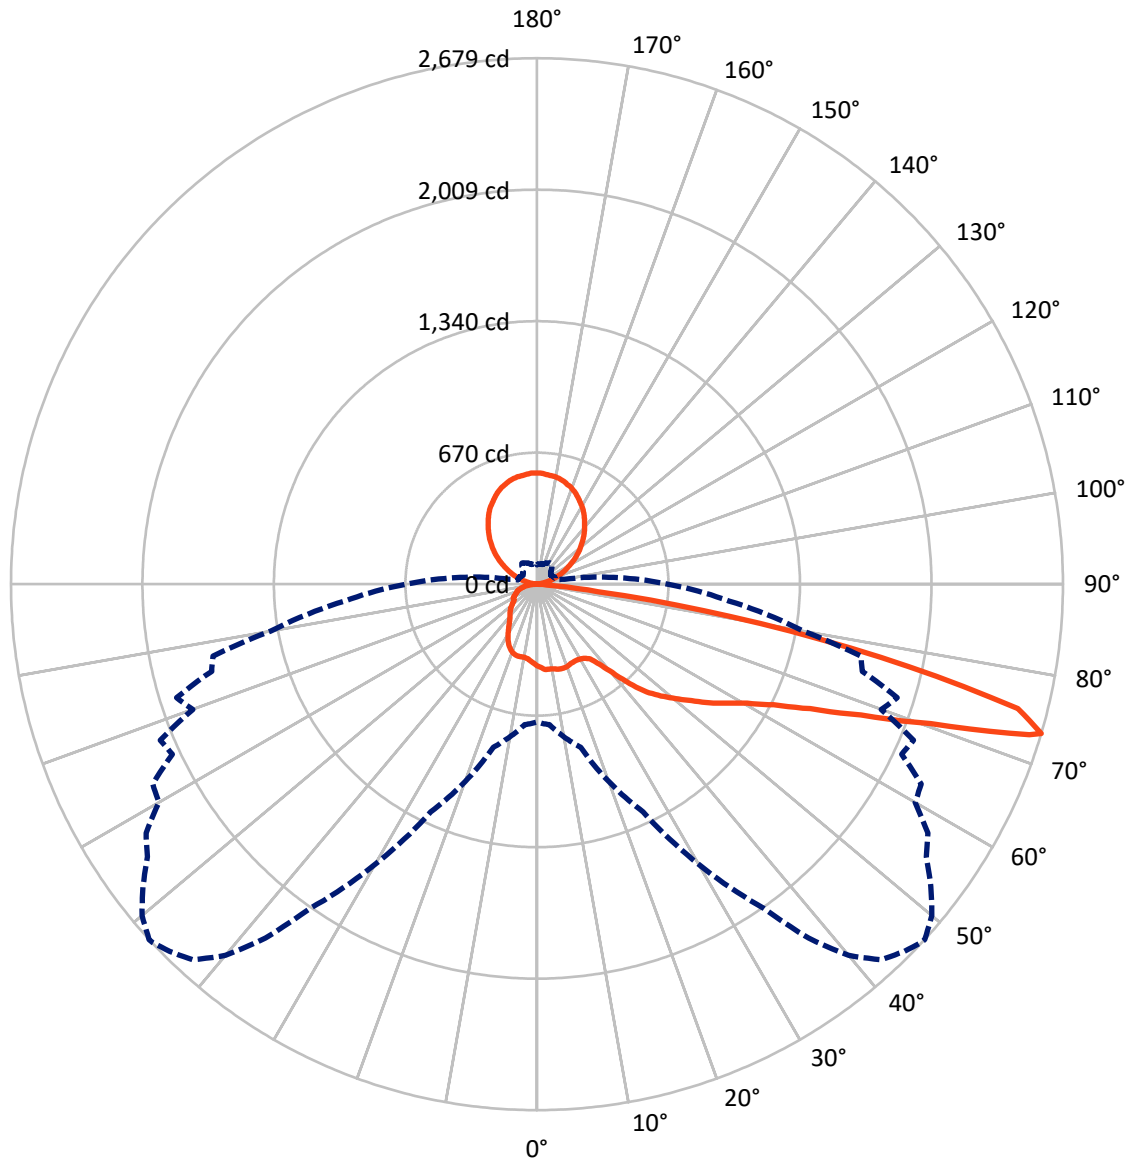

— Vertical Plane Through 47.5-Deg Lateral - - - Horizontal Cone Through 73-Deg Vertical

REPORT NUMBER: P271590

CATALOG NUMBER: ISS-AF-600-LED-E1-T4W-7027-ULG


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	678.5	699.9	1378.4
	% Fixture	14.1	14.6	28.7
Street Side	Lumens	2717.5	699.9	3417.3
	% Fixture	56.7	14.6	71.3
Total	Lumens	3395.9	1399.8	4795.7
	% Fixture	70.8	29.2	100.0

Coefficient of Utilization

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	39.7	0.8
10°-20°	118.2	2.5
20°-30°	181.6	3.8
30°-40°	265.0	5.5
40°-50°	436.9	9.1
50°-60°	684.0	14.3
60°-70°	927.9	19.3
70°-80°	687.1	14.3
80°-90°	55.5	1.2
90°-100°	4.7	0.1
100°-110°	67.7	1.4
110°-120°	150.2	3.1
120°-130°	219.7	4.6
130°-140°	260.7	5.4
140°-150°	264.3	5.5
150°-160°	226.8	4.7
160°-170°	152.2	3.2
170°-180°	53.3	1.1
0°-90°	3395.9	70.8
0°-180°	4795.7	100.0

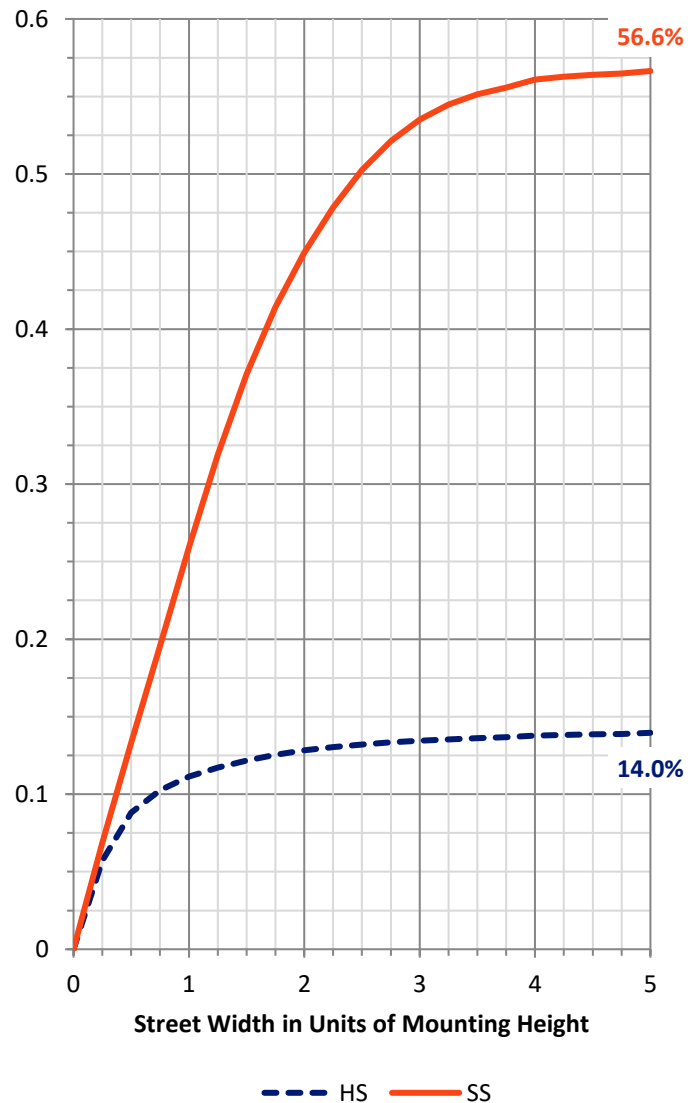

REPORT NUMBER: P271590


CATALOG NUMBER: ISS-AF-600-LED-E1-T4W-7027-ULG

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone	Lumens	% Fixture	Zone Rating/Lumen Limit		
			B	U	G
FL (0°-30°)	187.2	3.9			
FM (30°-60°)	1067.3	22.3			
FH (60°-80°)	1422.9	29.7			G1/1800
FVH (80°-90°)	40.0	0.8			G1/100
BL (0°-30°)	152.3	3.2	B1/500		
BM (30°-60°)	318.6	6.6	B1/1000		
BH (60°-80°)	192.1	4.0	B1/500		G1/500
BVH (80°-90°)	15.5	0.3			G1/100
UL (90°-100°)	4.7	0.1		U1/10	
UH (100°-180°)	699.9	14.6		U4/1000	

BUG Rating: B1-U5-G1

Type IV Medium

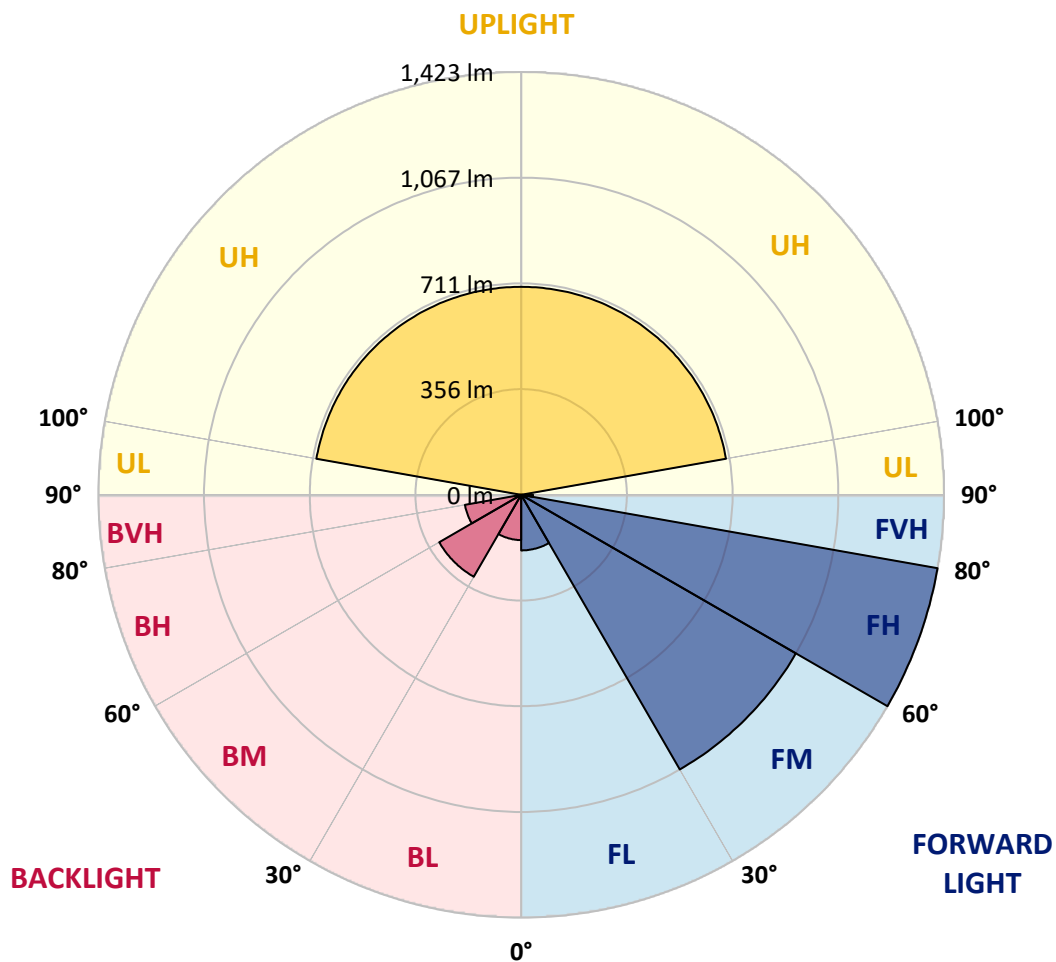



REPORT NUMBER: P271590

CATALOG NUMBER: ISS-AF-600-LED-E1-T4W-7027-ULG

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	37.5°	40°	42.5°	45°	47°	47.5°
0°	417.0	417.0	417.0	417.0	417.0	417.0	417.0	417.0	417.0	417.0	417.0
2.5°	441.7	440.6	437.1	436.0	432.7	430.5	429.4	428.2	431.5	429.4	426.0
5°	469.7	467.5	463.0	456.2	449.5	445.0	443.9	441.7	441.7	439.5	437.1
7.5°	489.8	488.8	482.0	472.0	460.7	452.8	448.4	445.0	446.2	443.9	437.1
10°	508.9	506.7	495.4	483.2	466.3	457.3	451.8	446.2	450.7	447.3	438.4
12.5°	523.5	521.3	505.6	489.8	470.8	460.7	455.1	451.8	456.2	454.0	443.9
15°	531.3	529.1	513.4	494.3	474.1	463.0	460.7	458.5	461.9	457.3	448.4
17.5°	526.9	526.9	512.3	492.1	475.3	464.2	460.7	458.5	463.0	458.5	448.4
20°	510.1	512.3	502.2	481.0	468.6	460.7	457.3	452.8	457.3	452.8	446.2
22.5°	488.8	491.0	485.4	466.3	457.3	451.8	450.7	446.2	449.5	446.2	439.5
25°	469.7	469.7	467.5	450.7	449.5	445.0	446.2	443.9	446.2	441.7	437.1
27.5°	470.8	470.8	461.9	445.0	443.9	443.9	443.9	443.9	445.0	441.7	437.1
30°	537.0	539.3	513.4	466.3	449.5	447.3	448.4	447.3	448.4	447.3	441.7
32.5°	636.8	636.8	612.0	539.3	479.9	465.2	459.7	458.5	455.1	454.0	449.5
35°	735.4	734.3	709.6	628.9	553.7	525.8	507.8	491.0	483.2	475.3	467.5
37.5°	818.4	815.0	811.6	719.7	641.2	608.7	587.4	562.8	547.1	533.6	515.6
40°	895.7	901.3	913.7	803.7	728.6	698.4	677.1	645.7	630.0	613.3	591.9
42.5°	1002.1	1010.1	1011.1	894.6	808.3	788.0	771.3	747.7	731.0	710.6	691.7
45°	1105.4	1106.4	1109.9	992.1	905.9	880.0	867.7	845.2	823.9	798.1	782.4
47.5°	1175.9	1172.6	1187.2	1104.2	1020.1	991.0	973.0	939.4	906.9	874.4	850.9
50°	1262.3	1259.0	1259.0	1231.9	1152.4	1118.7	1087.4	1024.6	989.8	949.5	915.9
52.5°	1338.6	1326.2	1334.1	1349.7	1291.4	1248.8	1193.8	1123.3	1077.2	1028.0	985.4
55°	1442.8	1378.9	1396.8	1451.8	1429.3	1363.2	1290.2	1215.1	1162.5	1106.4	1067.2
57.5°	1406.8	1363.2	1415.9	1512.3	1511.2	1449.4	1387.8	1296.0	1243.3	1190.5	1142.4
60°	1278.0	1300.4	1414.7	1553.8	1559.4	1511.2	1460.7	1375.5	1334.1	1279.1	1230.9
62.5°	1178.1	1210.6	1367.7	1550.4	1614.3	1569.4	1527.9	1477.5	1448.3	1402.4	1353.0
65°	1172.6	1191.6	1344.1	1547.0	1691.6	1668.2	1649.0	1625.6	1619.8	1586.2	1529.1
67.5°	1226.4	1244.3	1384.5	1633.3	1806.0	1795.9	1823.9	1819.3	1844.1	1827.2	1780.2
70°	1121.1	1131.1	1303.7	1663.6	2067.2	2112.1	2174.8	2171.5	2224.1	2183.8	2128.8
72.5°	786.9	807.1	959.6	1374.4	2072.7	2312.7	2458.4	2581.7	2639.0	2649.0	2623.2
73°	702.8	718.6	859.8	1280.3	2016.8	2272.4	2468.5	2595.1	2645.6	2676.9	2679.3
75°	244.4	252.2	375.5	775.8	1612.0	1983.1	2235.3	2349.7	2337.3	2429.3	2530.2
77.5°	78.5	79.6	97.6	200.6	778.0	1230.9	1512.3	1617.7	1557.1	1656.8	1791.4
80°	48.1	50.5	63.9	90.8	204.1	373.2	632.2	791.5	759.0	852.0	995.5
82.5°	29.1	30.3	39.3	56.1	81.8	90.8	118.8	161.4	198.4	238.8	312.8
85°	13.5	14.6	19.0	25.8	33.7	34.8	33.7	31.4	35.8	41.5	48.1
87.5°	0.0	0.0	1.1	2.2	1.1	0.0	0.0	0.0	0.0	1.1	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
97.5°	2.0	2.0	2.0	3.0	4.0	5.1	6.4	7.6	8.8	9.6	9.8
100°	7.8	7.8	9.8	13.7	21.6	23.5	25.5	27.5	29.5	29.8	29.9
102.5°	27.5	27.5	31.4	37.3	44.2	45.4	46.6	47.9	49.0	49.2	49.2
105°	53.0	53.0	55.0	59.8	64.8	65.8	66.7	67.7	68.7	68.9	68.9
107.5°	76.5	75.5	78.5	82.5	86.3	87.1	87.9	88.6	89.3	89.7	89.8



REPORT NUMBER: P271590

CATALOG NUMBER: ISS-AF-600-LED-E1-T4W-7027-ULG

CANDELA DISTRIBUTION (continued):

	0°	5°	15°	25°	35°	37.5°	40°	42.5°	45°	47°	47.5°
110°	99.2	100.1	101.1	104.0	108.0	108.4	109.0	109.4	110.0	110.3	110.4
112.5°	121.7	121.7	123.7	126.6	129.5	130.1	130.5	131.1	131.5	131.9	132.1
115°	143.3	144.3	146.2	148.2	151.2	151.6	152.2	152.6	153.1	153.5	153.6
117.5°	165.8	166.8	168.8	170.8	173.7	174.2	174.7	175.2	175.7	175.9	175.9
120°	189.5	191.4	192.3	194.3	197.3	197.4	197.8	198.1	198.3	198.6	198.7
122.5°	215.0	216.0	216.9	218.8	221.8	222.0	222.3	222.6	222.8	223.0	223.0
125°	239.5	241.5	242.5	243.4	246.3	246.6	246.9	247.1	247.3	247.6	247.6
127.5°	262.0	264.0	265.0	267.0	269.0	269.4	269.9	270.4	270.9	271.3	271.4
130°	284.7	286.6	287.5	288.5	292.5	292.7	292.9	293.3	293.5	293.8	293.9
132.5°	307.2	308.2	311.2	312.1	315.0	315.2	315.6	315.8	316.0	316.7	316.8
135°	329.8	330.8	332.7	334.7	338.6	338.6	338.6	338.6	338.6	339.2	339.4
137.5°	352.3	353.3	356.3	357.3	360.2	360.2	360.2	360.2	360.2	360.6	360.7
140°	375.0	375.9	377.8	378.8	380.8	381.0	381.3	381.6	381.8	382.0	382.0
142.5°	396.5	398.5	400.5	399.5	402.4	402.4	402.4	402.4	402.4	402.8	402.9
145°	417.2	418.1	420.0	420.0	423.0	423.2	423.6	423.8	424.0	424.4	424.4
147.5°	435.8	435.8	438.7	439.7	443.7	443.9	444.1	444.4	444.6	444.8	444.8
150°	452.5	453.5	455.4	456.4	460.3	460.5	460.8	461.1	461.3	461.5	461.5
152.5°	470.2	471.1	474.0	473.0	476.0	476.2	476.6	476.8	477.0	477.2	477.2
155°	489.8	490.7	492.7	491.7	493.7	493.7	493.7	493.7	493.7	493.9	493.9
157.5°	503.5	505.5	507.5	506.5	509.4	509.4	509.4	509.4	509.4	509.4	509.4
160°	515.3	517.2	519.2	519.2	522.2	522.2	522.2	522.2	522.2	522.2	522.2
162.5°	525.1	526.0	529.0	528.0	531.0	531.0	531.0	531.0	531.0	531.2	531.2
165°	535.9	536.8	538.8	537.8	541.8	541.8	541.8	541.8	541.8	541.9	541.9
167.5°	544.7	545.7	548.7	547.7	550.6	550.4	550.1	549.9	549.7	549.7	549.7
170°	551.6	552.5	555.5	554.5	556.5	556.3	556.1	555.7	555.5	555.3	555.3
172.5°	554.5	555.5	558.5	556.5	558.5	558.3	557.9	557.7	557.5	557.7	557.7
175°	556.5	558.5	559.5	558.5	561.4	561.4	561.4	561.4	561.4	561.6	561.6
177.5°	561.4	562.4	564.3	563.3	567.3	567.1	566.8	566.5	566.3	566.3	566.3
180°	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3



REPORT NUMBER: P271590

CATALOG NUMBER: ISS-AF-600-LED-E1-T4W-7027-ULG

CANDELA DISTRIBUTION (continued):

	50°	52.5°	55°	57.5°	60°	62.5°	65°	67.5°	70°	72.5°	75°
0°	417.0	417.0	417.0	417.0	417.0	417.0	417.0	417.0	417.0	417.0	417.0
2.5°	429.4	426.0	426.0	421.6	423.7	419.3	421.6	417.0	419.3	413.7	417.0
5°	436.0	430.5	430.5	423.7	424.9	417.0	420.4	411.4	415.8	405.9	412.5
7.5°	439.5	429.4	433.8	421.6	427.1	413.7	420.4	405.9	414.7	399.0	410.3
10°	443.9	429.4	437.1	423.7	430.5	414.7	423.7	405.9	417.0	397.9	408.1
12.5°	450.7	435.0	441.7	426.0	435.0	417.0	426.0	408.1	419.3	397.9	410.3
15°	455.1	439.5	446.2	430.5	437.1	417.0	428.2	406.9	419.3	396.8	410.3
17.5°	454.0	439.5	446.2	428.2	436.0	415.8	427.1	405.9	417.0	393.5	408.1
20°	449.5	437.1	441.7	426.0	432.7	412.5	422.7	401.4	413.7	390.1	404.7
22.5°	443.9	431.5	437.1	422.7	429.4	409.2	418.1	399.0	411.4	387.9	401.4
25°	440.6	430.5	433.8	419.3	428.2	410.3	419.3	397.9	411.4	387.9	403.6
27.5°	439.5	430.5	437.1	423.7	431.5	415.8	424.9	405.9	417.0	392.4	408.1
30°	446.2	438.4	443.9	432.7	439.5	423.7	432.7	414.7	426.0	402.4	420.4
32.5°	454.0	446.2	451.8	441.7	451.8	436.0	447.3	429.4	442.9	419.3	436.0
35°	470.8	461.9	469.7	458.5	469.7	457.3	469.7	450.7	467.5	443.9	461.9
37.5°	514.5	489.8	497.8	485.4	496.7	481.0	502.2	483.2	502.2	479.9	504.5
40°	584.1	540.3	548.1	522.5	539.3	515.6	541.5	526.9	552.6	524.6	556.1
42.5°	674.9	633.3	625.5	586.3	600.9	572.8	598.6	572.8	607.6	580.7	619.9
45°	757.8	714.2	701.8	663.7	673.7	636.8	669.2	633.3	679.4	647.9	697.3
47.5°	826.2	774.6	764.5	720.8	738.8	704.0	744.3	706.2	762.3	731.0	788.0
50°	889.0	825.0	822.8	775.8	806.0	771.3	828.5	802.6	857.6	826.2	893.5
52.5°	960.6	880.0	891.2	848.6	896.8	867.7	933.8	896.8	968.6	935.0	1009.0
55°	1036.9	951.8	980.9	955.1	1012.3	993.3	1049.3	1015.6	1086.3	1052.6	1131.1
57.5°	1121.1	1048.1	1099.7	1087.4	1137.8	1114.3	1177.0	1146.8	1217.5	1189.4	1267.9
60°	1230.9	1182.7	1233.1	1231.9	1275.8	1274.7	1315.0	1297.1	1364.3	1351.9	1423.7
62.5°	1373.3	1335.2	1389.0	1374.4	1427.0	1418.1	1467.4	1467.4	1515.6	1532.5	1604.2
65°	1564.9	1514.5	1578.4	1556.0	1608.7	1610.9	1642.3	1647.9	1706.2	1725.3	1786.9
67.5°	1825.1	1766.8	1817.2	1774.6	1835.1	1831.7	1858.6	1869.8	1877.6	1923.7	1930.4
70°	2199.4	2112.1	2158.0	2099.7	2110.8	2118.7	2068.3	2105.3	2015.5	2088.5	1989.8
72.5°	2604.2	2504.4	2424.7	2366.5	2251.1	2234.3	2087.3	2118.7	1928.1	1990.9	1791.4
73°	2625.5	2529.0	2421.4	2360.8	2224.1	2206.1	2049.2	2076.2	1865.4	1924.8	1715.1
75°	2386.7	2412.5	2153.5	2178.1	1940.5	1968.5	1722.9	1754.4	1495.5	1540.2	1270.1
77.5°	1608.7	1695.0	1404.6	1513.4	1218.6	1327.2	994.3	1004.5	733.2	685.0	465.2
80°	797.1	871.1	617.7	674.9	452.8	445.0	271.3	225.4	191.7	196.2	201.8
82.5°	229.8	258.9	160.3	159.2	113.3	107.5	107.5	114.4	116.6	130.1	126.8
85°	43.7	52.7	45.9	61.6	55.0	60.5	56.1	64.9	60.5	75.1	64.9
87.5°	1.1	0.0	1.1	3.3	3.3	7.8	5.6	8.9	8.9	15.7	14.6
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
97.5°	10.8	11.8	12.8	11.3	9.8	8.4	6.8	6.4	5.9	5.4	4.9
100°	30.5	30.9	31.4	30.9	30.5	29.9	29.5	28.7	27.9	27.3	26.5
102.5°	49.6	49.9	50.0	49.9	49.6	49.2	49.0	48.6	48.1	47.6	47.1
105°	69.2	69.5	69.7	69.7	69.7	69.7	69.7	69.2	68.7	68.2	67.7
107.5°	90.3	90.8	91.3	91.1	90.8	90.5	90.3	90.1	89.8	89.5	89.3



REPORT NUMBER: P271590

CATALOG NUMBER: ISS-AF-600-LED-E1-T4W-7027-ULG

CANDELA DISTRIBUTION (continued):

	50°	52.5°	55°	57.5°	60°	62.5°	65°	67.5°	70°	72.5°	75°
110°	110.9	111.4	111.9	111.9	111.9	111.9	111.9	111.7	111.4	111.1	110.9
112.5°	132.5	132.9	133.5	133.5	133.5	133.5	133.5	133.3	132.9	132.7	132.5
115°	154.1	154.6	155.0	155.0	155.0	155.0	155.0	155.0	155.0	155.0	155.0
117.5°	176.2	176.4	176.7	176.9	177.1	177.4	177.7	177.4	177.1	176.9	176.7
120°	199.2	199.7	200.2	200.2	200.2	200.2	200.2	200.2	200.2	200.2	200.2
122.5°	223.3	223.6	223.8	223.8	223.8	223.8	223.8	223.9	224.3	224.6	224.8
125°	247.8	248.1	248.3	248.5	248.8	249.1	249.3	249.3	249.3	249.3	249.3
127.5°	271.8	272.4	272.8	272.6	272.4	272.1	271.8	272.1	272.4	272.6	272.8
130°	294.5	294.9	295.5	295.5	295.5	295.5	295.5	295.6	295.9	296.2	296.4
132.5°	317.6	318.2	319.0	319.0	319.0	319.0	319.0	319.2	319.4	319.8	320.0
135°	340.1	340.7	341.5	341.5	341.5	341.5	341.5	341.7	342.1	342.3	342.5
137.5°	361.2	361.7	362.2	362.2	362.2	362.2	362.2	362.4	362.6	362.9	363.2
140°	382.3	382.6	382.8	382.8	382.8	382.8	382.8	383.3	383.8	384.3	384.7
142.5°	403.4	403.9	404.3	404.3	404.3	404.3	404.3	404.6	404.9	405.1	405.3
145°	425.0	425.4	426.0	425.8	425.4	425.2	425.0	425.2	425.4	425.8	426.0
147.5°	445.1	445.4	445.6	445.1	444.6	444.1	443.7	443.9	444.1	444.4	444.6
150°	461.8	462.1	462.3	461.8	461.3	460.8	460.3	460.3	460.3	460.3	460.3
152.5°	477.4	477.8	478.0	477.8	477.4	477.2	477.0	477.0	477.0	477.0	477.0
155°	494.2	494.4	494.7	494.4	494.2	493.9	493.7	493.9	494.2	494.4	494.7
157.5°	509.4	509.4	509.4	508.9	508.4	507.9	507.5	507.6	507.9	508.2	508.4
160°	522.2	522.2	522.2	521.6	521.2	520.7	520.2	520.2	520.2	520.2	520.2
162.5°	531.4	531.8	532.0	531.4	531.0	530.4	530.0	529.6	529.0	528.6	528.0
165°	542.3	542.6	542.8	541.9	541.3	540.6	539.8	539.3	538.8	538.4	537.8
167.5°	549.7	549.7	549.7	549.1	548.7	548.1	547.7	547.9	548.1	548.4	548.7
170°	555.1	554.7	554.5	554.3	554.1	553.7	553.5	554.1	554.5	555.1	555.5
172.5°	557.9	558.3	558.5	557.9	557.5	556.9	556.5	556.7	556.9	557.3	557.5
175°	561.9	562.2	562.4	561.6	560.9	560.3	559.5	558.9	558.5	557.9	557.5
177.5°	566.3	566.3	566.3	565.6	564.9	564.1	563.3	563.3	563.3	563.3	563.3
180°	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3



REPORT NUMBER: P271590

CATALOG NUMBER: ISS-AF-600-LED-E1-T4W-7027-ULG

CANDELA DISTRIBUTION (continued):

	77.5°	80°	85°	90°	95°	100°	102.5°	105°	107.5°	110°	112.5°
0°	417.0	417.0	417.0	417.0	417.0	417.0	417.0	417.0	417.0	417.0	417.0
2.5°	412.5	418.1	415.8	413.7	411.4	410.3	405.9	408.1	402.4	406.9	402.4
5°	403.6	410.3	406.9	402.4	400.3	397.9	390.1	395.7	386.7	394.5	387.9
7.5°	393.5	404.7	401.4	396.8	392.4	390.1	374.4	386.7	373.2	384.6	373.2
10°	390.1	402.4	397.9	392.4	387.9	385.6	366.6	381.2	366.6	378.9	364.4
12.5°	387.9	402.4	395.7	390.1	385.6	382.3	361.0	378.9	359.8	377.7	361.0
15°	385.6	402.4	393.5	386.7	382.3	378.9	356.4	376.7	355.4	375.5	356.4
17.5°	383.4	399.0	391.2	383.4	378.9	376.7	352.0	373.2	350.9	373.2	354.2
20°	380.1	395.7	386.7	378.9	374.4	371.1	346.4	368.8	345.3	367.7	346.4
22.5°	375.5	392.4	384.6	376.7	372.2	366.6	339.6	363.3	338.5	361.0	340.7
25°	376.7	394.5	384.6	376.7	369.9	364.4	335.2	361.0	332.9	355.4	332.9
27.5°	382.3	397.9	387.9	381.2	372.2	365.4	335.2	358.7	330.7	349.8	326.3
30°	393.5	409.2	400.3	390.1	382.3	373.2	340.7	359.8	330.7	343.1	319.4
32.5°	412.5	427.1	418.1	410.3	401.4	387.9	352.0	365.4	332.9	338.5	313.9
35°	437.1	455.1	450.7	445.0	433.8	410.3	371.1	373.2	337.4	334.1	306.1
37.5°	477.6	502.2	501.2	500.0	487.6	445.0	392.4	389.0	342.0	330.7	295.9
40°	530.2	559.4	567.2	575.1	549.3	486.5	417.0	404.7	344.1	324.0	280.2
42.5°	591.9	631.1	654.7	669.2	622.2	532.4	445.0	422.7	344.1	313.9	262.3
45°	668.1	714.2	759.0	774.6	702.8	581.8	474.1	437.1	339.6	298.1	238.8
47.5°	761.1	815.0	876.7	884.5	790.3	634.6	494.3	447.3	325.1	276.9	217.5
50°	864.3	929.4	1020.1	1014.5	883.3	689.4	507.8	454.0	299.3	252.2	191.7
52.5°	979.8	1061.5	1190.5	1164.7	996.6	757.8	520.2	463.0	268.0	223.0	165.8
55°	1124.4	1222.0	1383.3	1328.4	1122.2	832.9	538.1	464.2	226.5	188.4	146.9
57.5°	1280.3	1384.5	1590.7	1491.0	1239.8	891.2	530.2	428.2	185.1	159.2	132.3
60°	1467.4	1594.1	1798.0	1642.3	1338.6	911.4	475.3	353.1	158.0	143.5	125.5
62.5°	1677.0	1802.6	1968.5	1747.7	1394.6	877.7	353.1	244.4	135.6	127.8	115.4
65°	1900.2	2019.0	2050.3	1756.6	1357.6	729.9	218.6	160.3	117.7	114.4	106.4
67.5°	2105.3	2116.5	1972.9	1610.9	1178.1	508.9	149.1	127.8	108.8	107.5	103.1
70°	2158.0	1964.1	1640.0	1254.4	850.9	302.7	121.1	111.0	104.2	104.2	100.9
72.5°	1802.6	1495.5	1096.3	760.1	464.2	161.4	103.1	100.9	98.6	98.6	96.4
73°	1690.5	1377.7	981.9	663.7	392.4	144.5	100.9	98.6	97.6	96.4	95.3
75°	1123.3	865.4	557.2	336.3	182.7	104.2	89.7	89.7	88.6	89.7	88.6
77.5°	432.7	326.3	215.2	144.5	104.2	81.8	76.3	77.3	76.3	78.5	77.3
80°	190.6	188.4	142.4	102.0	76.3	61.6	61.6	61.6	62.8	63.9	63.9
82.5°	130.1	109.9	84.1	62.8	45.9	44.8	45.9	45.9	47.1	48.1	47.1
85°	71.8	60.5	44.8	28.0	24.6	30.3	30.3	30.3	29.1	29.1	28.0
87.5°	22.4	16.8	12.4	3.3	5.6	5.6	7.8	6.7	6.7	7.8	7.8
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95°	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
97.5°	4.7	4.4	4.0	4.0	4.0	4.4	4.7	4.9	5.4	5.9	6.4
100°	26.3	26.1	25.5	24.5	25.5	26.1	26.3	26.5	27.3	27.9	28.7
102.5°	47.3	47.6	48.1	47.1	48.1	47.6	47.3	47.1	47.6	48.1	48.6
105°	68.2	68.7	69.7	67.7	69.7	68.7	68.2	67.7	68.2	68.7	69.2
107.5°	89.5	89.8	90.3	89.3	90.3	89.8	89.5	89.3	89.5	89.8	90.1



REPORT NUMBER: P271590
 CATALOG NUMBER: ISS-AF-600-LED-E1-T4W-7027-ULG

REPORT N
 CATALOG

CANDELA DISTRIBUTION (continued):

CANDELA

	77.5°	80°	85°	90°	95°	100°	102.5°	105°	107.5°	110°	112.5°	
110°	111.1	111.4	111.9	110.9	111.9	111.4	111.1	110.9	111.1	111.4	111.7	0°
112.5°	132.9	133.5	134.5	132.5	134.5	133.5	132.9	132.5	132.7	132.9	133.3	2.5°
115°	155.6	156.0	157.0	156.0	157.0	156.0	155.6	155.0	155.0	155.0	155.0	5°
117.5°	177.1	177.7	178.7	176.7	178.7	177.7	177.1	176.7	176.9	177.1	177.4	7.5°
120°	200.7	201.2	202.2	200.2	202.2	201.2	200.7	200.2	200.2	200.2	200.2	10°
122.5°	225.7	226.7	228.7	227.7	228.7	226.7	225.7	224.8	224.6	224.3	223.9	12.5°
125°	250.1	250.8	252.2	251.3	252.2	250.8	250.1	249.3	249.3	249.3	249.3	15°
127.5°	273.6	274.3	275.8	272.8	275.8	274.3	273.6	272.8	272.6	272.4	272.1	17.5°
130°	297.2	297.9	299.3	297.4	299.3	297.9	297.2	296.4	296.2	295.9	295.6	20°
132.5°	320.8	321.4	322.9	321.0	322.9	321.4	320.8	320.0	319.8	319.4	319.2	22.5°
135°	343.1	343.5	344.5	343.5	344.5	343.5	343.1	342.5	342.3	342.1	341.7	25°
137.5°	364.2	365.1	367.0	365.1	367.0	365.1	364.2	363.2	362.9	362.6	362.4	27.5°
140°	385.7	386.7	388.7	386.7	388.7	386.7	385.7	384.7	384.3	383.8	383.3	30°
142.5°	406.1	406.8	408.3	407.3	408.3	406.8	406.1	405.3	405.1	404.9	404.6	32.5°
145°	426.8	427.4	428.9	427.0	428.9	427.4	426.8	426.0	425.8	425.4	425.2	35°
147.5°	445.4	446.1	447.5	444.6	447.5	446.1	445.4	444.6	444.4	444.1	443.9	37.5°
150°	461.3	462.3	464.2	461.3	464.2	462.3	461.3	460.3	460.3	460.3	460.3	40°
152.5°	477.8	478.4	480.0	477.0	480.0	478.4	477.8	477.0	477.0	477.0	477.0	42.5°
155°	495.4	496.1	497.6	495.7	497.6	496.1	495.4	494.7	494.4	494.2	493.9	45°
157.5°	509.6	510.9	513.3	510.3	513.3	510.9	509.6	508.4	508.2	507.9	507.6	47.5°
160°	520.9	521.6	523.2	521.2	523.2	521.6	520.9	520.2	520.2	520.2	520.2	50°
162.5°	528.6	529.0	530.0	527.0	530.0	529.0	528.6	528.0	528.6	529.0	529.6	52.5°
165°	538.4	538.8	539.8	537.8	539.8	538.8	538.4	537.8	538.4	538.8	539.3	55°
167.5°	549.7	550.6	552.5	550.6	552.5	550.6	549.7	548.7	548.4	548.1	547.9	57.5°
170°	556.7	557.9	560.5	558.5	560.5	557.9	556.7	555.5	555.1	554.5	554.1	60°
172.5°	558.3	558.9	560.5	557.5	560.5	558.9	558.3	557.5	557.3	556.9	556.7	62.5°
175°	558.3	558.9	560.5	557.5	560.5	558.9	558.3	557.5	557.9	558.5	558.9	65°
177.5°	564.1	564.9	566.3	563.3	566.3	564.9	564.1	563.3	563.3	563.3	563.3	67.5°
180°	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	70°
												72.5°
												73°
												75°
												77.5°
												80°
												82.5°
												85°
												87.5°
												90°
												92.5°
												95°
												97.5°
												100°
												102.5°
												105°
												107.5°

NUMBER: P271590
 NUMBER: ISS-AF-600-LED-E1-T4W-7027-ULG

REPORT NUMBER: P
 CATALOG NUMBER:

DISTRIBUTION (continued):

CANDELA DISTRIBUTION

115°	117.5°	120°	122.5°	125°	127.5°	130°	135°	145°	155°	165°	110°	115°
417.0	417.0	417.0	417.0	417.0	417.0	417.0	417.0	417.0	417.0	417.0	110°	111.9
406.9	403.6	406.9	401.4	405.9	401.4	404.7	404.7	403.6	403.6	403.6	112.5°	133.5
393.5	387.9	393.5	390.1	393.5	389.0	392.4	393.5	394.5	397.9	396.8	115°	155.0
383.4	372.2	384.6	373.2	383.4	373.2	382.3	383.4	386.7	391.2	394.5	117.5°	177.7
378.9	364.4	378.9	365.4	377.7	366.6	377.7	378.9	382.3	387.9	393.5	120°	200.2
376.7	361.0	376.7	363.3	376.7	365.4	376.7	380.1	382.3	386.7	393.5	122.5°	223.8
374.4	358.7	376.7	362.1	376.7	365.4	377.7	380.1	383.4	387.9	393.5	125°	249.3
373.2	355.4	374.4	361.0	374.4	363.3	376.7	376.7	381.2	386.7	390.1	127.5°	271.8
368.8	352.0	368.8	355.4	368.8	358.7	369.9	369.9	374.4	376.7	382.3	130°	295.5
362.1	344.1	359.8	347.6	359.8	349.8	358.7	358.7	362.1	365.4	368.8	132.5°	319.0
352.0	335.2	348.6	337.4	346.4	337.4	344.1	343.1	345.3	347.6	349.8	135°	341.5
340.7	324.0	335.2	322.9	328.5	319.4	324.0	321.8	322.9	324.0	325.1	137.5°	362.2
328.5	311.6	317.2	306.1	307.2	298.1	300.4	297.1	295.9	294.8	292.6	140°	382.8
315.0	297.1	297.1	285.9	283.7	275.8	275.8	271.3	268.0	263.5	258.9	142.5°	404.3
298.1	282.4	274.6	265.7	261.1	253.3	252.2	246.7	238.8	231.0	226.5	145°	425.0
281.3	263.5	252.2	243.4	238.8	233.2	232.0	227.6	218.6	209.7	202.8	147.5°	443.7
258.9	241.0	228.7	225.4	222.0	217.5	218.6	213.0	204.1	193.9	188.4	150°	460.3
236.5	220.8	210.7	209.7	207.4	206.3	207.4	202.8	192.9	183.8	177.1	152.5°	477.0
217.5	201.8	191.7	190.6	189.5	193.9	195.0	193.9	182.7	173.7	164.7	155°	493.7
198.4	179.3	172.7	170.4	171.6	178.2	180.5	183.8	173.7	163.7	151.4	157.5°	507.5
176.0	158.0	155.9	153.6	154.7	160.3	165.8	172.7	163.7	149.1	132.3	160°	520.2
155.9	140.1	141.2	139.0	141.2	145.7	150.3	161.4	150.3	135.6	127.8	162.5°	530.0
140.1	127.8	130.1	127.8	130.1	135.6	139.0	148.0	148.0	144.5	137.9	165°	539.8
128.9	119.9	122.2	119.9	123.2	127.8	131.2	150.3	161.4	152.4	139.0	167.5°	547.7
122.2	114.4	115.4	113.3	115.4	122.2	128.9	151.4	169.3	151.4	141.2	170°	553.5
112.1	105.4	104.2	104.2	106.4	117.7	121.1	141.2	167.1	150.3	142.4	172.5°	556.5
105.4	99.8	98.6	97.6	99.8	107.5	111.0	131.2	161.4	142.4	128.9	175°	559.5
102.0	97.6	95.3	93.1	95.3	102.0	105.4	123.2	152.4	135.6	121.1	177.5°	563.3
98.6	94.1	93.1	90.8	92.0	96.4	100.9	113.3	144.5	127.8	113.3	180°	565.3
94.1	89.7	88.6	85.2	86.2	90.8	93.1	106.4	134.6	119.9	105.4		
93.1	88.6	87.5	84.1	85.2	88.6	90.8	104.2	132.3	118.8	104.2		
87.5	82.9	81.8	79.6	80.7	80.7	82.9	95.3	125.5	112.1	97.6		
77.3	74.0	72.9	70.7	69.5	68.5	71.8	84.1	114.4	100.9	78.5		
63.9	60.5	59.4	55.0	55.0	55.0	59.4	71.8	85.2	72.9	60.5		
47.1	44.8	44.8	41.5	40.3	39.3	42.6	49.4	67.2	57.2	47.1		
28.0	26.9	28.0	24.6	25.8	24.6	28.0	34.8	37.0	29.1	22.4		
6.7	7.8	7.8	7.8	6.7	6.7	5.6	4.5	0.0	0.0	0.0		
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		
1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0		
6.8	8.4	9.8	11.3	12.8	11.8	10.8	8.8	4.0	3.0	2.0		
29.5	29.9	30.5	30.9	31.4	30.9	30.5	29.5	21.6	13.7	9.8		
49.0	49.2	49.6	49.9	50.0	49.9	49.6	49.0	44.2	37.3	31.4		
69.7	69.7	69.7	69.7	69.7	69.5	69.2	68.7	64.8	59.8	55.0		
90.3	90.5	90.8	91.1	91.3	90.8	90.3	89.3	86.3	82.5	78.5		

'271590
 ISS-AF-600-LED-E1-T4W-7027-ULG

REPORT NUMBER: P271590
 CATALOG NUMBER: ISS-AF-600

TION (continued):

CANDELA DISTRIBUTION (con

117.5°	120°	122.5°	125°	127.5°	130°	135°	145°	155°	165°		175°	180°
111.9	111.9	111.9	111.9	111.4	110.9	110.0	108.0	104.0	101.1	0°	417.0	417.0
133.5	133.5	133.5	133.5	132.9	132.5	131.5	129.5	126.6	123.7	2.5°	402.4	401.4
155.0	155.0	155.0	155.0	154.6	154.1	153.1	151.2	148.2	146.2	5°	396.8	396.8
177.4	177.1	176.9	176.7	176.4	176.2	175.7	173.7	170.8	168.8	7.5°	394.5	394.5
200.2	200.2	200.2	200.2	199.7	199.2	198.3	197.3	194.3	192.3	10°	395.7	395.7
223.8	223.8	223.8	223.8	223.6	223.3	222.8	221.8	218.8	216.9	12.5°	395.7	397.9
249.1	248.8	248.5	248.3	248.1	247.8	247.3	246.3	243.4	242.5	15°	399.0	397.9
272.1	272.4	272.6	272.8	272.4	271.8	270.9	269.0	267.0	265.0	17.5°	395.7	395.7
295.5	295.5	295.5	295.5	294.9	294.5	293.5	292.5	288.5	287.5	20°	386.7	389.0
319.0	319.0	319.0	319.0	318.2	317.6	316.0	315.0	312.1	311.2	22.5°	374.4	374.4
341.5	341.5	341.5	341.5	340.7	340.1	338.6	338.6	334.7	332.7	25°	354.2	355.4
362.2	362.2	362.2	362.2	361.7	361.2	360.2	360.2	357.3	356.3	27.5°	327.3	329.6
382.8	382.8	382.8	382.8	382.6	382.3	381.8	380.8	378.8	377.8	30°	293.7	295.9
404.3	404.3	404.3	404.3	403.9	403.4	402.4	402.4	399.5	400.5	32.5°	255.6	257.8
425.2	425.4	425.8	426.0	425.4	425.0	424.0	423.0	420.0	420.0	35°	225.4	226.5
444.1	444.6	445.1	445.6	445.4	445.1	444.6	443.7	439.7	438.7	37.5°	205.2	205.2
460.8	461.3	461.8	462.3	462.1	461.8	461.3	460.3	456.4	455.4	40°	188.4	188.4
477.2	477.4	477.8	478.0	477.8	477.4	477.0	476.0	473.0	474.0	42.5°	172.7	171.6
493.9	494.2	494.4	494.7	494.4	494.2	493.7	493.7	491.7	492.7	45°	156.9	154.7
507.9	508.4	508.9	509.4	509.4	509.4	509.4	509.4	506.5	507.5	47.5°	141.2	140.1
520.7	521.2	521.6	522.2	522.2	522.2	522.2	522.2	519.2	519.2	50°	127.8	127.8
530.4	531.0	531.4	532.0	531.8	531.4	531.0	531.0	528.0	529.0	52.5°	130.1	130.1
540.6	541.3	541.9	542.8	542.6	542.3	541.8	541.8	537.8	538.8	55°	140.1	140.1
548.1	548.7	549.1	549.7	549.7	549.7	549.7	550.6	547.7	548.7	57.5°	141.2	140.1
553.7	554.1	554.3	554.5	554.7	555.1	555.5	556.5	554.5	555.5	60°	153.6	152.4
556.9	557.5	557.9	558.5	558.3	557.9	557.5	558.5	556.5	558.5	62.5°	160.3	163.7
560.3	560.9	561.6	562.4	562.2	561.9	561.4	561.4	558.5	559.5	65°	140.1	135.6
564.1	564.9	565.6	566.3	566.3	566.3	566.3	567.3	563.3	564.3	67.5°	133.4	126.8
565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	565.3	70°	119.9	109.9
										72.5°	106.4	100.9
										73°	103.1	98.6
										75°	92.0	89.7
										77.5°	69.5	68.5
										80°	58.3	57.2
										82.5°	39.3	37.0
										85°	16.8	15.7
										87.5°	0.0	0.0
										90°	0.0	0.0
										92.5°	0.0	0.0
										95°	1.0	1.0
										97.5°	2.0	2.0
										100°	7.8	7.8
										102.5°	27.5	27.5
										105°	53.0	53.0
										107.5°	75.5	76.5



REPORT NUMBER: P271590

CATALOG NUMBER: ISS-AF-600-LED-E1-1

CANDELA DISTRIBUTION (continued):

	175°	180°
110°	100.1	99.2
112.5°	121.7	121.7
115°	144.3	143.3
117.5°	166.8	165.8
120°	191.4	189.5
122.5°	216.0	215.0
125°	241.5	239.5
127.5°	264.0	262.0
130°	286.6	284.7
132.5°	308.2	307.2
135°	330.8	329.8
137.5°	353.3	352.3
140°	375.9	375.0
142.5°	398.5	396.5
145°	418.1	417.2
147.5°	435.8	435.8
150°	453.5	452.5
152.5°	471.1	470.2
155°	490.7	489.8
157.5°	505.5	503.5
160°	517.2	515.3
162.5°	526.0	525.1
165°	536.8	535.9
167.5°	545.7	544.7
170°	552.5	551.6
172.5°	555.5	554.5
175°	558.5	556.5
177.5°	562.4	561.4
180°	565.3	565.3

(END OF REPORT)

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

