

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P242376

Luminaire Tested: **S122RDR-S1005D930-X4F0-XX-UDD-F-W**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P242376
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1802-639-24)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122RDR-S1005D930-X4F0-XX-UDD-F-W
Description: DEFINE 2 REGRESSED DIRECT RECESSED WITH SATIN FLUSH DIFFUSER
STANDARD LIGHT ENGINE
Light Source: (92) 3000K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2746.1 lumens
Efficiency: N/A
Efficacy: 66.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular (W 0.15' x L: 3.88' x H: 0')
CIE Type: Direct


Input Watts (W): 41.1
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P242376

CATALOG NUMBER: S122RDR-S1005D930-X4F0-XX-UDD-F-W

Luminous Intensity Polar Plot

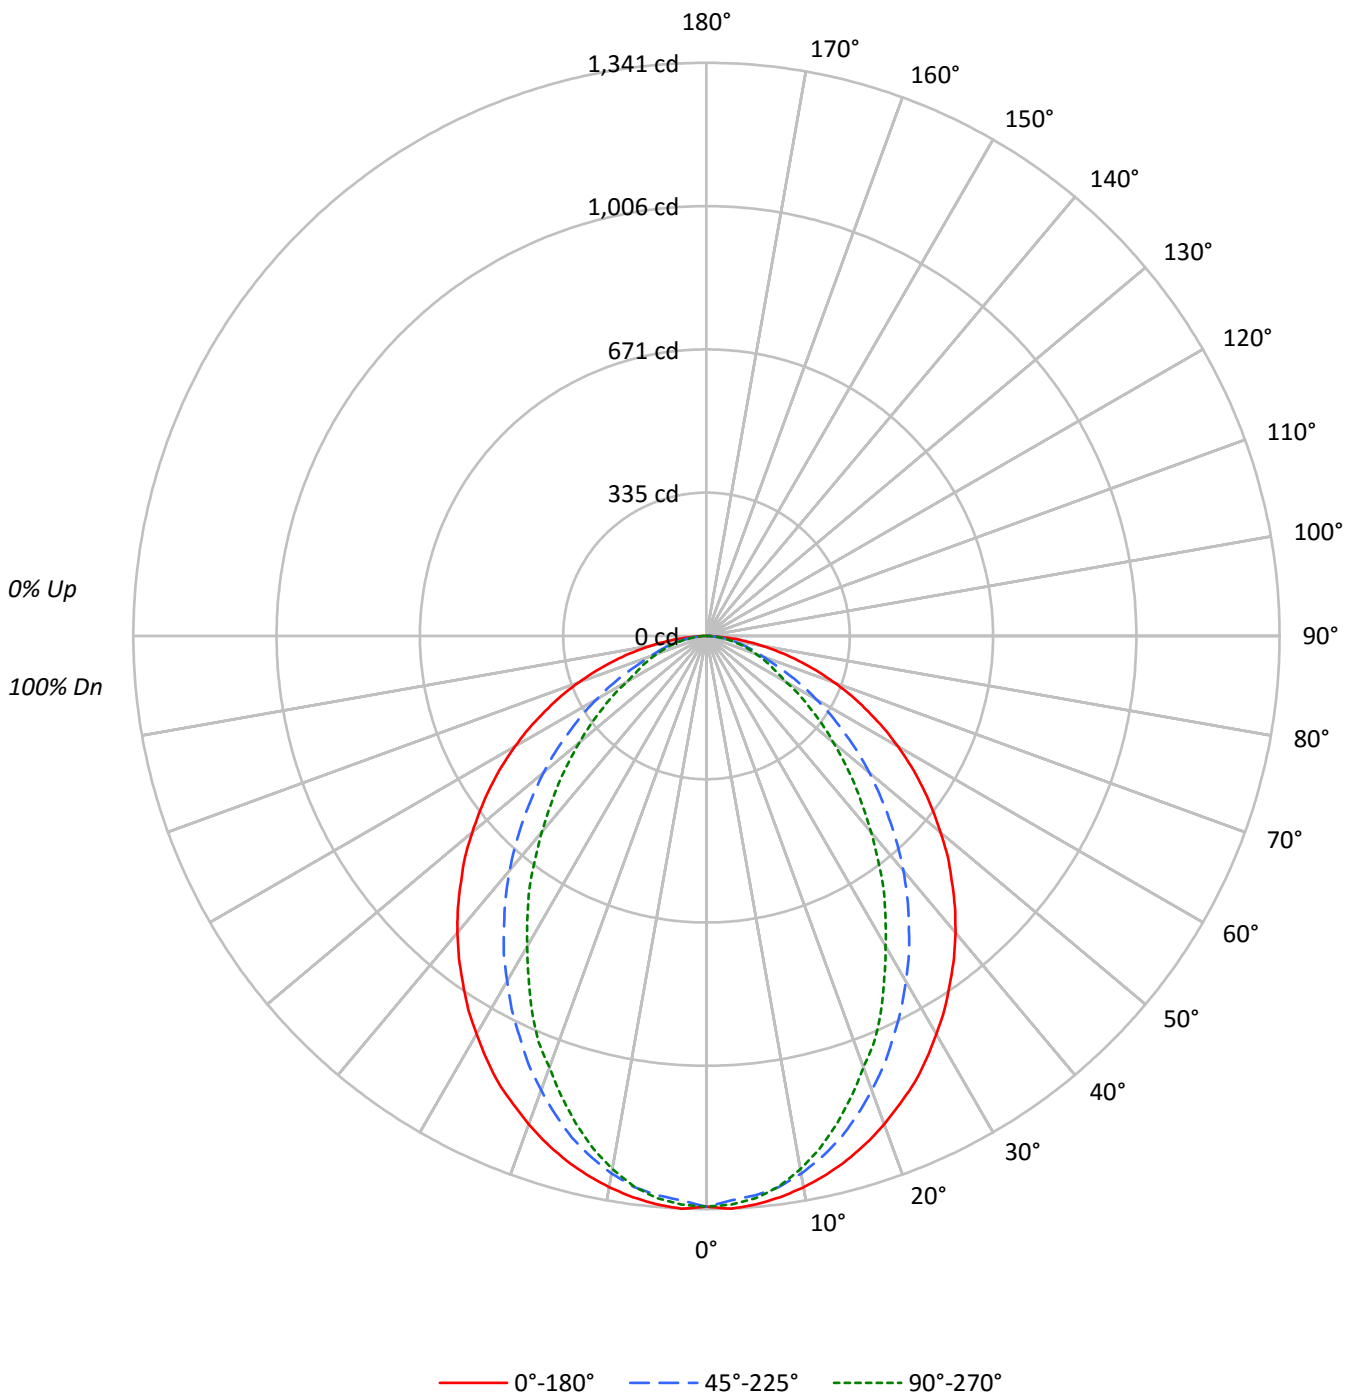



TEST NUMBER: P242376

CATALOG NUMBER: S122RDR-S1005D930-X4F0-XX-UDD-F-W

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	110	106	102	98	107	103	100	97	99	96	94	95	93	91	92	90	88	86
2	101	94	87	82	98	92	86	81	88	83	79	85	81	78	82	79	76	74
3	93	83	76	70	90	82	75	69	79	73	68	76	71	67	74	69	66	64
4	86	75	66	60	83	73	66	60	71	64	59	69	63	58	66	62	57	55
5	79	67	59	53	77	66	58	52	64	57	52	62	56	51	60	55	51	49
6	74	61	53	47	72	60	52	46	58	51	46	57	50	46	55	50	45	43
7	68	56	47	42	67	55	47	42	53	46	41	52	46	41	51	45	41	39
8	64	51	43	38	62	51	43	37	49	42	37	48	42	37	47	41	37	35
9	60	47	39	34	59	47	39	34	46	39	34	44	38	34	44	38	34	32
10	56	44	36	31	55	43	36	31	42	36	31	41	35	31	41	35	31	29

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	25433	25433	25433
5°	25530	25115	25252
10°	25334	24703	24492
15°	25044	23971	23279
20°	24640	22926	21774
25°	24228	21738	20317
30°	23653	20516	18445
35°	23097	19191	16803
40°	22535	17816	14902
45°	21873	16276	13183
50°	21196	14716	11495
55°	20506	13041	9873
60°	19703	11276	8194
65°	18790	9478	7459
70°	17699	7808	6867
75°	16360	7117	6403
80°	14446	6362	5836
85°	11364	5027	5027



TEST NUMBER: P242376

CATALOG NUMBER: S122RDR-S1005D930-X4F0-XX-UDD-F-W

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	125.1	4.6
10°-20°	343.5	12.5
20°-30°	482.3	17.6
30°-40°	525.7	19.1
40°-50°	483.2	17.6
50°-60°	379.5	13.8
60°-70°	247.0	9.0
70°-80°	127.2	4.6
80°-90°	32.5	1.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	951.0	34.6
0°-40°	1476.7	53.8
0°-60°	2339.4	85.2
0°-90°	2746.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2746.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1335	1335	1335	1335	1335	
5°	1335	1329	1314	1324	1321	127
15°	1270	1257	1216	1193	1180	358
25°	1153	1114	1034	985	967	530
35°	993	932	825	749	723	622
45°	812	731	604	518	489	627
55°	618	523	393	320	297	552
65°	417	319	210	169	166	413
75°	222	138	97	88	87	235
85°	52	27	23	23	23	62
90°	0	0	0	0	0	



TEST NUMBER: P242376

CATALOG NUMBER: S122RDR-S1005D930-X4F0-XX-UDD-F-W

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1335.2	1335.2	1335.2	1335.2	1335.2
2.5°	1341.3	1335.2	1321.9	1334.0	1331.6
5°	1335.2	1329.2	1313.5	1324.3	1320.7
7.5°	1324.3	1317.1	1300.2	1305.0	1299.0
10°	1309.8	1301.4	1277.2	1273.6	1266.3
12.5°	1291.7	1280.8	1248.2	1241.0	1227.7
15°	1270.0	1256.7	1215.6	1192.6	1180.5
17.5°	1244.6	1225.3	1174.5	1147.9	1128.6
20°	1215.6	1191.4	1131.0	1100.8	1074.2
22.5°	1184.2	1156.4	1086.3	1045.2	1027.1
25°	1152.8	1114.1	1034.3	984.8	966.7
27.5°	1115.3	1074.2	986.0	929.2	901.4
30°	1075.4	1029.5	932.8	871.2	838.6
32.5°	1036.8	981.2	882.1	809.6	779.4
35°	993.3	931.6	825.3	749.2	722.6
37.5°	951.0	884.5	772.1	688.8	658.5
40°	906.3	833.8	716.5	630.8	599.3
42.5°	860.3	783.0	661.0	571.5	541.3
45°	812.0	731.0	604.2	518.4	489.4
47.5°	766.1	680.3	549.8	464.0	437.4
50°	715.3	629.5	496.6	413.3	387.9
52.5°	665.8	575.2	445.9	366.1	343.2
55°	617.5	523.2	392.7	320.2	297.3
57.5°	567.9	471.3	345.6	277.9	258.6
60°	517.2	420.5	296.0	234.4	215.1
62.5°	467.6	371.0	253.8	195.8	186.1
65°	416.9	319.0	210.3	169.2	165.5
67.5°	368.5	270.7	169.2	148.6	145.0
70°	317.8	223.5	140.2	128.1	123.3
72.5°	269.5	180.0	117.2	107.5	105.1
75°	222.3	137.8	96.7	88.2	87.0
77.5°	175.2	97.9	76.1	71.3	68.9
80°	131.7	70.1	58.0	53.2	53.2
82.5°	91.8	47.1	39.9	37.5	37.5
85°	52.0	26.6	23.0	23.0	23.0
87.5°	19.3	9.7	9.7	8.5	8.5
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)