

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P242730

Luminaire Tested: **S124RDR-S1195D940-X4F0-XX-UDD-F-W**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P242730
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1802-639-26)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124RDR-S1195D940-X4F0-XX-UDD-F-W
Description: DEFINE 4 REGRESSED DIRECT RECESSED WITH SATIN FLUSH DIFFUSER
STANDARD LIGHT ENGINE
Light Source: (92) 4000K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3988.1 lumens
Efficiency: N/A
Efficacy: 97.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.09 / 1.24
Luminous Opening: Rectangular (W 0.31' x L: 3.88' x H: 0')
CIE Type: Direct


Input Watts (W): 41.1
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P242730

CATALOG NUMBER: S124RDR-S1195D940-X4F0-XX-UDD-F-W

Luminous Intensity Polar Plot

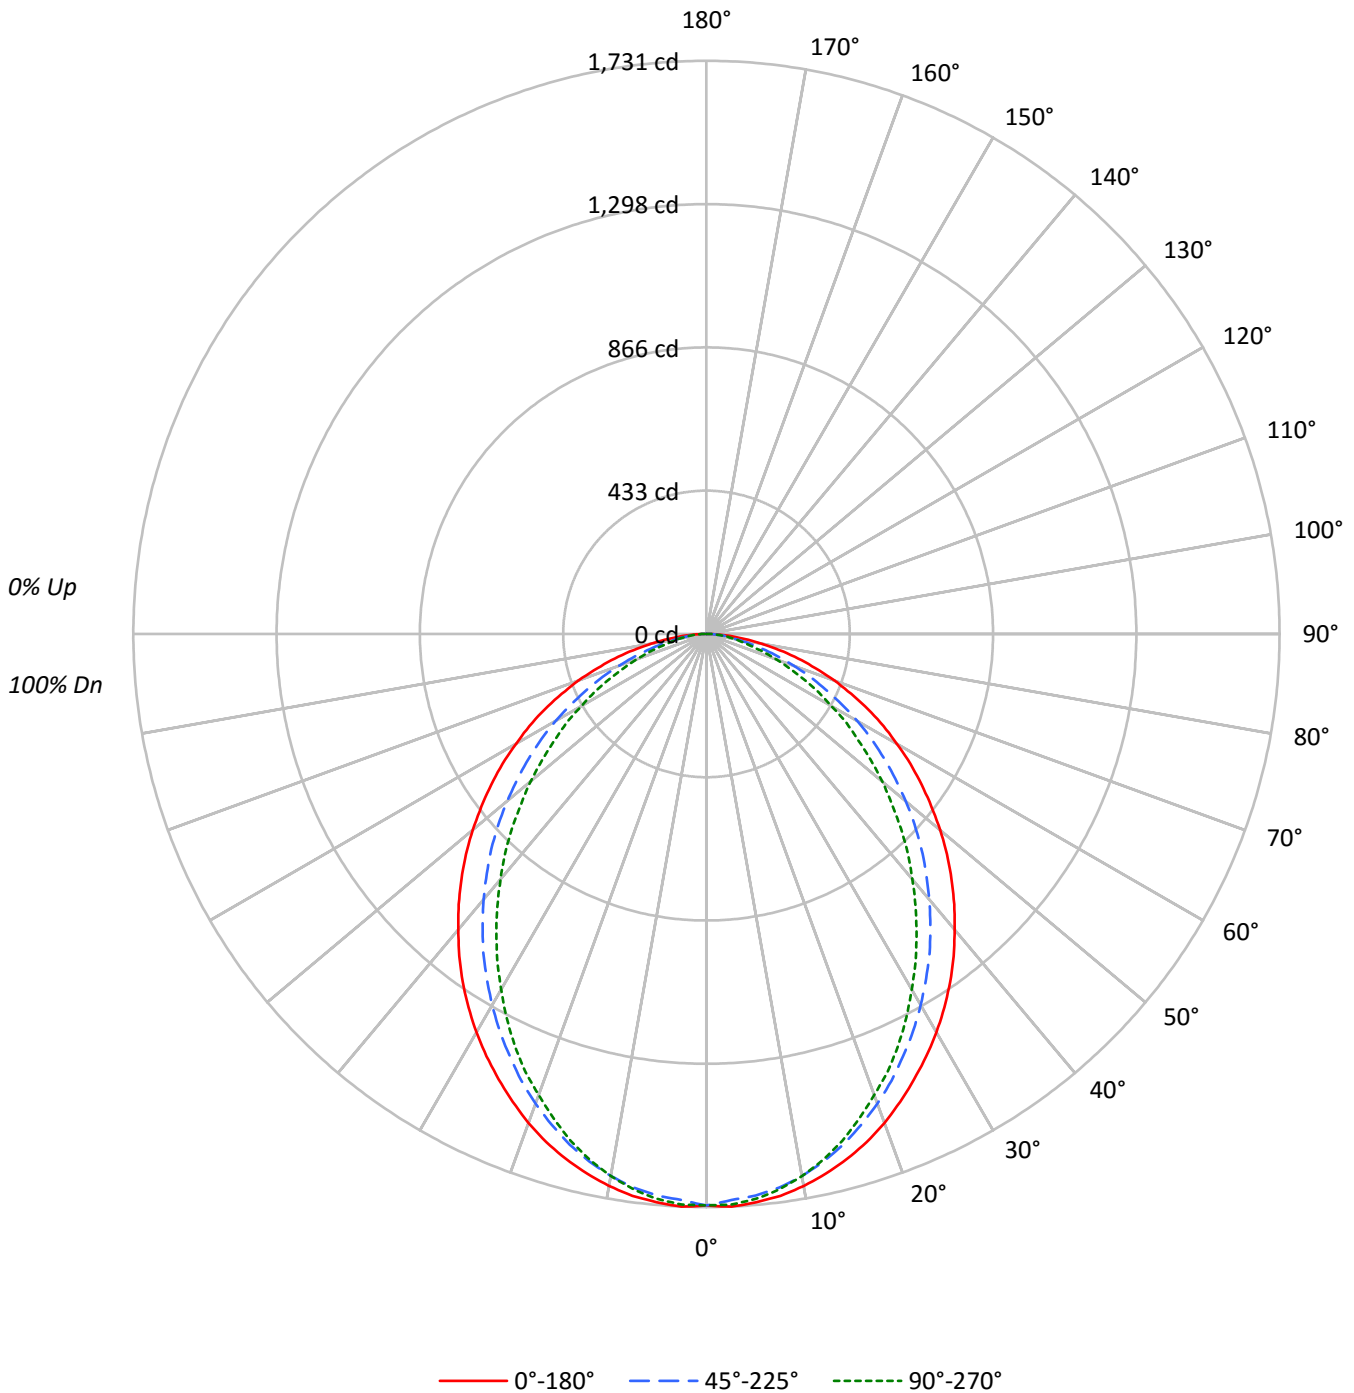



TEST NUMBER: P242730

CATALOG NUMBER: S124RDR-S1195D940-X4F0-XX-UDD-F-W

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	110	105	101	98	107	103	99	96	99	96	93	95	92	90	91	89	87	85
2	100	93	86	81	98	91	85	80	87	82	78	84	80	76	81	78	74	72
3	92	82	74	68	89	80	73	67	77	71	66	75	69	65	72	68	64	62
4	84	73	65	58	82	72	64	58	69	62	57	67	61	56	65	60	56	54
5	78	66	57	51	76	65	56	50	62	55	50	61	54	49	59	53	49	47
6	72	59	51	45	70	58	50	44	57	49	44	55	49	44	53	48	43	41
7	67	54	46	40	65	53	45	40	52	45	39	50	44	39	49	43	39	37
8	63	50	41	36	61	49	41	36	48	40	35	46	40	35	45	39	35	33
9	59	46	38	32	57	45	37	32	44	37	32	43	36	32	42	36	32	30
10	55	42	35	29	54	42	34	29	41	34	29	40	33	29	39	33	29	27

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	15342	15342	15342
5°	15377	15189	15283
10°	15280	15007	15007
15°	15105	14692	14582
20°	14864	14276	14014
25°	14556	13792	13442
30°	14257	13280	12723
35°	13926	12749	12004
40°	13525	12146	11225
45°	13158	11546	10434
50°	12738	10856	9594
55°	12289	10138	8685
60°	11794	9351	7753
65°	11341	8367	6838
70°	10682	7282	5803
75°	9850	6038	4719
80°	8590	4602	4331
85°	7282	4182	3906



TEST NUMBER: P242730

CATALOG NUMBER: S124RDR-S1195D940-X4F0-XX-UDD-F-W

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	162.3	4.1
10°-20°	452.5	11.3
20°-30°	653.3	16.4
30°-40°	740.4	18.6
40°-50°	714.9	17.9
50°-60°	594.4	14.9
60°-70°	410.2	10.3
70°-80°	207.3	5.2
80°-90°	52.6	1.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1268.2	31.8
0°-40°	2008.6	50.4
0°-60°	3317.9	83.2
0°-90°	3988.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3988.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1726	1726	1726	1726	1726	
5°	1723	1718	1702	1715	1713	164
15°	1641	1630	1596	1594	1585	463
25°	1484	1460	1406	1384	1370	684
35°	1283	1241	1175	1130	1106	802
45°	1047	998	918	854	830	807
55°	793	740	654	586	560	709
65°	539	482	398	341	325	532
75°	287	238	176	145	137	302
85°	71	45	41	38	38	83
90°	0	0	0	0	0	



TEST NUMBER: P242730

CATALOG NUMBER: S124RDR-S1195D940-X4F0-XX-UDD-F-W

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1726.0	1726.0	1726.0	1726.0	1726.0
2.5°	1731.3	1726.0	1711.5	1726.0	1724.7
5°	1723.3	1718.1	1702.2	1715.4	1712.8
7.5°	1711.5	1706.2	1686.3	1695.6	1691.6
10°	1692.9	1686.3	1662.6	1667.8	1662.6
12.5°	1669.2	1661.2	1632.2	1634.8	1626.9
15°	1641.4	1629.5	1596.5	1593.8	1584.6
17.5°	1609.7	1592.5	1554.2	1547.6	1534.4
20°	1571.4	1554.2	1509.2	1498.7	1481.5
22.5°	1529.1	1509.2	1460.4	1443.2	1430.0
25°	1484.1	1460.4	1406.2	1383.7	1370.5
27.5°	1437.9	1408.8	1352.0	1325.5	1307.0
30°	1389.0	1355.9	1293.8	1260.8	1239.6
32.5°	1337.4	1299.1	1234.4	1194.7	1174.9
35°	1283.3	1241.0	1174.9	1130.0	1106.2
37.5°	1226.4	1182.8	1110.1	1061.2	1037.4
40°	1165.6	1122.0	1046.7	991.2	967.4
42.5°	1107.5	1061.2	981.9	925.1	900.0
45°	1046.7	997.8	918.5	853.7	830.0
47.5°	984.6	934.4	852.4	785.0	758.6
50°	921.1	869.6	785.0	718.9	693.8
52.5°	856.4	806.2	718.9	651.5	625.1
55°	793.0	740.1	654.2	585.5	560.4
57.5°	730.8	675.3	590.7	520.7	502.2
60°	663.4	610.6	526.0	457.3	436.1
62.5°	602.6	547.1	459.9	397.8	381.9
65°	539.2	482.4	397.8	341.0	325.1
67.5°	473.1	418.9	339.6	289.4	270.9
70°	411.0	355.5	280.2	236.6	223.3
72.5°	344.9	296.0	226.0	190.3	178.4
75°	286.8	237.9	175.8	145.4	137.4
77.5°	226.0	183.7	130.8	109.7	107.0
80°	167.8	129.5	89.9	85.9	84.6
82.5°	117.6	83.3	64.8	62.1	60.8
85°	71.4	44.9	41.0	38.3	38.3
87.5°	30.4	19.8	18.5	17.2	18.5
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)