

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P888277

Luminaire Tested: **DPT5-6FO55-61V60-A-XX-UDD_4500K**

Issue Date: 10/24/2024

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.



Test Information

Test Method: LM-79-08
Report Number: P888277
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (DEFINE LENGTH SCALING TOOL)
Test Lab: INNOVATIONS CENTER
Issue Date: 10/24/2024
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: DPT5-6FO55-61V60-A-XX-UDD_4500K
Description: 5in Define Recessed Patient with Asymmetric Lens

Light Source: -
Ballast/Driver: -

Luminaire Equipment: Sample No. Condition Description

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2133.0 lumens
Efficiency: N/A
Efficacy: 98.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25
Luminous Opening: Rectangular (W 4.31' x L: 0.39' x H: 0')
CIE Type: Direct

Input Watts (W): 21.6
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P888277

CATALOG NUMBER: DPT5-6FO55-61V60-A-XX-UDD_4500K

Luminous Intensity Polar Plot

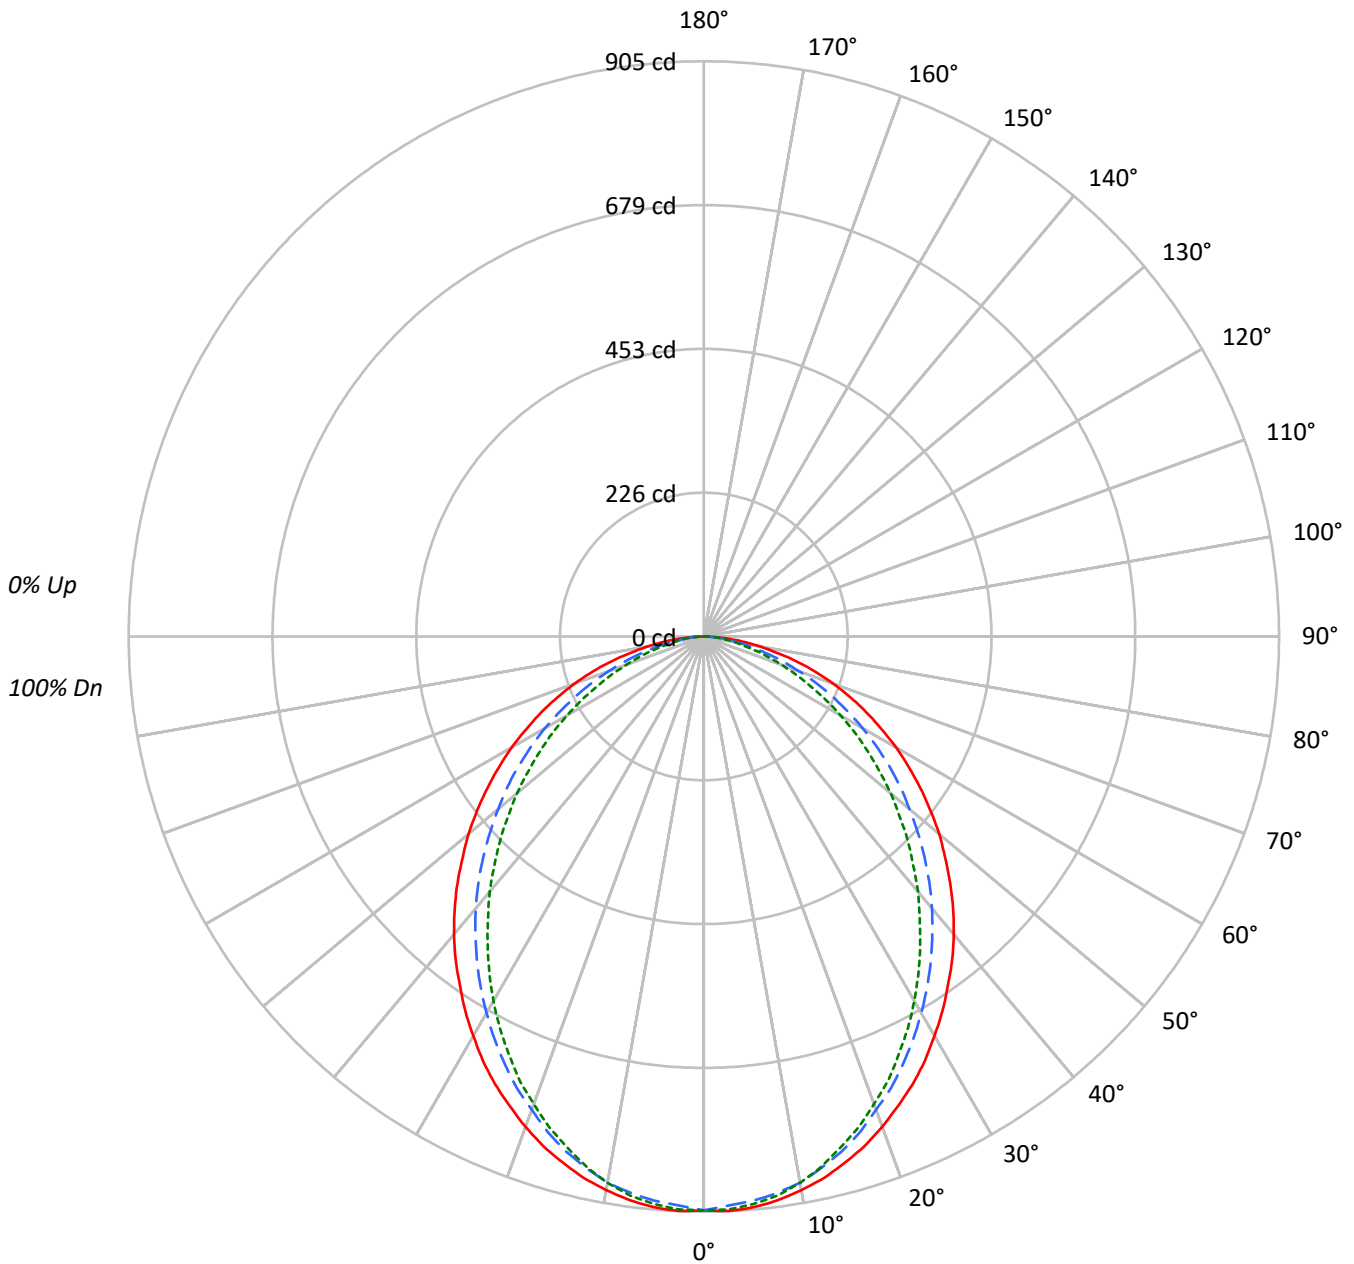



TEST NUMBER: P888277

CATALOG NUMBER: DPT5-6FO55-61V60-A-XX-UDD_4500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	109	105	101	97	107	103	99	96	99	96	93	95	92	90	91	89	87	85																			
2	100	92	86	80	98	90	84	79	87	82	78	84	79	76	81	77	74	72																			
3	92	82	74	68	89	80	73	67	77	71	66	74	69	65	72	67	64	61																			
4	84	73	64	58	82	71	64	57	69	62	57	67	61	56	64	59	55	53																			
5	78	65	57	50	76	64	56	50	62	55	49	60	54	49	58	53	48	46																			
6	72	59	50	44	70	58	50	44	56	49	44	55	48	43	53	47	43	41																			
7	67	54	45	39	65	53	45	39	51	44	39	50	43	39	49	43	38	36																			
8	62	49	41	35	61	48	41	35	47	40	35	46	39	35	45	39	34	33																			
9	58	45	37	32	57	45	37	32	44	37	32	42	36	31	41	36	31	29																			
10	55	42	34	29	54	41	34	29	40	34	29	39	33	29	39	33	29	27																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	5766	5766	5766
5°	5779	5713	5747
10°	5735	5660	5660
15°	5667	5544	5500
20°	5579	5385	5320
25°	5477	5227	5112
30°	5350	5043	4883
35°	5220	4854	4625
40°	5100	4655	4372
45°	4951	4434	4096
50°	4803	4194	3808
55°	4632	3965	3501
60°	4459	3684	3170
65°	4257	3361	2791
70°	4024	2952	2407
75°	3701	2490	2004
80°	3262	1960	1684
85°	2740	1605	1502



TEST NUMBER: P888277

CATALOG NUMBER: DPT5-6FO55-61V60-A-XX-UDD_4500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	85.0	4.0
10°-20°	237.5	11.1
20°-30°	344.3	16.1
30°-40°	392.3	18.4
40°-50°	382.3	17.9
50°-60°	321.8	15.1
60°-70°	225.5	10.6
70°-80°	115.6	5.4
80°-90°	28.8	1.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	666.7	31.3
0°-40°	1059.0	49.6
0°-60°	1763.1	82.7
0°-90°	2133.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2133.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	903	903	903	903	903	
5°	902	899	891	898	896	85
15°	857	853	839	838	832	242
25°	777	767	742	733	726	358
35°	670	653	623	603	593	419
45°	548	529	491	464	454	423
55°	416	394	356	325	314	372
65°	282	258	222	195	185	279
75°	150	130	101	86	81	159
85°	37	25	22	21	20	43
90°	0	0	0	0	0	



TEST NUMBER: P888277

CATALOG NUMBER: DPT5-6FO55-61V60-A-XX-UDD_4500K

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	902.9	902.9	902.9	902.9	902.9
2.5°	904.9	902.9	896.0	902.9	902.1
5°	901.5	898.8	891.2	897.9	896.5
7.5°	894.6	891.9	883.0	888.4	887.2
10°	884.4	882.4	872.8	874.9	872.8
12.5°	872.8	870.0	856.3	857.7	854.4
15°	857.2	853.0	838.6	838.0	831.9
17.5°	840.8	834.7	817.5	814.2	809.4
20°	820.9	814.2	792.3	788.9	782.8
22.5°	799.1	792.3	769.3	761.7	756.8
25°	777.3	767.0	741.8	733.0	725.5
27.5°	752.8	740.4	713.9	702.4	694.9
30°	725.5	712.6	683.9	668.4	662.2
32.5°	698.8	683.3	653.9	636.2	628.1
35°	669.6	653.3	622.6	602.8	593.2
37.5°	641.7	621.8	590.4	567.4	557.7
40°	611.7	591.2	558.4	532.5	524.4
42.5°	580.2	559.1	524.9	500.5	487.5
45°	548.2	528.6	490.9	463.7	453.5
47.5°	514.7	494.4	456.7	428.9	417.3
50°	483.4	460.9	422.1	393.5	383.3
52.5°	449.3	426.3	390.0	358.6	348.3
55°	416.0	394.1	356.1	325.3	314.4
57.5°	381.9	358.6	321.9	291.8	282.3
60°	349.1	325.3	288.4	258.4	248.2
62.5°	314.4	291.8	254.4	227.0	216.8
65°	281.7	258.4	222.4	194.9	184.7
67.5°	248.8	225.8	190.9	165.1	157.0
70°	215.5	192.3	158.1	137.0	128.9
72.5°	182.8	160.3	128.9	109.8	105.1
75°	150.0	129.5	100.9	86.0	81.2
77.5°	116.5	100.2	76.3	64.9	60.7
80°	88.7	72.3	53.3	47.1	45.8
82.5°	61.3	47.1	35.5	33.3	32.8
85°	37.4	25.2	21.9	21.1	20.5
87.5°	15.8	10.9	10.2	10.2	9.5
90°	0.0	0.0	0.0	0.0	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180° - - 45°-225° - - - - 90°-270°







(END OF REPORT)