

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P892204

Luminaire Tested: **0530W**

Issue Date: 10/24/2024

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.



**Test Information**

Test Method: LM-79-08  
Report Number: P892204  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P#)  
Test Lab: INNOVATION CENTER (G1)  
Issue Date: 10/24/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: 0530W  
Description: Define Patient, Downlight with Wide 55deg

Light Source: -  
Ballast/Driver: -

Luminaire Equipment: Sample No.   Condition   Description


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 542.0 lumens  
Efficiency: N/A  
Efficacy: 74.2 lumens/watt  
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.84  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct

Input Watts (W): 7.3  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P892204  
CATALOG NUMBER: 0530W

### Luminous Intensity Polar Plot

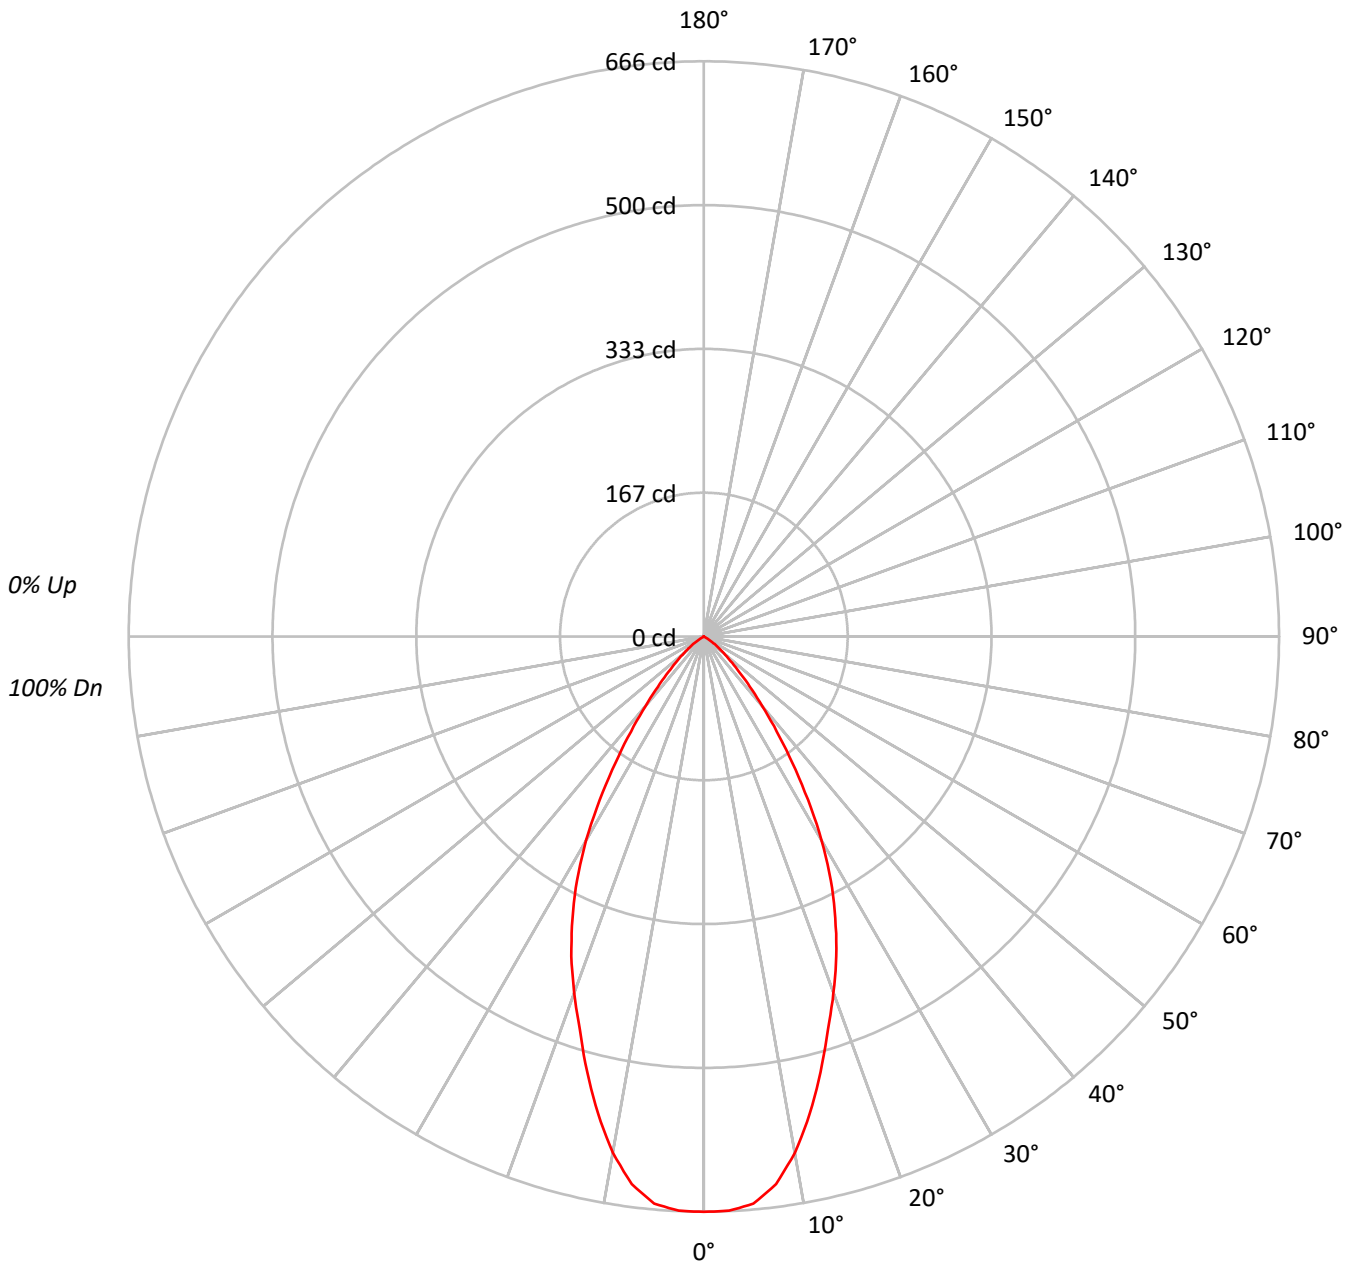



TEST NUMBER: P892204  
 CATALOG NUMBER: 0530W

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	109	106	104	104	103	101	101	99	98	97	96	95	93			
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80			
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75			
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69			
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65			
7	83	73	67	63	81	73	67	63	71	66	63	70	66	62	69	65	62	60			
8	79	69	63	59	78	69	63	59	67	62	59	66	62	58	65	61	58	57			
9	75	65	59	55	74	65	59	55	64	59	55	63	58	55	62	58	55	53			
10	71	62	56	52	70	61	56	52	60	55	52	60	55	52	59	55	51	50			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	328691
5°	326529
10°	304103
15°	266681
20°	230390
25°	195979
30°	155416
35°	107271
40°	67369
45°	40190
50°	23257
55°	11699
60°	691
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P892204  
 CATALOG NUMBER: 0530W

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	61.2	11.3
10°-20°	145.5	26.8
20°-30°	163.8	30.2
30°-40°	112.5	20.8
40°-50°	46.8	8.6
50°-60°	12.0	2.2
60°-70°	0.1	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	370.6	68.4
0°-40°	483.1	89.1
0°-60°	541.9	100.0
0°-90°	542.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	542.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	666	
5°	659	61
15°	522	146
25°	360	164
35°	178	113
45°	58	47
55°	14	12
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P892204  
CATALOG NUMBER: 0530W

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	666.2
2.5°	665.4
5°	659.3
7.5°	639.6
10°	607.0
12.5°	566.1
15°	522.1
17.5°	477.4
20°	438.8
22.5°	400.9
25°	360.0
27.5°	318.3
30°	272.8
32.5°	224.3
35°	178.1
37.5°	138.7
40°	104.6
42.5°	78.8
45°	57.6
47.5°	41.7
50°	30.3
52.5°	21.2
55°	13.6
57.5°	4.6
60°	0.7
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG







— 0°-180°







(END OF REPORT)