

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P334324

Luminaire Tested: **S125DS-S1270D930-4F0-1E-UDD-D**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P334324
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1802-639-17)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125DS-S1270D930-4F0-1E-UDD-D
Description: DEFINE 5 DIRECT LED LUMINAIRE, DROP SATIN WHITE DIFFUSER
PENDANT/SURFACE/WALL MOUNT, 1270 LUMENS PER FOOT
Light Source: 3000K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3818.1 lumens
Efficiency: N/A
Efficacy: 92.9 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.21 / 1.34
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: Direct


Input Watts (W): 41.1
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P334324

CATALOG NUMBER: S125DS-S1270D930-4F0-1E-UDD-D

Luminous Intensity Polar Plot

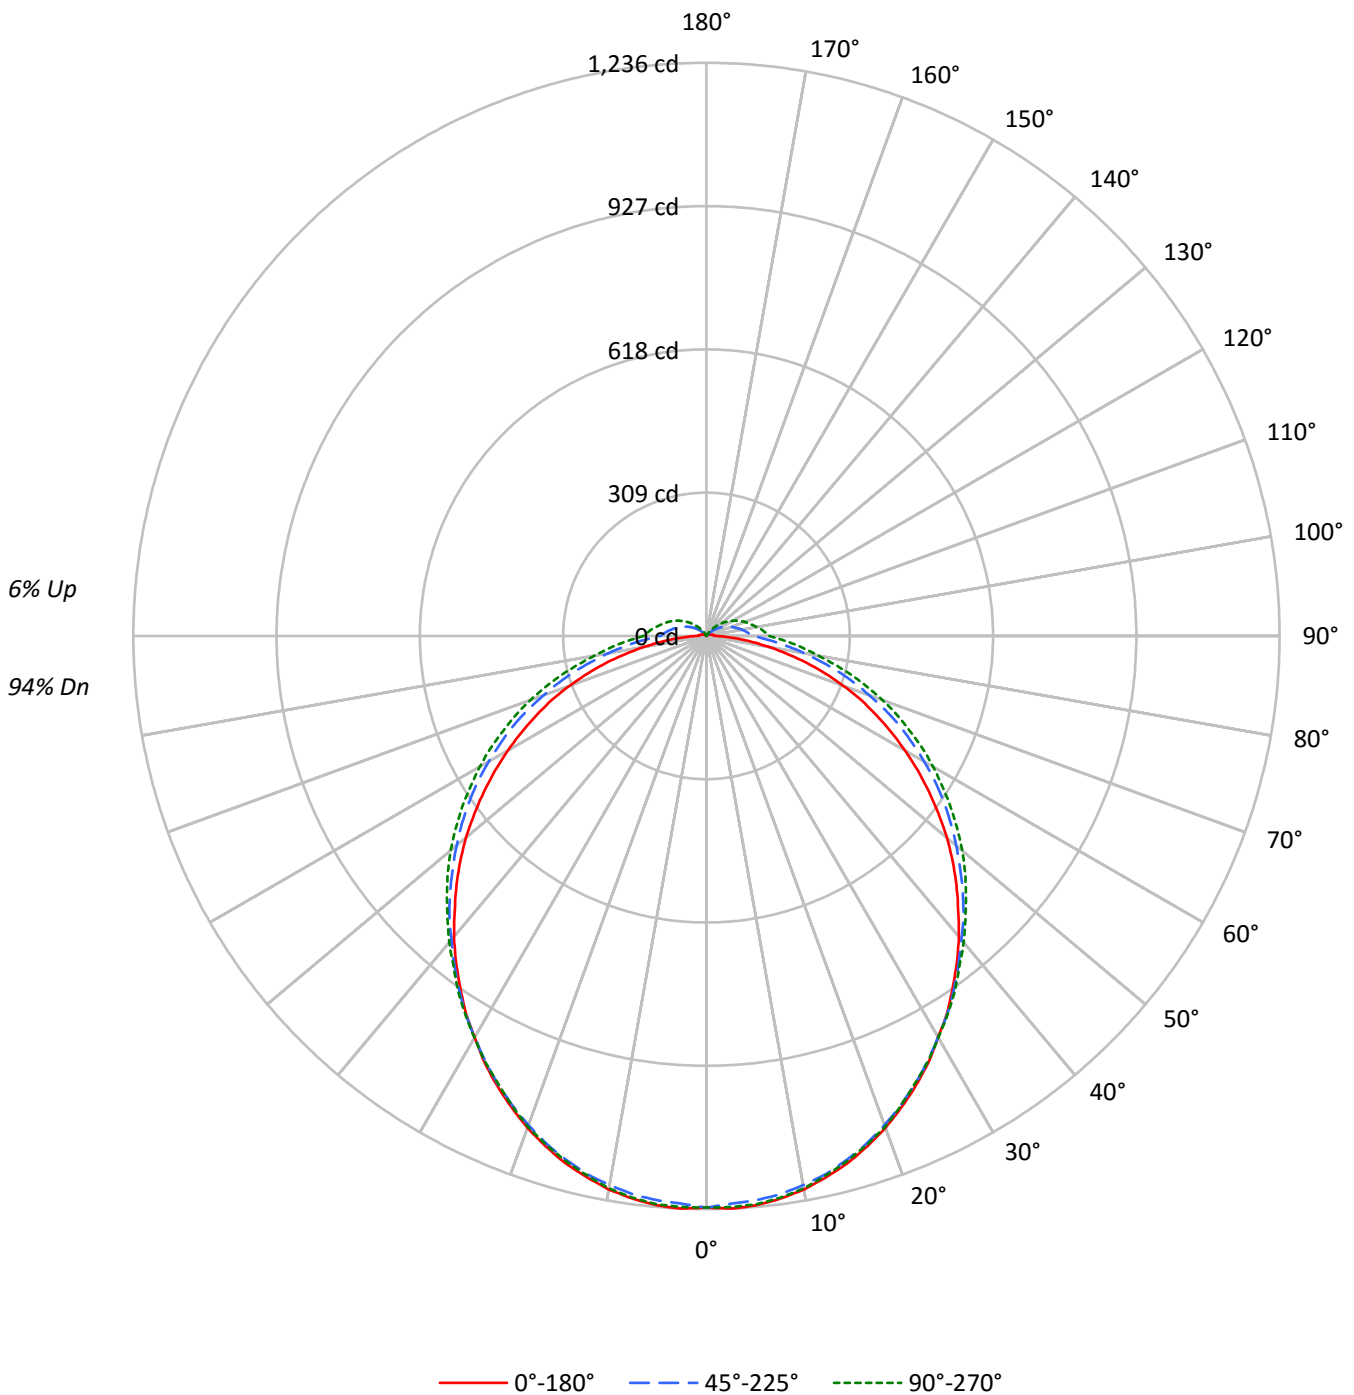



TEST NUMBER: P334324

CATALOG NUMBER: S125DS-S1270D930-4F0-1E-UDD-D

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	118	118	118	118	114	114	114	114	108	108	108	102	102	102	96	96	96	94
1	106	101	96	92	103	98	94	90	93	89	86	88	85	82	83	81	79	76
2	96	88	80	74	93	85	78	73	81	75	70	76	72	68	72	69	65	63
3	88	77	68	61	84	75	67	60	71	64	59	67	61	57	64	59	55	53
4	80	68	59	52	77	66	58	51	63	55	50	60	53	48	57	51	47	45
5	74	60	51	44	71	59	50	44	56	49	43	53	47	42	51	45	41	39
6	68	54	45	39	66	53	45	38	51	43	38	48	42	37	46	40	36	34
7	63	49	40	34	61	48	40	34	46	39	33	44	37	33	42	36	32	30
8	59	45	36	30	57	44	36	30	42	35	30	40	34	29	39	33	29	27
9	55	41	33	27	53	40	33	27	39	32	27	37	31	26	36	30	26	24
10	51	38	30	25	50	37	30	25	36	29	24	35	28	24	33	28	23	22

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	7960	7960	7960
5°	7990	7920	7975
10°	7948	7885	7932
15°	7869	7821	7837
20°	7757	7715	7740
25°	7621	7595	7586
30°	7452	7452	7461
35°	7298	7335	7364
40°	7141	7213	7274
45°	6964	7141	7229
50°	6799	7066	7236
55°	6598	7034	7238
60°	6383	7007	7289
65°	6168	7036	7386
70°	5933	7051	7621
75°	5547	7296	8050
80°	5077	7955	9123
85°	4928	11011	13701



TEST NUMBER: P334324

CATALOG NUMBER: S125DS-S1270D930-4F0-1E-UDD-D

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	116.6	3.1
10°-20°	331.1	8.7
20°-30°	492.3	12.9
30°-40°	583.1	15.3
40°-50°	602.8	15.8
50°-60°	555.3	14.5
60°-70°	448.9	11.8
70°-80°	300.4	7.9
80°-90°	155.3	4.1
90°-100°	87.5	2.3
100°-110°	64.5	1.7
110°-120°	43.2	1.1
120°-130°	24.4	0.6
130°-140°	10.7	0.3
140°-150°	2.1	0.1
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	940.1	24.6
0°-40°	1523.1	39.9
0°-60°	2681.2	70.2
0°-90°	3585.8	93.9
90°-120°	195.1	5.1
90°-150°	232.3	6.1
90°-180°	232.0	6.1
0°-180°	3818.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1232	1232	1232	1232	1232	
5°	1232	1230	1222	1231	1230	117
15°	1177	1178	1170	1177	1172	332
25°	1069	1073	1066	1071	1064	492
35°	926	934	930	934	934	579
45°	762	776	782	790	792	588
55°	586	605	625	638	643	524
65°	404	431	460	478	483	401
75°	222	254	292	317	323	236
85°	66	106	149	175	185	69
90°	19	58	99	127	135	13
95°	16	47	88	115	123	12
105°	11	30	66	91	99	12
115°	7	16	47	69	76	7
125°	5	4	28	47	53	4
135°	2	1	10	25	31	2
145°	1	0	0	6	11	0
155°	0	0	0	0	0	0
165°	0	0	0	0	0	0
175°	0	0	0	0	0	0
180°	0	0	0	0	0	0



TEST NUMBER: P334324

CATALOG NUMBER: S125DS-S1270D930-4F0-1E-UDD-D

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1232.5	1232.5	1232.5	1232.5	1232.5
2.5°	1236.1	1233.7	1225.3	1233.7	1232.5
5°	1232.5	1230.1	1221.6	1231.3	1230.1
7.5°	1224.0	1222.8	1214.4	1222.8	1221.6
10°	1212.0	1212.0	1202.3	1210.8	1209.5
12.5°	1195.0	1196.3	1189.0	1195.0	1191.4
15°	1176.9	1178.1	1169.7	1176.9	1172.1
17.5°	1154.0	1156.4	1147.9	1154.0	1150.3
20°	1128.6	1131.0	1122.5	1126.2	1126.2
22.5°	1099.6	1104.4	1094.8	1099.6	1096.0
25°	1069.4	1073.0	1065.8	1070.6	1064.5
27.5°	1036.8	1041.6	1033.1	1036.8	1034.3
30°	999.3	1006.5	999.3	1001.7	1000.5
32.5°	965.5	971.5	966.7	969.1	967.9
35°	925.6	934.0	930.4	934.0	934.0
37.5°	886.9	894.2	893.0	897.8	896.6
40°	847.0	856.7	855.5	860.3	862.8
42.5°	803.5	816.8	820.5	826.5	826.5
45°	762.5	775.8	781.8	790.3	791.5
47.5°	720.2	732.3	741.9	754.0	756.4
50°	676.7	690.0	703.3	716.5	720.2
52.5°	630.8	647.7	664.6	679.1	681.5
55°	586.0	605.4	624.7	638.0	642.8
57.5°	540.1	563.1	584.8	599.3	603.0
60°	494.2	518.4	542.5	560.7	564.3
62.5°	449.5	473.7	500.3	520.8	525.6
65°	403.6	431.4	460.4	478.5	483.3
67.5°	361.3	387.9	416.9	438.6	444.7
70°	314.2	342.0	373.4	396.3	403.6
72.5°	268.3	297.3	332.3	357.7	362.5
75°	222.3	253.8	292.4	316.6	322.6
77.5°	177.6	213.9	250.1	276.7	281.5
80°	136.5	172.8	213.9	240.5	245.3
82.5°	99.1	137.8	180.0	205.4	215.1
85°	66.5	106.3	148.6	175.2	184.9
87.5°	42.3	81.0	122.0	149.8	158.3
90°	19.3	58.0	99.1	126.9	135.3
92.5°	16.9	52.0	94.3	120.8	129.3
95°	15.7	47.1	88.2	114.8	123.3
97.5°	14.5	43.5	83.4	108.8	117.2
100°	13.3	38.7	77.3	102.7	110.0
102.5°	12.1	35.0	72.5	96.7	103.9
105°	10.9	30.2	66.5	90.6	99.1
107.5°	9.7	26.6	61.6	85.8	93.0
110°	8.5	23.0	56.8	79.8	88.2



TEST NUMBER: P334324

CATALOG NUMBER: S125DS-S1270D930-4F0-1E-UDD-D

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	8.5	19.3	52.0	73.7	82.2
115°	7.3	15.7	47.1	68.9	76.1
117.5°	6.0	12.1	42.3	62.8	71.3
120°	6.0	9.7	37.5	58.0	65.3
122.5°	4.8	6.0	32.6	52.0	59.2
125°	4.8	3.6	27.8	47.1	53.2
127.5°	3.6	2.4	23.0	41.1	48.3
130°	3.6	2.4	19.3	36.3	42.3
132.5°	2.4	2.4	14.5	31.4	36.3
135°	2.4	1.2	9.7	25.4	31.4
137.5°	2.4	1.2	6.0	20.5	25.4
140°	1.2	1.2	2.4	15.7	20.5
142.5°	1.2	0.0	0.0	10.9	15.7
145°	1.2	0.0	0.0	6.0	10.9
147.5°	0.0	0.0	0.0	2.4	4.8
150°	0.0	0.0	0.0	0.0	1.2
152.5°	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)