

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P929846

Luminaire Tested: DFN2DS-4P3F0-020DS840-RLL

Issue Date: 11/20/2024

Test Information

Test Method: LM-79-2019
Report Number: P929846
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P333882)
Test Lab: INNOVATION CENTER
Issue Date: 11/20/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DS-4P3F0-020DS840-RLL
Description: 3 foot, 90deg - 4way Define Geo, with Direct 1in Regressed Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1701.7 lumens
Efficiency: N/A
Efficacy: 91.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular (W 3.07' x L: 3.07' x H: 0')
CIE Type: Direct

Input Watts (W): 18.6
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9951
Total Harmonic Distortion (THDi): 0.07
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P929846

CATALOG NUMBER: DFN2DS-4P3F0-020DS840-RLL

Luminous Intensity Polar Plot

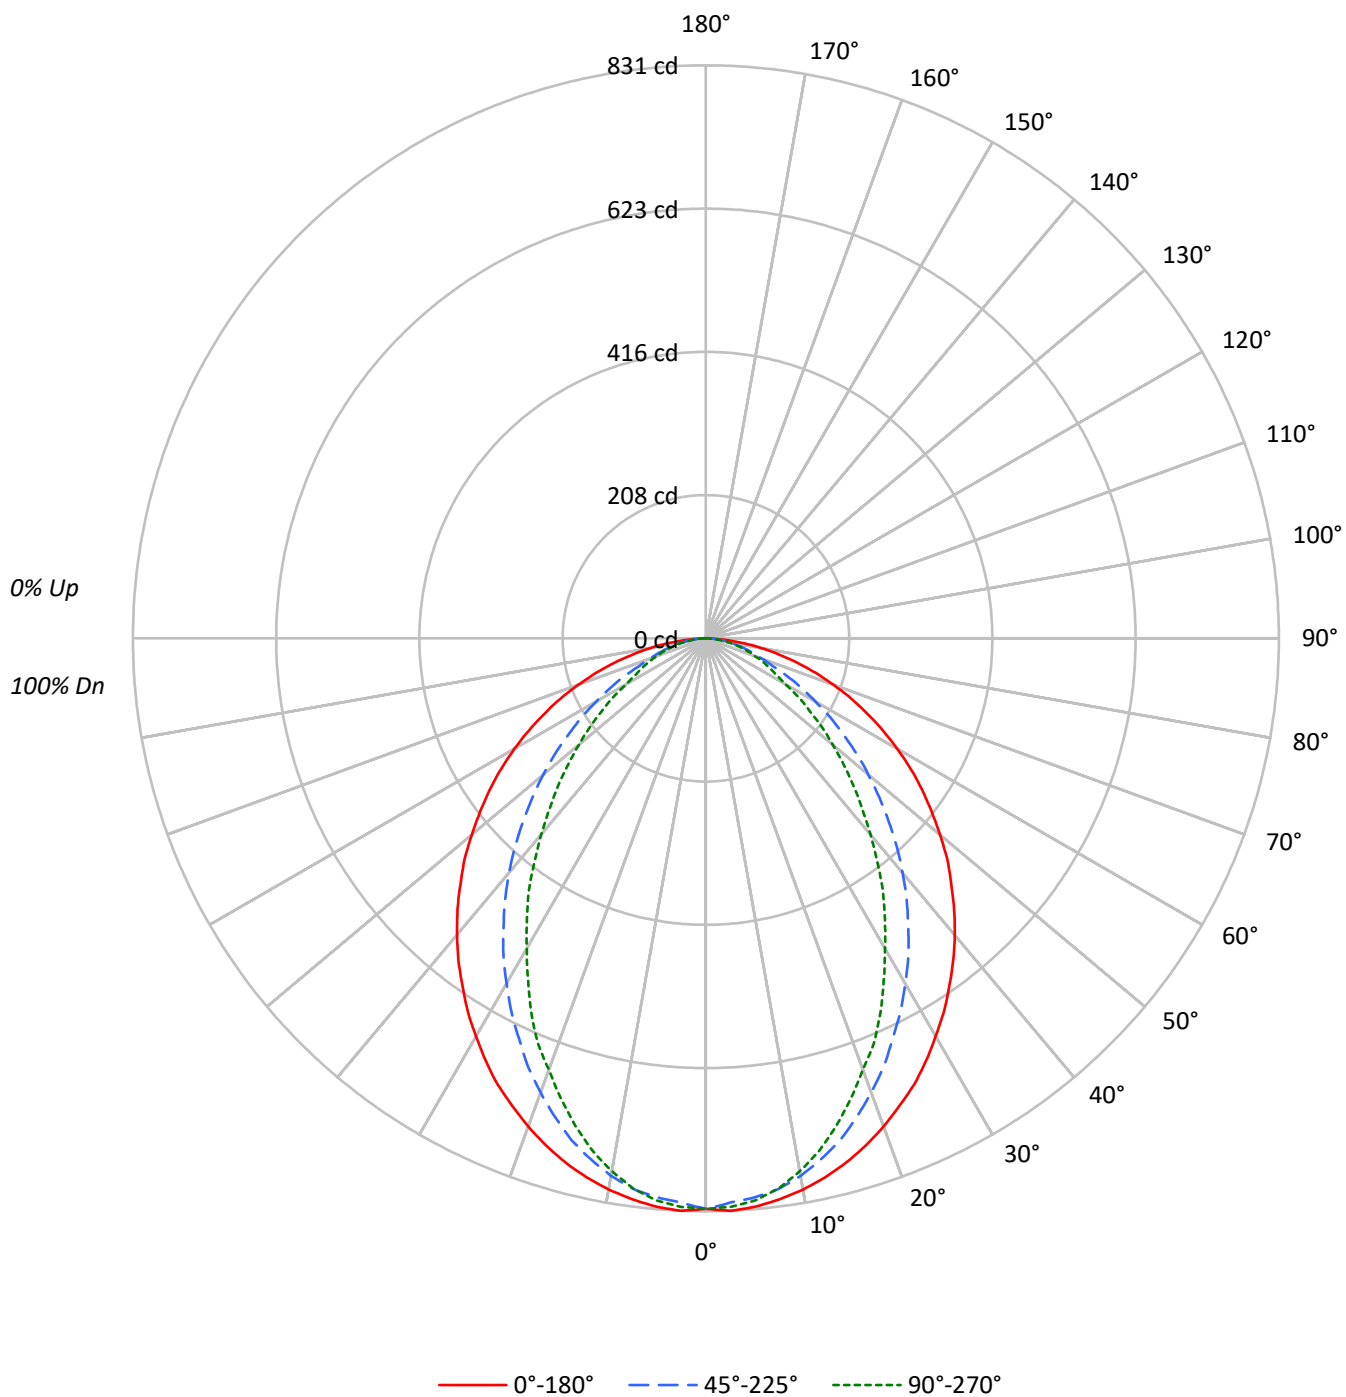

TEST NUMBER: P929846

CATALOG NUMBER: DFN2DS-4P3F0-020DS840-RLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	110	106	102	98	107	103	100	97	99	96	94		95	93	91		92
2	101	94	87	82	98	92	86	81	88	83	79		85	81	78		82
3	93	83	76	70	90	82	75	69	79	73	68		76	71	67		74
4	86	75	66	60	83	73	66	60	71	64	59		69	63	58		66
5	79	67	59	53	77	66	58	52	64	57	52		62	56	51		60
6	74	61	53	47	72	60	52	46	58	51	46		57	50	46		55
7	68	56	47	42	67	55	47	42	53	46	41		52	46	41		51
8	64	51	43	38	62	51	43	37	49	42	37		48	42	37		47
9	60	47	39	34	59	47	39	34	46	39	34		44	38	34		44
10	56	44	36	31	55	43	36	31	42	36	31		41	35	31		41

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	943	943	943
5°	947	931	936
10°	939	916	908
15°	928	889	863
20°	914	850	807
25°	898	806	753
30°	877	761	684
35°	856	712	623
40°	835	661	553
45°	811	604	489
50°	786	546	426
55°	760	483	366
60°	730	418	304
65°	697	351	277
70°	656	289	255
75°	606	264	238
80°	536	236	216
85°	420	186	186

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 811 cd/sqm

TEST NUMBER: P929846

CATALOG NUMBER: DFN2DS-4P3F0-020DS840-RLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	77.5	4.6
10°-20°	212.9	12.5
20°-30°	298.9	17.6
30°-40°	325.8	19.1
40°-50°	299.4	17.6
50°-60°	235.2	13.8
60°-70°	153.1	9.0
70°-80°	78.8	4.6
80°-90°	20.1	1.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	589.3	34.6
0°-40°	915.1	53.8
0°-60°	1449.7	85.2
0°-90°	1701.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1701.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	827	827	827	827	827	
5°	827	824	814	821	818	78
15°	787	779	753	739	732	222
25°	714	690	641	610	599	329
35°	616	577	512	464	448	385
45°	503	453	374	321	303	389
55°	383	324	243	198	184	342
65°	258	198	130	105	103	256
75°	138	85	60	55	54	146
85°	32	16	14	14	14	39
90°	0	0	0	0	0	

TEST NUMBER: P929846

CATALOG NUMBER: DFN2DS-4P3F0-020DS840-RLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	827.4	827.4	827.4	827.4	827.4
2.5°	831.1	827.4	819.1	826.7	825.2
5°	827.4	823.7	813.9	820.7	818.4
7.5°	820.7	816.2	805.7	808.7	804.9
10°	811.7	806.4	791.5	789.2	784.8
12.5°	800.5	793.7	773.5	769.1	760.8
15°	787.0	778.7	753.3	739.0	731.6
17.5°	771.3	759.3	727.8	711.3	699.4
20°	753.3	738.2	700.9	682.2	665.7
22.5°	733.8	716.6	673.2	647.7	636.5
25°	714.4	690.4	640.9	610.3	599.0
27.5°	691.2	665.7	611.0	575.8	558.6
30°	666.5	637.9	578.1	539.9	519.6
32.5°	642.4	608.0	546.6	501.7	483.0
35°	615.5	577.4	511.5	464.3	447.7
37.5°	589.3	548.0	478.5	426.8	408.1
40°	561.6	516.7	444.0	390.9	371.4
42.5°	533.1	485.3	409.6	354.2	335.5
45°	503.2	453.0	374.5	321.2	303.2
47.5°	474.8	421.6	340.7	287.5	271.1
50°	443.3	390.2	307.8	256.1	240.4
52.5°	412.5	356.4	276.3	226.9	212.7
55°	382.6	324.2	243.3	198.5	184.2
57.5°	352.0	292.0	214.2	172.3	160.3
60°	320.5	260.6	183.5	145.3	133.3
62.5°	289.8	229.9	157.3	121.3	115.3
65°	258.4	197.7	130.3	104.9	102.6
67.5°	228.4	167.7	104.9	92.1	89.9
70°	196.9	138.5	86.8	79.4	76.4
72.5°	167.0	111.5	72.6	66.7	65.2
75°	137.7	85.3	59.9	54.7	54.0
77.5°	108.6	60.7	47.1	44.1	42.6
80°	81.6	43.4	35.9	32.9	32.9
82.5°	56.9	29.2	24.7	23.2	23.2
85°	32.1	16.4	14.2	14.2	14.2
87.5°	12.0	6.0	6.0	5.2	5.2
90°	0.0	0.0	0.0	0.0	0.0

TEST NUMBER: P929846

CATALOG NUMBER: DFN2DS-4P3F0-020DS840-RLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.03	12.55	11.39	12.87	13.18	6.99	8.52	7.36	8.83	9.14
	3H	12.80	14.16	13.17	14.49	14.85	8.26	9.62	8.64	9.95	10.31
	4H	13.46	14.74	13.86	15.09	15.47	8.76	10.04	9.16	10.39	10.77
	6H	13.95	15.13	14.36	15.50	15.89	9.14	10.32	9.55	10.69	11.08
	8H	14.12	15.24	14.54	15.63	16.03	9.26	10.39	9.69	10.78	11.18
	12H	14.22	15.30	14.65	15.68	16.11	9.35	10.42	9.78	10.81	11.23
4H	2H	11.13	12.41	11.53	12.76	13.14	7.69	8.97	8.09	9.32	9.70
	3H	13.07	14.13	13.48	14.53	14.93	9.13	10.19	9.54	10.59	11.00
	4H	13.82	14.77	14.25	15.19	15.63	9.73	10.69	10.16	11.10	11.54
	6H	14.41	15.24	14.87	15.68	16.14	10.22	11.05	10.68	11.49	11.95
	8H	14.62	15.40	15.09	15.84	16.31	10.38	11.16	10.84	11.60	12.07
	12H	14.78	15.47	15.26	15.95	16.42	10.50	11.19	10.98	11.67	12.14
8H	4H	13.84	14.62	14.30	15.06	15.53	10.08	10.86	10.55	11.31	11.77
	6H	14.48	15.12	14.97	15.61	16.09	10.67	11.31	11.17	11.80	12.28
	8H	14.73	15.31	15.24	15.81	16.30	10.89	11.47	11.40	11.98	12.46
	12H	14.93	15.44	15.44	15.93	16.50	11.07	11.58	11.58	12.07	12.64
12H	4H	13.82	14.52	14.31	15.00	15.47	10.13	10.82	10.61	11.30	11.77
	6H	14.46	15.04	14.97	15.55	16.03	10.73	11.31	11.25	11.82	12.31
	8H	14.74	15.25	15.25	15.75	16.31	11.01	11.52	11.52	12.01	12.57