

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P930014

Luminaire Tested: DFN2DS-4P4F0-070DS930-RLL

Issue Date: 11/20/2024

Test Information

Test Method: LM-79-2019
Report Number: P930014
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P333882)
Test Lab: INNOVATION CENTER
Issue Date: 11/20/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DS-4P4F0-070DS930-RLL
Description: 4 foot, 90deg - 4way Define Geo, with Direct 1in Regressed Frosted Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4849.2 lumens
Efficiency: N/A
Efficacy: 64.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular (W 4.07' x L: 4.07' x H: 0')
CIE Type: Direct

Input Watts (W): 74.8
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9789
Total Harmonic Distortion (THDi): 0.074
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P930014
CATALOG NUMBER: DFN2DS-4P4F0-070DS930-RLL

Luminous Intensity Polar Plot

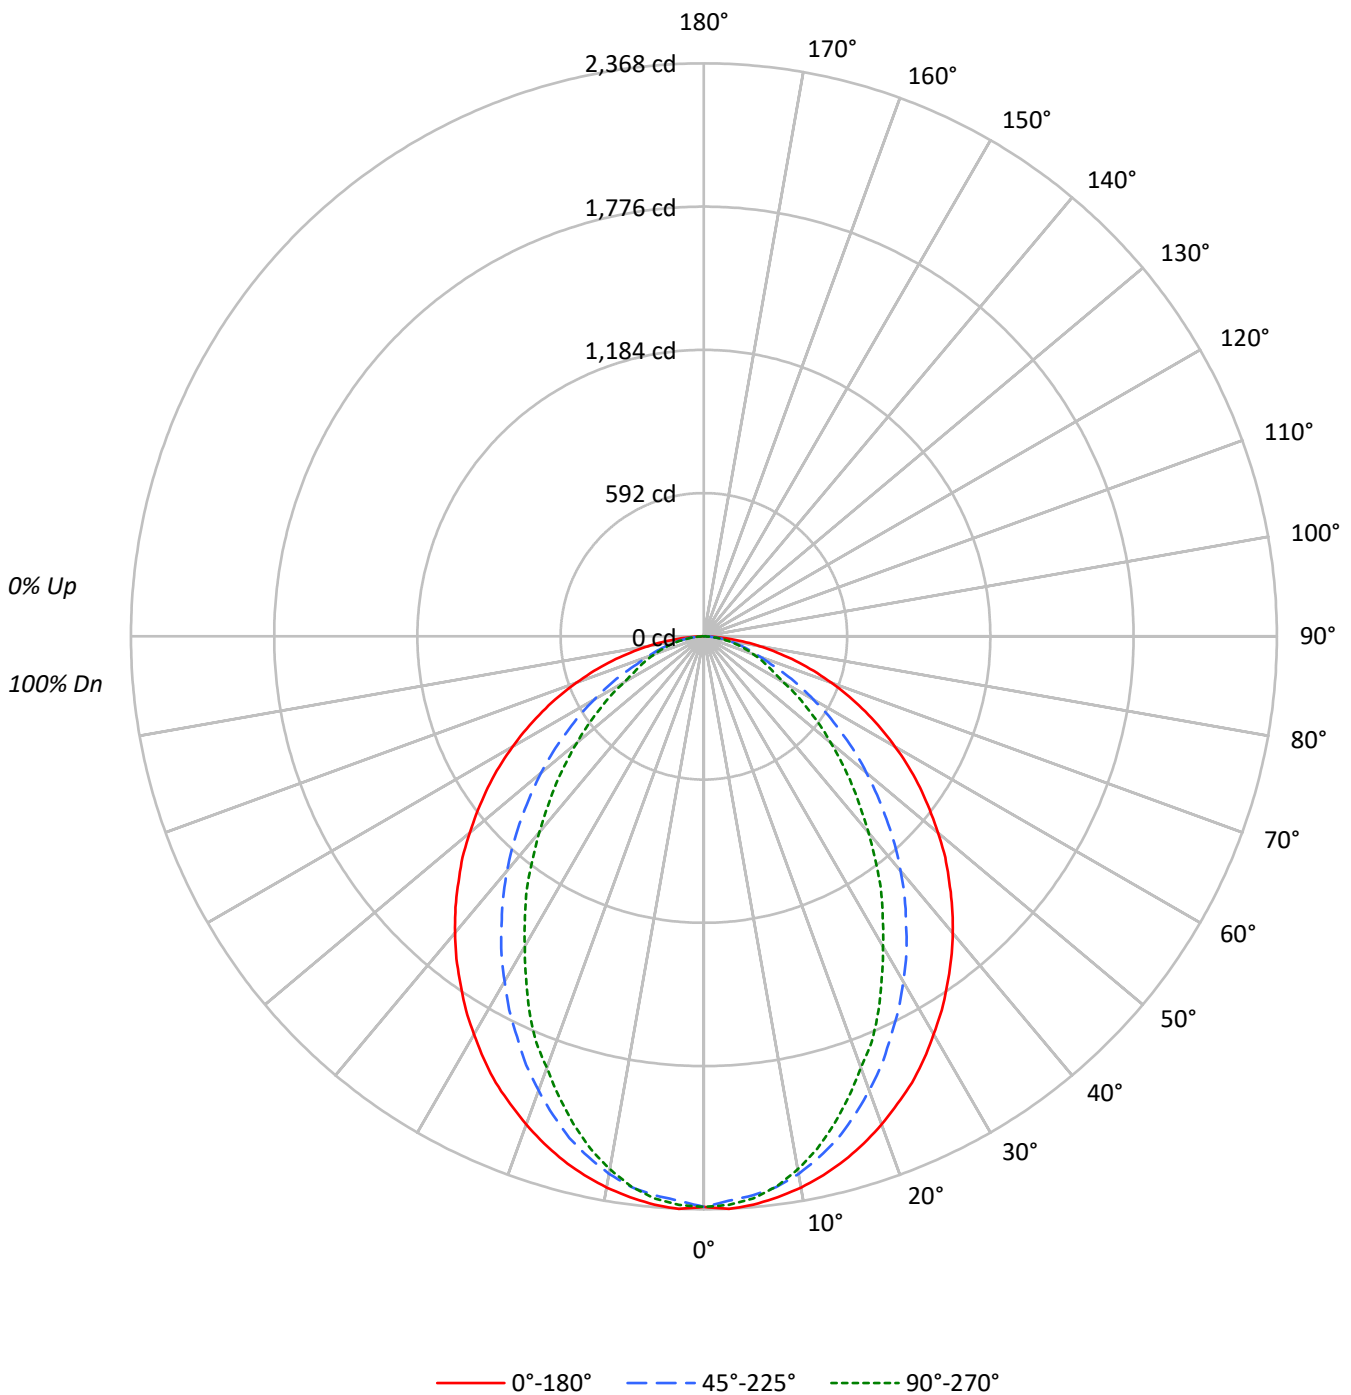



TEST NUMBER: P930014

CATALOG NUMBER: DFN2DS-4P4F0-070DS930-RLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	102	102	102	100
1	110	106	102	98	107	103	100	97	99	96	94	95	93	91	92	90	88	88	88	88	86
2	101	94	87	82	98	92	86	81	88	83	79	85	81	78	82	79	76	76	76	76	74
3	93	83	76	70	90	82	75	69	79	73	68	76	71	67	74	69	66	66	66	66	64
4	86	75	66	60	83	73	66	60	71	64	59	69	63	58	66	62	57	57	57	57	55
5	79	67	59	53	77	66	58	52	64	57	52	62	56	51	60	55	51	51	51	51	49
6	74	61	53	47	72	60	52	46	58	51	46	57	50	46	55	50	45	45	45	45	43
7	68	56	47	42	67	55	47	42	53	46	41	52	46	41	51	45	41	41	41	41	39
8	64	51	43	38	62	51	43	37	49	42	37	48	42	37	47	41	37	37	37	37	35
9	60	47	39	34	59	47	39	34	46	39	34	44	38	34	44	38	34	34	34	34	32
10	56	44	36	31	55	43	36	31	42	36	31	41	35	31	41	35	31	31	31	31	29

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1530	1530	1530
5°	1536	1510	1519
10°	1524	1486	1473
15°	1506	1442	1400
20°	1482	1379	1310
25°	1457	1307	1222
30°	1423	1234	1109
35°	1389	1154	1011
40°	1355	1072	896
45°	1316	979	793
50°	1275	885	691
55°	1233	784	594
60°	1185	678	493
65°	1130	570	449
70°	1064	469	413
75°	984	428	385
80°	869	383	351
85°	683	301	301

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 1316 cd/sqm



TEST NUMBER: P930014
 CATALOG NUMBER: DFN2DS-4P4F0-070DS930-RLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	221.0	4.6
10°-20°	606.6	12.5
20°-30°	851.7	17.6
30°-40°	928.4	19.1
40°-50°	853.3	17.6
50°-60°	670.1	13.8
60°-70°	436.2	9.0
70°-80°	224.5	4.6
80°-90°	57.3	1.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1679.3	34.6
0°-40°	2607.7	53.8
0°-60°	4131.2	85.2
0°-90°	4849.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4849.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2358	2358	2358	2358	2358	
5°	2358	2347	2319	2339	2332	224
15°	2243	2219	2147	2106	2085	632
25°	2036	1967	1826	1739	1707	936
35°	1754	1645	1458	1323	1276	1098
45°	1434	1291	1067	915	864	1107
55°	1090	924	693	566	525	974
65°	736	563	371	299	292	730
75°	393	243	171	156	154	415
85°	92	47	40	40	40	110
90°	0	0	0	0	0	



TEST NUMBER: P930014

CATALOG NUMBER: DFN2DS-4P4F0-070DS930-RLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2357.9	2357.9	2357.9	2357.9	2357.9
2.5°	2368.5	2357.9	2334.3	2355.8	2351.5
5°	2357.9	2347.2	2319.4	2338.6	2332.3
7.5°	2338.6	2325.9	2296.1	2304.4	2293.8
10°	2313.1	2298.1	2255.5	2249.0	2236.3
12.5°	2281.1	2261.9	2204.2	2191.5	2167.9
15°	2242.6	2219.1	2146.6	2106.1	2084.9
17.5°	2197.8	2163.7	2074.0	2027.1	1992.9
20°	2146.6	2103.8	1997.2	1944.0	1896.9
22.5°	2091.2	2042.1	1918.2	1845.7	1813.9
25°	2035.7	1967.3	1826.5	1739.1	1707.0
27.5°	1969.6	1896.9	1741.2	1640.9	1591.8
30°	1899.2	1817.9	1647.2	1538.6	1480.9
32.5°	1830.8	1732.6	1557.8	1429.7	1376.2
35°	1754.0	1645.2	1457.5	1323.1	1276.0
37.5°	1679.4	1561.9	1363.6	1216.1	1163.0
40°	1600.3	1472.5	1265.3	1113.9	1058.4
42.5°	1519.3	1382.8	1167.2	1009.2	956.1
45°	1434.0	1290.9	1067.0	915.3	864.1
47.5°	1352.9	1201.5	971.0	819.3	772.5
50°	1263.2	1111.8	877.0	729.7	685.1
52.5°	1175.6	1015.6	787.4	646.5	606.0
55°	1090.3	923.9	693.4	565.5	525.0
57.5°	1002.9	832.2	610.4	490.8	456.6
60°	913.3	742.5	522.7	414.1	379.9
62.5°	825.8	655.2	448.0	345.7	328.7
65°	736.2	563.2	371.3	298.9	292.3
67.5°	650.9	477.9	298.9	262.3	256.1
70°	561.2	394.8	247.4	226.2	217.5
72.5°	475.9	317.8	206.9	190.0	185.7
75°	392.6	243.1	170.7	155.7	153.7
77.5°	309.5	172.7	134.5	125.8	121.6
80°	232.5	123.8	102.4	94.0	94.0
82.5°	162.1	83.3	70.4	66.1	66.1
85°	91.7	46.9	40.5	40.5	40.5
87.5°	34.1	17.0	17.0	14.9	14.9
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P930014
 CATALOG NUMBER: DFN2DS-4P4F0-070DS930-RLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.71	14.23	13.08	14.55	14.86	8.67	10.19	9.04	10.51	10.82
	3H	14.48	15.84	14.85	16.17	16.53	9.94	11.30	10.31	11.63	11.99
	4H	15.14	16.42	15.54	16.77	17.15	10.44	11.72	10.84	12.07	12.45
	6H	15.63	16.81	16.04	17.18	17.57	10.82	12.00	11.23	12.37	12.76
	8H	15.80	16.92	16.22	17.31	17.71	10.94	12.07	11.37	12.46	12.86
	12H	15.90	16.98	16.33	17.36	17.79	11.03	12.10	11.46	12.49	12.91
4H	2H	12.82	14.10	13.22	14.44	14.82	9.37	10.65	9.77	11.00	11.38
	3H	14.75	15.81	15.16	16.21	16.61	10.81	11.87	11.22	12.27	12.67
	4H	15.50	16.45	15.93	16.87	17.31	11.41	12.37	11.84	12.78	13.22
	6H	16.09	16.92	16.55	17.36	17.82	11.90	12.73	12.36	13.17	13.63
	8H	16.30	17.08	16.77	17.53	17.99	12.06	12.84	12.52	13.28	13.75
	12H	16.46	17.15	16.94	17.63	18.10	12.18	12.87	12.66	13.35	13.82
8H	4H	15.52	16.30	15.99	16.74	17.21	11.76	12.54	12.23	12.99	13.45
	6H	16.16	16.80	16.66	17.29	17.77	12.35	12.99	12.85	13.48	13.96
	8H	16.41	16.99	16.92	17.50	17.98	12.57	13.15	13.09	13.66	14.15
	12H	16.61	17.12	17.12	17.62	18.18	12.75	13.26	13.26	13.75	14.32
12H	4H	15.51	16.20	15.99	16.68	17.15	11.81	12.50	12.29	12.98	13.45
	6H	16.14	16.72	16.65	17.23	17.72	12.41	12.99	12.93	13.50	13.99
	8H	16.42	16.93	16.93	17.43	17.99	12.69	13.20	13.20	13.69	14.25