

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P930916

Luminaire Tested: DFN2DS-SQ3F0-040DS935-RLL

Issue Date: 11/20/2024

Test Information

Test Method: LM-79-2019
Report Number: P930916
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P333882)
Test Lab: INNOVATION CENTER
Issue Date: 11/20/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DS-SQ3F0-040DS935-RLL
Description: 3 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2924.0 lumens
Efficiency: N/A
Efficacy: 76.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular (W 3.06' x L: 3.06' x H: 0')
CIE Type: Direct

Input Watts (W): 38.1
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9933
Total Harmonic Distortion (THDi): 0.066
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P930916

CATALOG NUMBER: DFN2DS-SQ3F0-040DS935-RLL

Luminous Intensity Polar Plot

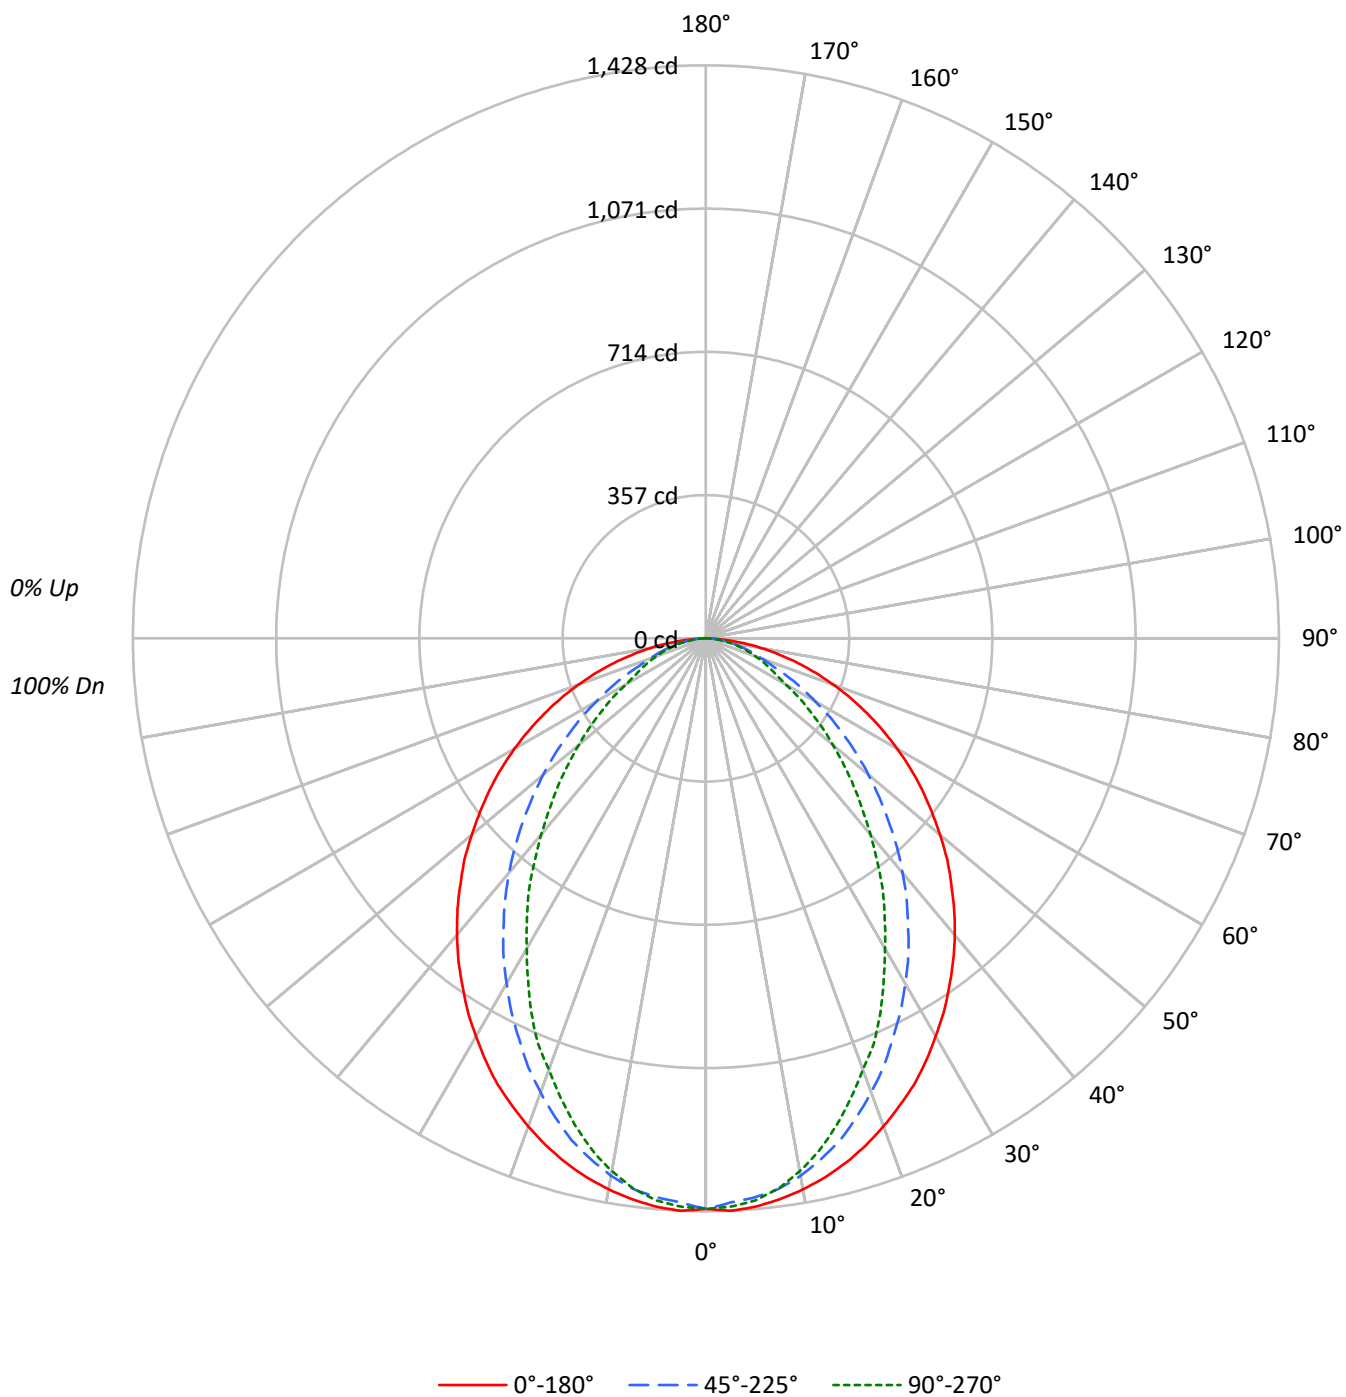

TEST NUMBER: P930916

CATALOG NUMBER: DFN2DS-SQ3F0-040DS935-RLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	110	106	102	98	107	103	100	97	99	96	94		95	93	91		92
2	101	94	87	82	98	92	86	81	88	83	79		85	81	78		82
3	93	83	76	70	90	82	75	69	79	73	68		76	71	67		74
4	86	75	66	60	83	73	66	60	71	64	59		69	63	58		66
5	79	67	59	53	77	66	58	52	64	57	52		62	56	51		60
6	74	61	53	47	72	60	52	46	58	51	46		57	50	46		55
7	68	56	47	42	67	55	47	42	53	46	41		52	46	41		51
8	64	51	43	38	62	51	43	37	49	42	37		48	42	37		47
9	60	47	39	34	59	47	39	34	46	39	34		44	38	34		44
10	56	44	36	31	55	43	36	31	42	36	31		41	35	31		41

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1629	1629	1629
5°	1635	1609	1618
10°	1623	1582	1569
15°	1604	1535	1491
20°	1578	1468	1395
25°	1552	1392	1301
30°	1515	1314	1181
35°	1479	1229	1076
40°	1443	1141	955
45°	1401	1043	844
50°	1358	943	736
55°	1313	835	632
60°	1262	722	525
65°	1204	607	478
70°	1134	500	440
75°	1048	456	410
80°	925	407	374
85°	727	321	321

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1401 cd/sqm

TEST NUMBER: P930916

CATALOG NUMBER: DFN2DS-SQ3F0-040DS935-RLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	133.2	4.6
10°-20°	365.8	12.5
20°-30°	513.6	17.6
30°-40°	559.8	19.1
40°-50°	514.5	17.6
50°-60°	404.1	13.8
60°-70°	263.0	9.0
70°-80°	135.4	4.6
80°-90°	34.6	1.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1012.6	34.6
0°-40°	1572.4	53.8
0°-60°	2491.0	85.2
0°-90°	2924.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2924.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1422	1422	1422	1422	1422	
5°	1422	1415	1398	1410	1406	135
15°	1352	1338	1294	1270	1257	381
25°	1228	1186	1101	1049	1029	565
35°	1058	992	879	798	769	662
45°	865	778	643	552	521	668
55°	658	557	418	341	317	588
65°	444	340	224	180	176	440
75°	237	147	103	94	93	250
85°	55	28	24	24	24	66
90°	0	0	0	0	0	

TEST NUMBER: P930916

CATALOG NUMBER: DFN2DS-SQ3F0-040DS935-RLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1421.8	1421.8	1421.8	1421.8	1421.8
2.5°	1428.2	1421.8	1407.6	1420.5	1417.9
5°	1421.8	1415.3	1398.5	1410.1	1406.4
7.5°	1410.1	1402.5	1384.5	1389.5	1383.1
10°	1394.7	1385.7	1360.0	1356.0	1348.5
12.5°	1375.5	1363.9	1329.0	1321.4	1307.2
15°	1352.3	1338.1	1294.4	1270.0	1257.1
17.5°	1325.3	1304.6	1250.5	1222.3	1201.7
20°	1294.4	1268.6	1204.3	1172.2	1143.8
22.5°	1260.9	1231.3	1156.6	1112.9	1093.7
25°	1227.5	1186.3	1101.3	1048.7	1029.2
27.5°	1187.7	1143.8	1049.9	989.4	959.8
30°	1145.2	1096.2	993.2	927.7	892.9
32.5°	1104.0	1044.7	939.3	862.1	829.8
35°	1057.7	992.0	878.8	797.7	769.4
37.5°	1012.6	941.8	822.2	733.3	701.2
40°	965.0	887.9	763.0	671.7	638.2
42.5°	916.1	833.8	703.8	608.5	576.5
45°	864.6	778.4	643.4	551.9	521.1
47.5°	815.8	724.5	585.5	494.1	465.8
50°	761.7	670.4	528.8	440.0	413.1
52.5°	708.9	612.4	474.8	389.8	365.4
55°	657.5	557.1	418.1	341.0	316.6
57.5°	604.8	501.8	368.0	295.9	275.4
60°	550.7	447.7	315.2	249.7	229.1
62.5°	498.0	395.1	270.1	208.5	198.2
65°	443.9	339.6	223.9	180.2	176.2
67.5°	392.5	288.2	180.2	158.2	154.4
70°	338.4	238.0	149.2	136.4	131.2
72.5°	287.0	191.7	124.8	114.6	112.0
75°	236.7	146.6	102.9	93.9	92.7
77.5°	186.6	104.1	81.1	75.9	73.3
80°	140.2	74.6	61.7	56.7	56.7
82.5°	97.8	50.2	42.5	39.8	39.8
85°	55.3	28.3	24.4	24.4	24.4
87.5°	20.6	10.2	10.2	9.0	9.0
90°	0.0	0.0	0.0	0.0	0.0

TEST NUMBER: P930916

CATALOG NUMBER: DFN2DS-SQ3F0-040DS935-RLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.93	14.45	13.30	14.77	15.08	8.89	10.41	9.26	10.73	11.04
	3H	14.70	16.06	15.07	16.39	16.75	10.16	11.52	10.53	11.85	12.21
	4H	15.36	16.64	15.76	16.99	17.37	10.66	11.94	11.06	12.29	12.67
	6H	15.85	17.03	16.26	17.40	17.79	11.04	12.22	11.45	12.59	12.98
	8H	16.02	17.14	16.44	17.53	17.93	11.16	12.29	11.59	12.68	13.08
	12H	16.12	17.20	16.55	17.58	18.01	11.24	12.32	11.67	12.70	13.13
4H	2H	13.03	14.31	13.43	14.66	15.04	9.59	10.87	9.99	11.22	11.59
	3H	14.97	16.03	15.38	16.43	16.83	11.03	12.09	11.44	12.49	12.89
	4H	15.72	16.67	16.15	17.09	17.53	11.63	12.59	12.06	13.00	13.44
	6H	16.31	17.14	16.77	17.58	18.04	12.12	12.95	12.57	13.39	13.85
	8H	16.52	17.30	16.99	17.74	18.21	12.28	13.06	12.74	13.50	13.97
	12H	16.68	17.37	17.16	17.85	18.32	12.40	13.09	12.88	13.57	14.04
8H	4H	15.74	16.52	16.20	16.96	17.43	11.98	12.76	12.45	13.20	13.67
	6H	16.38	17.02	16.87	17.51	17.99	12.57	13.21	13.07	13.70	14.18
	8H	16.63	17.21	17.14	17.71	18.20	12.79	13.37	13.30	13.88	14.36
	12H	16.83	17.34	17.34	17.83	18.40	12.97	13.48	13.48	13.97	14.54
12H	4H	15.73	16.42	16.21	16.90	17.37	12.03	12.72	12.51	13.20	13.67
	6H	16.36	16.94	16.87	17.45	17.93	12.63	13.21	13.15	13.72	14.21
	8H	16.64	17.15	17.15	17.65	18.21	12.91	13.42	13.42	13.91	14.47