

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P930988

Luminaire Tested: DFN2DS-SQ3F0-080DS935-RLL

Issue Date: 11/20/2024

Test Information

Test Method: LM-79-2019
Report Number: P930988
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P333882)
Test Lab: INNOVATION CENTER
Issue Date: 11/20/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DS-SQ3F0-080DS935-RLL
Description: 3 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5848.0 lumens
Efficiency: N/A
Efficacy: 71.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular (W 3.06' x L: 3.06' x H: 0')
CIE Type: Direct

Input Watts (W): 82
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9952
Total Harmonic Distortion (THDi): 0.069
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P930988

CATALOG NUMBER: DFN2DS-SQ3F0-080DS935-RLL

Luminous Intensity Polar Plot

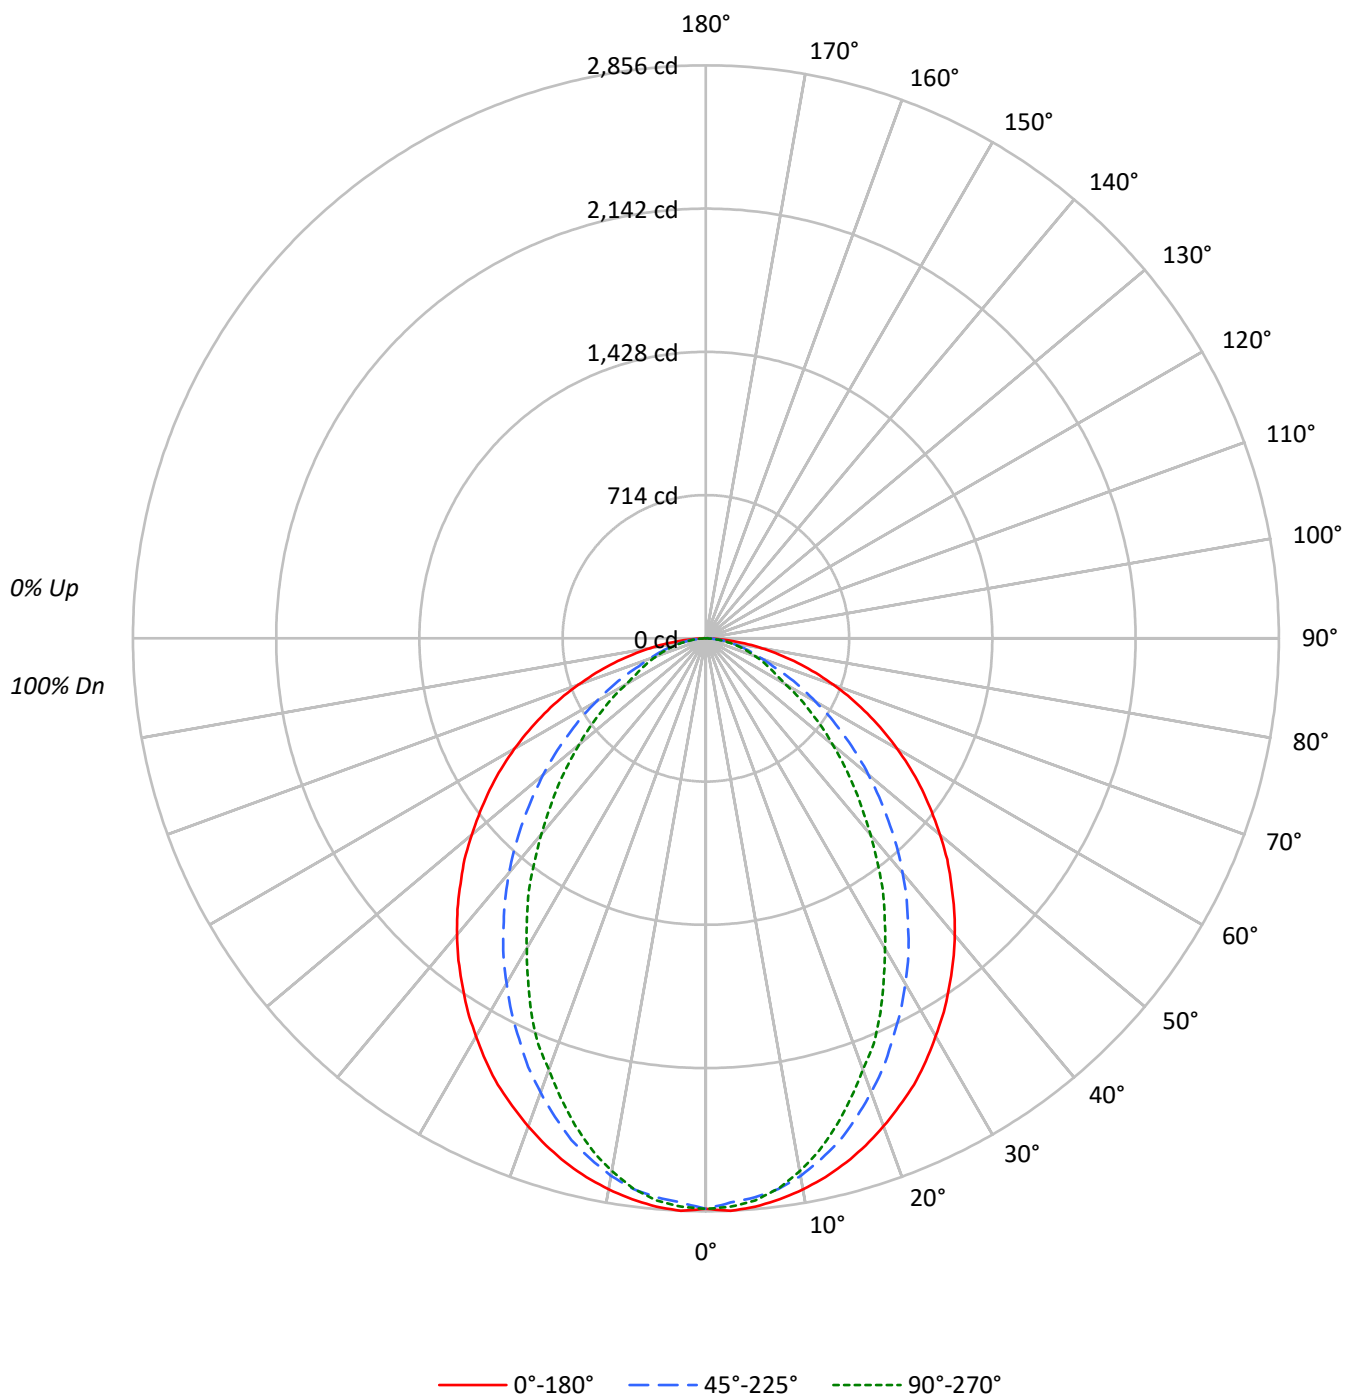

TEST NUMBER: P930988

CATALOG NUMBER: DFN2DS-SQ3F0-080DS935-RLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	110	106	102	98	107	103	100	97	99	96	94		95	93	91		92
2	101	94	87	82	98	92	86	81	88	83	79		85	81	78		82
3	93	83	76	70	90	82	75	69	79	73	68		76	71	67		74
4	86	75	66	60	83	73	66	60	71	64	59		69	63	58		66
5	79	67	59	53	77	66	58	52	64	57	52		62	56	51		60
6	74	61	53	47	72	60	52	46	58	51	46		57	50	46		55
7	68	56	47	42	67	55	47	42	53	46	41		52	46	41		51
8	64	51	43	38	62	51	43	37	49	42	37		48	42	37		47
9	60	47	39	34	59	47	39	34	46	39	34		44	38	34		44
10	56	44	36	31	55	43	36	31	42	36	31		41	35	31		41

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3258	3258	3258
5°	3271	3217	3235
10°	3245	3165	3138
15°	3208	3071	2982
20°	3157	2937	2789
25°	3104	2785	2603
30°	3030	2628	2363
35°	2959	2459	2152
40°	2887	2282	1909
45°	2802	2085	1689
50°	2716	1885	1473
55°	2627	1671	1265
60°	2524	1445	1050
65°	2407	1214	955
70°	2267	1000	879
75°	2096	912	821
80°	1850	814	748
85°	1454	642	642

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2802 cd/sqm

TEST NUMBER: P930988

CATALOG NUMBER: DFN2DS-SQ3F0-080DS935-RLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	266.5	4.6
10°-20°	731.6	12.5
20°-30°	1027.1	17.6
30°-40°	1119.6	19.1
40°-50°	1029.1	17.6
50°-60°	808.2	13.8
60°-70°	526.0	9.0
70°-80°	270.8	4.6
80°-90°	69.1	1.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2025.2	34.6
0°-40°	3144.8	53.8
0°-60°	4982.0	85.2
0°-90°	5848.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5848.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2844	2844	2844	2844	2844	
5°	2844	2831	2797	2820	2813	270
15°	2704	2676	2589	2540	2514	762
25°	2455	2373	2203	2097	2059	1129
35°	2115	1984	1758	1596	1539	1324
45°	1729	1557	1287	1104	1042	1335
55°	1315	1114	836	682	633	1175
65°	888	679	448	360	352	880
75°	473	293	206	188	185	501
85°	111	56	49	49	49	133
90°	0	0	0	0	0	

TEST NUMBER: P930988

CATALOG NUMBER: DFN2DS-SQ3F0-080DS935-RLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2843.5	2843.5	2843.5	2843.5	2843.5
2.5°	2856.3	2843.5	2815.1	2841.0	2835.8
5°	2843.5	2830.7	2797.1	2820.3	2812.6
7.5°	2820.3	2805.0	2768.9	2779.1	2766.2
10°	2789.4	2771.4	2720.1	2712.2	2696.9
12.5°	2751.0	2727.7	2658.1	2642.8	2614.4
15°	2704.5	2676.1	2588.8	2539.9	2514.2
17.5°	2650.4	2609.2	2501.1	2444.6	2403.4
20°	2588.8	2537.2	2408.6	2344.4	2287.6
22.5°	2521.9	2462.6	2313.3	2225.9	2187.4
25°	2455.0	2372.6	2202.7	2097.4	2058.6
27.5°	2375.2	2287.6	2099.8	1978.9	1919.6
30°	2290.4	2192.3	1986.5	1855.4	1785.8
32.5°	2207.9	2089.5	1878.7	1724.1	1659.7
35°	2115.3	1984.0	1757.7	1595.6	1538.7
37.5°	2025.2	1883.6	1644.4	1466.6	1402.5
40°	1930.0	1775.7	1525.9	1343.2	1276.3
42.5°	1832.2	1667.6	1407.6	1217.2	1152.9
45°	1729.3	1556.8	1286.7	1103.8	1042.1
47.5°	1631.6	1448.9	1171.0	988.1	931.6
50°	1523.4	1340.8	1057.7	880.0	826.1
52.5°	1417.8	1224.7	949.5	779.8	730.9
55°	1314.9	1114.2	836.3	682.0	633.1
57.5°	1209.5	1003.6	736.1	591.9	550.7
60°	1101.3	895.5	630.4	499.3	458.1
62.5°	996.0	790.1	540.3	416.9	396.5
65°	887.9	679.2	447.7	360.4	352.4
67.5°	784.9	576.4	360.4	316.4	308.8
70°	676.8	476.2	298.4	272.7	262.4
72.5°	573.9	383.3	249.6	229.1	223.9
75°	473.4	293.3	205.9	187.8	185.4
77.5°	373.2	208.3	162.2	151.8	146.6
80°	280.4	149.4	123.4	113.3	113.3
82.5°	195.5	100.4	84.9	79.7	79.7
85°	110.6	56.5	48.8	48.8	48.8
87.5°	41.2	20.5	20.5	18.1	18.1
90°	0.0	0.0	0.0	0.0	0.0

TEST NUMBER: P930988

CATALOG NUMBER: DFN2DS-SQ3F0-080DS935-RLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	15.34	16.86	15.70	17.17	17.49	11.30	12.82	11.66	13.13	13.45
	3H	17.10	18.47	17.48	18.80	19.16	12.56	13.93	12.94	14.26	14.62
	4H	17.77	19.05	18.17	19.40	19.78	13.07	14.35	13.47	14.70	15.07
	6H	18.26	19.44	18.67	19.81	20.20	13.45	14.63	13.86	15.00	15.39
	8H	18.42	19.55	18.85	19.94	20.34	13.57	14.70	14.00	15.09	15.49
	12H	18.53	19.61	18.96	19.99	20.42	13.65	14.73	14.08	15.11	15.54
4H	2H	15.44	16.72	15.84	17.07	17.45	11.99	13.27	12.39	13.62	14.00
	3H	17.38	18.44	17.79	18.84	19.24	13.44	14.50	13.85	14.90	15.30
	4H	18.13	19.08	18.56	19.50	19.94	14.04	14.99	14.47	15.41	15.85
	6H	18.72	19.55	19.17	19.99	20.45	14.53	15.36	14.98	15.80	16.26
	8H	18.93	19.71	19.39	20.15	20.62	14.69	15.46	15.15	15.91	16.38
	12H	19.08	19.78	19.57	20.26	20.73	14.80	15.50	15.29	15.98	16.45
8H	4H	18.15	18.93	18.61	19.37	19.84	14.39	15.17	14.85	15.61	16.08
	6H	18.79	19.43	19.28	19.92	20.40	14.98	15.62	15.47	16.11	16.59
	8H	19.04	19.61	19.55	20.12	20.61	15.20	15.77	15.71	16.28	16.77
	12H	19.24	19.75	19.75	20.24	20.81	15.38	15.89	15.89	16.38	16.94
12H	4H	18.13	18.83	18.62	19.31	19.78	14.43	15.13	14.92	15.61	16.08
	6H	18.77	19.35	19.28	19.86	20.34	15.04	15.62	15.55	16.13	16.62
	8H	19.05	19.56	19.56	20.05	20.62	15.31	15.82	15.82	16.32	16.88