

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P930954

Luminaire Tested: DFN2DS-SQ3F0-060DS940-RLL

Issue Date: 11/20/2024

Test Information

Test Method: LM-79-2019
Report Number: P930954
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P333882)
Test Lab: INNOVATION CENTER
Issue Date: 11/20/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DS-SQ3F0-060DS940-RLL
Description: 3 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4549.2 lumens
Efficiency: N/A
Efficacy: 76.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular (W 3.06' x L: 3.06' x H: 0')
CIE Type: Direct

Input Watts (W): 59.2
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9971
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P930954

CATALOG NUMBER: DFN2DS-SQ3F0-060DS940-RLL

Luminous Intensity Polar Plot

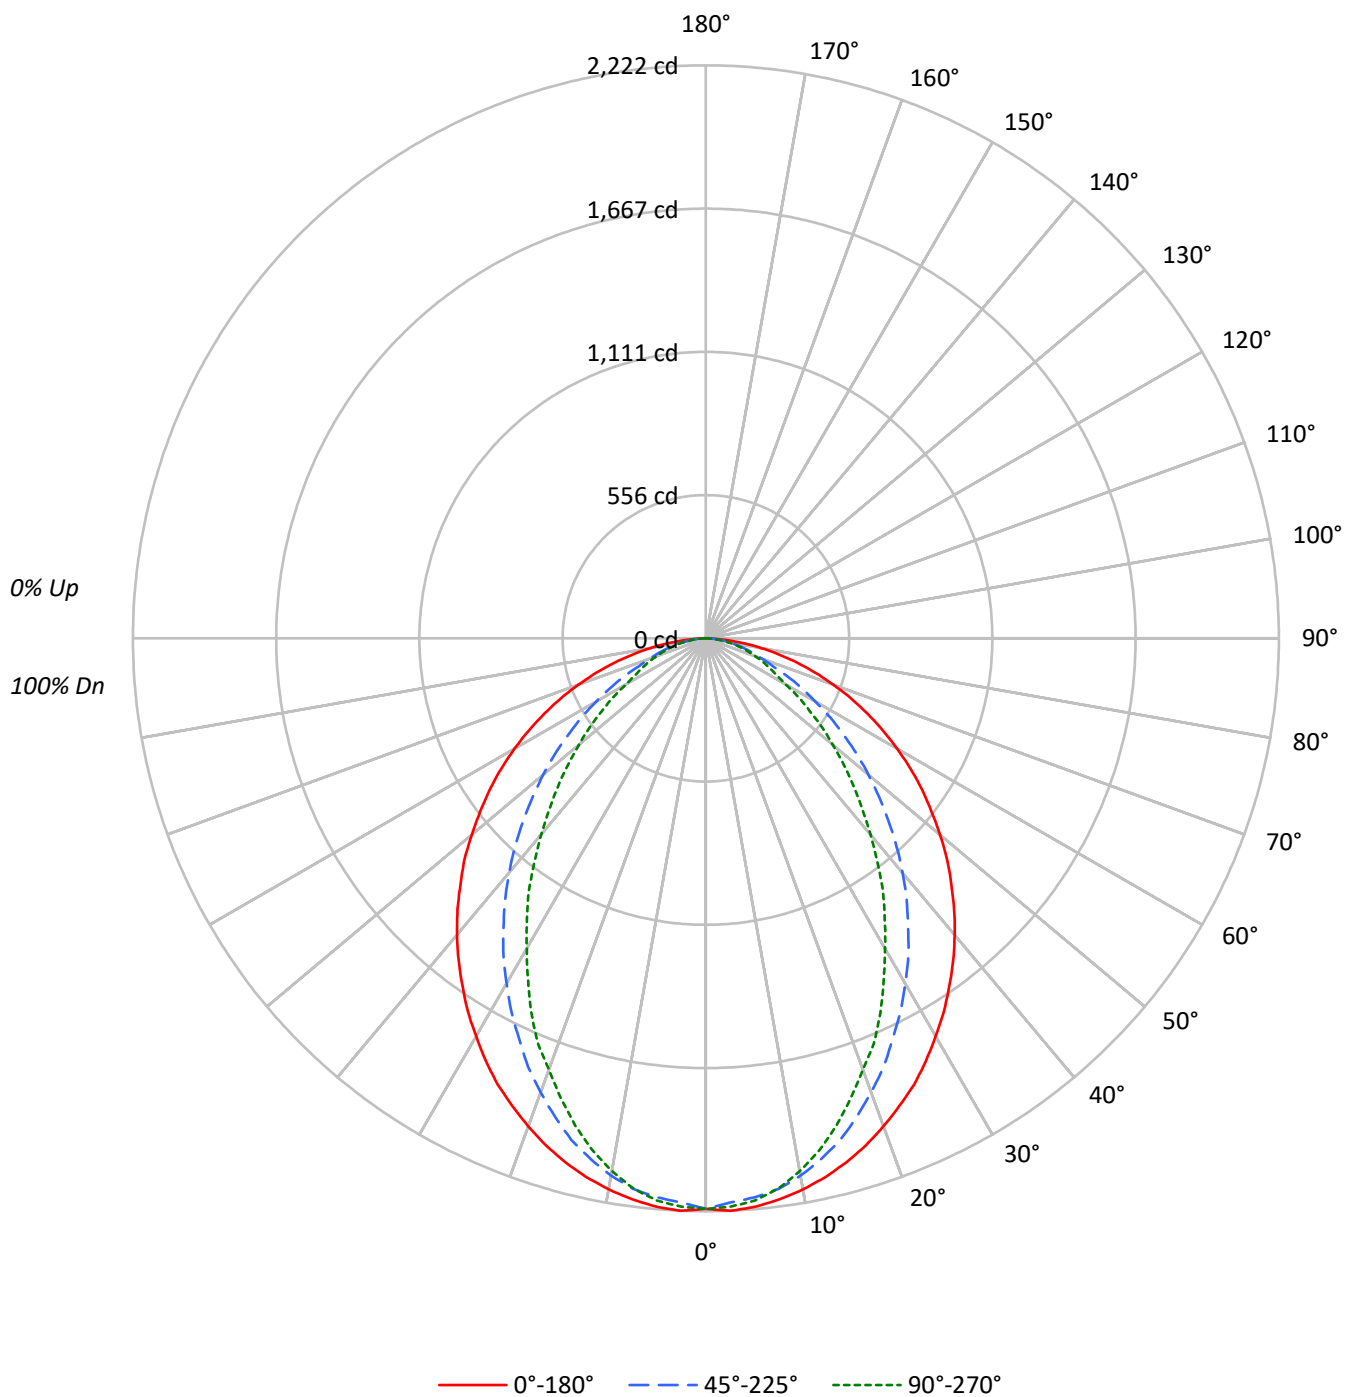

TEST NUMBER: P930954

CATALOG NUMBER: DFN2DS-SQ3F0-060DS940-RLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	110	106	102	98	107	103	100	97	99	96	94		95	93	91		92
2	101	94	87	82	98	92	86	81	88	83	79		85	81	78		82
3	93	83	76	70	90	82	75	69	79	73	68		76	71	67		74
4	86	75	66	60	83	73	66	60	71	64	59		69	63	58		66
5	79	67	59	53	77	66	58	52	64	57	52		62	56	51		60
6	74	61	53	47	72	60	52	46	58	51	46		57	50	46		55
7	68	56	47	42	67	55	47	42	53	46	41		52	46	41		51
8	64	51	43	38	62	51	43	37	49	42	37		48	42	37		47
9	60	47	39	34	59	47	39	34	46	39	34		44	38	34		44
10	56	44	36	31	55	43	36	31	42	36	31		41	35	31		41

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2535	2535	2535
5°	2544	2503	2517
10°	2525	2462	2441
15°	2496	2389	2320
20°	2455	2285	2170
25°	2414	2166	2025
30°	2357	2045	1838
35°	2302	1913	1674
40°	2246	1775	1485
45°	2180	1622	1314
50°	2113	1467	1146
55°	2043	1299	984
60°	1963	1124	817
65°	1873	944	743
70°	1764	778	684
75°	1630	709	638
80°	1439	633	581
85°	1131	500	500

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2180 cd/sqm

TEST NUMBER: P930954

CATALOG NUMBER: DFN2DS-SQ3F0-060DS940-RLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	207.3	4.6
10°-20°	569.1	12.5
20°-30°	799.0	17.6
30°-40°	871.0	19.1
40°-50°	800.5	17.6
50°-60°	628.7	13.8
60°-70°	409.2	9.0
70°-80°	210.6	4.6
80°-90°	53.8	1.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1575.4	34.6
0°-40°	2446.4	53.8
0°-60°	3875.6	85.2
0°-90°	4549.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4549.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2212	2212	2212	2212	2212	
5°	2212	2202	2176	2194	2188	210
15°	2104	2082	2014	1976	1956	593
25°	1910	1846	1714	1632	1601	878
35°	1646	1543	1367	1241	1197	1030
45°	1345	1211	1001	859	811	1039
55°	1023	867	650	531	492	914
65°	691	528	348	280	274	685
75°	368	228	160	146	144	390
85°	86	44	38	38	38	103
90°	0	0	0	0	0	

TEST NUMBER: P930954

CATALOG NUMBER: DFN2DS-SQ3F0-060DS940-RLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2212.0	2212.0	2212.0	2212.0	2212.0
2.5°	2222.0	2212.0	2189.9	2210.0	2206.0
5°	2212.0	2202.0	2175.9	2194.0	2188.0
7.5°	2194.0	2182.0	2154.0	2161.9	2151.9
10°	2169.9	2155.9	2116.0	2109.8	2097.9
12.5°	2140.0	2121.9	2067.7	2055.9	2033.8
15°	2103.9	2081.7	2013.8	1975.8	1955.8
17.5°	2061.9	2029.7	1945.6	1901.7	1869.6
20°	2013.8	1973.6	1873.6	1823.7	1779.5
22.5°	1961.8	1915.7	1799.5	1731.6	1701.6
25°	1909.8	1845.6	1713.5	1631.6	1601.4
27.5°	1847.8	1779.5	1633.4	1539.3	1493.3
30°	1781.7	1705.4	1545.3	1443.3	1389.2
32.5°	1717.5	1625.4	1461.5	1341.2	1291.1
35°	1645.6	1543.4	1367.3	1241.1	1197.0
37.5°	1575.5	1465.2	1279.2	1141.0	1091.0
40°	1501.3	1381.4	1187.0	1044.9	992.9
42.5°	1425.3	1297.2	1095.0	946.8	896.9
45°	1345.2	1211.0	1001.0	858.6	810.6
47.5°	1269.2	1127.1	910.9	768.6	724.7
50°	1185.1	1043.0	822.8	684.5	642.7
52.5°	1102.9	952.7	738.7	606.6	568.6
55°	1022.9	866.8	650.5	530.6	492.5
57.5°	940.9	780.7	572.6	460.5	428.3
60°	856.8	696.7	490.4	388.5	356.4
62.5°	774.8	614.7	420.3	324.3	308.4
65°	690.7	528.4	348.3	280.4	274.2
67.5°	610.6	448.3	280.4	246.2	240.2
70°	526.5	370.4	232.1	212.2	204.1
72.5°	446.4	298.2	194.1	178.2	174.1
75°	368.3	228.1	160.1	146.1	144.2
77.5°	290.3	162.1	126.1	118.1	114.1
80°	218.1	116.1	96.0	88.1	88.1
82.5°	152.1	78.1	66.0	62.0	62.0
85°	86.0	44.0	38.0	38.0	38.0
87.5°	32.1	16.0	16.0	14.0	14.0
90°	0.0	0.0	0.0	0.0	0.0

TEST NUMBER: P930954

CATALOG NUMBER: DFN2DS-SQ3F0-060DS940-RLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	14.47	15.99	14.83	16.30	16.62	10.43	11.95	10.79	12.26	12.58
	3H	16.23	17.60	16.61	17.92	18.29	11.69	13.06	12.07	13.39	13.75
	4H	16.90	18.18	17.30	18.53	18.91	12.19	13.47	12.59	13.82	14.20
	6H	17.39	18.57	17.80	18.94	19.33	12.57	13.76	12.99	14.12	14.52
	8H	17.55	18.68	17.98	19.07	19.47	12.70	13.83	13.13	14.22	14.62
	12H	17.65	18.73	18.09	19.12	19.54	12.78	13.86	13.21	14.24	14.67
4H	2H	14.57	15.85	14.97	16.20	16.58	11.12	12.40	11.52	12.75	13.13
	3H	16.50	17.57	16.91	17.97	18.37	12.57	13.63	12.98	14.03	14.43
	4H	17.25	18.21	17.69	18.62	19.06	13.16	14.12	13.60	14.54	14.98
	6H	17.84	18.68	18.30	19.12	19.58	13.65	14.48	14.11	14.93	15.39
	8H	18.06	18.84	18.52	19.28	19.75	13.81	14.59	14.28	15.04	15.50
	12H	18.21	18.91	18.69	19.38	19.86	13.93	14.63	14.41	15.10	15.58
8H	4H	17.28	18.05	17.74	18.50	18.97	13.52	14.30	13.98	14.74	15.21
	6H	17.91	18.56	18.41	19.05	19.53	14.10	14.75	14.60	15.24	15.72
	8H	18.16	18.74	18.68	19.25	19.74	14.33	14.90	14.84	15.41	15.90
	12H	18.37	18.88	18.88	19.37	19.93	14.50	15.01	15.01	15.51	16.07
12H	4H	17.26	17.96	17.74	18.43	18.91	13.56	14.26	14.04	14.73	15.21
	6H	17.89	18.47	18.41	18.98	19.47	14.17	14.75	14.68	15.26	15.74
	8H	18.18	18.69	18.69	19.18	19.75	14.44	14.95	14.95	15.44	16.01