

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P931292

Luminaire Tested: DFN2DS-TR2F0-050DS930-RLL

Issue Date: 11/20/2024

Test Information

Test Method: LM-79-2019
Report Number: P931292
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P333882)
Test Lab: INNOVATION CENTER
Issue Date: 11/20/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DS-TR2F0-050DS930-RLL
Description: 2 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 3463.8 lumens
Efficiency: N/A
Efficacy: 69.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular (W 2.36' x L: 2.04' x H: 0')
CIE Type: Direct

Input Watts (W): 49.9
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9789
Total Harmonic Distortion (THDi): 0.074
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P931292

CATALOG NUMBER: DFN2DS-TR2F0-050DS930-RLL

Luminous Intensity Polar Plot

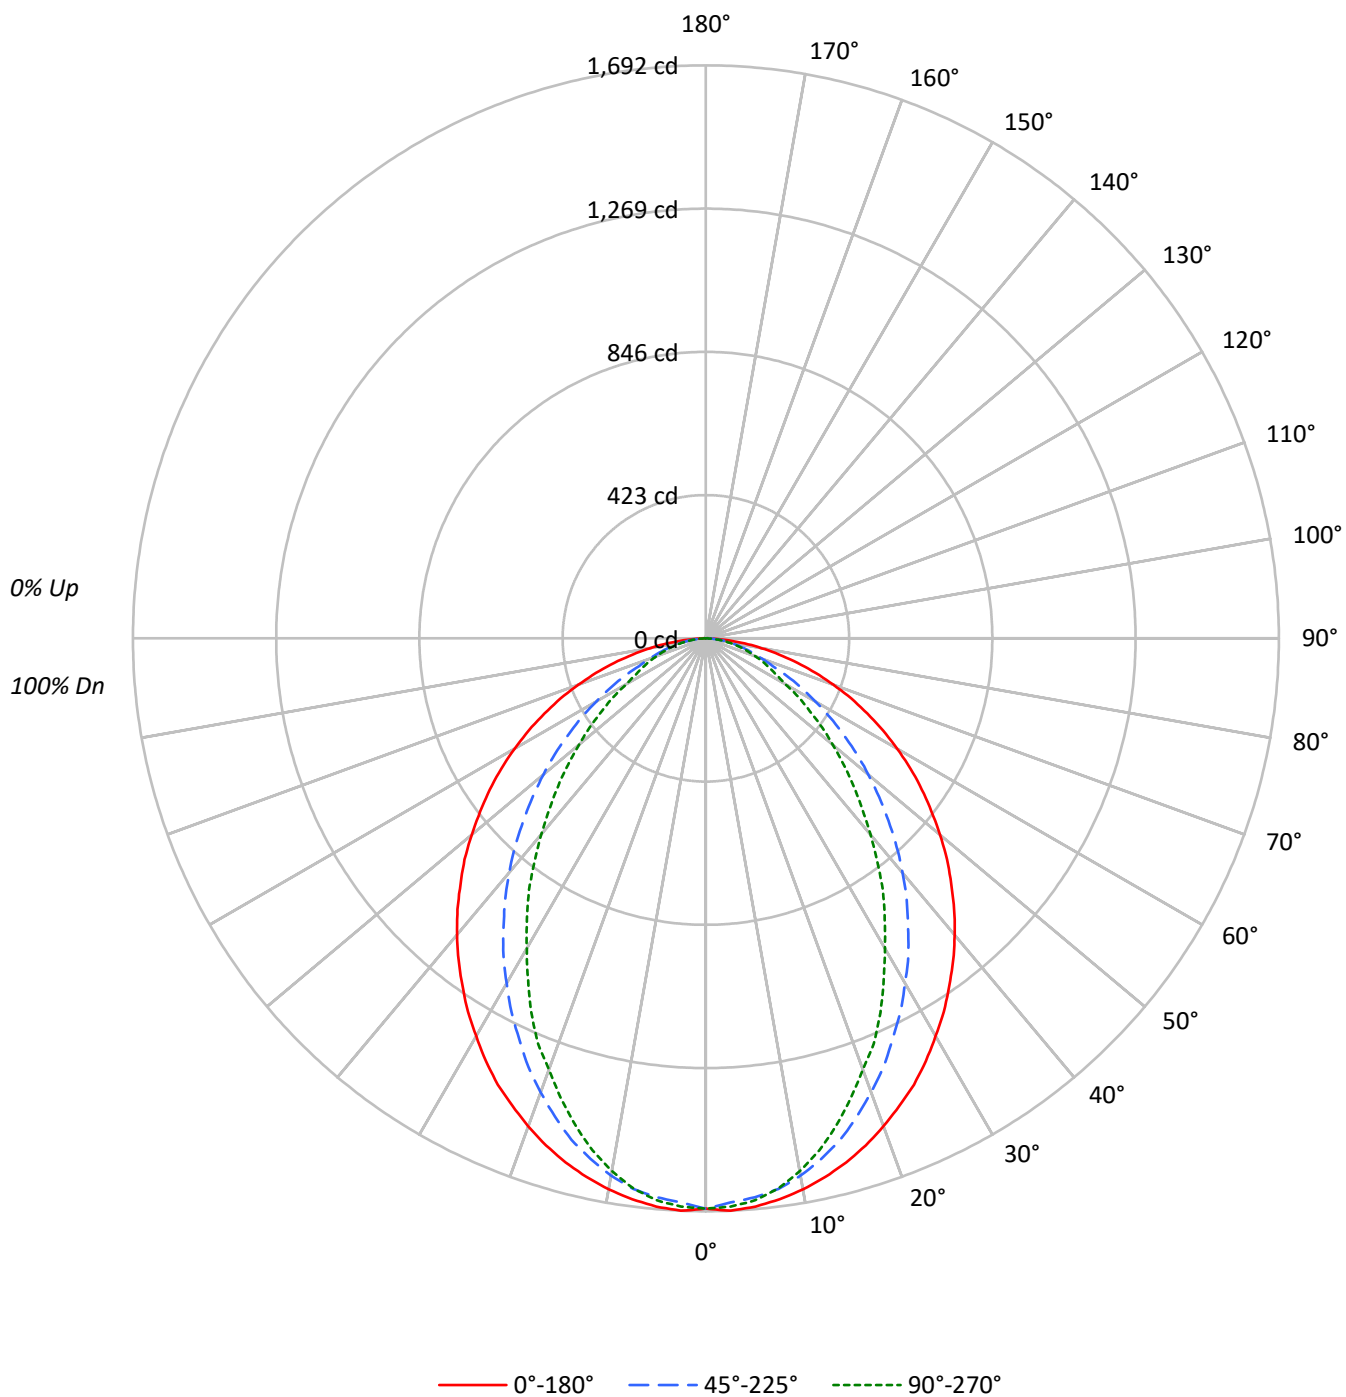

TEST NUMBER: P931292

CATALOG NUMBER: DFN2DS-TR2F0-050DS930-RLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	110	106	102	98	107	103	100	97	99	96	94		95	93	91		92
2	101	94	87	82	98	92	86	81	88	83	79		85	81	78		82
3	93	83	76	70	90	82	75	69	79	73	68		76	71	67		74
4	86	75	66	60	83	73	66	60	71	64	59		69	63	58		66
5	79	67	59	53	77	66	58	52	64	57	52		62	56	51		60
6	74	61	53	47	72	60	52	46	58	51	46		57	50	46		55
7	68	56	47	42	67	55	47	42	53	46	41		52	46	41		51
8	64	51	43	38	62	51	43	37	49	42	37		48	42	37		47
9	60	47	39	34	59	47	39	34	46	39	34		44	38	34		44
10	56	44	36	31	55	43	36	31	42	36	31		41	35	31		41

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3756	3756	3756
5°	3771	3709	3730
10°	3742	3649	3618
15°	3699	3541	3439
20°	3639	3386	3216
25°	3578	3211	3000
30°	3494	3030	2724
35°	3411	2835	2482
40°	3328	2632	2201
45°	3231	2404	1947
50°	3131	2174	1698
55°	3028	1926	1458
60°	2910	1666	1210
65°	2775	1400	1102
70°	2614	1153	1013
75°	2416	1051	946
80°	2133	939	862
85°	1676	740	740

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 3231 cd/sqm

TEST NUMBER: P931292

CATALOG NUMBER: DFN2DS-TR2F0-050DS930-RLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	157.8	4.6
10°-20°	433.3	12.5
20°-30°	608.4	17.6
30°-40°	663.2	19.1
40°-50°	609.5	17.6
50°-60°	478.7	13.8
60°-70°	311.6	9.0
70°-80°	160.4	4.6
80°-90°	40.9	1.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1199.5	34.6
0°-40°	1862.7	53.8
0°-60°	2950.9	85.2
0°-90°	3463.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3463.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1684	1684	1684	1684	1684	
5°	1684	1677	1657	1670	1666	160
15°	1602	1585	1533	1504	1489	451
25°	1454	1405	1305	1242	1219	669
35°	1253	1175	1041	945	911	784
45°	1024	922	762	654	617	791
55°	779	660	495	404	375	696
65°	526	402	265	213	209	521
75°	280	174	122	111	110	297
85°	66	34	29	29	29	79
90°	0	0	0	0	0	

TEST NUMBER: P931292

CATALOG NUMBER: DFN2DS-TR2F0-050DS930-RLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1684.2	1684.2	1684.2	1684.2	1684.2
2.5°	1691.8	1684.2	1667.4	1682.7	1679.6
5°	1684.2	1676.6	1656.7	1670.4	1665.9
7.5°	1670.4	1661.4	1640.0	1646.1	1638.4
10°	1652.2	1641.5	1611.1	1606.4	1597.3
12.5°	1629.3	1615.7	1574.4	1565.4	1548.5
15°	1601.9	1585.1	1533.3	1504.4	1489.2
17.5°	1569.9	1545.5	1481.4	1447.9	1423.5
20°	1533.3	1502.8	1426.6	1388.6	1354.9
22.5°	1493.7	1458.6	1370.2	1318.4	1295.6
25°	1454.0	1405.2	1304.7	1242.2	1219.2
27.5°	1406.9	1354.9	1243.7	1172.1	1137.0
30°	1356.6	1298.5	1176.6	1098.9	1057.7
32.5°	1307.7	1237.6	1112.7	1021.2	983.1
35°	1252.9	1175.1	1041.1	945.0	911.4
37.5°	1199.5	1115.7	974.0	868.7	830.7
40°	1143.1	1051.8	903.8	795.6	756.0
42.5°	1085.3	987.7	833.7	720.9	682.9
45°	1024.3	922.1	762.1	653.8	617.2
47.5°	966.3	858.2	693.6	585.3	551.8
50°	902.4	794.1	626.5	521.2	489.3
52.5°	839.8	725.4	562.4	461.9	432.9
55°	778.8	659.9	495.3	403.9	375.0
57.5°	716.4	594.5	435.9	350.6	326.2
60°	652.3	530.4	373.4	295.8	271.3
62.5°	589.9	468.0	320.1	246.9	234.8
65°	525.8	402.4	265.2	213.4	208.8
67.5°	464.9	341.4	213.4	187.4	182.9
70°	400.9	282.0	176.8	161.5	155.4
72.5°	339.9	227.1	147.8	135.7	132.6
75°	280.4	173.7	121.9	111.2	109.8
77.5°	221.0	123.4	96.1	89.9	86.8
80°	166.1	88.4	73.1	67.1	67.1
82.5°	115.8	59.5	50.3	47.2	47.2
85°	65.5	33.5	28.9	28.9	28.9
87.5°	24.4	12.1	12.1	10.7	10.7
90°	0.0	0.0	0.0	0.0	0.0

TEST NUMBER: P931292

CATALOG NUMBER: DFN2DS-TR2F0-050DS930-RLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	15.83	17.36	16.20	17.67	17.98	11.79	13.32	12.16	13.63	13.94
	3H	17.60	18.96	17.98	19.29	19.65	13.06	14.42	13.44	14.75	15.11
	4H	18.26	19.55	18.66	19.89	20.27	13.56	14.84	13.96	15.19	15.57
	6H	18.75	19.94	19.17	20.30	20.70	13.94	15.12	14.35	15.49	15.88
	8H	18.92	20.05	19.35	20.44	20.84	14.07	15.19	14.49	15.58	15.98
	12H	19.02	20.10	19.45	20.48	20.91	14.15	15.22	14.58	15.61	16.04
4H	2H	15.94	17.22	16.34	17.57	17.95	12.49	13.77	12.89	14.12	14.50
	3H	17.87	18.93	18.28	19.33	19.73	13.93	15.00	14.34	15.39	15.80
	4H	18.62	19.58	19.05	19.99	20.43	14.53	15.49	14.96	15.90	16.34
	6H	19.21	20.04	19.67	20.49	20.95	15.02	15.85	15.48	16.29	16.75
	8H	19.43	20.20	19.89	20.65	21.11	15.18	15.96	15.64	16.40	16.87
	12H	19.58	20.27	20.06	20.75	21.22	15.30	15.99	15.78	16.47	16.94
8H	4H	18.64	19.42	19.11	19.87	20.33	14.89	15.66	15.35	16.11	16.57
	6H	19.28	19.92	19.78	20.42	20.89	15.47	16.11	15.97	16.61	17.08
	8H	19.53	20.11	20.05	20.62	21.11	15.69	16.27	16.21	16.78	17.27
	12H	19.74	20.25	20.25	20.74	21.30	15.87	16.38	16.38	16.87	17.44
12H	4H	18.63	19.32	19.11	19.80	20.27	14.93	15.62	15.41	16.10	16.57
	6H	19.26	19.84	19.78	20.35	20.84	15.53	16.11	16.05	16.62	17.11
	8H	19.55	20.06	20.06	20.55	21.11	15.81	16.32	16.32	16.81	17.37