

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P931474

Luminaire Tested: DFN2DS-TR4F0-050DS935-RLL

Issue Date: 11/20/2024

Test Information

Test Method: LM-79-2019
Report Number: P931474
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P333882)
Test Lab: INNOVATION CENTER
Issue Date: 11/20/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DS-TR4F0-050DS935-RLL
Description: 4 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 3655.0 lumens
Efficiency: N/A
Efficacy: 75.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular (W 3.96' x L: 3.43' x H: 0')
CIE Type: Direct

Input Watts (W): 48.2
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.996
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P931474

CATALOG NUMBER: DFN2DS-TR4F0-050DS935-RLL

Luminous Intensity Polar Plot

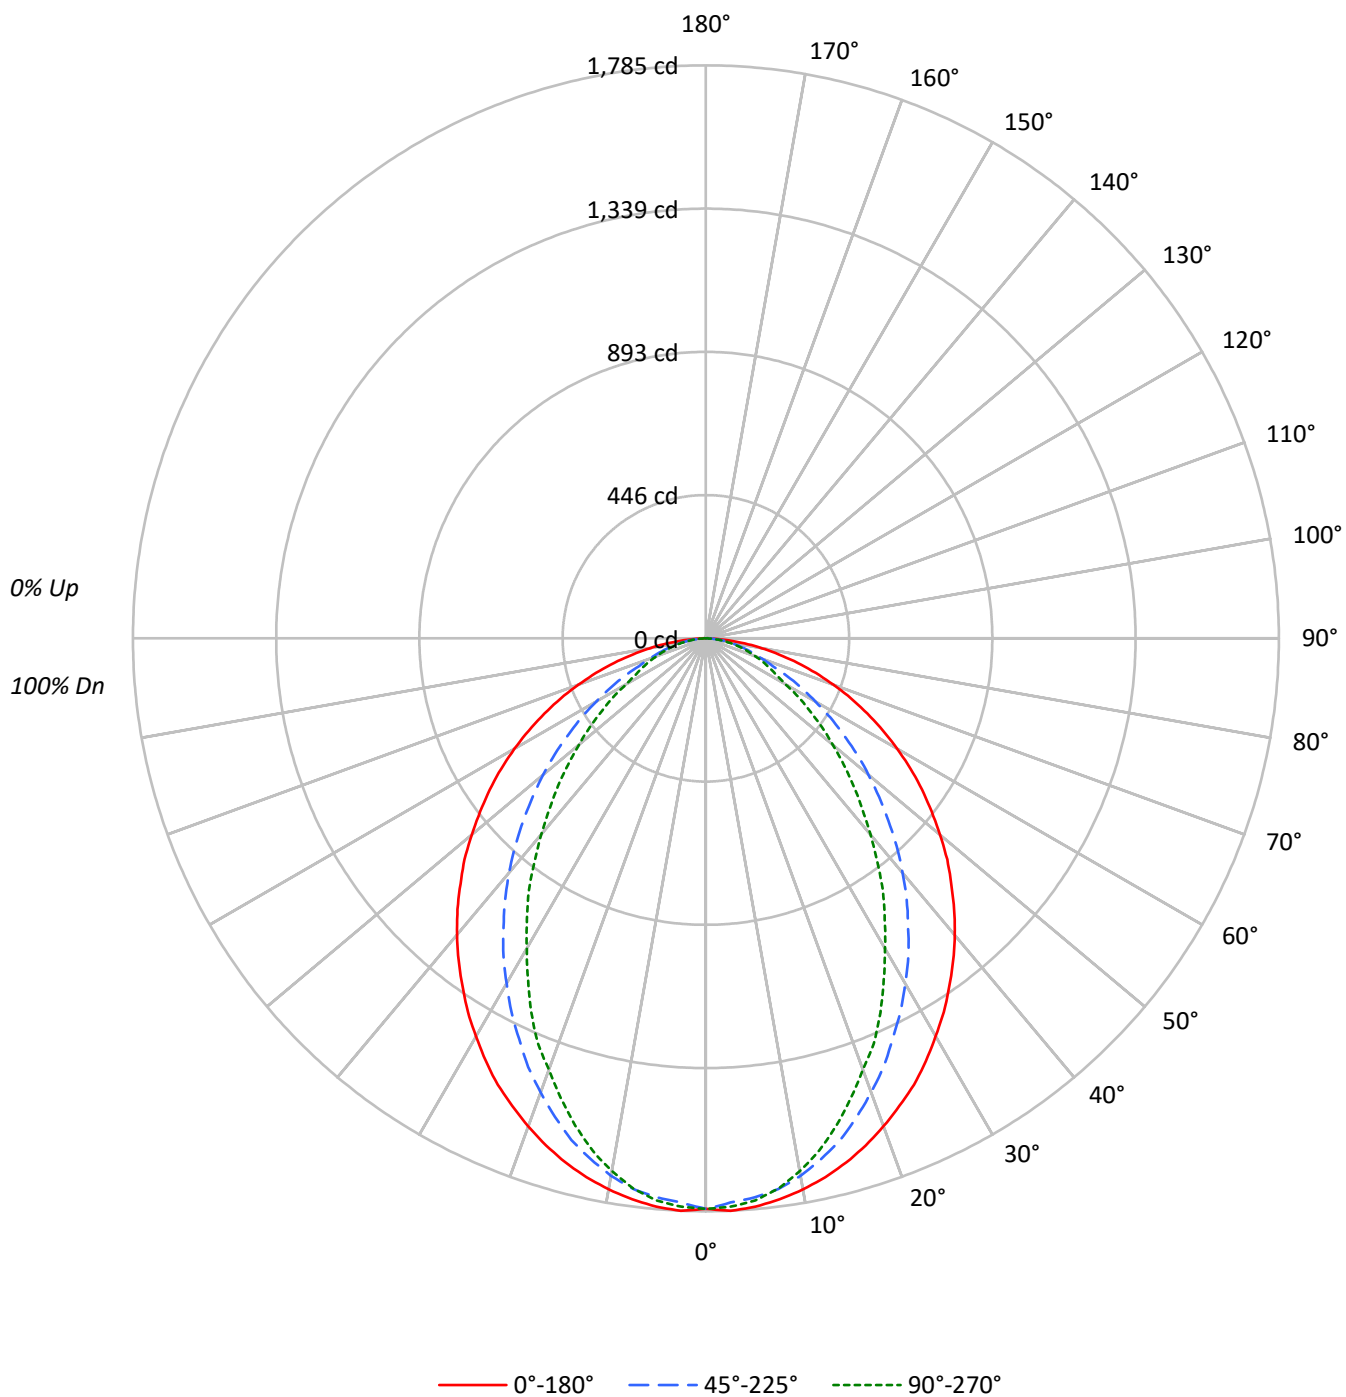

TEST NUMBER: P931474

CATALOG NUMBER: DFN2DS-TR4F0-050DS935-RLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	110	106	102	98	107	103	100	97	99	96	94		95	93	91		92
2	101	94	87	82	98	92	86	81	88	83	79		85	81	78		82
3	93	83	76	70	90	82	75	69	79	73	68		76	71	67		74
4	86	75	66	60	83	73	66	60	71	64	59		69	63	58		66
5	79	67	59	53	77	66	58	52	64	57	52		62	56	51		60
6	74	61	53	47	72	60	52	46	58	51	46		57	50	46		55
7	68	56	47	42	67	55	47	42	53	46	41		52	46	41		51
8	64	51	43	38	62	51	43	37	49	42	37		48	42	37		47
9	60	47	39	34	59	47	39	34	46	39	34		44	38	34		44
10	56	44	36	31	55	43	36	31	42	36	31		41	35	31		41

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1412	1412	1412
5°	1417	1394	1402
10°	1406	1371	1360
15°	1390	1331	1292
20°	1368	1273	1209
25°	1345	1207	1128
30°	1313	1139	1024
35°	1282	1065	933
40°	1251	989	827
45°	1214	904	732
50°	1177	817	638
55°	1138	724	548
60°	1094	626	455
65°	1043	526	414
70°	983	433	381
75°	908	395	355
80°	802	353	324
85°	630	278	278

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1214 cd/sqm

TEST NUMBER: P931474

CATALOG NUMBER: DFN2DS-TR4F0-050DS935-RLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	166.6	4.6
10°-20°	457.2	12.5
20°-30°	641.9	17.6
30°-40°	699.8	19.1
40°-50°	643.2	17.6
50°-60°	505.1	13.8
60°-70°	328.8	9.0
70°-80°	169.3	4.6
80°-90°	43.2	1.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1265.8	34.6
0°-40°	1965.5	53.8
0°-60°	3113.8	85.2
0°-90°	3655.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3655.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1777	1777	1777	1777	1777	
5°	1777	1769	1748	1763	1758	169
15°	1690	1673	1618	1588	1571	476
25°	1534	1483	1377	1311	1287	706
35°	1322	1240	1099	997	962	827
45°	1081	973	804	690	651	835
55°	822	696	523	426	396	734
65°	555	425	280	225	220	550
75°	296	183	129	117	116	313
85°	69	35	30	30	30	83
90°	0	0	0	0	0	

TEST NUMBER: P931474

CATALOG NUMBER: DFN2DS-TR4F0-050DS935-RLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1777.2	1777.2	1777.2	1777.2	1777.2
2.5°	1785.2	1777.2	1759.5	1775.6	1772.4
5°	1777.2	1769.2	1748.2	1762.7	1757.9
7.5°	1762.7	1753.1	1730.6	1736.9	1728.9
10°	1743.4	1732.1	1700.0	1695.1	1685.5
12.5°	1719.3	1704.9	1661.3	1651.8	1634.0
15°	1690.3	1672.6	1618.0	1587.5	1571.4
17.5°	1656.5	1630.8	1563.2	1527.9	1502.1
20°	1618.0	1585.8	1505.3	1465.3	1429.8
22.5°	1576.2	1539.1	1445.8	1391.2	1367.1
25°	1534.3	1482.8	1376.7	1310.8	1286.6
27.5°	1484.5	1429.8	1312.4	1236.8	1199.8
30°	1431.5	1370.2	1241.6	1159.6	1116.1
32.5°	1380.0	1305.9	1174.2	1077.6	1037.3
35°	1322.1	1240.0	1098.6	997.2	961.7
37.5°	1265.7	1177.3	1027.8	916.7	876.6
40°	1206.2	1109.8	953.7	839.5	797.7
42.5°	1145.2	1042.2	879.8	760.7	720.6
45°	1080.8	973.0	804.2	689.9	651.3
47.5°	1019.7	905.6	731.9	617.6	582.2
50°	952.2	838.0	661.1	550.0	516.3
52.5°	886.1	765.5	593.5	487.4	456.8
55°	821.8	696.3	522.6	426.2	395.7
57.5°	755.9	627.3	460.0	370.0	344.2
60°	688.3	559.7	394.0	312.1	286.3
62.5°	622.5	493.8	337.7	260.6	247.8
65°	554.9	424.6	279.8	225.2	220.3
67.5°	490.5	360.3	225.2	197.8	193.0
70°	423.0	297.6	186.5	170.5	164.0
72.5°	358.7	239.6	156.0	143.2	139.9
75°	295.9	183.3	128.7	117.4	115.8
77.5°	233.2	130.2	101.4	94.9	91.6
80°	175.3	93.3	77.1	70.8	70.8
82.5°	122.2	62.8	53.1	49.8	49.8
85°	69.1	35.3	30.5	30.5	30.5
87.5°	25.8	12.8	12.8	11.3	11.3
90°	0.0	0.0	0.0	0.0	0.0

TEST NUMBER: P931474

CATALOG NUMBER: DFN2DS-TR4F0-050DS935-RLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.43	13.95	12.80	14.27	14.58	8.39	9.92	8.76	10.23	10.54
	3H	14.20	15.56	14.58	15.89	16.25	9.66	11.02	10.04	11.35	11.71
	4H	14.86	16.15	15.26	16.49	16.87	10.16	11.44	10.56	11.79	12.17
	6H	15.35	16.54	15.77	16.90	17.30	10.54	11.72	10.95	12.09	12.48
	8H	15.52	16.65	15.95	17.04	17.44	10.67	11.79	11.09	12.18	12.58
	12H	15.62	16.70	16.05	17.08	17.51	10.75	11.83	11.18	12.21	12.64
4H	2H	12.54	13.82	12.94	14.17	14.54	9.09	10.37	9.49	10.72	11.10
	3H	14.47	15.53	14.88	15.93	16.33	10.53	11.60	10.94	12.00	12.40
	4H	15.22	16.18	15.65	16.59	17.03	11.13	12.09	11.56	12.50	12.94
	6H	15.81	16.64	16.27	17.09	17.55	11.62	12.45	12.08	12.89	13.35
	8H	16.03	16.80	16.49	17.25	17.71	11.78	12.56	12.25	13.00	13.47
	12H	16.18	16.87	16.66	17.35	17.82	11.90	12.59	12.38	13.07	13.54
8H	4H	15.24	16.02	15.71	16.47	16.93	11.49	12.26	11.95	12.71	13.17
	6H	15.88	16.52	16.38	17.02	17.49	12.07	12.71	12.57	13.21	13.68
	8H	16.13	16.71	16.65	17.22	17.71	12.29	12.87	12.81	13.38	13.87
	12H	16.34	16.85	16.85	17.34	17.90	12.47	12.98	12.98	13.47	14.04
12H	4H	15.23	15.92	15.71	16.40	16.87	11.53	12.22	12.01	12.70	13.17
	6H	15.86	16.44	16.38	16.95	17.44	12.14	12.71	12.65	13.22	13.71
	8H	16.15	16.66	16.66	17.15	17.71	12.41	12.92	12.92	13.41	13.98