

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P931568

Luminaire Tested: DFN2DS-TR4F0-100DS950-RLL

Issue Date: 11/20/2024

Test Information

Test Method: LM-79-2019
Report Number: P931568
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P333882)
Test Lab: INNOVATION CENTER
Issue Date: 11/20/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DS-TR4F0-100DS950-RLL
Description: 4 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8032.5 lumens
Efficiency: N/A
Efficacy: 74.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular (W 3.96' x L: 3.43' x H: 0')
CIE Type: Direct

Input Watts (W): 107.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9972
Total Harmonic Distortion (THDi): 0.128
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P931568

CATALOG NUMBER: DFN2DS-TR4F0-100DS950-RLL

Luminous Intensity Polar Plot

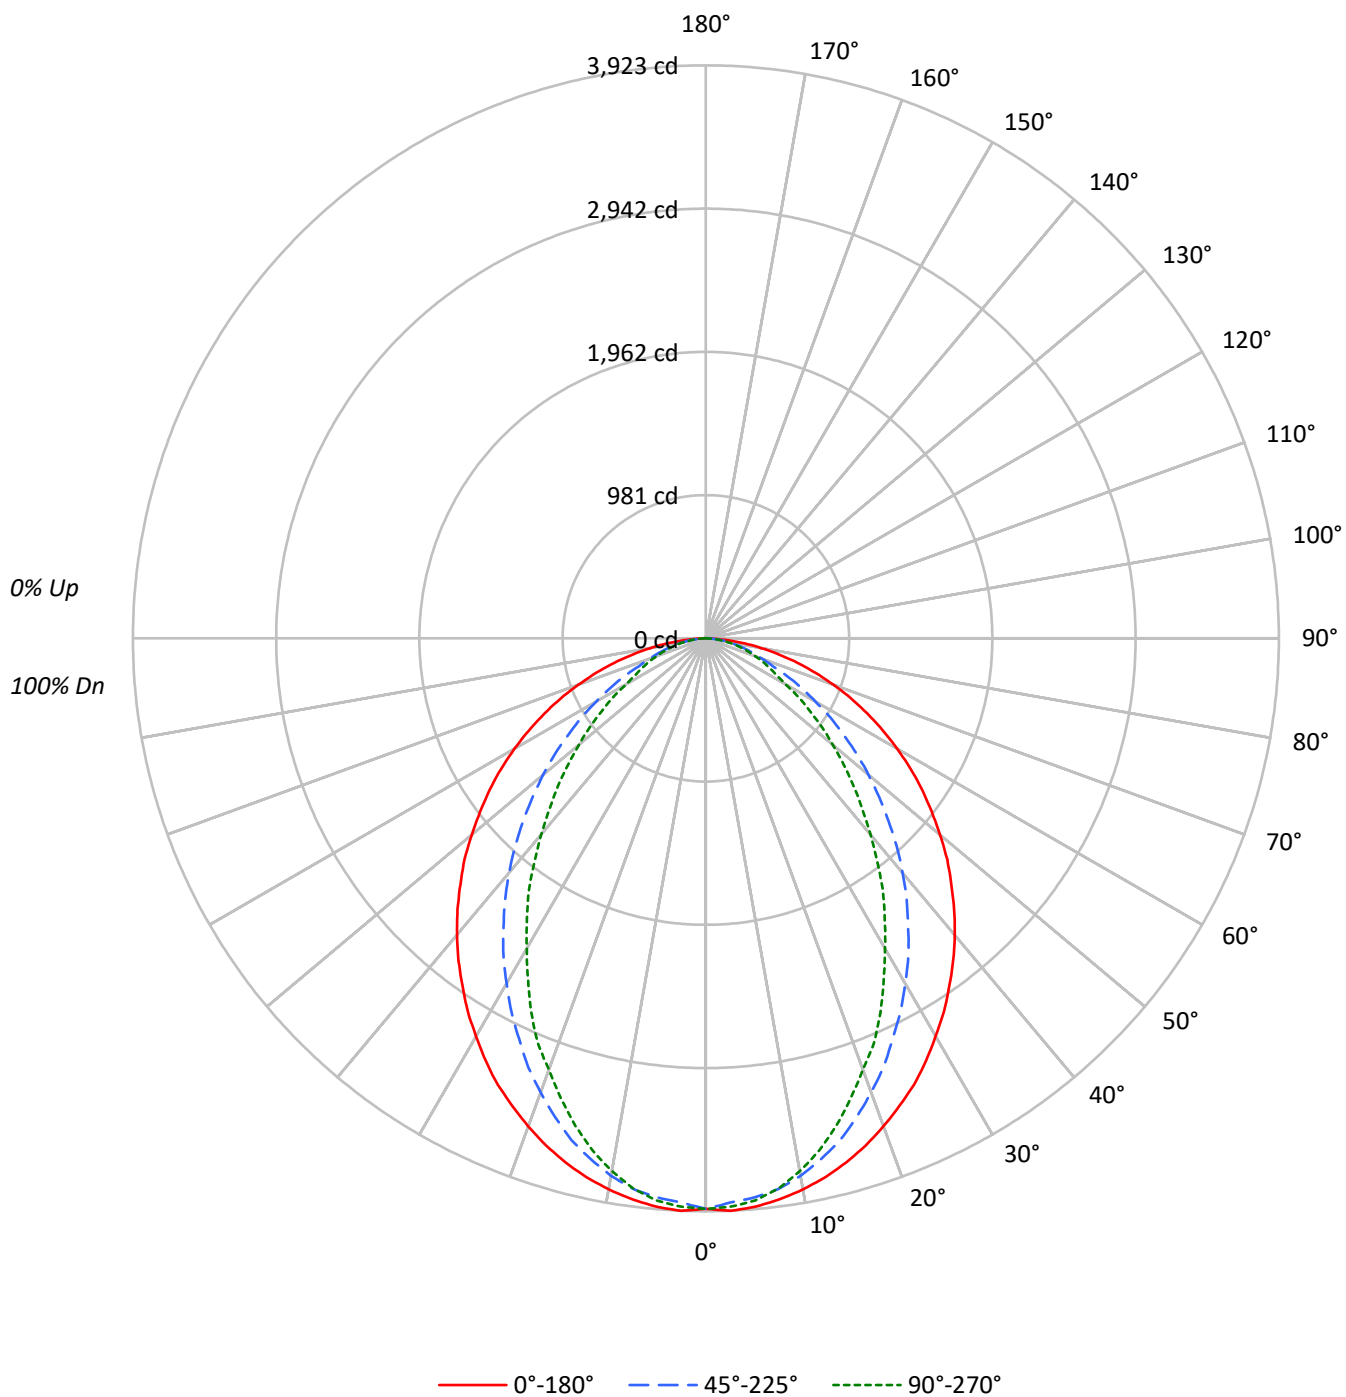

TEST NUMBER: P931568

CATALOG NUMBER: DFN2DS-TR4F0-100DS950-RLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	110	106	102	98	107	103	100	97	99	96	94		95	93	91		92
2	101	94	87	82	98	92	86	81	88	83	79		85	81	78		82
3	93	83	76	70	90	82	75	69	79	73	68		76	71	67		74
4	86	75	66	60	83	73	66	60	71	64	59		69	63	58		66
5	79	67	59	53	77	66	58	52	64	57	52		62	56	51		60
6	74	61	53	47	72	60	52	46	58	51	46		57	50	46		55
7	68	56	47	42	67	55	47	42	53	46	41		52	46	41		51
8	64	51	43	38	62	51	43	37	49	42	37		48	42	37		47
9	60	47	39	34	59	47	39	34	46	39	34		44	38	34		44
10	56	44	36	31	55	43	36	31	42	36	31		41	35	31		41

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3103	3103	3103
5°	3115	3064	3081
10°	3091	3014	2988
15°	3055	2924	2840
20°	3006	2797	2656
25°	2956	2652	2478
30°	2886	2503	2250
35°	2818	2341	2050
40°	2749	2174	1818
45°	2669	1986	1608
50°	2586	1795	1403
55°	2501	1591	1204
60°	2404	1376	1000
65°	2292	1156	910
70°	2159	952	837
75°	1996	868	781
80°	1762	775	712
85°	1385	612	612

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2669 cd/sqm

TEST NUMBER: P931568

CATALOG NUMBER: DFN2DS-TR4F0-100DS950-RLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	366.0	4.6
10°-20°	1004.9	12.5
20°-30°	1410.8	17.6
30°-40°	1537.9	19.1
40°-50°	1413.5	17.6
50°-60°	1110.1	13.8
60°-70°	722.5	9.0
70°-80°	371.9	4.6
80°-90°	95.0	1.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2781.7	34.6
0°-40°	4319.6	53.8
0°-60°	6843.1	85.2
0°-90°	8032.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	8032.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3906	3906	3906	3906	3906	
5°	3906	3888	3842	3874	3863	370
15°	3715	3676	3556	3489	3453	1047
25°	3372	3259	3026	2881	2828	1551
35°	2906	2725	2414	2192	2114	1819
45°	2375	2138	1767	1516	1431	1834
55°	1806	1530	1149	937	870	1614
65°	1220	933	615	495	484	1209
75°	650	403	283	258	255	688
85°	152	78	67	67	67	182
90°	0	0	0	0	0	

TEST NUMBER: P931568

CATALOG NUMBER: DFN2DS-TR4F0-100DS950-RLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3905.7	3905.7	3905.7	3905.7	3905.7
2.5°	3923.3	3905.7	3866.7	3902.3	3895.2
5°	3905.7	3888.0	3841.9	3873.8	3863.3
7.5°	3873.8	3852.8	3803.2	3817.1	3799.6
10°	3831.4	3806.6	3736.2	3725.3	3704.3
12.5°	3778.6	3746.6	3651.0	3630.0	3591.0
15°	3714.8	3675.8	3555.8	3488.7	3453.4
17.5°	3640.5	3583.9	3435.5	3357.8	3301.2
20°	3555.8	3484.9	3308.3	3220.2	3142.1
22.5°	3463.9	3382.5	3177.4	3057.5	3004.5
25°	3372.0	3258.8	3025.5	2880.7	2827.5
27.5°	3262.5	3142.1	2884.1	2718.0	2636.6
30°	3145.9	3011.2	2728.5	2548.6	2452.9
32.5°	3032.7	2869.9	2580.4	2368.2	2279.6
35°	2905.5	2725.2	2414.3	2191.5	2113.5
37.5°	2781.8	2587.1	2258.6	2014.6	1926.4
40°	2650.9	2439.0	2095.9	1845.0	1753.2
42.5°	2516.6	2290.5	1933.6	1671.8	1583.6
45°	2375.3	2138.3	1767.4	1516.2	1431.4
47.5°	2241.1	1990.2	1608.4	1357.1	1279.5
50°	2092.5	1841.6	1452.7	1208.7	1134.8
52.5°	1947.4	1682.3	1304.3	1071.0	1003.9
55°	1806.0	1530.4	1148.6	936.8	869.6
57.5°	1661.3	1378.5	1011.1	813.0	756.4
60°	1512.8	1230.0	865.9	685.9	629.3
62.5°	1368.0	1085.2	742.1	572.7	544.5
65°	1219.5	933.0	615.0	495.0	484.1
67.5°	1078.2	791.6	495.0	434.6	424.1
70°	929.6	654.0	409.8	374.6	360.4
72.5°	788.2	526.5	342.8	314.6	307.5
75°	650.3	402.8	282.7	258.0	254.6
77.5°	512.7	286.1	222.7	208.5	201.4
80°	385.1	205.2	169.5	155.6	155.6
82.5°	268.5	138.0	116.6	109.5	109.5
85°	151.9	77.6	67.1	67.1	67.1
87.5°	56.6	28.2	28.2	24.8	24.8
90°	0.0	0.0	0.0	0.0	0.0

TEST NUMBER: P931568

CATALOG NUMBER: DFN2DS-TR4F0-100DS950-RLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	15.17	16.69	15.53	17.00	17.32	11.13	12.65	11.49	12.96	13.28
	3H	16.93	18.30	17.31	18.63	18.99	12.39	13.76	12.77	14.09	14.45
	4H	17.60	18.88	18.00	19.23	19.61	12.90	14.18	13.30	14.53	14.90
	6H	18.09	19.27	18.50	19.64	20.03	13.28	14.46	13.69	14.83	15.22
	8H	18.25	19.38	18.68	19.77	20.17	13.40	14.53	13.83	14.92	15.32
	12H	18.36	19.44	18.79	19.82	20.25	13.48	14.56	13.91	14.94	15.37
4H	2H	15.27	16.55	15.67	16.90	17.28	11.82	13.11	12.22	13.45	13.83
	3H	17.21	18.27	17.62	18.67	19.07	13.27	14.33	13.68	14.73	15.13
	4H	17.96	18.91	18.39	19.33	19.77	13.87	14.82	14.30	15.24	15.68
	6H	18.55	19.38	19.00	19.82	20.28	14.36	15.19	14.81	15.63	16.09
	8H	18.76	19.54	19.23	19.98	20.45	14.52	15.29	14.98	15.74	16.21
	12H	18.92	19.61	19.40	20.09	20.56	14.63	15.33	15.12	15.81	16.28
8H	4H	17.98	18.76	18.44	19.20	19.67	14.22	15.00	14.68	15.44	15.91
	6H	18.62	19.26	19.11	19.75	20.23	14.81	15.45	15.30	15.94	16.42
	8H	18.87	19.44	19.38	19.95	20.44	15.03	15.61	15.54	16.11	16.60
	12H	19.07	19.58	19.58	20.07	20.64	15.21	15.72	15.72	16.21	16.77
12H	4H	17.96	18.66	18.45	19.14	19.61	14.26	14.96	14.75	15.44	15.91
	6H	18.60	19.18	19.11	19.69	20.17	14.87	15.45	15.38	15.96	16.45
	8H	18.88	19.39	19.39	19.88	20.45	15.14	15.65	15.65	16.15	16.71

END OF REPORT