

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P644362

Luminaire Tested: CRQ4DIP-SR4F0-50D25U940-FLLOOB-1DUDD-WW

Issue Date: 2/20/2023



**Test Information**

Test Method: LM-79-2019  
Report Number: P644362  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2203-563-26, G2-2206-689-14)  
Test Lab: INNOVATION CENTER  
Issue Date: 2/20/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: CRQ4DIP-SR4F0-50D25U940-FLLOOB-1DUDD-WW  
Description: NEO-RAY CIRQUE SUSPENDED LED LUMINAIRE  
DOWNLIGHT - CURVED FROSTED LENS - 500 LUMENS PER FOOT  
UPLIGHT - BATWING OPTIC - 250 LUMENS PER FOOT  
Light Source: 4000K CCT, 90 CRI LEDS  
Ballast/Driver: ELECTRONIC DRIVER


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2859.1 lumens  
Efficiency: N/A  
Efficacy: 126.5 lumens/watt  
Spacing Criteria (0/90/45): 1.19 / 1.19 / 1.3  
Luminous Opening: Rectangular w/ Sides (W: 0.17' x L: 4' x H: 0.33')  
CIE Type: Semi-Direct

Input Watts (W): 22.6  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P644362  
CATALOG NUMBER: CRQ4DIP-SR4F0-50D25U940-FLLOOB-1DUDD-WW

### Luminous Intensity Polar Plot

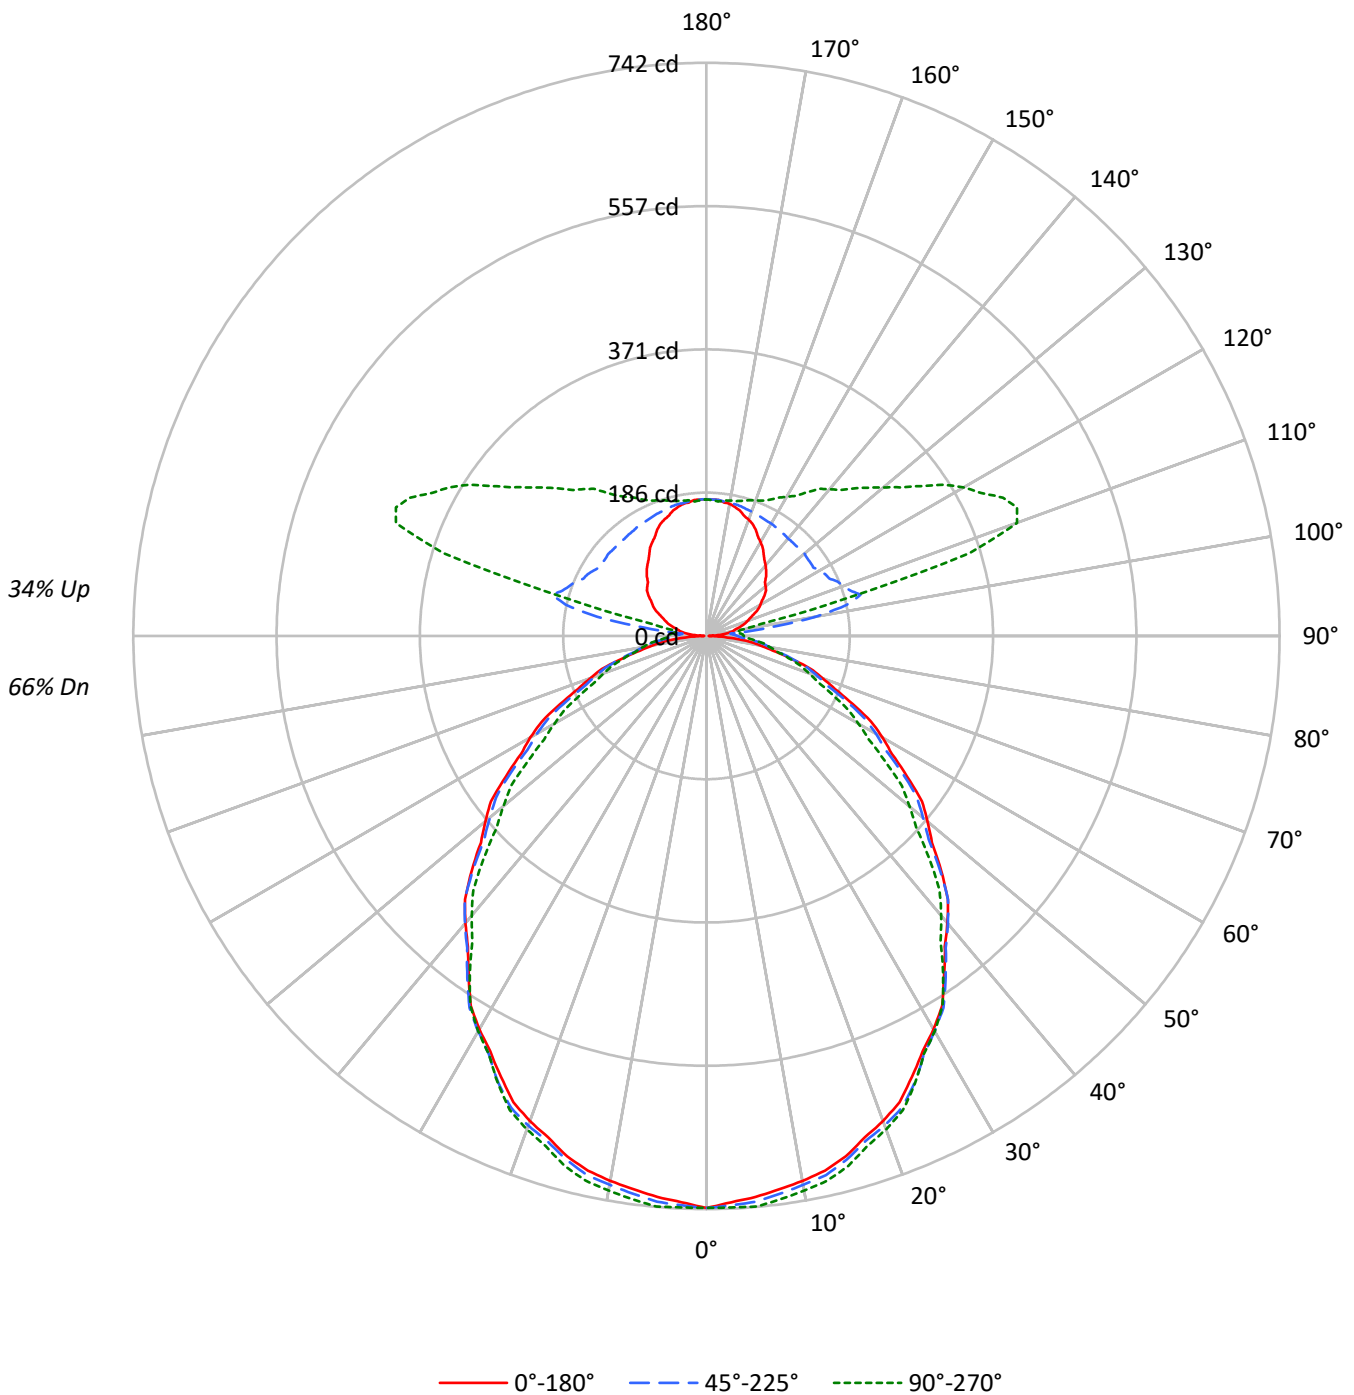



TEST NUMBER: P644362

CATALOG NUMBER: CRQ4DIP-SR4F0-50D25U940-FLLOOB-1DUDD-WW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	111	111	111	111	104	104	104	104	92	92	92	81	81	81	70	70	70	66
1	101	96	92	89	95	91	87	84	80	78	75	71	69	67	62	60	59	55
2	92	84	78	73	86	80	74	69	71	66	62	62	59	56	55	52	50	46
3	84	74	67	61	79	70	63	58	62	57	53	55	51	47	48	45	43	39
4	77	66	58	52	72	62	55	49	56	50	45	49	45	41	43	40	37	34
5	71	59	51	44	66	56	48	43	50	44	39	44	39	36	39	35	32	29
6	65	53	45	39	61	50	43	37	45	39	34	40	35	31	36	32	28	26
7	61	48	40	34	57	46	38	33	41	35	30	37	32	28	33	29	25	23
8	56	44	36	30	53	42	34	29	37	31	27	34	29	25	30	26	23	21
9	53	40	32	27	49	38	31	26	34	29	24	31	26	22	28	24	21	19
10	49	37	29	25	46	35	28	24	32	26	22	29	24	20	26	22	19	17

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	11956	11956	11956
5°	11730	10555	10228
10°	11575	9391	8836
15°	11406	8411	7728
20°	11145	7545	6760
25°	10797	6738	5890
30°	10456	5953	5113
35°	9992	5236	4388
40°	9560	4584	3720
45°	9059	3940	3105
50°	8532	3336	2546
55°	7972	2808	2053
60°	7438	2301	1641
65°	6781	1835	1299
70°	6146	1438	1026
75°	5377	1104	809
80°	4489	821	631
85°	3273	597	479

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 9059 cd/sqm



TEST NUMBER: P644362

CATALOG NUMBER: CRQ4DIP-SR4F0-50D25U940-FLLOOB-1DUDD-WW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	69.9	2.4
10°-20°	198.3	6.9
20°-30°	292.8	10.2
30°-40°	336.6	11.8
40°-50°	326.5	11.4
50°-60°	273.3	9.6
60°-70°	196.9	6.9
70°-80°	120.3	4.2
80°-90°	58.9	2.1
90°-100°	44.9	1.6
100°-110°	163.3	5.7
110°-120°	213.2	7.5
120°-130°	172.4	6.0
130°-140°	137.8	4.8
140°-150°	108.5	3.8
150°-160°	79.4	2.8
160°-170°	49.3	1.7
170°-180°	16.8	0.6
0°-30°	561.0	19.6
0°-40°	897.6	31.4
0°-60°	1497.4	52.4
0°-90°	1873.5	65.5
90°-120°	421.4	14.7
90°-150°	840.1	29.4
90°-180°	986.0	34.5
0°-180°	2859.1	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	740	740	740	740	740	
5°	729	742	735	736	742	69
15°	698	708	702	705	710	196
25°	630	640	638	635	639	290
35°	536	545	540	534	534	336
45°	430	434	427	414	408	331
55°	317	321	310	290	281	284
65°	209	210	200	185	180	208
75°	113	113	115	112	110	121
85°	34	42	58	62	62	36
90°	3	22	40	47	48	4
95°	19	26	31	39	43	19
105°	45	57	206	267	182	47
115°	68	77	176	363	424	68
125°	92	102	164	286	338	82
135°	109	121	165	235	270	84
145°	129	140	166	205	227	81
155°	151	157	169	186	195	69
165°	168	170	174	178	181	47
175°	177	178	177	176	175	17
180°	177	177	177	177	177	

TEST NUMBER: P644362

CATALOG NUMBER: CRQ4DIP-SR4F0-50D25U940-FLLOOB-1DUDD-WW

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	740.5	740.5	740.5	740.5	740.5
2.5°	733.8	744.4	737.9	739.6	740.5
5°	729.0	742.2	735.2	736.4	741.5
7.5°	722.3	734.5	728.3	729.7	735.6
10°	716.4	728.7	721.6	723.8	729.0
12.5°	708.9	720.3	714.9	717.1	722.3
15°	697.6	707.8	701.8	705.0	710.1
17.5°	680.8	691.9	685.4	687.2	692.4
20°	668.3	678.5	674.6	674.7	679.8
22.5°	653.2	664.3	661.2	658.8	664.7
25°	629.6	639.8	638.0	634.9	639.0
27.5°	606.2	613.7	610.1	607.1	610.1
30°	587.8	597.0	590.9	587.8	590.9
32.5°	567.7	576.9	570.8	566.9	568.3
35°	536.5	544.7	539.7	534.4	534.4
37.5°	507.0	512.3	508.9	500.1	497.8
40°	485.3	491.4	486.3	475.8	472.7
42.5°	462.7	468.8	462.9	451.5	446.8
45°	429.8	433.9	426.7	414.0	407.9
47.5°	396.0	400.3	390.3	376.3	369.0
50°	373.4	378.5	366.0	351.2	343.0
52.5°	351.6	355.1	343.5	326.1	318.8
55°	316.9	321.0	309.6	290.5	281.3
57.5°	284.5	288.4	274.8	256.7	249.5
60°	263.6	266.6	253.1	234.1	226.9
62.5°	240.1	243.2	230.5	214.0	206.9
65°	209.2	210.2	199.8	185.0	179.9
67.5°	180.1	180.1	171.3	160.3	156.2
70°	160.0	160.0	153.7	145.3	141.2
72.5°	141.6	140.8	137.0	131.1	127.8
75°	113.0	113.0	115.0	111.9	109.8
77.5°	87.9	86.2	95.2	94.7	93.7
80°	71.1	71.1	82.6	84.7	83.7
82.5°	56.1	57.7	72.6	75.5	74.5
85°	34.5	41.7	57.5	61.7	61.7
87.5°	15.7	28.4	45.6	51.3	51.5
90°	3.1	21.6	39.9	47.3	48.3
92.5°	9.2	19.4	35.8	44.2	46.9
95°	19.4	25.9	30.9	39.4	42.6
97.5°	28.3	37.9	81.3	41.3	39.9
100°	33.7	45.0	143.8	56.4	45.4
102.5°	38.2	50.4	186.7	116.4	71.5
105°	44.9	57.3	206.5	266.6	181.6
107.5°	51.7	59.7	195.1	380.1	357.4
110°	56.2	64.1	188.9	397.4	427.8



TEST NUMBER: P644362

CATALOG NUMBER: CRQ4DIP-SR4F0-50D25U940-FLLOOB-1DUDD-WW

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	61.5	69.5	183.6	384.6	435.0
115°	68.5	77.4	175.6	362.6	423.5
117.5°	75.5	85.4	173.3	338.1	400.7
120°	80.8	90.8	168.9	319.5	384.7
122.5°	85.3	95.3	164.5	304.3	364.3
125°	92.0	101.9	164.5	285.8	338.0
127.5°	97.2	108.6	164.7	264.5	316.0
130°	99.9	113.0	165.6	250.2	299.1
132.5°	102.7	115.8	164.8	243.8	284.0
135°	109.0	120.9	164.6	235.4	270.2
137.5°	114.5	127.4	164.6	226.2	256.0
140°	119.0	130.9	164.6	220.8	248.0
142.5°	123.4	134.5	165.5	214.5	240.0
145°	129.0	139.9	165.7	205.1	226.8
147.5°	135.7	145.2	167.0	198.3	215.0
150°	140.1	148.8	167.9	193.8	207.9
152.5°	144.6	152.4	167.9	190.2	201.7
155°	151.2	156.7	169.0	185.9	194.6
157.5°	156.6	161.8	170.3	183.2	189.5
160°	160.1	164.5	171.2	181.4	186.8
162.5°	162.8	167.1	172.1	180.4	184.1
165°	167.9	170.1	173.5	178.0	181.2
167.5°	170.8	172.7	174.6	176.8	178.8
170°	173.5	174.5	174.6	176.8	177.9
172.5°	174.4	176.3	175.5	175.9	177.0
175°	176.8	177.9	176.8	175.7	174.6
177.5°	176.8	177.7	176.8	176.8	175.9
180°	176.8	176.8	176.8	176.8	176.8

(END OF REPORT)