

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331427-927

Luminaire Tested: **S122DIP-S1005D330U927-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331427-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIP-S1005D330U927-4F0-1E-UDD-F1
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1005 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 330 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4140.9 lumens
Efficiency: N/A
Efficacy: 83.2 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 49.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331427-927

CATALOG NUMBER: S122DIP-S1005D330U927-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

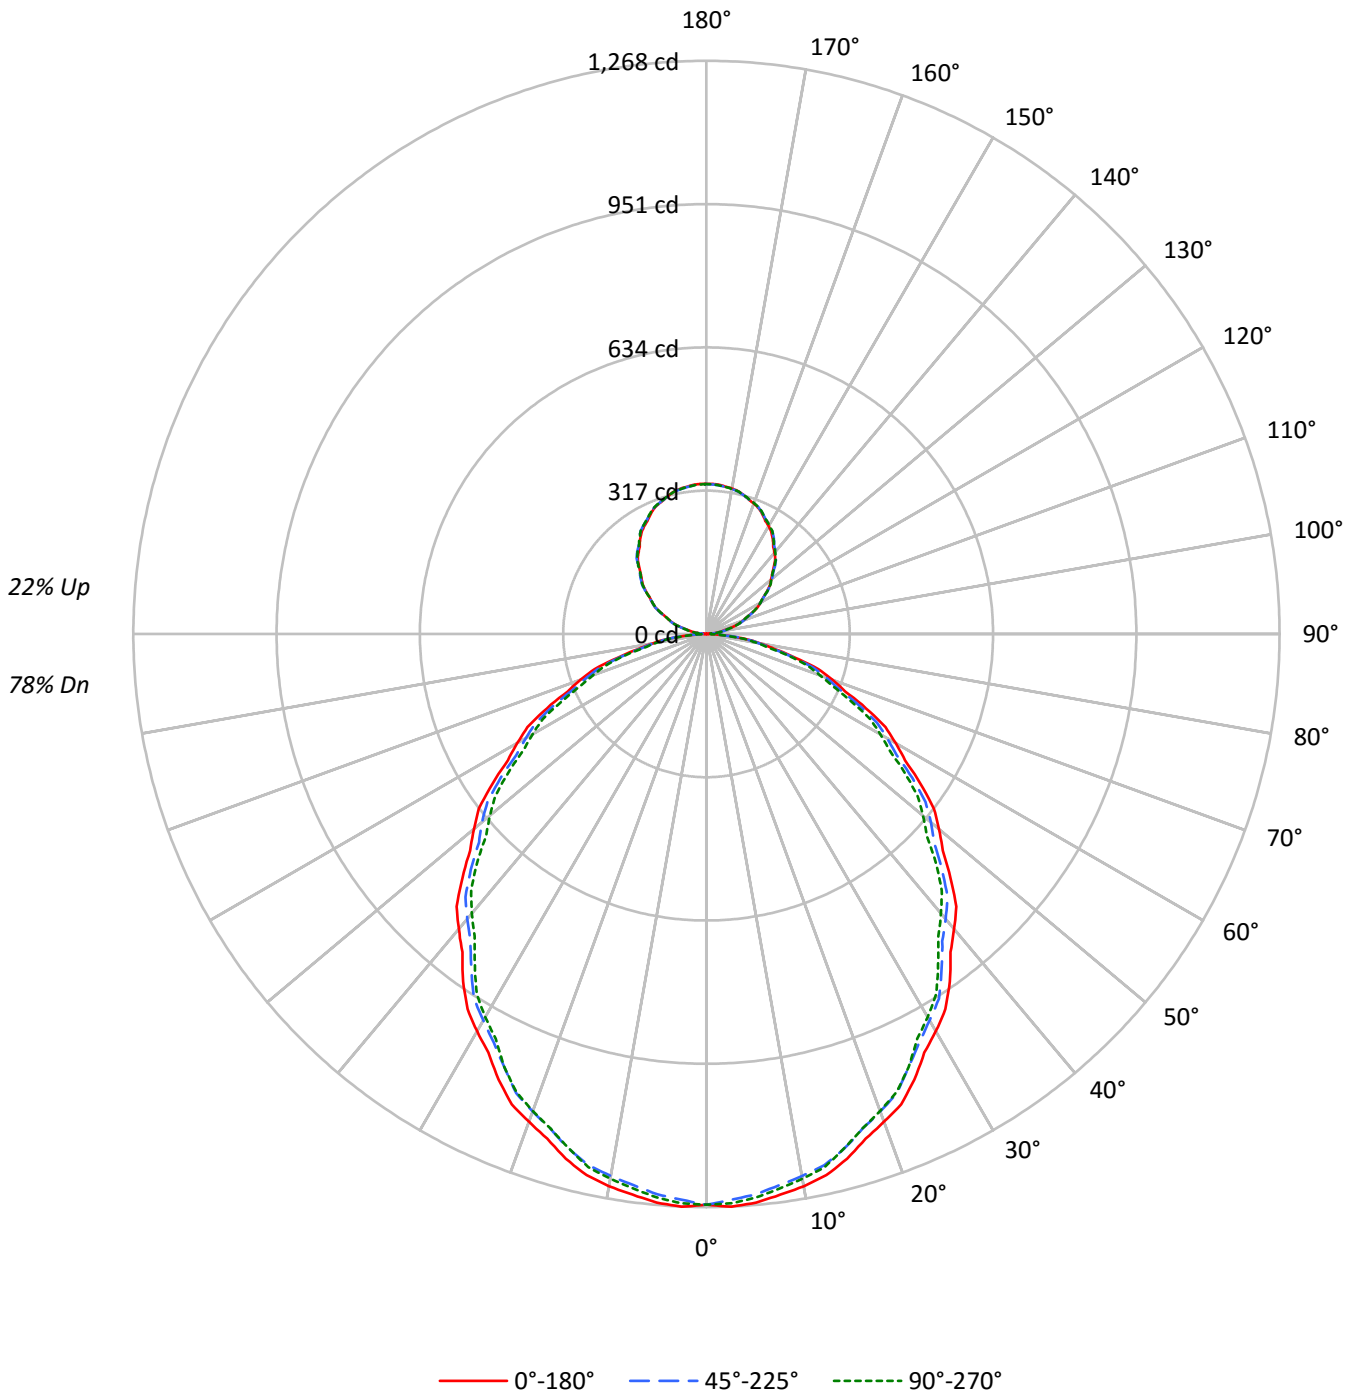



TEST NUMBER: P331427-927

CATALOG NUMBER: S122DIP-S1005D330U927-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	114	114	114	114	108	108	108	108	99	99	99	90	90	90	81	81	81	78
1	104	99	95	92	99	95	91	88	87	84	81	79	77	75	72	70	69	65
2	95	87	80	75	90	83	77	72	76	71	67	69	66	63	63	61	58	55
3	86	76	69	63	82	73	66	61	67	61	57	61	57	53	56	53	49	46
4	79	68	60	53	75	65	57	52	60	53	49	55	50	46	50	46	43	40
5	73	61	52	46	69	58	50	45	54	47	42	49	44	40	45	41	37	35
6	67	55	46	40	64	52	45	39	48	42	37	45	39	35	41	37	33	30
7	62	49	41	35	59	48	40	34	44	37	33	41	35	31	38	33	29	27
8	58	45	37	31	55	43	36	31	40	34	29	37	32	28	35	30	26	24
9	54	41	33	28	52	40	33	28	37	31	26	34	29	25	32	27	24	22
10	51	38	31	25	48	37	30	25	34	28	24	32	27	23	30	25	22	20

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	20386	20386	20386
5°	20464	20169	20285
10°	20341	19964	20064
15°	20090	19704	19686
20°	19734	19316	19295
25°	19379	18838	18838
30°	18921	18401	18243
35°	18496	17875	17611
40°	17962	17351	17015
45°	17438	16826	16411
50°	16865	16284	15707
55°	16268	15651	15071
60°	15603	14899	14347
65°	14888	14147	13498
70°	13983	13237	12609
75°	12726	12190	11890
80°	11288	10953	10386
85°	9207	8781	7873



TEST NUMBER: P331427-927

CATALOG NUMBER: S122DIP-S1005D330U927-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	118.7	2.9
10°-20°	334.1	8.1
20°-30°	491.0	11.9
30°-40°	570.4	13.8
40°-50°	569.8	13.8
50°-60°	496.9	12.0
60°-70°	367.4	8.9
70°-80°	208.1	5.0
80°-90°	57.3	1.4
90°-100°	21.0	0.5
100°-110°	65.3	1.6
110°-120°	111.6	2.7
120°-130°	146.7	3.5
130°-140°	164.7	4.0
140°-150°	161.5	3.9
150°-160°	135.4	3.3
160°-170°	89.8	2.2
170°-180°	31.4	0.8
0°-30°	943.8	22.8
0°-40°	1514.2	36.6
0°-60°	2580.8	62.3
0°-90°	3213.6	77.6
90°-120°	197.9	4.8
90°-150°	670.7	16.2
90°-180°	927.0	22.4
0°-180°	4140.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1263	1263	1263	1263	1263	
5°	1263	1257	1244	1253	1252	120
15°	1202	1194	1179	1183	1178	338
25°	1088	1078	1057	1060	1057	500
35°	938	926	907	900	894	586
45°	764	755	737	724	719	589
55°	578	570	556	542	535	517
65°	390	382	370	360	353	385
75°	204	201	195	189	191	218
85°	50	49	47	44	42	57
90°	0	4	10	9	10	3
95°	15	17	18	18	17	17
105°	60	61	62	62	62	64
115°	112	114	113	113	112	111
125°	163	165	164	164	163	146
135°	211	214	214	214	213	163
145°	256	258	259	260	259	160
155°	292	293	294	295	295	135
165°	318	318	318	320	318	90
175°	331	330	330	331	330	31
180°	332	332	332	332	332	



TEST NUMBER: P331427-927

CATALOG NUMBER: S122DIP-S1005D330U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1262.6	1262.6	1262.6	1262.6	1262.6	1262.6	1262.6	1262.6	1262.6	1262.6	1262.6
2.5°	1268.4	1267.3	1266.3	1265.2	1264.1	1262.4	1260.0	1257.7	1255.3	1252.9	1255.1
5°	1262.6	1261.6	1260.4	1259.3	1258.3	1256.2	1253.3	1250.3	1247.4	1244.4	1246.6
7.5°	1251.4	1249.7	1248.1	1246.4	1244.8	1242.4	1239.4	1236.4	1233.3	1230.3	1232.5
10°	1240.7	1238.9	1237.0	1235.1	1233.2	1230.7	1227.4	1224.2	1220.9	1217.7	1219.9
12.5°	1226.2	1224.5	1222.8	1221.1	1219.5	1217.0	1213.8	1210.5	1207.4	1204.1	1205.6
15°	1201.9	1200.3	1198.7	1197.1	1195.4	1192.9	1189.4	1185.8	1182.3	1178.8	1180.0
17.5°	1170.8	1169.2	1167.6	1165.9	1164.3	1161.7	1158.2	1154.6	1151.0	1147.6	1148.7
20°	1148.5	1146.8	1145.3	1143.6	1142.0	1139.3	1135.5	1131.8	1128.0	1124.2	1125.0
22.5°	1126.2	1123.9	1121.7	1119.4	1117.1	1114.2	1110.6	1107.1	1103.5	1099.9	1100.1
25°	1087.8	1085.6	1083.5	1081.3	1079.2	1075.8	1071.2	1066.6	1062.0	1057.4	1058.0
27.5°	1044.1	1042.1	1040.2	1038.2	1036.3	1033.6	1029.9	1026.3	1022.7	1019.1	1018.3
30°	1014.9	1012.8	1010.6	1008.4	1006.3	1003.2	999.2	995.1	991.1	987.0	986.2
32.5°	983.9	982.1	980.4	978.7	976.9	974.0	969.7	965.4	961.2	956.9	955.5
35°	938.4	935.7	933.0	930.3	927.6	924.2	919.8	915.5	911.2	906.9	905.3
37.5°	887.2	884.9	882.5	880.1	877.7	874.4	870.1	865.8	861.4	857.1	855.1
40°	852.2	850.1	848.0	845.8	843.6	840.4	836.1	831.8	827.4	823.2	820.7
42.5°	818.2	816.1	814.0	811.8	809.6	806.4	802.1	797.7	793.4	789.1	786.5
45°	763.7	761.8	759.9	758.0	756.1	753.1	749.1	745.0	741.0	736.9	734.0
47.5°	709.2	707.5	705.7	703.9	702.1	699.1	694.9	690.7	686.5	682.3	679.1
50°	671.4	670.0	668.7	667.3	666.0	663.4	659.7	655.8	652.0	648.3	644.5
52.5°	634.5	632.7	630.9	629.2	627.3	624.6	621.1	617.5	614.0	610.5	607.3
55°	577.9	576.2	574.6	573.1	571.4	568.9	565.8	562.5	559.3	556.0	552.8
57.5°	521.1	519.8	518.5	517.2	515.9	513.5	509.9	506.4	502.8	499.2	496.1
60°	483.2	482.1	481.0	480.0	478.9	476.4	472.7	468.9	465.1	461.4	458.4
62.5°	446.3	444.6	442.8	441.1	439.3	437.0	434.1	431.3	428.3	425.4	422.6
65°	389.7	388.1	386.5	384.8	383.3	381.0	378.3	375.7	373.0	370.3	367.9
67.5°	332.2	330.9	329.5	328.3	327.0	325.1	322.7	320.3	317.8	315.4	313.5
70°	296.2	295.2	294.1	293.0	291.9	290.2	287.7	285.3	282.9	280.4	278.5
72.5°	259.3	258.3	257.1	256.1	255.0	253.7	252.2	250.6	249.0	247.4	245.5
75°	204.0	203.4	202.9	202.3	201.8	200.8	199.5	198.1	196.8	195.4	193.8
77.5°	154.4	153.5	152.6	151.7	150.8	150.0	149.5	148.9	148.4	147.9	147.0
80°	121.4	121.1	120.9	120.6	120.3	119.9	119.4	118.8	118.3	117.8	116.9
82.5°	90.3	90.3	90.2	90.2	90.1	89.9	89.6	89.3	89.0	88.6	87.6
85°	49.7	49.5	49.3	49.0	48.7	48.4	48.2	47.8	47.6	47.4	46.5
87.5°	17.5	17.3	17.0	16.7	16.4	16.2	16.0	15.8	15.7	15.5	14.9
90°	0.3	1.0	1.7	2.5	3.2	4.4	5.7	7.1	8.4	9.8	9.7
92.5°	5.0	5.5	6.1	6.7	7.2	7.6	7.9	8.2	8.6	8.9	9.0
95°	14.6	15.2	15.8	16.4	17.0	17.4	17.5	17.7	17.8	17.9	17.9
97.5°	26.6	27.2	27.6	28.2	28.8	29.2	29.4	29.6	29.9	30.1	30.1
100°	35.6	36.0	36.5	37.1	37.5	37.9	38.0	38.3	38.4	38.7	38.7
102.5°	44.9	45.3	45.7	46.1	46.5	46.9	47.1	47.3	47.5	47.8	47.8
105°	60.2	60.4	60.5	60.8	60.9	61.1	61.2	61.3	61.5	61.6	61.7
107.5°	75.5	75.8	76.0	76.4	76.6	76.8	76.8	76.8	76.8	76.8	76.8
110°	85.4	85.7	86.1	86.5	86.8	87.1	87.1	87.1	87.1	87.1	87.1



TEST NUMBER: P331427-927

CATALOG NUMBER: S122DIP-S1005D330U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	96.1	96.5	96.9	97.2	97.6	97.8	97.7	97.7	97.6	97.6	97.4
115°	111.9	112.3	112.7	113.0	113.4	113.6	113.4	113.3	113.2	113.0	113.0
117.5°	127.7	128.3	128.7	129.2	129.8	129.8	129.4	129.1	128.7	128.4	128.3
120°	138.2	138.8	139.3	139.7	140.2	140.2	139.7	139.3	138.8	138.2	138.2
122.5°	147.9	148.5	149.1	149.6	150.3	150.4	150.0	149.7	149.3	149.0	148.9
125°	162.9	163.4	164.0	164.5	165.1	165.3	165.1	164.9	164.8	164.5	164.4
127.5°	177.5	178.2	179.0	179.6	180.3	180.5	180.4	180.1	179.9	179.7	179.4
130°	186.7	187.5	188.3	189.1	189.9	190.3	190.1	190.0	189.9	189.7	189.6
132.5°	197.0	197.6	198.3	198.9	199.6	199.9	199.9	200.0	200.0	200.0	199.8
135°	210.7	211.4	212.1	212.8	213.5	213.9	214.0	214.1	214.3	214.4	214.3
137.5°	225.2	225.8	226.3	227.0	227.5	227.8	228.0	228.1	228.3	228.5	228.5
140°	234.0	234.6	235.1	235.7	236.2	236.6	236.9	237.3	237.6	237.9	237.9
142.5°	243.0	243.5	244.1	244.6	245.2	245.6	245.7	246.0	246.2	246.4	246.4
145°	255.8	256.3	256.7	257.1	257.5	257.9	258.3	258.7	259.0	259.4	259.5
147.5°	267.3	267.8	268.3	268.9	269.3	269.7	270.0	270.3	270.5	270.8	270.9
150°	275.1	275.5	275.8	276.2	276.6	276.9	277.2	277.4	277.7	277.9	278.1
152.5°	282.1	282.4	282.8	283.2	283.5	283.9	284.2	284.5	284.8	285.1	285.3
155°	292.5	292.6	292.9	293.0	293.2	293.4	293.6	293.7	294.0	294.1	294.5
157.5°	301.3	301.5	301.6	301.7	301.9	302.0	302.1	302.2	302.3	302.5	302.9
160°	306.7	306.9	307.0	307.1	307.2	307.4	307.4	307.4	307.5	307.6	307.9
162.5°	311.6	311.7	311.7	311.7	311.8	311.8	311.9	312.0	312.0	312.0	312.5
165°	318.2	318.1	318.1	318.1	318.0	317.9	317.9	317.9	317.9	317.9	318.4
167.5°	323.7	323.5	323.4	323.1	323.0	322.9	322.8	322.8	322.8	322.8	323.2
170°	326.6	326.5	326.2	326.1	325.9	325.7	325.7	325.6	325.6	325.5	325.9
172.5°	328.6	328.4	328.3	328.0	327.9	327.7	327.7	327.6	327.6	327.5	328.0
175°	331.1	330.9	330.7	330.5	330.3	330.2	330.1	329.9	329.8	329.7	330.1
177.5°	332.1	331.9	331.8	331.7	331.5	331.4	331.3	331.2	331.1	331.0	331.3
180°	331.7	331.7	331.7	331.7	331.7	331.7	331.7	331.7	331.7	331.7	331.7



TEST NUMBER: P331427-927

CATALOG NUMBER: S122DIP-S1005D330U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1262.6	1262.6	1262.6	1262.6	1262.6	1262.6	1262.6	1262.6
2.5°	1257.2	1259.3	1261.6	1262.4	1261.9	1261.6	1261.1	1260.7
5°	1248.7	1250.9	1253.0	1253.9	1253.3	1252.8	1252.2	1251.6
7.5°	1234.6	1236.8	1239.0	1239.8	1239.1	1238.6	1237.9	1237.4
10°	1222.0	1224.2	1226.3	1227.0	1226.2	1225.3	1224.6	1223.8
12.5°	1207.1	1208.6	1210.1	1210.6	1210.0	1209.4	1208.8	1208.2
15°	1181.0	1182.1	1183.1	1183.0	1181.7	1180.4	1179.0	1177.7
17.5°	1150.0	1151.3	1152.5	1152.5	1151.1	1149.9	1148.6	1147.2
20°	1125.8	1126.6	1127.4	1127.3	1126.2	1125.1	1124.1	1123.0
22.5°	1100.3	1100.4	1100.6	1100.3	1099.7	1099.1	1098.4	1097.7
25°	1058.5	1059.1	1059.6	1059.6	1059.1	1058.5	1058.0	1057.4
27.5°	1017.5	1016.6	1015.8	1014.8	1013.5	1012.2	1010.9	1009.6
30°	985.4	984.6	983.8	982.9	981.8	980.6	979.6	978.5
32.5°	954.0	952.5	951.1	949.8	948.7	947.7	946.6	945.5
35°	903.6	902.1	900.4	899.0	897.6	896.3	894.8	893.5
37.5°	853.1	851.1	849.1	847.5	846.2	844.9	843.6	842.3
40°	818.2	815.9	813.4	811.7	810.6	809.5	808.4	807.3
42.5°	783.9	781.2	778.6	776.5	775.0	773.5	772.0	770.4
45°	731.0	728.0	725.1	723.0	721.9	720.9	719.8	718.7
47.5°	676.0	672.9	669.8	667.4	665.8	664.3	662.7	661.2
50°	640.7	637.0	633.2	630.7	629.3	628.0	626.6	625.3
52.5°	604.2	601.0	597.9	595.5	593.7	591.9	590.1	588.4
55°	549.5	546.3	543.1	540.8	539.5	538.1	536.8	535.4
57.5°	492.8	489.6	486.5	484.3	483.4	482.4	481.3	480.3
60°	455.4	452.4	449.5	447.6	446.8	446.0	445.1	444.3
62.5°	419.9	417.2	414.4	412.5	411.5	410.4	409.4	408.4
65°	365.4	363.0	360.6	358.7	357.4	356.0	354.7	353.3
67.5°	311.6	309.7	307.8	306.3	305.3	304.2	303.2	302.1
70°	276.6	274.8	272.9	271.4	270.3	269.3	268.2	267.1
72.5°	243.7	241.8	239.9	238.5	237.7	236.8	235.9	235.0
75°	192.3	190.6	189.0	188.5	189.0	189.5	190.0	190.6
77.5°	146.2	145.4	144.7	143.9	143.1	142.4	141.6	140.9
80°	116.1	115.3	114.5	113.8	113.3	112.8	112.3	111.7
82.5°	86.6	85.6	84.5	84.0	83.8	83.7	83.7	83.5
85°	45.7	44.9	44.1	43.6	43.3	43.0	42.8	42.5
87.5°	14.2	13.5	12.8	12.4	12.2	12.0	11.8	11.6
90°	9.6	9.4	9.3	9.3	9.3	9.4	9.4	9.5
92.5°	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0
95°	17.9	17.9	17.9	17.8	17.7	17.6	17.5	17.3
97.5°	30.1	30.1	30.1	30.1	30.1	30.1	30.1	30.0
100°	38.7	38.7	38.7	38.6	38.5	38.5	38.4	38.3
102.5°	47.9	47.9	48.0	48.0	47.9	47.8	47.8	47.8
105°	61.8	61.9	62.1	62.1	62.1	62.1	62.1	62.1
107.5°	76.8	76.9	76.9	76.8	76.5	76.3	76.0	75.7
110°	87.1	87.1	87.1	87.0	86.7	86.6	86.4	86.2



TEST NUMBER: P331427-927

CATALOG NUMBER: S122DIP-S1005D330U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	97.3	97.1	97.0	96.8	96.7	96.6	96.4	96.3
115°	113.0	112.9	112.8	112.7	112.5	112.3	112.2	111.9
117.5°	128.1	127.9	127.8	127.6	127.5	127.3	127.1	126.9
120°	138.2	138.2	138.2	138.2	138.0	137.8	137.6	137.4
122.5°	148.7	148.5	148.4	148.3	148.1	148.0	147.8	147.7
125°	164.2	164.0	163.8	163.7	163.7	163.6	163.5	163.4
127.5°	179.3	179.0	178.8	178.6	178.4	178.2	178.0	177.8
130°	189.5	189.4	189.3	189.1	188.9	188.5	188.3	188.1
132.5°	199.5	199.2	199.0	198.8	198.5	198.4	198.1	198.0
135°	214.3	214.2	214.1	214.0	213.8	213.7	213.5	213.3
137.5°	228.4	228.3	228.3	228.1	227.9	227.7	227.4	227.1
140°	237.9	237.9	237.9	237.7	237.5	237.3	237.0	236.8
142.5°	246.5	246.5	246.6	246.5	246.3	246.0	245.7	245.5
145°	259.6	259.6	259.7	259.6	259.4	259.1	258.9	258.6
147.5°	271.0	271.2	271.3	271.2	271.0	270.8	270.5	270.3
150°	278.3	278.5	278.7	278.7	278.5	278.3	278.1	277.9
152.5°	285.6	285.8	286.1	286.1	285.8	285.6	285.3	285.1
155°	294.8	295.1	295.4	295.5	295.2	295.1	294.9	294.7
157.5°	303.2	303.7	304.1	304.2	303.9	303.6	303.3	303.0
160°	308.3	308.7	309.1	309.1	308.9	308.6	308.4	308.2
162.5°	312.9	313.3	313.8	313.8	313.5	313.2	312.9	312.6
165°	318.8	319.2	319.6	319.7	319.4	319.1	318.8	318.5
167.5°	323.7	324.1	324.6	324.6	324.3	323.9	323.6	323.3
170°	326.4	326.8	327.3	327.3	326.9	326.5	326.1	325.7
172.5°	328.4	328.8	329.2	329.3	328.9	328.5	328.2	327.8
175°	330.6	331.0	331.4	331.4	331.1	330.7	330.3	329.9
177.5°	331.6	331.8	332.2	332.2	331.8	331.6	331.3	331.0
180°	331.7	331.7	331.7	331.7	331.7	331.7	331.7	331.7

(END OF REPORT)