

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331429-927

Luminaire Tested: **S122DIP-S1005D530U927-4F0-1E-UDD-A**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P331429-927  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S122DIP-S1005D530U927-4F0-1E-UDD-A  
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 1005 LUMENS PER FOOT, ASYMMETRIC DIFFUSER  
UPLIGHT 530 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5160.8 lumens  
Efficiency: N/A  
Efficacy: 93.7 lumens/watt  
Spacing Criteria (0/90/45): 1.08 / 1.16 / 1.23  
Luminous Opening: Rectangular (W 4' x L: 0.17' x H: 0')  
CIE Type: Semi-Direct


Input Watts (W): 55.1  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331429-927

CATALOG NUMBER: S122DIP-S1005D530U927-4F0-1E-UDD-A

### Luminous Intensity Polar Plot

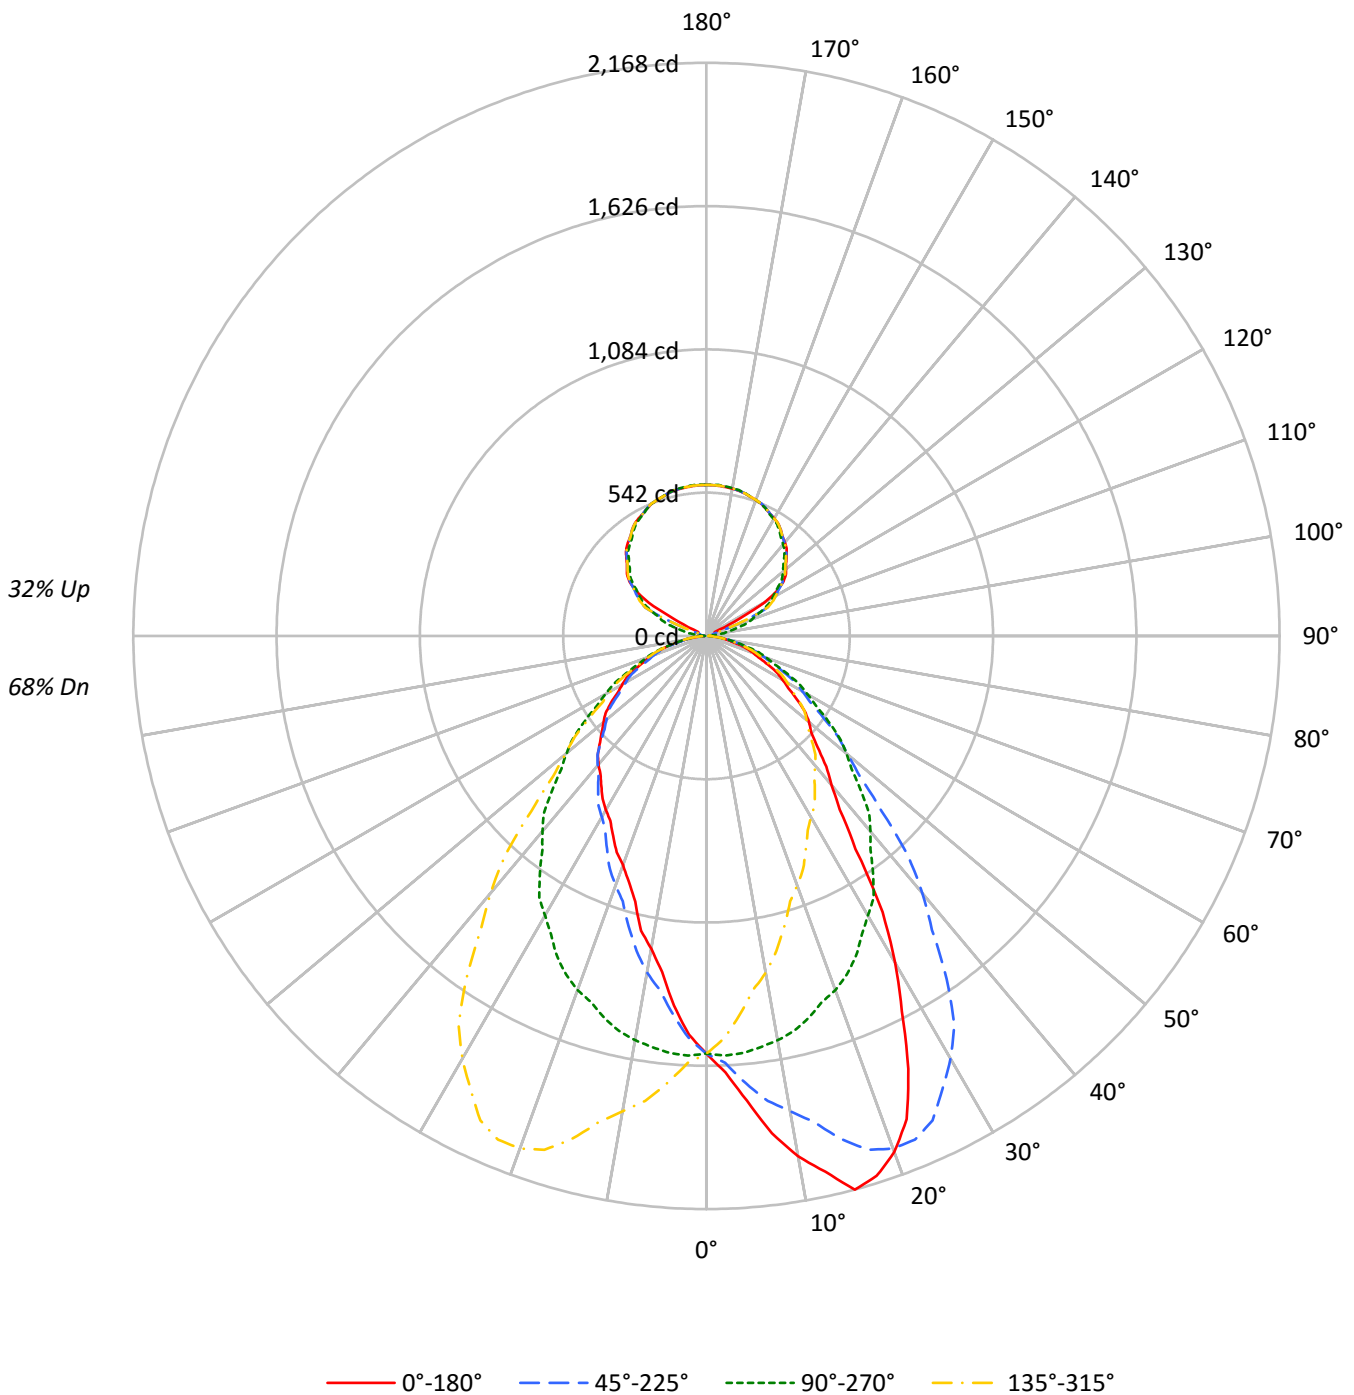



TEST NUMBER: P331429-927

CATALOG NUMBER: S122DIP-S1005D530U927-4F0-1E-UDD-A

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20										
RC	80									70									50									30									10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0														
RCR																																						
0	111	111	111	111	105	105	105	105	93	93	93	82	82	82	72	72	72	68																				
1	102	98	94	91	96	93	90	87	83	80	78	73	72	70	65	64	62	58																				
2	94	87	81	75	88	82	77	72	73	69	66	65	62	59	58	56	53	50																				
3	86	77	69	64	81	73	66	61	65	60	56	58	54	51	52	49	46	43																				
4	79	68	61	55	74	65	58	53	58	53	48	52	48	44	47	43	40	37																				
5	73	61	53	47	69	58	51	46	53	47	42	47	43	39	43	39	36	33																				
6	67	55	47	42	64	53	46	40	48	42	37	43	38	35	39	35	32	29																				
7	63	50	42	37	59	48	41	36	44	38	33	40	35	31	36	32	29	26																				
8	58	46	38	33	55	44	37	32	40	34	30	36	31	28	33	29	26	24																				
9	55	42	35	30	52	40	34	29	37	31	27	34	29	25	31	26	24	22																				
10	51	39	32	27	48	37	31	26	34	29	25	31	26	23	28	24	22	20																				

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	25504	25504	25504	25504
5°	28593	25671	22749	25671
10°	32765	25460	19687	25460
15°	36247	24993	17392	24993
20°	35696	24493	15856	24493
25°	32186	23826	14883	23826
30°	26597	22760	14171	22760
35°	19385	21646	13665	21646
40°	15483	20331	13384	20331
45°	13531	18810	13001	18810
50°	12717	17337	12750	17337
55°	11724	15842	12408	15842
60°	10743	14250	11880	14250
65°	9788	12825	11366	12825
70°	8884	11434	10607	11434
75°	7879	9881	9395	9881
80°	6778	8182	7569	8182
85°	6076	6076	4502	6076



TEST NUMBER: P331429-927

CATALOG NUMBER: S122DIP-S1005D530U927-4F0-1E-UDD-A

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	150.4	2.9
10°-20°	437.4	8.5
20°-30°	634.7	12.3
30°-40°	669.8	13.0
40°-50°	593.0	11.5
50°-60°	473.3	9.2
60°-70°	321.7	6.2
70°-80°	164.9	3.2
80°-90°	41.2	0.8
90°-100°	19.1	0.4
100°-110°	69.9	1.4
110°-120°	186.8	3.6
120°-130°	308.4	6.0
130°-140°	328.0	6.4
140°-150°	304.8	5.9
150°-160°	245.1	4.7
160°-170°	157.9	3.1
170°-180°	54.4	1.1
0°-30°	1222.5	23.7
0°-40°	1892.3	36.7
0°-60°	2958.6	57.3
0°-90°	3486.4	67.6
90°-120°	275.8	5.3
90°-150°	1217.0	23.6
90°-180°	1674.0	32.4
0°-180°	5160.8	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	1580	1580	1580	1580	1580	
5°	1764	1584	1404	1584	1764	176
15°	2168	1495	1040	1495	2168	598
25°	1807	1337	835	1337	1807	817
35°	984	1098	693	1098	984	640
45°	593	824	569	824	593	466
55°	416	563	441	563	416	373
65°	256	336	298	336	256	255
75°	126	158	151	158	126	135
85°	33	33	24	33	33	36
90°	11	0	11	0	11	7
95°	18	27	18	27	18	17
105°	31	126	31	126	31	33
115°	34	238	34	238	34	85
125°	354	336	354	336	354	306
135°	430	416	430	416	430	331
145°	490	482	490	482	490	306
155°	532	531	532	531	532	245
165°	558	560	558	560	558	158
175°	569	573	569	573	569	54
180°	571	571	571	571	571	



TEST NUMBER: P331429-927

CATALOG NUMBER: S122DIP-S1005D530U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1579.6	1579.6	1579.6	1579.6	1579.6	1579.6	1579.6	1579.6	1579.6	1579.6	1579.6
2.5°	1652.5	1653.0	1653.9	1646.2	1645.2	1645.2	1638.4	1632.6	1625.8	1616.5	1617.6
5°	1764.2	1770.8	1773.3	1766.0	1755.1	1753.9	1743.6	1726.6	1710.8	1698.0	1688.9
7.5°	1897.5	1900.2	1894.3	1884.7	1876.5	1861.9	1842.8	1823.9	1797.6	1773.5	1755.5
10°	1998.5	2002.2	1991.9	1977.9	1966.4	1949.4	1921.4	1892.9	1858.3	1825.0	1798.2
12.5°	2075.3	2084.2	2071.0	2069.2	2049.5	2026.1	1992.8	1978.4	1929.7	1883.2	1854.6
15°	2168.5	2167.9	2169.2	2157.6	2143.0	2139.4	2104.2	2065.9	1997.3	1970.0	1922.6
17.5°	2141.6	2150.8	2155.1	2154.9	2154.6	2152.3	2141.0	2116.8	2082.4	2038.1	1983.5
20°	2077.5	2089.6	2091.4	2105.4	2113.3	2123.6	2127.9	2121.1	2099.9	2062.9	2015.5
22.5°	1978.4	1981.8	1987.5	2009.2	2026.3	2052.2	2065.7	2088.1	2080.0	2061.9	2022.4
25°	1806.7	1800.6	1821.9	1832.8	1872.2	1913.5	1943.3	1976.1	2005.3	2022.8	2011.3
27.5°	1600.5	1591.4	1623.3	1652.3	1684.3	1729.0	1775.4	1830.1	1875.7	1932.6	1952.2
30°	1426.6	1432.1	1462.4	1493.4	1542.0	1605.1	1657.3	1717.5	1782.4	1846.2	1890.5
32.5°	1239.2	1260.2	1279.4	1326.8	1369.6	1440.0	1516.5	1591.7	1672.7	1745.2	1813.8
35°	983.5	1007.7	1034.5	1069.1	1129.2	1199.0	1273.7	1375.1	1485.6	1584.5	1665.9
37.5°	827.8	823.9	839.2	864.3	912.9	969.3	1055.3	1155.4	1285.5	1401.8	1516.5
40°	734.6	732.1	743.1	766.1	803.2	844.5	919.7	1007.7	1128.5	1270.7	1407.2
42.5°	670.5	671.9	678.0	694.3	719.6	753.6	810.0	884.9	995.5	1129.3	1276.1
45°	592.6	596.8	603.5	611.3	625.9	653.9	685.4	738.9	826.2	937.9	1082.4
47.5°	536.4	536.5	543.4	550.2	558.9	574.6	600.4	633.9	695.6	786.6	910.8
50°	506.3	502.1	506.9	512.4	521.5	532.4	549.4	581.0	622.3	695.7	799.5
52.5°	469.4	469.5	473.9	475.9	484.1	495.0	510.6	532.4	569.8	627.2	712.6
55°	416.5	419.5	421.9	425.6	432.8	440.8	452.9	467.5	496.6	539.7	602.9
57.5°	366.7	367.7	370.1	377.0	381.6	388.9	400.4	413.7	432.6	464.5	512.0
60°	332.7	332.7	337.5	340.6	346.7	353.9	363.1	375.8	392.8	418.9	457.2
62.5°	301.6	301.1	303.1	308.0	312.7	319.5	328.5	339.4	355.4	378.6	410.0
65°	256.2	255.0	258.6	259.8	264.7	271.4	278.7	290.2	302.9	320.0	347.8
67.5°	212.5	214.0	215.9	218.2	220.9	227.9	232.7	240.9	251.7	265.8	284.7
70°	188.2	188.2	188.2	190.0	193.7	197.3	202.2	208.8	219.2	231.3	248.3
72.5°	161.0	163.0	164.9	163.8	168.4	170.6	176.4	180.2	190.0	197.8	212.9
75°	126.3	126.3	126.3	129.3	131.1	132.9	136.6	140.2	145.1	154.8	162.7
77.5°	94.2	94.0	94.6	95.3	97.3	99.4	100.5	103.8	108.3	112.8	119.5
80°	72.9	74.1	74.7	75.9	75.9	77.1	77.7	82.0	85.0	88.0	92.3
82.5°	56.3	56.6	56.7	57.0	57.4	58.1	59.7	61.1	62.2	64.7	68.0
85°	32.8	32.2	32.2	33.4	32.8	32.8	34.0	35.2	35.2	35.8	37.6
87.5°	14.9	14.8	15.3	14.7	14.7	15.1	15.1	14.5	14.9	15.3	15.6
90°	11.2	11.0	10.8	10.6	10.5	10.1	9.7	9.2	8.7	8.2	7.5
92.5°	11.2	11.1	10.9	10.9	10.7	10.5	10.3	10.1	9.8	9.6	9.2
95°	17.7	17.9	18.0	18.1	18.1	18.0	17.5	17.0	16.6	16.2	15.4
97.5°	23.8	23.6	23.5	23.4	23.3	23.1	22.7	22.3	21.9	21.5	20.1
100°	27.7	27.5	27.3	27.2	26.9	26.5	25.7	25.0	24.3	23.5	22.0
102.5°	29.7	29.4	29.2	28.9	28.7	28.0	27.1	26.1	25.2	24.2	37.3
105°	31.4	31.1	30.7	30.3	29.9	29.2	28.3	27.3	26.2	25.2	50.3
107.5°	32.3	31.9	31.6	31.2	30.9	31.2	32.2	33.3	34.3	35.3	65.4
110°	32.6	32.3	31.9	31.5	31.2	35.6	44.8	53.9	63.1	72.3	98.9



TEST NUMBER: P331429-927

CATALOG NUMBER: S122DIP-S1005D530U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	33.0	32.7	32.4	32.1	31.8	48.4	81.9	115.4	148.9	182.5	189.0
115°	33.9	40.5	47.1	53.7	60.4	84.9	127.5	170.0	212.5	255.1	252.8
117.5°	138.4	160.2	181.9	203.6	225.4	241.4	251.7	262.0	272.3	282.5	281.0
120°	252.2	264.6	277.0	289.4	301.8	307.4	306.3	305.2	304.1	303.0	301.3
122.5°	314.7	317.1	319.5	321.9	324.3	325.2	324.6	323.8	323.2	322.6	320.8
125°	353.5	353.2	352.9	352.7	352.4	351.9	351.3	350.6	350.0	349.4	347.6
127.5°	378.0	377.9	377.9	377.8	377.7	377.2	376.3	375.3	374.4	373.5	372.2
130°	393.2	393.2	393.3	393.4	393.6	393.1	392.1	391.0	390.1	389.0	388.0
132.5°	408.1	408.1	408.2	408.3	408.4	408.1	407.2	406.3	405.4	404.6	403.5
135°	429.5	429.8	429.9	430.1	430.3	429.9	429.0	428.1	427.1	426.2	425.4
137.5°	449.2	449.5	449.7	450.0	450.4	450.1	449.2	448.3	447.4	446.5	445.5
140°	461.4	461.8	462.3	462.7	463.2	463.0	462.2	461.4	460.6	459.7	458.7
142.5°	473.2	473.7	474.2	474.7	475.2	475.0	474.2	473.5	472.7	472.0	470.8
145°	489.9	490.4	490.8	491.3	491.7	491.6	491.0	490.4	489.7	489.1	487.5
147.5°	504.5	504.9	505.3	505.7	506.0	506.0	505.6	505.1	504.6	504.1	502.6
150°	513.5	513.9	514.4	514.8	515.3	515.2	514.7	514.1	513.6	513.0	511.6
152.5°	521.1	521.7	522.3	522.9	523.5	523.6	523.0	522.4	521.9	521.3	519.9
155°	531.6	532.4	533.1	533.9	534.6	534.7	534.2	533.6	533.1	532.5	531.4
157.5°	541.3	542.0	542.7	543.4	544.2	544.2	543.6	543.0	542.3	541.8	541.0
160°	546.9	547.6	548.3	548.9	549.5	549.5	549.0	548.4	548.0	547.4	546.8
162.5°	551.6	552.4	553.2	554.0	554.8	554.8	554.2	553.6	552.9	552.3	551.8
165°	558.5	559.2	559.8	560.5	561.1	561.1	560.5	559.8	559.2	558.5	558.3
167.5°	562.9	563.7	564.6	565.4	566.3	566.3	565.7	565.0	564.4	563.7	563.5
170°	565.5	566.4	567.2	568.0	568.9	568.9	568.3	567.7	567.0	566.4	566.2
172.5°	567.5	568.4	569.2	570.1	570.8	570.9	570.3	569.7	569.0	568.4	568.2
175°	569.3	570.2	571.1	572.0	573.0	573.1	572.4	571.8	571.2	570.5	570.3
177.5°	570.4	571.0	571.6	572.4	573.0	573.1	572.6	572.0	571.6	571.0	570.9
180°	571.3	571.3	571.3	571.3	571.3	571.3	571.3	571.3	571.3	571.3	571.3



TEST NUMBER: P331429-927

CATALOG NUMBER: S122DIP-S1005D530U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1579.6	1579.6	1579.6	1579.6	1579.6	1579.6	1579.6	1579.6	1579.6	1579.6	1579.6
2.5°	1621.0	1617.1	1614.6	1605.9	1598.1	1590.3	1587.9	1588.9	1578.2	1568.0	1563.6
5°	1684.1	1671.9	1660.4	1644.0	1624.6	1603.3	1592.4	1583.9	1562.7	1539.6	1526.2
7.5°	1740.7	1723.3	1701.1	1670.2	1642.0	1608.5	1587.3	1568.4	1537.4	1504.8	1484.9
10°	1775.1	1751.4	1722.9	1685.3	1650.7	1610.0	1581.4	1552.9	1516.5	1477.7	1453.3
12.5°	1804.7	1772.8	1744.8	1696.5	1655.5	1604.6	1570.8	1530.6	1492.2	1446.0	1422.3
15°	1875.3	1816.4	1763.0	1708.3	1658.0	1586.9	1549.3	1495.2	1444.9	1387.8	1360.5
17.5°	1929.8	1863.6	1779.5	1710.1	1651.3	1572.6	1517.3	1452.6	1393.1	1327.9	1290.7
20°	1960.9	1885.0	1794.5	1712.0	1641.6	1551.7	1491.6	1425.5	1355.7	1282.1	1242.1
22.5°	1979.3	1899.6	1810.1	1704.7	1622.2	1534.7	1459.0	1386.6	1315.8	1236.5	1194.5
25°	1985.2	1912.3	1817.7	1698.7	1597.8	1498.9	1407.9	1337.4	1251.8	1177.7	1116.4
27.5°	1956.3	1904.1	1813.0	1687.2	1569.8	1454.1	1352.6	1272.8	1182.5	1102.1	1040.5
30°	1920.8	1890.5	1801.8	1675.5	1547.4	1423.0	1311.3	1220.8	1131.0	1049.6	986.5
32.5°	1866.0	1859.4	1781.5	1659.1	1523.7	1383.7	1268.1	1176.6	1077.1	997.2	937.0
35°	1758.2	1787.2	1738.1	1622.2	1478.8	1327.7	1202.6	1098.2	995.1	918.5	862.1
37.5°	1613.7	1686.0	1673.2	1568.1	1418.4	1266.8	1128.7	1019.5	921.2	844.0	788.6
40°	1514.1	1606.4	1619.7	1526.9	1375.7	1219.6	1073.3	964.6	868.7	798.4	742.4
42.5°	1407.2	1515.0	1551.7	1477.3	1329.0	1170.1	1023.8	911.2	816.3	747.8	698.3
45°	1228.1	1370.8	1437.0	1394.5	1251.3	1088.5	937.9	823.8	737.6	673.3	635.0
47.5°	1060.7	1216.6	1305.6	1290.5	1164.7	1003.5	854.7	745.1	661.2	609.9	575.7
50°	942.2	1102.5	1209.9	1214.8	1102.5	942.8	793.4	690.2	613.1	565.2	537.3
52.5°	839.2	992.2	1109.4	1135.1	1033.0	879.6	738.6	635.9	568.0	523.9	498.9
55°	704.8	834.2	964.1	1011.4	929.5	783.8	653.2	562.8	499.0	468.7	446.8
57.5°	586.0	693.8	813.7	866.1	815.6	690.9	568.5	489.9	438.2	411.6	394.8
60°	523.3	608.3	715.2	777.7	734.0	622.9	516.0	441.3	398.9	375.2	359.4
62.5°	465.0	540.3	630.7	687.9	664.0	559.3	463.6	397.7	361.0	338.7	327.3
65°	383.7	443.1	513.0	565.8	550.0	470.5	392.2	335.7	306.6	289.0	279.9
67.5°	315.9	358.9	407.3	453.6	440.8	384.5	321.6	277.7	256.0	240.7	235.3
70°	273.2	305.9	349.1	386.1	375.8	329.6	279.9	242.2	223.4	210.6	205.2
72.5°	232.4	259.4	292.2	322.5	315.5	277.2	235.7	207.2	192.8	181.0	176.6
75°	175.5	196.1	216.1	236.1	234.3	204.6	180.3	158.4	146.9	137.8	136.0
77.5°	129.5	141.1	154.7	166.6	163.3	146.3	127.2	114.7	106.2	100.1	99.2
80°	98.9	105.6	115.3	123.8	119.6	112.3	97.1	88.0	82.0	75.9	73.4
82.5°	71.8	78.4	84.3	88.9	85.6	78.8	69.5	63.3	59.7	55.5	54.5
85°	37.6	41.3	43.7	44.9	43.7	39.5	35.2	32.8	29.8	28.0	27.3
87.5°	15.9	15.8	15.6	16.4	14.7	14.6	12.4	10.8	10.5	10.2	9.4
90°	6.8	6.1	5.3	4.4	3.4	2.5	1.4	0.4	1.4	2.5	3.4
92.5°	8.9	8.5	8.2	8.0	8.1	8.2	8.2	8.3	8.2	8.2	8.1
95°	14.8	14.2	13.5	14.7	17.7	20.8	23.8	26.9	23.8	20.8	17.7
97.5°	18.6	17.1	15.6	19.2	27.7	36.3	44.8	53.3	44.8	36.3	27.7
100°	20.4	18.9	17.3	22.8	35.4	48.0	60.6	73.2	60.6	48.0	35.4
102.5°	50.4	63.5	76.4	84.4	87.0	89.7	92.4	95.0	92.4	89.7	87.0
105°	75.4	100.4	125.6	136.7	134.0	131.2	128.4	125.6	128.4	131.2	134.0
107.5°	95.5	125.6	155.6	169.5	167.3	165.1	162.9	160.7	162.9	165.1	167.3
110°	125.5	152.0	178.6	190.8	188.9	187.0	185.1	183.2	185.1	187.0	188.9





TEST NUMBER: P331429-927

CATALOG NUMBER: S122DIP-S1005D530U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	195.6	202.2	208.7	211.1	209.5	207.7	206.0	204.3	206.0	207.7	209.5
115°	250.5	248.2	245.9	244.0	242.4	240.8	239.2	237.7	239.2	240.8	242.4
117.5°	279.4	277.8	276.2	274.6	272.8	271.1	269.3	267.6	269.3	271.1	272.8
120°	299.8	298.1	296.4	294.9	293.5	292.2	290.7	289.4	290.7	292.2	293.5
122.5°	318.9	317.1	315.4	313.7	312.3	310.9	309.3	307.9	309.3	310.9	312.3
125°	345.9	344.1	342.4	340.9	339.7	338.5	337.3	336.1	337.3	338.5	339.7
127.5°	370.9	369.6	368.3	366.9	365.6	364.3	363.0	361.6	363.0	364.3	365.6
130°	387.0	386.0	385.0	383.7	382.3	380.8	379.3	377.9	379.3	380.8	382.3
132.5°	402.6	401.6	400.5	399.4	398.2	396.9	395.6	394.4	395.6	396.9	398.2
135°	424.6	423.7	422.9	421.8	420.3	418.8	417.4	415.9	417.4	418.8	420.3
137.5°	444.7	443.7	442.8	441.7	440.7	439.7	438.6	437.7	438.6	439.7	440.7
140°	457.7	456.7	455.7	454.8	454.1	453.4	452.6	451.9	452.6	453.4	454.1
142.5°	469.6	468.5	467.3	466.4	465.7	465.1	464.5	463.7	464.5	465.1	465.7
145°	485.9	484.4	482.8	482.1	482.2	482.3	482.4	482.4	482.4	482.3	482.2
147.5°	501.1	499.5	498.0	497.3	497.7	498.0	498.4	498.8	498.4	498.0	497.7
150°	510.1	508.7	507.2	506.8	507.4	508.0	508.7	509.3	508.7	508.0	507.4
152.5°	518.6	517.1	515.7	515.4	516.1	516.8	517.5	518.2	517.5	516.8	516.1
155°	530.3	529.2	528.1	527.9	528.8	529.6	530.4	531.2	530.4	529.6	528.8
157.5°	540.2	539.4	538.7	538.6	539.3	540.0	540.7	541.4	540.7	540.0	539.3
160°	546.3	545.7	545.2	545.2	545.7	546.3	546.8	547.4	546.8	546.3	545.7
162.5°	551.4	550.9	550.4	550.5	551.0	551.5	552.1	552.6	552.1	551.5	551.0
165°	557.9	557.7	557.5	557.5	558.1	558.6	559.2	559.8	559.2	558.6	558.1
167.5°	563.2	562.9	562.7	562.8	563.4	564.0	564.5	565.1	564.5	564.0	563.4
170°	566.0	565.9	565.6	565.9	566.4	567.0	567.5	568.0	567.5	567.0	566.4
172.5°	568.0	567.8	567.6	567.8	568.4	568.9	569.5	570.1	569.5	568.9	568.4
175°	570.1	570.0	569.8	570.0	570.7	571.3	572.0	572.6	572.0	571.3	570.7
177.5°	570.8	570.8	570.7	570.9	571.5	572.0	572.5	573.0	572.5	572.0	571.5
180°	571.3	571.3	571.3	571.3	571.3	571.3	571.3	571.3	571.3	571.3	571.3



TEST NUMBER: P331429-927

CATALOG NUMBER: S122DIP-S1005D530U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1579.6	1579.6	1579.6	1579.6	1579.6	1579.6	1579.6	1579.6	1579.6	1579.6	1579.6
2.5°	1558.8	1555.8	1545.6	1540.3	1531.6	1523.3	1518.0	1520.4	1522.3	1521.4	1519.9
5°	1514.1	1502.5	1484.9	1469.7	1458.8	1438.8	1430.3	1426.1	1422.4	1418.2	1413.9
7.5°	1460.9	1442.7	1417.5	1395.8	1375.4	1350.5	1336.3	1327.9	1319.1	1309.5	1301.0
10°	1423.0	1397.5	1370.8	1340.5	1316.2	1293.7	1273.7	1260.3	1248.2	1236.7	1228.1
12.5°	1383.2	1353.8	1320.8	1279.3	1252.5	1220.4	1217.3	1193.8	1174.8	1167.7	1157.7
15°	1319.8	1278.5	1236.7	1187.5	1166.3	1137.1	1118.9	1100.7	1084.3	1072.7	1069.7
17.5°	1247.8	1194.4	1152.7	1117.4	1082.6	1052.7	1035.9	1021.4	1007.9	992.4	990.4
20°	1192.9	1146.8	1101.3	1070.3	1034.5	1004.1	983.5	968.9	957.4	948.2	940.4
22.5°	1141.0	1090.4	1048.8	1014.9	979.6	955.1	938.8	924.7	915.1	905.1	897.6
25°	1057.6	1018.1	972.6	934.3	905.1	889.4	876.0	863.9	857.9	851.1	842.6
27.5°	984.6	940.7	898.1	868.5	842.9	828.9	819.4	811.2	805.5	801.6	796.8
30°	933.1	888.7	855.4	826.2	805.0	791.1	785.0	780.1	773.4	771.0	768.6
32.5°	883.5	843.6	815.1	789.8	769.5	760.4	754.9	750.5	745.3	742.8	738.0
35°	813.5	780.1	752.2	738.2	721.8	713.9	709.7	703.6	698.8	696.3	695.7
37.5°	747.6	718.6	700.2	682.2	675.3	670.5	664.6	660.5	659.1	658.7	658.1
40°	704.8	681.1	664.8	650.2	647.1	639.8	635.0	631.4	631.4	632.0	631.4
42.5°	666.0	644.8	630.3	617.7	614.1	609.7	604.9	604.7	605.6	607.7	605.6
45°	607.1	591.9	581.6	575.5	568.9	564.6	564.0	565.8	566.4	567.0	568.9
47.5°	552.9	542.9	533.5	526.8	523.9	523.2	522.4	525.6	528.5	529.7	532.4
50°	520.9	509.4	501.5	497.2	494.8	493.5	494.8	498.4	500.8	503.9	505.7
52.5°	485.0	476.8	471.3	468.1	467.1	467.9	468.1	472.2	476.1	477.2	478.0
55°	435.3	429.2	428.0	422.6	424.9	424.4	427.4	429.8	433.5	437.1	437.7
57.5°	385.7	380.9	377.6	378.1	378.8	381.5	384.0	388.3	392.2	396.1	396.4
60°	352.8	350.3	348.5	348.5	349.7	353.3	356.3	360.6	363.1	365.4	367.3
62.5°	322.6	320.2	318.4	319.3	322.5	324.6	328.2	330.5	333.0	335.3	336.2
65°	275.0	273.8	275.6	276.9	277.4	280.5	284.7	286.5	289.0	290.2	294.5
67.5°	231.2	231.4	231.2	232.9	236.4	237.1	241.1	245.4	245.9	248.2	251.0
70°	201.5	202.8	204.0	205.2	208.3	209.5	212.5	214.3	216.7	218.6	220.4
72.5°	174.4	174.6	175.8	175.5	178.1	180.8	183.3	185.1	187.6	189.9	191.7
75°	134.2	134.2	135.4	136.0	139.0	142.0	141.5	142.7	145.1	147.5	148.8
77.5°	98.0	96.6	98.0	98.6	99.6	102.1	102.6	104.3	107.1	106.2	107.6
80°	74.7	72.9	74.7	75.3	75.3	78.3	78.3	79.5	81.4	79.5	81.4
82.5°	53.3	52.4	53.8	53.9	54.9	55.0	56.0	56.2	58.1	57.2	58.1
85°	26.7	26.1	26.7	26.1	26.7	27.3	27.3	26.7	26.7	28.0	26.1
87.5°	9.1	8.9	8.5	8.6	8.3	8.0	7.6	7.7	7.8	6.9	7.0
90°	4.4	5.3	6.1	6.8	7.5	8.2	8.7	9.2	9.7	10.1	10.5
92.5°	8.0	8.2	8.5	8.9	9.2	9.6	9.8	10.1	10.3	10.5	10.7
95°	14.7	13.5	14.2	14.8	15.4	16.2	16.6	17.0	17.5	18.0	18.1
97.5°	19.2	15.6	17.1	18.6	20.1	21.5	21.9	22.3	22.7	23.1	23.3
100°	22.8	17.3	18.9	20.4	22.0	23.5	24.3	25.0	25.7	26.5	26.9
102.5°	84.4	76.4	63.5	50.4	37.3	24.2	25.2	26.1	27.1	28.0	28.7
105°	136.7	125.6	100.4	75.4	50.3	25.2	26.2	27.3	28.3	29.2	29.9
107.5°	169.5	155.6	125.6	95.5	65.4	35.3	34.3	33.3	32.2	31.2	30.9
110°	190.8	178.6	152.0	125.5	98.9	72.3	63.1	53.9	44.8	35.6	31.2



TEST NUMBER: P331429-927

CATALOG NUMBER: S122DIP-S1005D530U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	211.1	208.7	202.2	195.6	189.0	182.5	148.9	115.4	81.9	48.4	31.8
115°	244.0	245.9	248.2	250.5	252.8	255.1	212.5	170.0	127.5	84.9	60.4
117.5°	274.6	276.2	277.8	279.4	281.0	282.5	272.3	262.0	251.7	241.4	225.4
120°	294.9	296.4	298.1	299.8	301.3	303.0	304.1	305.2	306.3	307.4	301.8
122.5°	313.7	315.4	317.1	318.9	320.8	322.6	323.2	323.8	324.6	325.2	324.3
125°	340.9	342.4	344.1	345.9	347.6	349.4	350.0	350.6	351.3	351.9	352.4
127.5°	366.9	368.3	369.6	370.9	372.2	373.5	374.4	375.3	376.3	377.2	377.7
130°	383.7	385.0	386.0	387.0	388.0	389.0	390.1	391.0	392.1	393.1	393.6
132.5°	399.4	400.5	401.6	402.6	403.5	404.6	405.4	406.3	407.2	408.1	408.4
135°	421.8	422.9	423.7	424.6	425.4	426.2	427.1	428.1	429.0	429.9	430.3
137.5°	441.7	442.8	443.7	444.7	445.5	446.5	447.4	448.3	449.2	450.1	450.4
140°	454.8	455.7	456.7	457.7	458.7	459.7	460.6	461.4	462.2	463.0	463.2
142.5°	466.4	467.3	468.5	469.6	470.8	472.0	472.7	473.5	474.2	475.0	475.2
145°	482.1	482.8	484.4	485.9	487.5	489.1	489.7	490.4	491.0	491.6	491.7
147.5°	497.3	498.0	499.5	501.1	502.6	504.1	504.6	505.1	505.6	506.0	506.0
150°	506.8	507.2	508.7	510.1	511.6	513.0	513.6	514.1	514.7	515.2	515.3
152.5°	515.4	515.7	517.1	518.6	519.9	521.3	521.9	522.4	523.0	523.6	523.5
155°	527.9	528.1	529.2	530.3	531.4	532.5	533.1	533.6	534.2	534.7	534.6
157.5°	538.6	538.7	539.4	540.2	541.0	541.8	542.3	543.0	543.6	544.2	544.2
160°	545.2	545.2	545.7	546.3	546.8	547.4	548.0	548.4	549.0	549.5	549.5
162.5°	550.5	550.4	550.9	551.4	551.8	552.3	552.9	553.6	554.2	554.8	554.8
165°	557.5	557.5	557.7	557.9	558.3	558.5	559.2	559.8	560.5	561.1	561.1
167.5°	562.8	562.7	562.9	563.2	563.5	563.7	564.4	565.0	565.7	566.3	566.3
170°	565.9	565.6	565.9	566.0	566.2	566.4	567.0	567.7	568.3	568.9	568.9
172.5°	567.8	567.6	567.8	568.0	568.2	568.4	569.0	569.7	570.3	570.9	570.8
175°	570.0	569.8	570.0	570.1	570.3	570.5	571.2	571.8	572.4	573.1	573.0
177.5°	570.9	570.7	570.8	570.8	570.9	571.0	571.6	572.0	572.6	573.1	573.0
180°	571.3	571.3	571.3	571.3	571.3	571.3	571.3	571.3	571.3	571.3	571.3



TEST NUMBER: P331429-927

CATALOG NUMBER: S122DIP-S1005D530U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1579.6	1579.6	1579.6	1579.6	1579.6	1579.6	1579.6	1579.6	1579.6	1579.6	1579.6
2.5°	1515.0	1514.1	1514.1	1509.7	1514.1	1514.1	1515.0	1519.9	1521.4	1522.3	1520.4
5°	1405.4	1403.6	1400.6	1403.6	1400.6	1403.6	1405.4	1413.9	1418.2	1422.4	1426.1
7.5°	1297.0	1289.7	1288.6	1281.4	1288.6	1289.7	1297.0	1301.0	1309.5	1319.1	1327.9
10°	1217.8	1213.0	1212.4	1200.8	1212.4	1213.0	1217.8	1228.1	1236.7	1248.2	1260.3
12.5°	1157.6	1146.0	1148.3	1141.5	1148.3	1146.0	1157.6	1157.7	1167.7	1174.8	1193.8
15°	1053.3	1053.3	1050.9	1040.5	1050.9	1053.3	1053.3	1069.7	1072.7	1084.3	1100.7
17.5°	978.4	977.2	971.4	974.2	971.4	977.2	978.4	990.4	992.4	1007.9	1021.4
20°	933.7	930.1	922.8	922.8	922.8	930.1	933.7	940.4	948.2	957.4	968.9
22.5°	891.4	891.2	883.4	885.9	883.4	891.2	891.4	897.6	905.1	915.1	924.7
25°	842.0	837.2	833.5	835.4	833.5	837.2	842.0	842.6	851.1	857.9	863.9
27.5°	795.2	792.5	792.3	787.3	792.3	792.5	795.2	796.8	801.6	805.5	811.2
30°	767.9	761.9	763.1	760.1	763.1	761.9	767.9	768.6	771.0	773.4	780.1
32.5°	736.9	734.7	733.5	730.9	733.5	734.7	736.9	738.0	742.8	745.3	750.5
35°	694.5	695.1	692.1	693.3	692.1	695.1	694.5	695.7	696.3	698.8	703.6
37.5°	657.5	659.4	658.0	658.3	658.0	659.4	657.5	658.1	658.7	659.1	660.5
40°	633.2	633.2	633.2	635.0	633.2	633.2	633.2	631.4	632.0	631.4	631.4
42.5°	609.9	609.0	607.9	607.8	607.9	609.0	609.9	605.6	607.7	605.6	604.7
45°	570.1	571.9	572.5	569.4	572.5	571.9	570.1	568.9	567.0	566.4	565.8
47.5°	534.0	534.2	534.0	536.7	534.0	534.2	534.0	532.4	529.7	528.5	525.6
50°	508.7	507.6	508.7	507.6	508.7	507.6	508.7	505.7	503.9	500.8	498.4
52.5°	482.0	482.3	481.6	481.3	481.6	482.3	482.0	478.0	477.2	476.1	472.2
55°	440.1	441.3	440.8	440.8	440.8	441.3	440.1	437.7	437.1	433.5	429.8
57.5°	396.8	397.9	398.7	396.1	398.7	397.9	396.8	396.4	396.1	392.2	388.3
60°	366.7	369.7	369.1	367.9	369.1	369.7	366.7	367.3	365.4	363.1	360.6
62.5°	339.0	340.1	340.0	339.8	340.0	340.1	339.0	336.2	335.3	333.0	330.5
65°	296.3	297.5	295.6	297.5	295.6	297.5	296.3	294.5	290.2	289.0	286.5
67.5°	250.3	250.6	251.9	252.8	251.9	250.6	250.3	251.0	248.2	245.9	245.4
70°	221.6	221.0	222.8	224.7	222.8	221.0	221.6	220.4	218.6	216.7	214.3
72.5°	191.5	192.8	192.2	193.5	192.2	192.8	191.5	191.7	189.9	187.6	185.1
75°	147.5	149.3	148.8	150.6	148.8	149.3	147.5	148.8	147.5	145.1	142.7
77.5°	106.6	106.9	106.6	107.6	106.6	106.9	106.6	107.6	106.2	107.1	104.3
80°	81.4	80.2	78.9	81.4	78.9	80.2	81.4	81.4	79.5	81.4	79.5
82.5°	56.6	57.3	56.1	56.1	56.1	57.3	56.6	58.1	57.2	58.1	56.2
85°	26.1	25.5	24.3	24.3	24.3	25.5	26.1	26.1	28.0	26.7	26.7
87.5°	7.0	6.5	6.6	6.1	6.6	6.5	7.0	7.0	6.9	7.8	7.7
90°	10.6	10.8	11.0	11.2	11.0	10.8	10.6	10.5	10.1	9.7	9.2
92.5°	10.9	10.9	11.1	11.2	11.1	10.9	10.9	10.7	10.5	10.3	10.1
95°	18.1	18.0	17.9	17.7	17.9	18.0	18.1	18.1	18.0	17.5	17.0
97.5°	23.4	23.5	23.6	23.8	23.6	23.5	23.4	23.3	23.1	22.7	22.3
100°	27.2	27.3	27.5	27.7	27.5	27.3	27.2	26.9	26.5	25.7	25.0
102.5°	28.9	29.2	29.4	29.7	29.4	29.2	28.9	28.7	28.0	27.1	26.1
105°	30.3	30.7	31.1	31.4	31.1	30.7	30.3	29.9	29.2	28.3	27.3
107.5°	31.2	31.6	31.9	32.3	31.9	31.6	31.2	30.9	31.2	32.2	33.3
110°	31.5	31.9	32.3	32.6	32.3	31.9	31.5	31.2	35.6	44.8	53.9



TEST NUMBER: P331429-927

CATALOG NUMBER: S122DIP-S1005D530U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	32.1	32.4	32.7	33.0	32.7	32.4	32.1	31.8	48.4	81.9	115.4
115°	53.7	47.1	40.5	33.9	40.5	47.1	53.7	60.4	84.9	127.5	170.0
117.5°	203.6	181.9	160.2	138.4	160.2	181.9	203.6	225.4	241.4	251.7	262.0
120°	289.4	277.0	264.6	252.2	264.6	277.0	289.4	301.8	307.4	306.3	305.2
122.5°	321.9	319.5	317.1	314.7	317.1	319.5	321.9	324.3	325.2	324.6	323.8
125°	352.7	352.9	353.2	353.5	353.2	352.9	352.7	352.4	351.9	351.3	350.6
127.5°	377.8	377.9	377.9	378.0	377.9	377.9	377.8	377.7	377.2	376.3	375.3
130°	393.4	393.3	393.2	393.2	393.2	393.3	393.4	393.6	393.1	392.1	391.0
132.5°	408.3	408.2	408.1	408.1	408.1	408.2	408.3	408.4	408.1	407.2	406.3
135°	430.1	429.9	429.8	429.5	429.8	429.9	430.1	430.3	429.9	429.0	428.1
137.5°	450.0	449.7	449.5	449.2	449.5	449.7	450.0	450.4	450.1	449.2	448.3
140°	462.7	462.3	461.8	461.4	461.8	462.3	462.7	463.2	463.0	462.2	461.4
142.5°	474.7	474.2	473.7	473.2	473.7	474.2	474.7	475.2	475.0	474.2	473.5
145°	491.3	490.8	490.4	489.9	490.4	490.8	491.3	491.7	491.6	491.0	490.4
147.5°	505.7	505.3	504.9	504.5	504.9	505.3	505.7	506.0	506.0	505.6	505.1
150°	514.8	514.4	513.9	513.5	513.9	514.4	514.8	515.3	515.2	514.7	514.1
152.5°	522.9	522.3	521.7	521.1	521.7	522.3	522.9	523.5	523.6	523.0	522.4
155°	533.9	533.1	532.4	531.6	532.4	533.1	533.9	534.6	534.7	534.2	533.6
157.5°	543.4	542.7	542.0	541.3	542.0	542.7	543.4	544.2	544.2	543.6	543.0
160°	548.9	548.3	547.6	546.9	547.6	548.3	548.9	549.5	549.5	549.0	548.4
162.5°	554.0	553.2	552.4	551.6	552.4	553.2	554.0	554.8	554.8	554.2	553.6
165°	560.5	559.8	559.2	558.5	559.2	559.8	560.5	561.1	561.1	560.5	559.8
167.5°	565.4	564.6	563.7	562.9	563.7	564.6	565.4	566.3	566.3	565.7	565.0
170°	568.0	567.2	566.4	565.5	566.4	567.2	568.0	568.9	568.9	568.3	567.7
172.5°	570.1	569.2	568.4	567.5	568.4	569.2	570.1	570.8	570.9	570.3	569.7
175°	572.0	571.1	570.2	569.3	570.2	571.1	572.0	573.0	573.1	572.4	571.8
177.5°	572.4	571.6	571.0	570.4	571.0	571.6	572.4	573.0	573.1	572.6	572.0
180°	571.3	571.3	571.3	571.3	571.3	571.3	571.3	571.3	571.3	571.3	571.3



TEST NUMBER: P331429-927

CATALOG NUMBER: S122DIP-S1005D530U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1579.6	1579.6	1579.6	1579.6	1579.6	1579.6	1579.6	1579.6	1579.6	1579.6	1579.6
2.5°	1518.0	1523.3	1531.6	1540.3	1545.6	1555.8	1558.8	1563.6	1568.0	1578.2	1588.9
5°	1430.3	1438.8	1458.8	1469.7	1484.9	1502.5	1514.1	1526.2	1539.6	1562.7	1583.9
7.5°	1336.3	1350.5	1375.4	1395.8	1417.5	1442.7	1460.9	1484.9	1504.8	1537.4	1568.4
10°	1273.7	1293.7	1316.2	1340.5	1370.8	1397.5	1423.0	1453.3	1477.7	1516.5	1552.9
12.5°	1217.3	1220.4	1252.5	1279.3	1320.8	1353.8	1383.2	1422.3	1446.0	1492.2	1530.6
15°	1118.9	1137.1	1166.3	1187.5	1236.7	1278.5	1319.8	1360.5	1387.8	1444.9	1495.2
17.5°	1035.9	1052.7	1082.6	1117.4	1152.7	1194.4	1247.8	1290.7	1327.9	1393.1	1452.6
20°	983.5	1004.1	1034.5	1070.3	1101.3	1146.8	1192.9	1242.1	1282.1	1355.7	1425.5
22.5°	938.8	955.1	979.6	1014.9	1048.8	1090.4	1141.0	1194.5	1236.5	1315.8	1386.6
25°	876.0	889.4	905.1	934.3	972.6	1018.1	1057.6	1116.4	1177.7	1251.8	1337.4
27.5°	819.4	828.9	842.9	868.5	898.1	940.7	984.6	1040.5	1102.1	1182.5	1272.8
30°	785.0	791.1	805.0	826.2	855.4	888.7	933.1	986.5	1049.6	1131.0	1220.8
32.5°	754.9	760.4	769.5	789.8	815.1	843.6	883.5	937.0	997.2	1077.1	1176.6
35°	709.7	713.9	721.8	738.2	752.2	780.1	813.5	862.1	918.5	995.1	1098.2
37.5°	664.6	670.5	675.3	682.2	700.2	718.6	747.6	788.6	844.0	921.2	1019.5
40°	635.0	639.8	647.1	650.2	664.8	681.1	704.8	742.4	798.4	868.7	964.6
42.5°	604.9	609.7	614.1	617.7	630.3	644.8	666.0	698.3	747.8	816.3	911.2
45°	564.0	564.6	568.9	575.5	581.6	591.9	607.1	635.0	673.3	737.6	823.8
47.5°	522.4	523.2	523.9	526.8	533.5	542.9	552.9	575.7	609.9	661.2	745.1
50°	494.8	493.5	494.8	497.2	501.5	509.4	520.9	537.3	565.2	613.1	690.2
52.5°	468.1	467.9	467.1	468.1	471.3	476.8	485.0	498.9	523.9	568.0	635.9
55°	427.4	424.4	424.9	422.6	428.0	429.2	435.3	446.8	468.7	499.0	562.8
57.5°	384.0	381.5	378.8	378.1	377.6	380.9	385.7	394.8	411.6	438.2	489.9
60°	356.3	353.3	349.7	348.5	348.5	350.3	352.8	359.4	375.2	398.9	441.3
62.5°	328.2	324.6	322.5	319.3	318.4	320.2	322.6	327.3	338.7	361.0	397.7
65°	284.7	280.5	277.4	276.9	275.6	273.8	275.0	279.9	289.0	306.6	335.7
67.5°	241.1	237.1	236.4	232.9	231.2	231.4	231.2	235.3	240.7	256.0	277.7
70°	212.5	209.5	208.3	205.2	204.0	202.8	201.5	205.2	210.6	223.4	242.2
72.5°	183.3	180.8	178.1	175.5	175.8	174.6	174.4	176.6	181.0	192.8	207.2
75°	141.5	142.0	139.0	136.0	135.4	134.2	134.2	136.0	137.8	146.9	158.4
77.5°	102.6	102.1	99.6	98.6	98.0	96.6	98.0	99.2	100.1	106.2	114.7
80°	78.3	78.3	75.3	75.3	74.7	72.9	74.7	73.4	75.9	82.0	88.0
82.5°	56.0	55.0	54.9	53.9	53.8	52.4	53.3	54.5	55.5	59.7	63.3
85°	27.3	27.3	26.7	26.1	26.7	26.1	26.7	27.3	28.0	29.8	32.8
87.5°	7.6	8.0	8.3	8.6	8.5	8.9	9.1	9.4	10.2	10.5	10.8
90°	8.7	8.2	7.5	6.8	6.1	5.3	4.4	3.4	2.5	1.4	0.4
92.5°	9.8	9.6	9.2	8.9	8.5	8.2	8.0	8.1	8.2	8.2	8.3
95°	16.6	16.2	15.4	14.8	14.2	13.5	14.7	17.7	20.8	23.8	26.9
97.5°	21.9	21.5	20.1	18.6	17.1	15.6	19.2	27.7	36.3	44.8	53.3
100°	24.3	23.5	22.0	20.4	18.9	17.3	22.8	35.4	48.0	60.6	73.2
102.5°	25.2	24.2	37.3	50.4	63.5	76.4	84.4	87.0	89.7	92.4	95.0
105°	26.2	25.2	50.3	75.4	100.4	125.6	136.7	134.0	131.2	128.4	125.6
107.5°	34.3	35.3	65.4	95.5	125.6	155.6	169.5	167.3	165.1	162.9	160.7
110°	63.1	72.3	98.9	125.5	152.0	178.6	190.8	188.9	187.0	185.1	183.2



TEST NUMBER: P331429-927

CATALOG NUMBER: S122DIP-S1005D530U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	148.9	182.5	189.0	195.6	202.2	208.7	211.1	209.5	207.7	206.0	204.3
115°	212.5	255.1	252.8	250.5	248.2	245.9	244.0	242.4	240.8	239.2	237.7
117.5°	272.3	282.5	281.0	279.4	277.8	276.2	274.6	272.8	271.1	269.3	267.6
120°	304.1	303.0	301.3	299.8	298.1	296.4	294.9	293.5	292.2	290.7	289.4
122.5°	323.2	322.6	320.8	318.9	317.1	315.4	313.7	312.3	310.9	309.3	307.9
125°	350.0	349.4	347.6	345.9	344.1	342.4	340.9	339.7	338.5	337.3	336.1
127.5°	374.4	373.5	372.2	370.9	369.6	368.3	366.9	365.6	364.3	363.0	361.6
130°	390.1	389.0	388.0	387.0	386.0	385.0	383.7	382.3	380.8	379.3	377.9
132.5°	405.4	404.6	403.5	402.6	401.6	400.5	399.4	398.2	396.9	395.6	394.4
135°	427.1	426.2	425.4	424.6	423.7	422.9	421.8	420.3	418.8	417.4	415.9
137.5°	447.4	446.5	445.5	444.7	443.7	442.8	441.7	440.7	439.7	438.6	437.7
140°	460.6	459.7	458.7	457.7	456.7	455.7	454.8	454.1	453.4	452.6	451.9
142.5°	472.7	472.0	470.8	469.6	468.5	467.3	466.4	465.7	465.1	464.5	463.7
145°	489.7	489.1	487.5	485.9	484.4	482.8	482.1	482.2	482.3	482.4	482.4
147.5°	504.6	504.1	502.6	501.1	499.5	498.0	497.3	497.7	498.0	498.4	498.8
150°	513.6	513.0	511.6	510.1	508.7	507.2	506.8	507.4	508.0	508.7	509.3
152.5°	521.9	521.3	519.9	518.6	517.1	515.7	515.4	516.1	516.8	517.5	518.2
155°	533.1	532.5	531.4	530.3	529.2	528.1	527.9	528.8	529.6	530.4	531.2
157.5°	542.3	541.8	541.0	540.2	539.4	538.7	538.6	539.3	540.0	540.7	541.4
160°	548.0	547.4	546.8	546.3	545.7	545.2	545.2	545.7	546.3	546.8	547.4
162.5°	552.9	552.3	551.8	551.4	550.9	550.4	550.5	551.0	551.5	552.1	552.6
165°	559.2	558.5	558.3	557.9	557.7	557.5	557.5	558.1	558.6	559.2	559.8
167.5°	564.4	563.7	563.5	563.2	562.9	562.7	562.8	563.4	564.0	564.5	565.1
170°	567.0	566.4	566.2	566.0	565.9	565.6	565.9	566.4	567.0	567.5	568.0
172.5°	569.0	568.4	568.2	568.0	567.8	567.6	567.8	568.4	568.9	569.5	570.1
175°	571.2	570.5	570.3	570.1	570.0	569.8	570.0	570.7	571.3	572.0	572.6
177.5°	571.6	571.0	570.9	570.8	570.8	570.7	570.9	571.5	572.0	572.5	573.0
180°	571.3	571.3	571.3	571.3	571.3	571.3	571.3	571.3	571.3	571.3	571.3



TEST NUMBER: P331429-927

CATALOG NUMBER: S122DIP-S1005D530U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1579.6	1579.6	1579.6	1579.6	1579.6	1579.6	1579.6	1579.6	1579.6	1579.6	1579.6
2.5°	1587.9	1590.3	1598.1	1605.9	1614.6	1617.1	1621.0	1617.6	1616.5	1625.8	1632.6
5°	1592.4	1603.3	1624.6	1644.0	1660.4	1671.9	1684.1	1688.9	1698.0	1710.8	1726.6
7.5°	1587.3	1608.5	1642.0	1670.2	1701.1	1723.3	1740.7	1755.5	1773.5	1797.6	1823.9
10°	1581.4	1610.0	1650.7	1685.3	1722.9	1751.4	1775.1	1798.2	1825.0	1858.3	1892.9
12.5°	1570.8	1604.6	1655.5	1696.5	1744.8	1772.8	1804.7	1854.6	1883.2	1929.7	1978.4
15°	1549.3	1586.9	1658.0	1708.3	1763.0	1816.4	1875.3	1922.6	1970.0	1997.3	2065.9
17.5°	1517.3	1572.6	1651.3	1710.1	1779.5	1863.6	1929.8	1983.5	2038.1	2082.4	2116.8
20°	1491.6	1551.7	1641.6	1712.0	1794.5	1885.0	1960.9	2015.5	2062.9	2099.9	2121.1
22.5°	1459.0	1534.7	1622.2	1704.7	1810.1	1899.6	1979.3	2022.4	2061.9	2080.0	2088.1
25°	1407.9	1498.9	1597.8	1698.7	1817.7	1912.3	1985.2	2011.3	2022.8	2005.3	1976.1
27.5°	1352.6	1454.1	1569.8	1687.2	1813.0	1904.1	1956.3	1952.2	1932.6	1875.7	1830.1
30°	1311.3	1423.0	1547.4	1675.5	1801.8	1890.5	1920.8	1890.5	1846.2	1782.4	1717.5
32.5°	1268.1	1383.7	1523.7	1659.1	1781.5	1859.4	1866.0	1813.8	1745.2	1672.7	1591.7
35°	1202.6	1327.7	1478.8	1622.2	1738.1	1787.2	1758.2	1665.9	1584.5	1485.6	1375.1
37.5°	1128.7	1266.8	1418.4	1568.1	1673.2	1686.0	1613.7	1516.5	1401.8	1285.5	1155.4
40°	1073.3	1219.6	1375.7	1526.9	1619.7	1606.4	1514.1	1407.2	1270.7	1128.5	1007.7
42.5°	1023.8	1170.1	1329.0	1477.3	1551.7	1515.0	1407.2	1276.1	1129.3	995.5	884.9
45°	937.9	1088.5	1251.3	1394.5	1437.0	1370.8	1228.1	1082.4	937.9	826.2	738.9
47.5°	854.7	1003.5	1164.7	1290.5	1305.6	1216.6	1060.7	910.8	786.6	695.6	633.9
50°	793.4	942.8	1102.5	1214.8	1209.9	1102.5	942.2	799.5	695.7	622.3	581.0
52.5°	738.6	879.6	1033.0	1135.1	1109.4	992.2	839.2	712.6	627.2	569.8	532.4
55°	653.2	783.8	929.5	1011.4	964.1	834.2	704.8	602.9	539.7	496.6	467.5
57.5°	568.5	690.9	815.6	866.1	813.7	693.8	586.0	512.0	464.5	432.6	413.7
60°	516.0	622.9	734.0	777.7	715.2	608.3	523.3	457.2	418.9	392.8	375.8
62.5°	463.6	559.3	664.0	687.9	630.7	540.3	465.0	410.0	378.6	355.4	339.4
65°	392.2	470.5	550.0	565.8	513.0	443.1	383.7	347.8	320.0	302.9	290.2
67.5°	321.6	384.5	440.8	453.6	407.3	358.9	315.9	284.7	265.8	251.7	240.9
70°	279.9	329.6	375.8	386.1	349.1	305.9	273.2	248.3	231.3	219.2	208.8
72.5°	235.7	277.2	315.5	322.5	292.2	259.4	232.4	212.9	197.8	190.0	180.2
75°	180.3	204.6	234.3	236.1	216.1	196.1	175.5	162.7	154.8	145.1	140.2
77.5°	127.2	146.3	163.3	166.6	154.7	141.1	129.5	119.5	112.8	108.3	103.8
80°	97.1	112.3	119.6	123.8	115.3	105.6	98.9	92.3	88.0	85.0	82.0
82.5°	69.5	78.8	85.6	88.9	84.3	78.4	71.8	68.0	64.7	62.2	61.1
85°	35.2	39.5	43.7	44.9	43.7	41.3	37.6	37.6	35.8	35.2	35.2
87.5°	12.4	14.6	14.7	16.4	15.6	15.8	15.9	15.6	15.3	14.9	14.5
90°	1.4	2.5	3.4	4.4	5.3	6.1	6.8	7.5	8.2	8.7	9.2
92.5°	8.2	8.2	8.1	8.0	8.2	8.5	8.9	9.2	9.6	9.8	10.1
95°	23.8	20.8	17.7	14.7	13.5	14.2	14.8	15.4	16.2	16.6	17.0
97.5°	44.8	36.3	27.7	19.2	15.6	17.1	18.6	20.1	21.5	21.9	22.3
100°	60.6	48.0	35.4	22.8	17.3	18.9	20.4	22.0	23.5	24.3	25.0
102.5°	92.4	89.7	87.0	84.4	76.4	63.5	50.4	37.3	24.2	25.2	26.1
105°	128.4	131.2	134.0	136.7	125.6	100.4	75.4	50.3	25.2	26.2	27.3
107.5°	162.9	165.1	167.3	169.5	155.6	125.6	95.5	65.4	35.3	34.3	33.3
110°	185.1	187.0	188.9	190.8	178.6	152.0	125.5	98.9	72.3	63.1	53.9





TEST NUMBER: P331429-927

CATALOG NUMBER: S122DIP-S1005D530U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	206.0	207.7	209.5	211.1	208.7	202.2	195.6	189.0	182.5	148.9	115.4
115°	239.2	240.8	242.4	244.0	245.9	248.2	250.5	252.8	255.1	212.5	170.0
117.5°	269.3	271.1	272.8	274.6	276.2	277.8	279.4	281.0	282.5	272.3	262.0
120°	290.7	292.2	293.5	294.9	296.4	298.1	299.8	301.3	303.0	304.1	305.2
122.5°	309.3	310.9	312.3	313.7	315.4	317.1	318.9	320.8	322.6	323.2	323.8
125°	337.3	338.5	339.7	340.9	342.4	344.1	345.9	347.6	349.4	350.0	350.6
127.5°	363.0	364.3	365.6	366.9	368.3	369.6	370.9	372.2	373.5	374.4	375.3
130°	379.3	380.8	382.3	383.7	385.0	386.0	387.0	388.0	389.0	390.1	391.0
132.5°	395.6	396.9	398.2	399.4	400.5	401.6	402.6	403.5	404.6	405.4	406.3
135°	417.4	418.8	420.3	421.8	422.9	423.7	424.6	425.4	426.2	427.1	428.1
137.5°	438.6	439.7	440.7	441.7	442.8	443.7	444.7	445.5	446.5	447.4	448.3
140°	452.6	453.4	454.1	454.8	455.7	456.7	457.7	458.7	459.7	460.6	461.4
142.5°	464.5	465.1	465.7	466.4	467.3	468.5	469.6	470.8	472.0	472.7	473.5
145°	482.4	482.3	482.2	482.1	482.8	484.4	485.9	487.5	489.1	489.7	490.4
147.5°	498.4	498.0	497.7	497.3	498.0	499.5	501.1	502.6	504.1	504.6	505.1
150°	508.7	508.0	507.4	506.8	507.2	508.7	510.1	511.6	513.0	513.6	514.1
152.5°	517.5	516.8	516.1	515.4	515.7	517.1	518.6	519.9	521.3	521.9	522.4
155°	530.4	529.6	528.8	527.9	528.1	529.2	530.3	531.4	532.5	533.1	533.6
157.5°	540.7	540.0	539.3	538.6	538.7	539.4	540.2	541.0	541.8	542.3	543.0
160°	546.8	546.3	545.7	545.2	545.2	545.7	546.3	546.8	547.4	548.0	548.4
162.5°	552.1	551.5	551.0	550.5	550.4	550.9	551.4	551.8	552.3	552.9	553.6
165°	559.2	558.6	558.1	557.5	557.5	557.7	557.9	558.3	558.5	559.2	559.8
167.5°	564.5	564.0	563.4	562.8	562.7	562.9	563.2	563.5	563.7	564.4	565.0
170°	567.5	567.0	566.4	565.9	565.6	565.9	566.0	566.2	566.4	567.0	567.7
172.5°	569.5	568.9	568.4	567.8	567.6	567.8	568.0	568.2	568.4	569.0	569.7
175°	572.0	571.3	570.7	570.0	569.8	570.0	570.1	570.3	570.5	571.2	571.8
177.5°	572.5	572.0	571.5	570.9	570.7	570.8	570.8	570.9	571.0	571.6	572.0
180°	571.3	571.3	571.3	571.3	571.3	571.3	571.3	571.3	571.3	571.3	571.3



TEST NUMBER: P331429-927

CATALOG NUMBER: S122DIP-S1005D530U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
0°	1579.6	1579.6	1579.6	1579.6	1579.6	1579.6	1579.6
2.5°	1638.4	1645.2	1645.2	1646.2	1653.9	1653.0	1652.5
5°	1743.6	1753.9	1755.1	1766.0	1773.3	1770.8	1764.2
7.5°	1842.8	1861.9	1876.5	1884.7	1894.3	1900.2	1897.5
10°	1921.4	1949.4	1966.4	1977.9	1991.9	2002.2	1998.5
12.5°	1992.8	2026.1	2049.5	2069.2	2071.0	2084.2	2075.3
15°	2104.2	2139.4	2143.0	2157.6	2169.2	2167.9	2168.5
17.5°	2141.0	2152.3	2154.6	2154.9	2155.1	2150.8	2141.6
20°	2127.9	2123.6	2113.3	2105.4	2091.4	2089.6	2077.5
22.5°	2065.7	2052.2	2026.3	2009.2	1987.5	1981.8	1978.4
25°	1943.3	1913.5	1872.2	1832.8	1821.9	1800.6	1806.7
27.5°	1775.4	1729.0	1684.3	1652.3	1623.3	1591.4	1600.5
30°	1657.3	1605.1	1542.0	1493.4	1462.4	1432.1	1426.6
32.5°	1516.5	1440.0	1369.6	1326.8	1279.4	1260.2	1239.2
35°	1273.7	1199.0	1129.2	1069.1	1034.5	1007.7	983.5
37.5°	1055.3	969.3	912.9	864.3	839.2	823.9	827.8
40°	919.7	844.5	803.2	766.1	743.1	732.1	734.6
42.5°	810.0	753.6	719.6	694.3	678.0	671.9	670.5
45°	685.4	653.9	625.9	611.3	603.5	596.8	592.6
47.5°	600.4	574.6	558.9	550.2	543.4	536.5	536.4
50°	549.4	532.4	521.5	512.4	506.9	502.1	506.3
52.5°	510.6	495.0	484.1	475.9	473.9	469.5	469.4
55°	452.9	440.8	432.8	425.6	421.9	419.5	416.5
57.5°	400.4	388.9	381.6	377.0	370.1	367.7	366.7
60°	363.1	353.9	346.7	340.6	337.5	332.7	332.7
62.5°	328.5	319.5	312.7	308.0	303.1	301.1	301.6
65°	278.7	271.4	264.7	259.8	258.6	255.0	256.2
67.5°	232.7	227.9	220.9	218.2	215.9	214.0	212.5
70°	202.2	197.3	193.7	190.0	188.2	188.2	188.2
72.5°	176.4	170.6	168.4	163.8	164.9	163.0	161.0
75°	136.6	132.9	131.1	129.3	126.3	126.3	126.3
77.5°	100.5	99.4	97.3	95.3	94.6	94.0	94.2
80°	77.7	77.1	75.9	75.9	74.7	74.1	72.9
82.5°	59.7	58.1	57.4	57.0	56.7	56.6	56.3
85°	34.0	32.8	32.8	33.4	32.2	32.2	32.8
87.5°	15.1	15.1	14.7	14.7	15.3	14.8	14.9
90°	9.7	10.1	10.5	10.6	10.8	11.0	11.2
92.5°	10.3	10.5	10.7	10.9	10.9	11.1	11.2
95°	17.5	18.0	18.1	18.1	18.0	17.9	17.7
97.5°	22.7	23.1	23.3	23.4	23.5	23.6	23.8
100°	25.7	26.5	26.9	27.2	27.3	27.5	27.7
102.5°	27.1	28.0	28.7	28.9	29.2	29.4	29.7
105°	28.3	29.2	29.9	30.3	30.7	31.1	31.4
107.5°	32.2	31.2	30.9	31.2	31.6	31.9	32.3
110°	44.8	35.6	31.2	31.5	31.9	32.3	32.6



TEST NUMBER: P331429-927

CATALOG NUMBER: S122DIP-S1005D530U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
112.5°	81.9	48.4	31.8	32.1	32.4	32.7	33.0
115°	127.5	84.9	60.4	53.7	47.1	40.5	33.9
117.5°	251.7	241.4	225.4	203.6	181.9	160.2	138.4
120°	306.3	307.4	301.8	289.4	277.0	264.6	252.2
122.5°	324.6	325.2	324.3	321.9	319.5	317.1	314.7
125°	351.3	351.9	352.4	352.7	352.9	353.2	353.5
127.5°	376.3	377.2	377.7	377.8	377.9	377.9	378.0
130°	392.1	393.1	393.6	393.4	393.3	393.2	393.2
132.5°	407.2	408.1	408.4	408.3	408.2	408.1	408.1
135°	429.0	429.9	430.3	430.1	429.9	429.8	429.5
137.5°	449.2	450.1	450.4	450.0	449.7	449.5	449.2
140°	462.2	463.0	463.2	462.7	462.3	461.8	461.4
142.5°	474.2	475.0	475.2	474.7	474.2	473.7	473.2
145°	491.0	491.6	491.7	491.3	490.8	490.4	489.9
147.5°	505.6	506.0	506.0	505.7	505.3	504.9	504.5
150°	514.7	515.2	515.3	514.8	514.4	513.9	513.5
152.5°	523.0	523.6	523.5	522.9	522.3	521.7	521.1
155°	534.2	534.7	534.6	533.9	533.1	532.4	531.6
157.5°	543.6	544.2	544.2	543.4	542.7	542.0	541.3
160°	549.0	549.5	549.5	548.9	548.3	547.6	546.9
162.5°	554.2	554.8	554.8	554.0	553.2	552.4	551.6
165°	560.5	561.1	561.1	560.5	559.8	559.2	558.5
167.5°	565.7	566.3	566.3	565.4	564.6	563.7	562.9
170°	568.3	568.9	568.9	568.0	567.2	566.4	565.5
172.5°	570.3	570.9	570.8	570.1	569.2	568.4	567.5
175°	572.4	573.1	573.0	572.0	571.1	570.2	569.3
177.5°	572.6	573.1	573.0	572.4	571.6	571.0	570.4
180°	571.3	571.3	571.3	571.3	571.3	571.3	571.3

(END OF REPORT)