

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331437-927

Luminaire Tested: **S122DIP-S1005D530U927-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331437-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-16,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIP-S1005D530U927-4F0-1E-UDD-F4
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1005 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 530 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4849.1 lumens
Efficiency: N/A
Efficacy: 88.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 55.1
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331437-927

CATALOG NUMBER: S122DIP-S1005D530U927-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

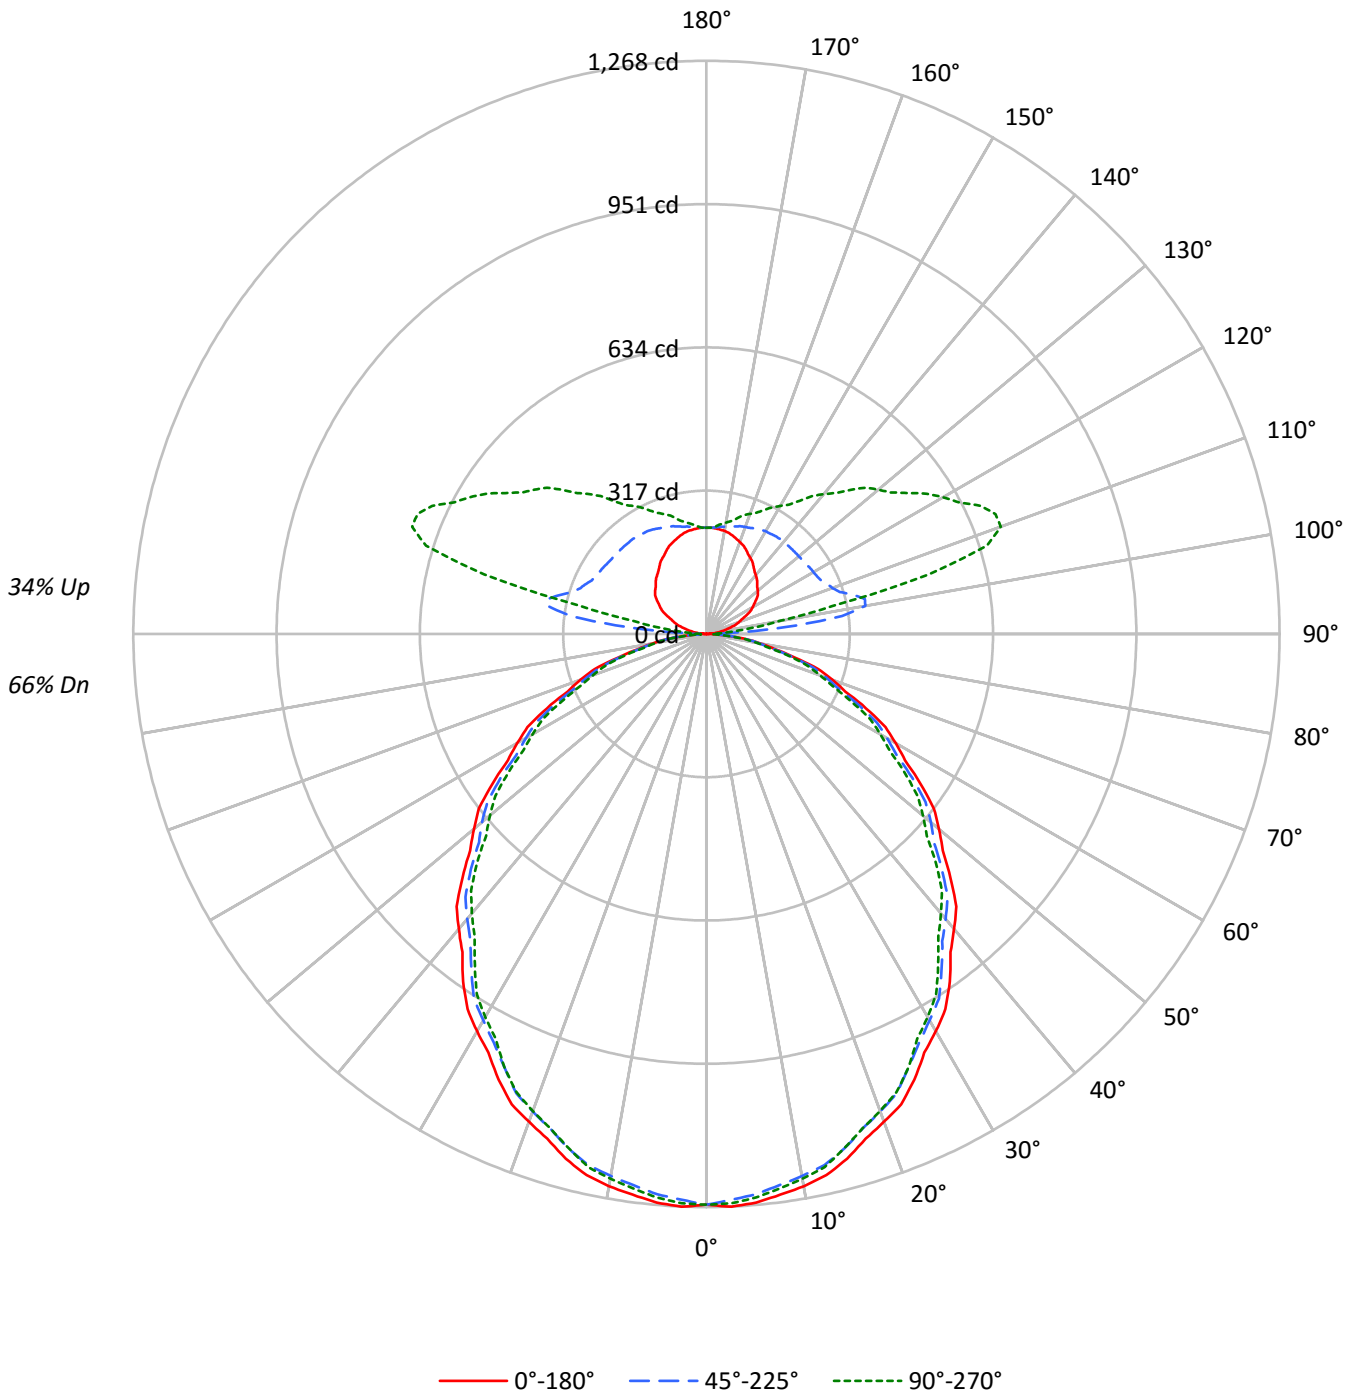



TEST NUMBER: P331437-927

CATALOG NUMBER: S122DIP-S1005D530U927-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	111	111	111	111	105	105	105	105	92	92	92	81	81	81	71	71	71	66
1	101	97	93	89	95	91	88	85	81	78	76	72	70	68	63	61	60	56
2	92	85	78	73	87	80	74	70	71	67	63	63	60	57	55	53	51	47
3	84	75	67	61	79	70	64	58	63	57	53	56	51	48	49	46	43	40
4	77	66	58	52	72	63	55	50	56	50	45	50	45	41	44	40	37	34
5	71	59	51	44	67	56	48	43	50	44	39	45	40	36	40	36	32	30
6	65	53	45	39	61	50	43	37	45	39	34	40	35	31	36	32	29	26
7	61	48	40	34	57	46	38	33	41	35	30	37	32	28	33	29	25	23
8	56	44	36	30	53	42	34	29	38	31	27	34	29	25	30	26	23	21
9	53	40	32	27	49	38	31	26	34	28	24	31	26	22	28	24	21	19
10	49	37	29	24	46	35	28	24	32	26	22	29	24	20	26	22	19	17

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	20386	20386	20386
5°	20464	20169	20285
10°	20341	19964	20064
15°	20090	19704	19686
20°	19734	19316	19295
25°	19379	18838	18838
30°	18921	18401	18243
35°	18496	17875	17611
40°	17962	17351	17015
45°	17438	16826	16411
50°	16865	16284	15707
55°	16268	15651	15071
60°	15603	14899	14347
65°	14888	14147	13498
70°	13983	13237	12609
75°	12726	12190	11890
80°	11288	10953	10386
85°	9207	8781	7873



TEST NUMBER: P331437-927

CATALOG NUMBER: S122DIP-S1005D530U927-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	118.7	2.4
10°-20°	334.1	6.9
20°-30°	491.0	10.1
30°-40°	570.4	11.8
40°-50°	569.8	11.7
50°-60°	496.9	10.2
60°-70°	367.4	7.6
70°-80°	208.1	4.3
80°-90°	58.1	1.2
90°-100°	93.9	1.9
100°-110°	318.8	6.6
110°-120°	338.6	7.0
120°-130°	278.8	5.7
130°-140°	223.9	4.6
140°-150°	169.2	3.5
150°-160°	118.9	2.5
160°-170°	70.0	1.4
170°-180°	22.8	0.5
0°-30°	943.8	19.5
0°-40°	1514.2	31.2
0°-60°	2580.8	53.2
0°-90°	3214.4	66.3
90°-120°	751.3	15.5
90°-150°	1423.1	29.3
90°-180°	1635.0	33.7
0°-180°	4849.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1263	1263	1263	1263	1263	
5°	1263	1257	1244	1253	1252	120
15°	1202	1194	1179	1183	1178	338
25°	1088	1078	1057	1060	1057	500
35°	938	926	907	900	894	586
45°	764	755	737	724	719	589
55°	578	570	556	542	535	517
65°	390	382	370	360	353	385
75°	204	201	195	189	191	218
85°	50	49	47	44	42	57
90°	0	6	15	15	15	3
95°	16	39	177	67	52	17
105°	55	83	335	598	509	59
115°	97	123	280	578	670	96
125°	136	160	269	468	544	120
135°	159	190	266	394	450	123
145°	182	209	265	329	360	114
155°	206	223	257	291	302	95
165°	225	232	246	261	265	63
175°	234	235	237	240	239	22
180°	235	235	235	235	235	



TEST NUMBER: P331437-927

CATALOG NUMBER: S122DIP-S1005D530U927-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1262.6	1262.6	1262.6	1262.6	1262.6	1262.6	1262.6	1262.6	1262.6	1262.6	1262.6
2.5°	1268.4	1267.3	1266.3	1265.2	1264.1	1262.4	1260.0	1257.7	1255.3	1252.9	1255.1
5°	1262.6	1261.6	1260.4	1259.3	1258.3	1256.2	1253.3	1250.3	1247.4	1244.4	1246.6
7.5°	1251.4	1249.7	1248.1	1246.4	1244.8	1242.4	1239.4	1236.4	1233.3	1230.3	1232.5
10°	1240.7	1238.9	1237.0	1235.1	1233.2	1230.7	1227.4	1224.2	1220.9	1217.7	1219.9
12.5°	1226.2	1224.5	1222.8	1221.1	1219.5	1217.0	1213.8	1210.5	1207.4	1204.1	1205.6
15°	1201.9	1200.3	1198.7	1197.1	1195.4	1192.9	1189.4	1185.8	1182.3	1178.8	1180.0
17.5°	1170.8	1169.2	1167.6	1165.9	1164.3	1161.7	1158.2	1154.6	1151.0	1147.6	1148.7
20°	1148.5	1146.8	1145.3	1143.6	1142.0	1139.3	1135.5	1131.8	1128.0	1124.2	1125.0
22.5°	1126.2	1123.9	1121.7	1119.4	1117.1	1114.2	1110.6	1107.1	1103.5	1099.9	1100.1
25°	1087.8	1085.6	1083.5	1081.3	1079.2	1075.8	1071.2	1066.6	1062.0	1057.4	1058.0
27.5°	1044.1	1042.1	1040.2	1038.2	1036.3	1033.6	1029.9	1026.3	1022.7	1019.1	1018.3
30°	1014.9	1012.8	1010.6	1008.4	1006.3	1003.2	999.2	995.1	991.1	987.0	986.2
32.5°	983.9	982.1	980.4	978.7	976.9	974.0	969.7	965.4	961.2	956.9	955.5
35°	938.4	935.7	933.0	930.3	927.6	924.2	919.8	915.5	911.2	906.9	905.3
37.5°	887.2	884.9	882.5	880.1	877.7	874.4	870.1	865.8	861.4	857.1	855.1
40°	852.2	850.1	848.0	845.8	843.6	840.4	836.1	831.8	827.4	823.2	820.7
42.5°	818.2	816.1	814.0	811.8	809.6	806.4	802.1	797.7	793.4	789.1	786.5
45°	763.7	761.8	759.9	758.0	756.1	753.1	749.1	745.0	741.0	736.9	734.0
47.5°	709.2	707.5	705.7	703.9	702.1	699.1	694.9	690.7	686.5	682.3	679.1
50°	671.4	670.0	668.7	667.3	666.0	663.4	659.7	655.8	652.0	648.3	644.5
52.5°	634.5	632.7	630.9	629.2	627.3	624.6	621.1	617.5	614.0	610.5	607.3
55°	577.9	576.2	574.6	573.1	571.4	568.9	565.8	562.5	559.3	556.0	552.8
57.5°	521.1	519.8	518.5	517.2	515.9	513.5	509.9	506.4	502.8	499.2	496.1
60°	483.2	482.1	481.0	480.0	478.9	476.4	472.7	468.9	465.1	461.4	458.4
62.5°	446.3	444.6	442.8	441.1	439.3	437.0	434.1	431.3	428.3	425.4	422.6
65°	389.7	388.1	386.5	384.8	383.3	381.0	378.3	375.7	373.0	370.3	367.9
67.5°	332.2	330.9	329.5	328.3	327.0	325.1	322.7	320.3	317.8	315.4	313.5
70°	296.2	295.2	294.1	293.0	291.9	290.2	287.7	285.3	282.9	280.4	278.5
72.5°	259.3	258.3	257.1	256.1	255.0	253.7	252.2	250.6	249.0	247.4	245.5
75°	204.0	203.4	202.9	202.3	201.8	200.8	199.5	198.1	196.8	195.4	193.8
77.5°	154.4	153.5	152.6	151.7	150.8	150.0	149.5	148.9	148.4	147.9	147.0
80°	121.4	121.1	120.9	120.6	120.3	119.9	119.4	118.8	118.3	117.8	116.9
82.5°	90.3	90.3	90.2	90.2	90.1	89.9	89.6	89.3	89.0	88.6	87.6
85°	49.7	49.5	49.3	49.0	48.7	48.4	48.2	47.8	47.6	47.4	46.5
87.5°	17.6	17.4	17.3	17.1	16.9	16.7	16.7	16.9	17.0	16.6	15.9
90°	0.5	1.8	3.6	4.5	5.4	6.8	9.0	12.2	14.9	15.4	14.9
92.5°	5.5	7.9	11.2	13.2	16.2	20.5	30.7	45.1	57.9	58.7	49.6
95°	15.8	17.6	22.1	26.2	33.4	44.3	65.0	104.3	156.8	177.1	155.0
97.5°	25.7	28.2	33.0	39.1	47.5	59.7	85.9	140.6	227.7	302.3	317.1
100°	34.8	36.1	40.2	47.5	56.5	69.2	93.1	148.2	245.7	356.9	421.9
102.5°	43.1	44.1	48.2	55.4	64.8	77.4	99.6	148.5	238.9	358.7	461.0
105°	55.1	57.0	60.0	66.9	76.8	89.4	110.7	150.9	225.5	334.8	455.0
107.5°	68.1	69.6	72.6	78.9	88.7	101.5	122.1	157.1	218.7	309.1	415.3
110°	76.8	78.6	81.4	87.2	96.6	109.8	129.7	162.2	217.3	296.8	390.3



TEST NUMBER: P331437-927

CATALOG NUMBER: S122DIP-S1005D530U927-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	84.8	86.6	89.6	95.1	104.3	117.7	136.9	167.6	217.7	288.8	373.0
115°	97.1	99.4	102.1	107.5	116.5	128.7	148.2	175.7	219.6	280.1	351.5
117.5°	110.0	111.8	114.5	119.3	127.9	140.6	158.6	184.4	222.8	275.8	337.9
120°	117.9	119.7	122.4	126.5	135.5	148.2	165.8	190.2	225.0	273.3	330.7
122.5°	125.5	127.0	129.7	134.1	143.1	156.1	172.7	195.3	227.5	271.9	324.6
125°	135.5	136.9	139.6	145.0	154.1	166.7	183.0	203.3	231.3	269.3	315.8
127.5°	143.5	145.3	149.1	155.0	163.7	176.7	192.6	210.8	235.2	267.8	307.7
130°	148.2	150.0	154.5	160.8	169.8	182.5	198.4	215.5	238.1	267.0	302.2
132.5°	152.5	154.7	159.5	166.3	175.6	188.3	203.4	220.2	241.0	266.6	297.9
135°	159.0	160.8	166.3	173.0	183.4	196.1	210.6	226.3	244.4	266.1	291.8
137.5°	165.2	167.3	172.8	180.0	190.3	202.0	216.3	231.0	247.5	266.0	287.6
140°	169.8	171.7	177.1	184.3	194.2	206.0	219.6	233.5	248.9	265.6	285.1
142.5°	174.6	176.0	181.1	188.3	197.9	208.9	222.1	235.8	250.0	265.6	282.6
145°	181.6	183.4	187.9	194.7	203.7	213.7	225.9	238.5	251.2	264.7	279.2
147.5°	189.2	190.5	194.9	201.1	208.7	217.5	228.9	240.1	251.5	263.1	275.8
150°	194.2	195.6	199.2	205.1	211.9	220.0	230.4	240.8	251.2	262.1	272.9
152.5°	199.3	199.9	203.6	208.7	215.2	222.5	231.9	241.1	250.5	260.2	270.4
155°	206.4	206.9	209.6	214.6	219.6	226.3	234.0	241.7	249.4	257.1	265.6
157.5°	212.4	212.9	215.1	219.4	223.4	229.0	235.5	241.7	247.3	253.8	261.2
160°	216.4	216.8	218.6	222.3	225.9	230.8	236.3	241.7	246.2	251.7	257.9
162.5°	220.4	220.1	221.9	224.8	228.1	232.0	236.6	241.3	245.1	249.9	255.1
165°	225.0	224.5	225.5	228.1	230.4	233.1	237.2	240.3	243.0	246.2	250.3
167.5°	228.8	228.2	229.0	230.8	232.4	234.1	237.1	239.7	241.0	243.0	245.6
170°	231.3	230.4	230.8	232.2	233.1	234.5	236.7	239.0	239.9	241.2	243.0
172.5°	232.7	232.2	232.0	233.3	233.9	234.8	236.4	237.9	238.4	239.1	240.5
175°	234.5	234.0	233.5	234.5	234.5	234.9	235.8	236.7	236.3	236.7	237.2
177.5°	235.3	234.6	234.2	234.9	234.9	234.9	235.3	236.0	235.3	234.9	235.3
180°	234.9	234.9	234.9	234.9	234.9	234.9	234.9	234.9	234.9	234.9	234.9



TEST NUMBER: P331437-927

CATALOG NUMBER: S122DIP-S1005D530U927-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1262.6	1262.6	1262.6	1262.6	1262.6	1262.6	1262.6	1262.6
2.5°	1257.2	1259.3	1261.6	1262.4	1261.9	1261.6	1261.1	1260.7
5°	1248.7	1250.9	1253.0	1253.9	1253.3	1252.8	1252.2	1251.6
7.5°	1234.6	1236.8	1239.0	1239.8	1239.1	1238.6	1237.9	1237.4
10°	1222.0	1224.2	1226.3	1227.0	1226.2	1225.3	1224.6	1223.8
12.5°	1207.1	1208.6	1210.1	1210.6	1210.0	1209.4	1208.8	1208.2
15°	1181.0	1182.1	1183.1	1183.0	1181.7	1180.4	1179.0	1177.7
17.5°	1150.0	1151.3	1152.5	1152.5	1151.1	1149.9	1148.6	1147.2
20°	1125.8	1126.6	1127.4	1127.3	1126.2	1125.1	1124.1	1123.0
22.5°	1100.3	1100.4	1100.6	1100.3	1099.7	1099.1	1098.4	1097.7
25°	1058.5	1059.1	1059.6	1059.6	1059.1	1058.5	1058.0	1057.4
27.5°	1017.5	1016.6	1015.8	1014.8	1013.5	1012.2	1010.9	1009.6
30°	985.4	984.6	983.8	982.9	981.8	980.6	979.6	978.5
32.5°	954.0	952.5	951.1	949.8	948.7	947.7	946.6	945.5
35°	903.6	902.1	900.4	899.0	897.6	896.3	894.8	893.5
37.5°	853.1	851.1	849.1	847.5	846.2	844.9	843.6	842.3
40°	818.2	815.9	813.4	811.7	810.6	809.5	808.4	807.3
42.5°	783.9	781.2	778.6	776.5	775.0	773.5	772.0	770.4
45°	731.0	728.0	725.1	723.0	721.9	720.9	719.8	718.7
47.5°	676.0	672.9	669.8	667.4	665.8	664.3	662.7	661.2
50°	640.7	637.0	633.2	630.7	629.3	628.0	626.6	625.3
52.5°	604.2	601.0	597.9	595.5	593.7	591.9	590.1	588.4
55°	549.5	546.3	543.1	540.8	539.5	538.1	536.8	535.4
57.5°	492.8	489.6	486.5	484.3	483.4	482.4	481.3	480.3
60°	455.4	452.4	449.5	447.6	446.8	446.0	445.1	444.3
62.5°	419.9	417.2	414.4	412.5	411.5	410.4	409.4	408.4
65°	365.4	363.0	360.6	358.7	357.4	356.0	354.7	353.3
67.5°	311.6	309.7	307.8	306.3	305.3	304.2	303.2	302.1
70°	276.6	274.8	272.9	271.4	270.3	269.3	268.2	267.1
72.5°	243.7	241.8	239.9	238.5	237.7	236.8	235.9	235.0
75°	192.3	190.6	189.0	188.5	189.0	189.5	190.0	190.6
77.5°	146.2	145.4	144.7	143.9	143.1	142.4	141.6	140.9
80°	116.1	115.3	114.5	113.8	113.3	112.8	112.3	111.7
82.5°	86.6	85.6	84.5	84.0	83.8	83.7	83.7	83.5
85°	45.7	44.9	44.1	43.6	43.3	43.0	42.8	42.5
87.5°	15.2	14.3	13.9	13.5	13.3	13.2	12.9	12.7
90°	14.4	13.5	14.4	14.9	14.9	14.9	14.9	14.9
92.5°	39.4	33.8	30.0	27.2	26.9	25.4	25.7	25.0
95°	118.4	90.8	71.9	61.9	56.0	52.4	51.0	51.5
97.5°	276.2	226.0	177.1	144.5	122.9	111.8	105.2	101.4
100°	412.5	356.5	294.5	239.9	202.4	183.0	169.8	161.8
102.5°	501.8	489.1	443.9	385.9	345.2	312.0	295.6	284.6
105°	548.9	599.9	605.9	590.9	562.9	534.9	515.5	509.1
107.5°	514.9	591.8	638.8	660.7	664.2	662.7	658.8	650.4
110°	485.7	566.5	624.3	661.4	680.8	689.4	693.5	693.0



TEST NUMBER: P331437-927

CATALOG NUMBER: S122DIP-S1005D530U927-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	458.9	536.5	598.3	640.8	667.8	682.1	689.8	692.3
115°	426.0	495.6	554.8	601.3	633.3	654.2	665.9	669.9
117.5°	401.2	462.3	516.0	559.7	592.4	614.3	626.7	630.1
120°	389.0	445.0	492.9	534.0	565.6	586.8	599.9	604.4
122.5°	379.2	430.6	475.9	513.0	541.4	562.3	573.9	577.7
125°	365.0	411.5	451.3	485.2	511.4	528.5	539.9	543.5
127.5°	351.0	393.2	430.6	461.9	484.7	500.8	510.6	513.5
130°	342.0	380.9	416.5	446.3	468.5	483.9	492.9	496.5
132.5°	333.4	369.3	402.1	430.1	451.9	467.2	475.5	478.8
135°	321.2	351.0	380.9	406.2	425.6	440.5	448.6	450.4
137.5°	311.6	336.5	360.1	382.2	399.9	412.7	419.9	422.6
140°	305.4	327.1	347.8	367.7	382.2	394.0	400.7	403.5
142.5°	300.3	318.8	336.7	353.3	367.0	377.7	383.7	384.3
145°	293.2	308.1	322.1	335.3	346.0	353.7	358.2	359.6
147.5°	287.7	299.4	310.4	320.0	328.9	335.0	338.1	338.9
150°	283.7	293.7	303.2	311.2	318.1	323.4	326.1	326.6
152.5°	279.7	289.0	297.0	304.0	309.3	314.1	316.1	316.2
155°	274.3	281.5	288.2	293.2	298.2	301.3	303.2	302.2
157.5°	267.8	273.9	279.6	283.4	286.9	289.6	290.4	290.4
160°	263.8	268.8	273.8	276.9	280.1	282.3	282.8	282.8
162.5°	259.8	264.1	268.4	270.8	273.9	275.5	275.9	275.6
165°	253.9	257.1	260.2	262.1	263.8	265.6	265.6	265.2
167.5°	248.2	250.6	252.8	254.4	255.2	256.3	256.2	255.6
170°	245.3	246.7	248.5	249.4	249.9	251.2	250.7	249.9
172.5°	242.1	243.0	244.5	245.0	245.5	246.1	245.7	245.1
175°	238.5	239.0	239.5	239.9	239.9	240.3	239.9	239.0
177.5°	236.0	236.0	236.4	236.4	236.4	236.4	236.0	235.3
180°	234.9	234.9	234.9	234.9	234.9	234.9	234.9	234.9

(END OF REPORT)