

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331454-927

Luminaire Tested: **S122DIP-S1005D925U927-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331454-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIP-S1005D925U927-4F0-1E-UDD-F1
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1005 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 925 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5835.5 lumens
Efficiency: N/A
Efficacy: 87.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 66.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331454-927

CATALOG NUMBER: S122DIP-S1005D925U927-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

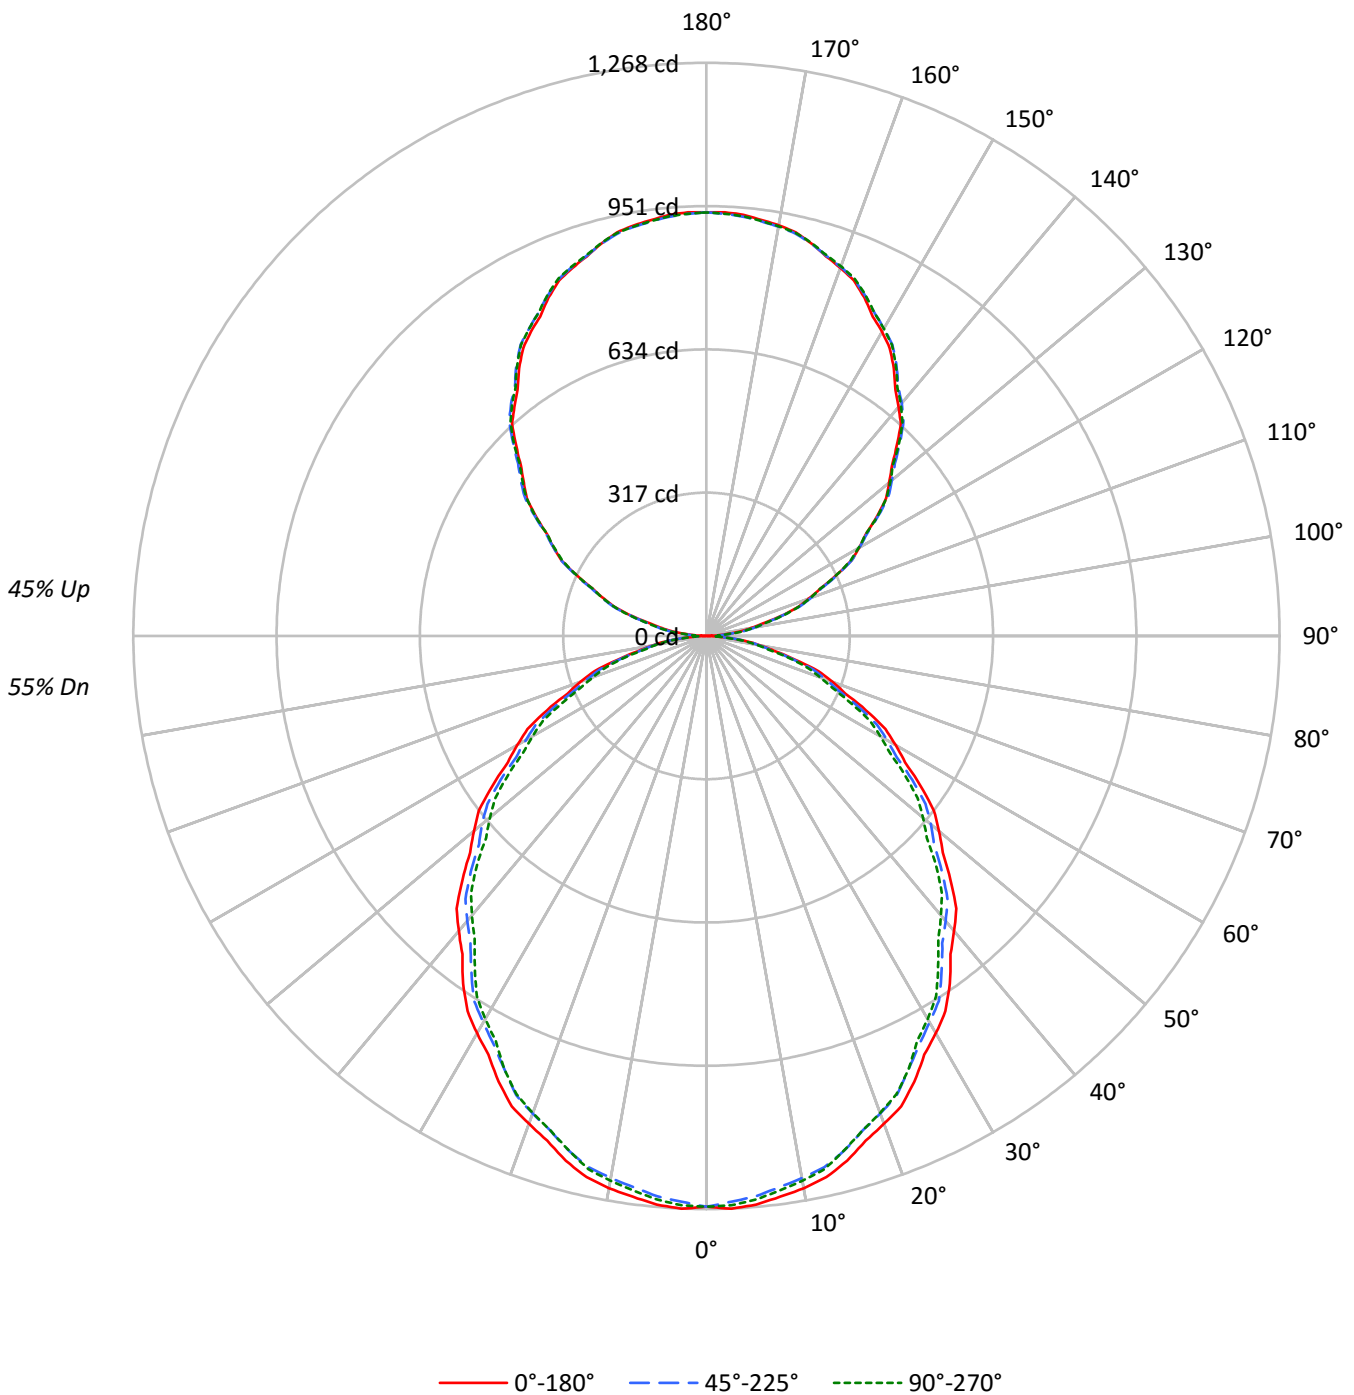



TEST NUMBER: P331454-927

CATALOG NUMBER: S122DIP-S1005D925U927-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	108	108	108	108	101	101	101	101	86	86	86		73	73	73		61	61	61	55
1	99	95	91	87	92	88	85	81	76	73	71		64	62	61		54	52	51	46
2	90	83	76	71	83	77	71	67	66	62	59		56	53	51		47	45	43	39
3	82	73	65	59	76	68	61	56	58	53	49		50	46	43		42	39	37	33
4	75	64	56	50	70	60	53	47	52	46	42		44	40	37		37	34	32	28
5	69	57	49	43	64	54	46	41	47	41	36		40	35	32		34	30	28	25
6	64	51	43	37	59	48	41	35	42	36	32		36	32	28		31	27	24	22
7	59	46	38	33	55	44	36	31	38	32	28		33	28	25		28	24	22	19
8	55	42	34	29	51	40	33	28	35	29	25		30	25	22		26	22	19	17
9	51	39	31	26	47	36	29	25	32	26	22		28	23	20		24	20	18	15
10	48	35	28	23	44	33	27	22	29	24	20		26	21	18		22	19	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	20386	20386	20386
5°	20464	20169	20285
10°	20341	19964	20064
15°	20090	19704	19686
20°	19734	19316	19295
25°	19379	18838	18838
30°	18921	18401	18243
35°	18496	17875	17611
40°	17962	17351	17015
45°	17438	16826	16411
50°	16865	16284	15707
55°	16268	15651	15071
60°	15603	14899	14347
65°	14888	14147	13498
70°	13983	13237	12609
75°	12726	12190	11890
80°	11288	10953	10386
85°	9207	8781	7873



TEST NUMBER: P331454-927

CATALOG NUMBER: S122DIP-S1005D925U927-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	118.7	2.0
10°-20°	334.1	5.7
20°-30°	491.0	8.4
30°-40°	570.4	9.8
40°-50°	569.8	9.8
50°-60°	496.9	8.5
60°-70°	367.4	6.3
70°-80°	208.1	3.6
80°-90°	59.7	1.0
90°-100°	59.4	1.0
100°-110°	184.4	3.2
110°-120°	315.1	5.4
120°-130°	414.4	7.1
130°-140°	465.2	8.0
140°-150°	456.1	7.8
150°-160°	382.5	6.6
160°-170°	253.7	4.3
170°-180°	88.7	1.5
0°-30°	943.8	16.2
0°-40°	1514.2	25.9
0°-60°	2580.8	44.2
0°-90°	3216.0	55.1
90°-120°	558.9	9.6
90°-150°	1894.5	32.5
90°-180°	2620.0	44.9
0°-180°	5835.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1263	1263	1263	1263	1263	
5°	1263	1257	1244	1253	1252	120
15°	1202	1194	1179	1183	1178	338
25°	1088	1078	1057	1060	1057	500
35°	938	926	907	900	894	586
45°	764	755	737	724	719	589
55°	578	570	556	542	535	517
65°	390	382	370	360	353	385
75°	204	201	195	189	191	218
85°	50	49	47	44	42	57
90°	1	11	28	26	27	5
95°	41	49	51	50	49	47
105°	170	172	174	175	176	180
115°	316	321	319	318	316	313
125°	460	467	465	463	462	411
135°	595	604	606	605	602	460
145°	722	728	733	733	730	451
155°	826	828	831	834	832	380
165°	899	898	898	903	900	253
175°	935	933	931	936	932	89
180°	937	937	937	937	937	



TEST NUMBER: P331454-927

CATALOG NUMBER: S122DIP-S1005D925U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1262.6	1262.6	1262.6	1262.6	1262.6	1262.6	1262.6	1262.6	1262.6	1262.6	1262.6
2.5°	1268.4	1267.3	1266.3	1265.2	1264.1	1262.4	1260.0	1257.7	1255.3	1252.9	1255.1
5°	1262.6	1261.6	1260.4	1259.3	1258.3	1256.2	1253.3	1250.3	1247.4	1244.4	1246.6
7.5°	1251.4	1249.7	1248.1	1246.4	1244.8	1242.4	1239.4	1236.4	1233.3	1230.3	1232.5
10°	1240.7	1238.9	1237.0	1235.1	1233.2	1230.7	1227.4	1224.2	1220.9	1217.7	1219.9
12.5°	1226.2	1224.5	1222.8	1221.1	1219.5	1217.0	1213.8	1210.5	1207.4	1204.1	1205.6
15°	1201.9	1200.3	1198.7	1197.1	1195.4	1192.9	1189.4	1185.8	1182.3	1178.8	1180.0
17.5°	1170.8	1169.2	1167.6	1165.9	1164.3	1161.7	1158.2	1154.6	1151.0	1147.6	1148.7
20°	1148.5	1146.8	1145.3	1143.6	1142.0	1139.3	1135.5	1131.8	1128.0	1124.2	1125.0
22.5°	1126.2	1123.9	1121.7	1119.4	1117.1	1114.2	1110.6	1107.1	1103.5	1099.9	1100.1
25°	1087.8	1085.6	1083.5	1081.3	1079.2	1075.8	1071.2	1066.6	1062.0	1057.4	1058.0
27.5°	1044.1	1042.1	1040.2	1038.2	1036.3	1033.6	1029.9	1026.3	1022.7	1019.1	1018.3
30°	1014.9	1012.8	1010.6	1008.4	1006.3	1003.2	999.2	995.1	991.1	987.0	986.2
32.5°	983.9	982.1	980.4	978.7	976.9	974.0	969.7	965.4	961.2	956.9	955.5
35°	938.4	935.7	933.0	930.3	927.6	924.2	919.8	915.5	911.2	906.9	905.3
37.5°	887.2	884.9	882.5	880.1	877.7	874.4	870.1	865.8	861.4	857.1	855.1
40°	852.2	850.1	848.0	845.8	843.6	840.4	836.1	831.8	827.4	823.2	820.7
42.5°	818.2	816.1	814.0	811.8	809.6	806.4	802.1	797.7	793.4	789.1	786.5
45°	763.7	761.8	759.9	758.0	756.1	753.1	749.1	745.0	741.0	736.9	734.0
47.5°	709.2	707.5	705.7	703.9	702.1	699.1	694.9	690.7	686.5	682.3	679.1
50°	671.4	670.0	668.7	667.3	666.0	663.4	659.7	655.8	652.0	648.3	644.5
52.5°	634.5	632.7	630.9	629.2	627.3	624.6	621.1	617.5	614.0	610.5	607.3
55°	577.9	576.2	574.6	573.1	571.4	568.9	565.8	562.5	559.3	556.0	552.8
57.5°	521.1	519.8	518.5	517.2	515.9	513.5	509.9	506.4	502.8	499.2	496.1
60°	483.2	482.1	481.0	480.0	478.9	476.4	472.7	468.9	465.1	461.4	458.4
62.5°	446.3	444.6	442.8	441.1	439.3	437.0	434.1	431.3	428.3	425.4	422.6
65°	389.7	388.1	386.5	384.8	383.3	381.0	378.3	375.7	373.0	370.3	367.9
67.5°	332.2	330.9	329.5	328.3	327.0	325.1	322.7	320.3	317.8	315.4	313.5
70°	296.2	295.2	294.1	293.0	291.9	290.2	287.7	285.3	282.9	280.4	278.5
72.5°	259.3	258.3	257.1	256.1	255.0	253.7	252.2	250.6	249.0	247.4	245.5
75°	204.0	203.4	202.9	202.3	201.8	200.8	199.5	198.1	196.8	195.4	193.8
77.5°	154.4	153.5	152.6	151.7	150.8	150.0	149.5	148.9	148.4	147.9	147.0
80°	121.4	121.1	120.9	120.6	120.3	119.9	119.4	118.8	118.3	117.8	116.9
82.5°	90.3	90.3	90.2	90.2	90.1	89.9	89.6	89.3	89.0	88.6	87.6
85°	49.7	49.5	49.3	49.0	48.7	48.4	48.2	47.8	47.6	47.4	46.5
87.5°	17.7	17.7	17.6	17.6	17.6	17.7	18.1	18.5	18.8	19.2	18.4
90°	0.8	2.9	5.0	7.1	9.2	12.2	16.1	20.0	23.8	27.6	27.3
92.5°	14.1	15.6	17.2	18.7	20.3	21.5	22.4	23.3	24.2	25.1	25.2
95°	41.1	42.9	44.6	46.3	48.2	49.2	49.5	49.9	50.2	50.6	50.6
97.5°	75.1	76.7	78.2	79.8	81.3	82.4	83.1	83.7	84.4	85.1	85.1
100°	100.4	101.8	103.2	104.6	106.0	107.0	107.5	108.1	108.6	109.1	109.1
102.5°	127.0	128.1	129.2	130.3	131.4	132.4	133.0	133.7	134.4	135.1	135.1
105°	170.0	170.5	171.0	171.6	172.1	172.5	172.9	173.3	173.6	173.9	174.3
107.5°	213.3	214.0	214.8	215.6	216.4	216.7	216.7	216.7	216.7	216.7	216.9
110°	241.1	242.2	243.2	244.3	245.3	245.9	245.9	245.9	245.9	245.9	245.9



TEST NUMBER: P331454-927

CATALOG NUMBER: S122DIP-S1005D925U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	271.5	272.5	273.6	274.6	275.7	276.2	276.0	275.8	275.8	275.6	275.2
115°	316.2	317.3	318.3	319.4	320.4	320.8	320.4	320.1	319.7	319.4	319.2
117.5°	360.8	362.2	363.6	365.0	366.5	366.6	365.7	364.6	363.7	362.7	362.3
120°	390.5	392.0	393.3	394.7	396.2	396.2	394.7	393.3	392.0	390.5	390.5
122.5°	417.7	419.4	421.1	422.8	424.5	424.8	423.8	422.9	421.9	420.9	420.5
125°	460.1	461.7	463.3	464.9	466.4	467.0	466.4	465.9	465.4	464.9	464.3
127.5°	501.4	503.4	505.4	507.4	509.4	510.1	509.5	508.8	508.2	507.6	506.9
130°	527.3	529.6	531.9	534.2	536.5	537.4	537.0	536.7	536.4	536.0	535.7
132.5°	556.4	558.3	560.2	562.0	563.9	564.8	564.9	565.0	565.0	565.1	564.4
135°	595.3	597.2	599.1	601.1	603.0	604.2	604.5	604.8	605.2	605.5	605.4
137.5°	636.3	637.8	639.4	641.0	642.5	643.6	644.0	644.5	645.0	645.4	645.3
140°	660.9	662.5	664.1	665.7	667.3	668.4	669.3	670.2	671.1	672.0	672.0
142.5°	686.2	687.8	689.4	690.9	692.5	693.6	694.2	694.8	695.4	696.0	696.2
145°	722.5	723.8	725.0	726.3	727.5	728.6	729.7	730.7	731.8	732.8	733.0
147.5°	754.9	756.5	758.0	759.4	760.9	762.0	762.7	763.3	764.1	764.8	765.2
150°	777.1	778.2	779.2	780.3	781.3	782.2	782.9	783.6	784.3	785.1	785.5
152.5°	796.7	797.8	798.8	799.9	801.0	801.9	802.7	803.6	804.4	805.3	806.0
155°	826.2	826.6	827.2	827.8	828.2	828.8	829.3	829.8	830.4	830.8	831.8
157.5°	851.3	851.6	852.0	852.3	852.7	853.0	853.3	853.7	854.0	854.3	855.5
160°	866.5	866.8	867.1	867.5	867.8	868.2	868.3	868.5	868.6	868.8	869.9
162.5°	880.4	880.4	880.5	880.6	880.7	880.7	881.0	881.1	881.3	881.5	882.6
165°	898.9	898.7	898.5	898.3	898.2	898.1	898.1	898.1	898.1	898.1	899.3
167.5°	914.3	913.9	913.3	912.8	912.3	912.0	912.0	911.9	911.9	911.8	913.1
170°	922.6	922.0	921.5	921.0	920.4	920.1	920.0	919.8	919.6	919.4	920.7
172.5°	928.3	927.7	927.2	926.7	926.1	925.8	925.7	925.4	925.3	925.1	926.4
175°	935.3	934.7	934.1	933.7	933.1	932.7	932.3	932.0	931.6	931.3	932.5
177.5°	938.1	937.6	937.2	936.8	936.4	936.0	935.7	935.5	935.2	934.9	935.7
180°	936.8	936.8	936.8	936.8	936.8	936.8	936.8	936.8	936.8	936.8	936.8



TEST NUMBER: P331454-927

CATALOG NUMBER: S122DIP-S1005D925U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1262.6	1262.6	1262.6	1262.6	1262.6	1262.6	1262.6	1262.6
2.5°	1257.2	1259.3	1261.6	1262.4	1261.9	1261.6	1261.1	1260.7
5°	1248.7	1250.9	1253.0	1253.9	1253.3	1252.8	1252.2	1251.6
7.5°	1234.6	1236.8	1239.0	1239.8	1239.1	1238.6	1237.9	1237.4
10°	1222.0	1224.2	1226.3	1227.0	1226.2	1225.3	1224.6	1223.8
12.5°	1207.1	1208.6	1210.1	1210.6	1210.0	1209.4	1208.8	1208.2
15°	1181.0	1182.1	1183.1	1183.0	1181.7	1180.4	1179.0	1177.7
17.5°	1150.0	1151.3	1152.5	1152.5	1151.1	1149.9	1148.6	1147.2
20°	1125.8	1126.6	1127.4	1127.3	1126.2	1125.1	1124.1	1123.0
22.5°	1100.3	1100.4	1100.6	1100.3	1099.7	1099.1	1098.4	1097.7
25°	1058.5	1059.1	1059.6	1059.6	1059.1	1058.5	1058.0	1057.4
27.5°	1017.5	1016.6	1015.8	1014.8	1013.5	1012.2	1010.9	1009.6
30°	985.4	984.6	983.8	982.9	981.8	980.6	979.6	978.5
32.5°	954.0	952.5	951.1	949.8	948.7	947.7	946.6	945.5
35°	903.6	902.1	900.4	899.0	897.6	896.3	894.8	893.5
37.5°	853.1	851.1	849.1	847.5	846.2	844.9	843.6	842.3
40°	818.2	815.9	813.4	811.7	810.6	809.5	808.4	807.3
42.5°	783.9	781.2	778.6	776.5	775.0	773.5	772.0	770.4
45°	731.0	728.0	725.1	723.0	721.9	720.9	719.8	718.7
47.5°	676.0	672.9	669.8	667.4	665.8	664.3	662.7	661.2
50°	640.7	637.0	633.2	630.7	629.3	628.0	626.6	625.3
52.5°	604.2	601.0	597.9	595.5	593.7	591.9	590.1	588.4
55°	549.5	546.3	543.1	540.8	539.5	538.1	536.8	535.4
57.5°	492.8	489.6	486.5	484.3	483.4	482.4	481.3	480.3
60°	455.4	452.4	449.5	447.6	446.8	446.0	445.1	444.3
62.5°	419.9	417.2	414.4	412.5	411.5	410.4	409.4	408.4
65°	365.4	363.0	360.6	358.7	357.4	356.0	354.7	353.3
67.5°	311.6	309.7	307.8	306.3	305.3	304.2	303.2	302.1
70°	276.6	274.8	272.9	271.4	270.3	269.3	268.2	267.1
72.5°	243.7	241.8	239.9	238.5	237.7	236.8	235.9	235.0
75°	192.3	190.6	189.0	188.5	189.0	189.5	190.0	190.6
77.5°	146.2	145.4	144.7	143.9	143.1	142.4	141.6	140.9
80°	116.1	115.3	114.5	113.8	113.3	112.8	112.3	111.7
82.5°	86.6	85.6	84.5	84.0	83.8	83.7	83.7	83.5
85°	45.7	44.9	44.1	43.6	43.3	43.0	42.8	42.5
87.5°	17.7	17.0	16.2	15.8	15.6	15.4	15.3	15.1
90°	26.9	26.6	26.3	26.1	26.4	26.5	26.7	26.9
92.5°	25.3	25.3	25.4	25.5	25.5	25.5	25.6	25.6
95°	50.6	50.6	50.6	50.4	50.1	49.7	49.4	49.0
97.5°	85.1	85.1	85.1	85.1	85.0	85.0	84.9	84.9
100°	109.1	109.1	109.1	109.0	108.8	108.7	108.4	108.3
102.5°	135.3	135.5	135.6	135.5	135.4	135.2	135.1	134.9
105°	174.6	175.0	175.3	175.5	175.5	175.5	175.5	175.5
107.5°	217.1	217.2	217.3	217.0	216.2	215.4	214.6	213.7
110°	245.9	245.9	245.9	245.6	245.1	244.5	244.0	243.5



TEST NUMBER: P331454-927

CATALOG NUMBER: S122DIP-S1005D925U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	274.7	274.3	273.9	273.5	273.1	272.7	272.4	272.0
115°	319.0	318.9	318.7	318.3	317.8	317.3	316.7	316.2
117.5°	361.9	361.5	361.0	360.5	360.0	359.5	358.9	358.5
120°	390.5	390.5	390.5	390.3	389.8	389.2	388.7	388.2
122.5°	420.0	419.6	419.2	418.8	418.4	418.0	417.6	417.2
125°	463.8	463.3	462.7	462.4	462.2	462.0	461.8	461.7
127.5°	506.3	505.6	505.0	504.4	503.8	503.3	502.7	502.2
130°	535.3	535.0	534.6	534.1	533.4	532.7	532.0	531.2
132.5°	563.6	562.8	562.0	561.3	560.8	560.2	559.7	559.1
135°	605.2	605.1	604.8	604.5	604.0	603.5	602.9	602.4
137.5°	645.2	645.0	644.8	644.4	643.7	643.0	642.3	641.6
140°	672.0	672.0	672.0	671.6	670.9	670.2	669.6	668.8
142.5°	696.3	696.4	696.6	696.3	695.6	694.9	694.2	693.5
145°	733.2	733.4	733.6	733.3	732.6	731.9	731.2	730.5
147.5°	765.6	766.0	766.4	766.2	765.6	764.9	764.2	763.5
150°	786.1	786.6	787.1	787.1	786.6	786.1	785.5	785.1
152.5°	806.6	807.2	807.9	807.9	807.2	806.6	806.0	805.3
155°	832.7	833.5	834.4	834.6	834.0	833.5	833.0	832.4
157.5°	856.7	857.9	859.0	859.2	858.4	857.5	856.7	855.9
160°	870.9	872.0	873.1	873.2	872.5	871.8	871.1	870.4
162.5°	883.8	885.0	886.2	886.5	885.6	884.7	883.9	883.0
165°	900.6	901.7	903.0	903.2	902.3	901.4	900.6	899.7
167.5°	914.3	915.5	916.7	916.9	916.0	915.0	914.2	913.2
170°	921.9	923.1	924.3	924.4	923.4	922.3	921.2	920.2
172.5°	927.6	928.8	930.0	930.1	929.1	928.0	926.9	925.9
175°	933.7	934.9	936.2	936.3	935.3	934.1	933.1	932.1
177.5°	936.6	937.5	938.3	938.3	937.5	936.6	935.7	934.9
180°	936.8	936.8	936.8	936.8	936.8	936.8	936.8	936.8

(END OF REPORT)