

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331344-927

Luminaire Tested: **S122DIP-S675D530U927-4F0-1E-UDD-D4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331344-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-16,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIP-S675D530U927-4F0-1E-UDD-D4
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 675 LUMENS PER FOOT, DROP SATIN WHITE DIFFUSER
UPLIGHT 530 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3765.7 lumens
Efficiency: N/A
Efficacy: 93.4 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.32 / 1.42
Luminous Opening: Rectangular w/ Sides (W: 0.17' x L: 4' x H: 0.08')
CIE Type: General Diffuse


Input Watts (W): 40.3
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331344-927

CATALOG NUMBER: S122DIP-S675D530U927-4F0-1E-UDD-D4

Luminous Intensity Polar Plot

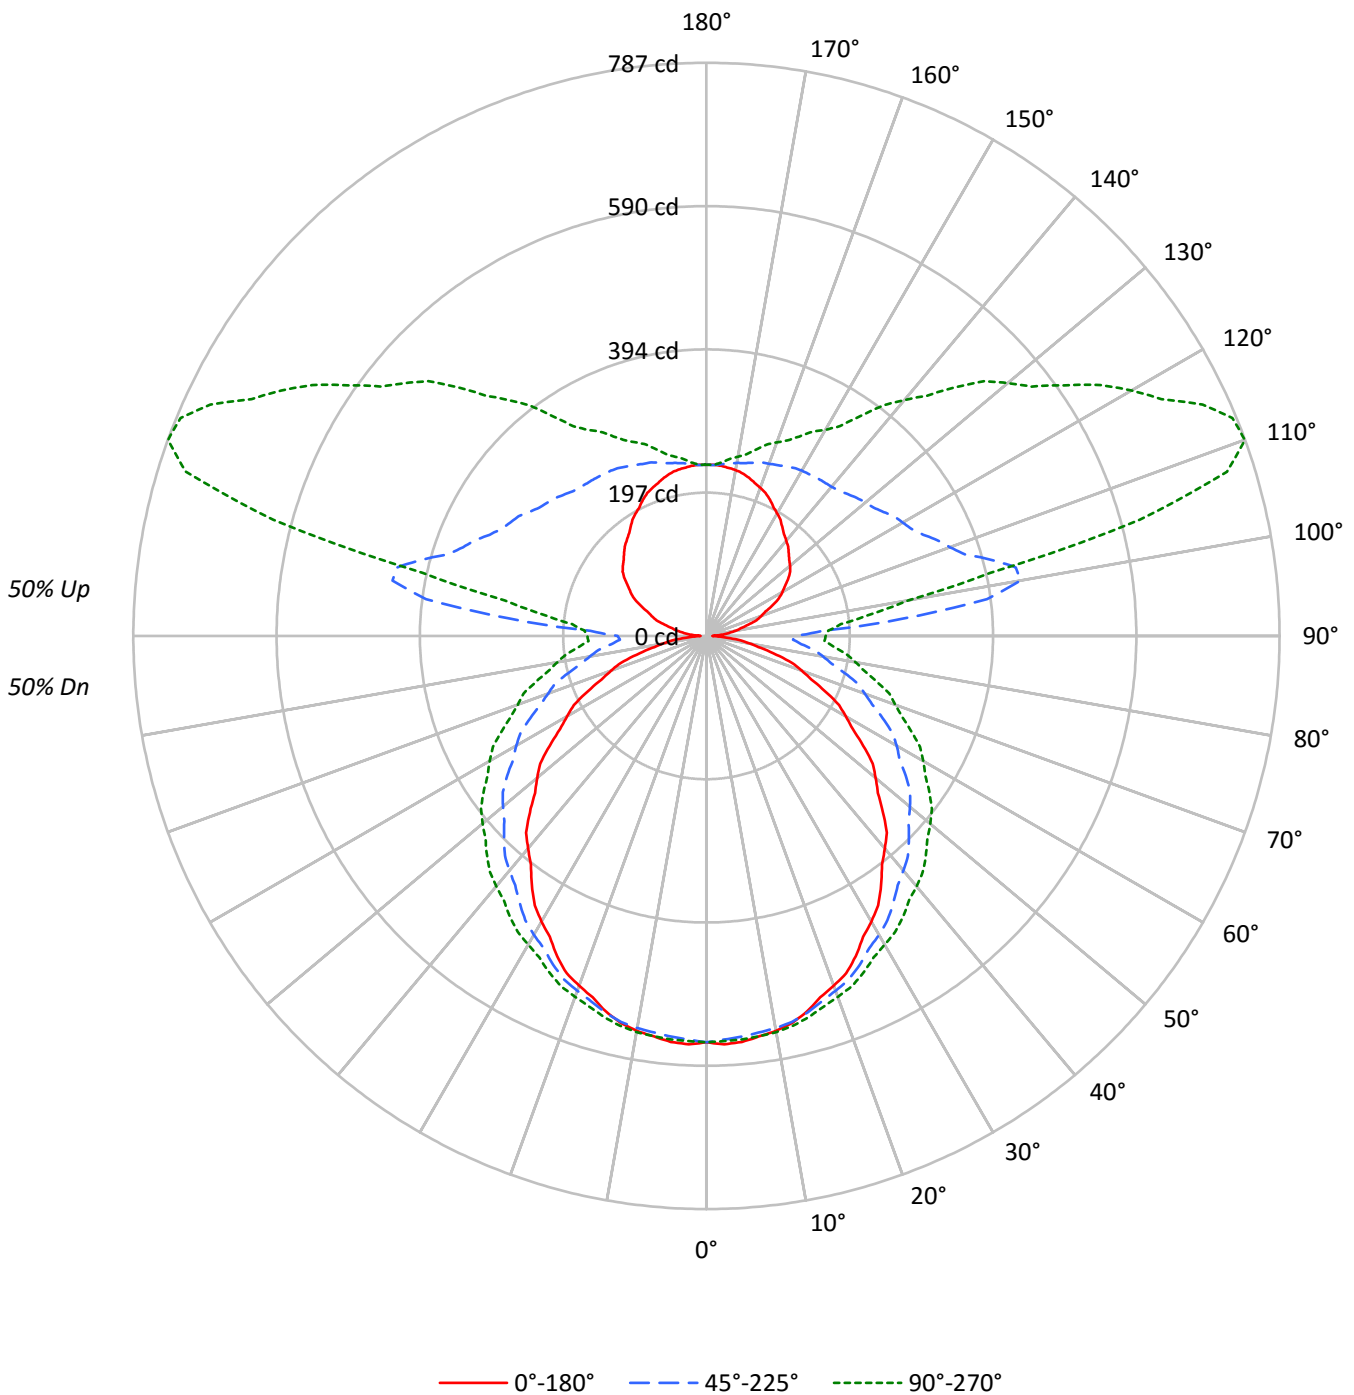



TEST NUMBER: P331344-927

CATALOG NUMBER: S122DIP-S675D530U927-4F0-1E-UDD-D4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	107	107	107	107	99	99	99	99	83	83	83	69	69	69	56	56	56	50
1	96	91	87	83	89	84	80	77	71	68	65	59	57	55	47	46	45	39
2	87	79	72	66	80	73	67	62	61	57	53	51	47	44	41	38	36	32
3	79	69	61	55	72	64	57	51	54	48	44	44	40	37	36	33	30	26
4	72	61	52	46	66	56	49	43	47	41	37	39	35	31	32	28	26	22
5	66	54	45	39	60	50	42	36	42	36	32	35	30	27	28	25	22	19
6	61	48	40	34	56	45	37	31	38	32	27	31	27	23	26	22	19	16
7	56	43	35	29	51	40	33	27	34	28	24	29	24	20	23	20	17	14
8	52	39	31	26	48	36	29	24	31	25	21	26	21	18	21	18	15	13
9	48	36	28	23	44	33	26	21	28	23	19	24	19	16	20	16	14	11
10	45	33	25	20	42	30	24	19	26	21	17	22	18	15	18	15	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	9009	9009	9009
5°	9053	8672	8638
10°	8996	8417	8321
15°	8873	8146	7988
20°	8716	7854	7665
25°	8561	7573	7372
30°	8343	7286	7079
35°	8122	7007	6870
40°	7890	6771	6665
45°	7670	6558	6488
50°	7431	6366	6313
55°	7184	6161	6135
60°	6882	5948	5948
65°	6564	5697	5724
70°	6211	5427	5485
75°	5759	5163	5263
80°	5048	4895	5040
85°	4369	4658	4864



TEST NUMBER: P331344-927

CATALOG NUMBER: S122DIP-S675D530U927-4F0-1E-UDD-D4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	52.9	1.4
10°-20°	151.6	4.0
20°-30°	229.8	6.1
30°-40°	279.8	7.4
40°-50°	301.1	8.0
50°-60°	292.4	7.8
60°-70°	255.3	6.8
70°-80°	196.5	5.2
80°-90°	134.0	3.6
90°-100°	184.8	4.9
100°-110°	385.1	10.2
110°-120°	382.4	10.2
120°-130°	303.2	8.1
130°-140°	234.1	6.2
140°-150°	170.9	4.5
150°-160°	118.9	3.2
160°-170°	70.0	1.9
170°-180°	22.8	0.6
0°-30°	434.3	11.5
0°-40°	714.1	19.0
0°-60°	1307.5	34.7
0°-90°	1893.4	50.3
90°-120°	952.4	25.3
90°-150°	1660.7	44.1
90°-180°	1872.0	49.7
0°-180°	3765.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	558	558	558	558	558	
5°	560	557	552	557	556	53
15°	534	535	535	542	542	150
25°	485	491	498	507	510	223
35°	418	432	447	464	471	261
45°	343	365	393	417	426	265
55°	263	293	334	362	374	235
65°	180	220	267	299	310	178
75°	100	145	196	230	242	105
85°	29	79	131	164	176	31
90°	9	61	122	153	164	6
95°	22	84	270	189	185	22
105°	59	112	404	695	616	63
115°	100	136	329	650	752	99
125°	137	163	297	517	600	122
135°	160	191	275	419	483	124
145°	182	209	265	334	368	114
155°	206	223	257	291	302	95
165°	225	232	246	261	265	63
175°	234	235	237	240	239	22
180°	235	235	235	235	235	



TEST NUMBER: P331344-927

CATALOG NUMBER: S122DIP-S675D530U927-4F0-1E-UDD-D4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	558.0	558.0	558.0	558.0	558.0	558.0	558.0	558.0	558.0	558.0	558.0
2.5°	561.3	560.8	560.4	559.9	559.5	558.8	557.8	556.7	555.8	554.8	555.5
5°	559.6	559.0	558.6	558.0	557.5	556.7	555.6	554.5	553.4	552.3	553.4
7.5°	554.6	554.2	553.9	553.5	553.2	552.5	551.8	550.9	550.1	549.3	550.6
10°	550.7	550.3	550.0	549.6	549.3	548.8	548.3	547.8	547.2	546.7	548.1
12.5°	544.2	544.3	544.4	544.5	544.5	544.4	544.0	543.6	543.2	542.8	544.2
15°	533.8	534.1	534.5	534.8	535.2	535.4	535.4	535.4	535.4	535.4	536.9
17.5°	520.1	520.9	521.7	522.4	523.2	523.9	524.4	525.0	525.5	526.2	527.8
20°	511.1	512.0	512.9	513.8	514.7	515.5	516.2	517.0	517.7	518.4	520.4
22.5°	501.4	502.4	503.5	504.5	505.6	506.6	507.6	508.6	509.6	510.6	512.6
25°	485.2	486.5	487.7	489.0	490.3	491.7	493.3	495.0	496.5	498.1	500.3
27.5°	465.8	467.9	469.9	472.0	474.0	476.0	477.9	479.8	481.7	483.6	486.3
30°	452.9	455.2	457.6	459.9	462.2	464.5	466.9	469.2	471.6	473.9	476.7
32.5°	438.6	441.2	443.9	446.5	449.2	451.9	454.6	457.3	460.1	462.9	466.2
35°	418.1	421.1	424.2	427.2	430.3	433.6	437.0	440.4	443.8	447.2	451.1
37.5°	395.8	399.3	402.8	406.3	409.9	413.8	418.3	422.7	427.1	431.5	435.9
40°	380.9	384.8	388.8	392.8	396.7	401.1	406.0	410.8	415.7	420.5	425.2
42.5°	366.7	370.6	374.5	378.5	382.5	387.2	392.8	398.4	403.9	409.6	414.6
45°	342.9	347.8	352.6	357.4	362.3	367.9	374.1	380.5	386.7	393.0	398.6
47.5°	319.4	324.7	330.0	335.3	340.6	346.9	354.3	361.6	369.0	376.4	382.2
50°	303.2	308.9	314.4	320.0	325.5	332.4	340.5	348.6	356.6	364.7	370.8
52.5°	287.7	293.6	299.4	305.3	311.2	318.4	326.9	335.4	343.9	352.4	358.7
55°	262.8	269.3	275.8	282.3	288.7	296.6	305.9	315.3	324.6	334.0	340.5
57.5°	238.2	245.6	252.9	260.2	267.4	275.8	285.3	294.9	304.4	313.9	320.9
60°	220.8	228.5	236.2	244.0	251.7	260.7	270.9	281.1	291.4	301.7	308.5
62.5°	205.3	213.3	221.3	229.3	237.3	246.4	256.7	266.9	277.2	287.4	294.7
65°	179.5	188.3	197.2	206.0	214.8	224.4	235.0	245.7	256.3	266.9	274.3
67.5°	155.9	165.1	174.4	183.5	192.7	202.7	213.6	224.4	235.3	246.1	253.6
70°	139.1	148.5	157.8	167.2	176.5	186.7	197.9	209.0	220.1	231.3	239.0
72.5°	123.6	133.2	142.8	152.5	162.1	172.5	183.9	195.1	206.4	217.7	225.3
75°	99.5	109.6	119.6	129.7	139.7	150.5	162.0	173.5	185.0	196.5	204.2
77.5°	76.2	86.7	97.3	107.7	118.3	129.4	141.1	152.8	164.5	176.1	183.9
80°	60.7	71.6	82.5	93.6	104.5	115.8	127.5	139.2	150.8	162.6	170.1
82.5°	47.7	58.5	69.3	80.2	91.0	102.3	114.2	126.0	137.8	149.6	157.2
85°	29.2	40.2	51.4	62.5	73.7	85.0	96.5	108.0	119.5	131.0	138.6
87.5°	15.9	26.9	38.0	48.9	59.8	71.1	83.1	95.2	107.3	118.9	126.1
90°	8.6	20.3	32.6	43.9	55.2	67.5	81.3	95.9	110.2	122.1	128.8
92.5°	12.9	25.1	38.0	49.7	62.5	77.2	98.5	123.9	147.7	159.6	157.6
95°	22.3	32.6	45.5	58.0	73.7	94.1	125.7	175.8	239.0	270.1	254.8
97.5°	31.4	41.4	53.6	67.3	83.2	104.3	140.9	206.0	303.4	388.4	409.9
100°	40.5	48.5	59.2	73.0	88.7	109.7	143.8	208.9	316.6	437.8	509.5
102.5°	48.1	55.2	65.4	78.6	94.1	114.7	146.6	205.3	305.5	435.1	543.8
105°	59.2	66.1	74.5	86.5	101.7	121.6	152.2	201.8	285.7	404.3	530.8
107.5°	72.0	77.6	84.8	95.3	109.3	128.6	158.1	202.2	272.7	372.0	484.3
110°	80.0	85.5	91.7	101.2	114.3	133.6	162.2	203.6	267.5	355.8	455.1



TEST NUMBER: P331344-927

CATALOG NUMBER: S122DIP-S675D530U927-4F0-1E-UDD-D4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	88.0	92.8	98.9	107.4	119.6	138.7	166.3	205.3	263.8	343.3	433.2
115°	100.4	104.6	109.3	116.7	127.7	144.9	172.5	208.1	260.0	328.6	405.4
117.5°	112.4	115.5	119.5	125.6	135.5	152.6	178.0	211.4	257.2	317.7	385.2
120°	120.3	122.9	126.3	131.1	140.9	157.4	182.3	213.8	255.8	311.3	373.8
122.5°	127.9	129.7	132.7	137.4	146.7	163.3	186.6	215.9	254.8	306.0	363.5
125°	137.1	138.5	141.2	146.6	155.7	171.2	193.2	219.3	253.0	296.8	348.2
127.5°	145.1	146.7	150.4	156.1	164.6	179.8	200.3	223.2	252.2	289.4	333.8
130°	149.8	151.5	155.7	161.9	170.8	185.2	204.8	225.8	252.1	284.8	324.3
132.5°	154.2	156.1	160.8	167.3	176.6	190.6	208.6	228.3	252.0	280.5	316.0
135°	159.9	161.6	167.1	173.8	184.3	197.8	214.0	231.6	251.5	275.0	304.5
137.5°	166.0	168.1	173.5	180.7	190.9	203.0	218.2	233.7	250.9	270.2	295.1
140°	170.6	172.3	177.5	184.6	194.3	206.2	220.1	234.5	250.2	267.3	289.5
142.5°	175.4	176.7	181.5	188.5	198.0	208.9	222.2	235.9	250.3	265.9	285.2
145°	181.6	183.4	187.9	194.7	203.7	213.7	225.9	238.5	251.2	264.7	280.3
147.5°	189.2	190.5	194.9	201.1	208.7	217.5	228.9	240.1	251.5	263.1	275.9
150°	194.2	195.6	199.2	205.1	211.9	220.0	230.4	240.8	251.2	262.1	272.9
152.5°	199.3	199.9	203.6	208.7	215.2	222.5	231.9	241.1	250.5	260.2	270.4
155°	206.4	206.9	209.6	214.6	219.6	226.3	234.0	241.7	249.4	257.1	265.6
157.5°	212.4	212.9	215.1	219.4	223.4	229.0	235.5	241.7	247.3	253.8	261.2
160°	216.4	216.8	218.6	222.3	225.9	230.8	236.3	241.7	246.2	251.7	257.9
162.5°	220.4	220.1	221.9	224.8	228.1	232.0	236.6	241.3	245.1	249.9	255.1
165°	225.0	224.5	225.5	228.1	230.4	233.1	237.2	240.3	243.0	246.2	250.3
167.5°	228.8	228.2	229.0	230.8	232.4	234.1	237.1	239.7	241.0	243.0	245.6
170°	231.3	230.4	230.8	232.2	233.1	234.5	236.7	239.0	239.9	241.2	243.0
172.5°	232.7	232.2	232.0	233.3	233.9	234.8	236.4	237.9	238.4	239.1	240.5
175°	234.5	234.0	233.5	234.5	234.5	234.9	235.8	236.7	236.3	236.7	237.2
177.5°	235.3	234.6	234.2	234.9	234.9	234.9	235.3	236.0	235.3	234.9	235.3
180°	234.9	234.9	234.9	234.9	234.9	234.9	234.9	234.9	234.9	234.9	234.9



TEST NUMBER: P331344-927

CATALOG NUMBER: S122DIP-S675D530U927-4F0-1E-UDD-D4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	558.0	558.0	558.0	558.0	558.0	558.0	558.0	558.0
2.5°	556.2	556.9	557.6	557.9	557.5	557.3	557.0	556.7
5°	554.5	555.6	556.7	557.1	556.9	556.7	556.6	556.3
7.5°	551.8	553.2	554.4	555.0	554.8	554.6	554.4	554.3
10°	549.5	551.0	552.5	553.0	552.9	552.7	552.5	552.3
12.5°	545.7	547.1	548.6	549.1	549.0	548.8	548.7	548.4
15°	538.6	540.2	541.9	542.6	542.4	542.2	542.0	541.9
17.5°	529.5	531.2	532.9	533.8	533.8	533.8	533.8	533.8
20°	522.4	524.3	526.2	527.3	527.3	527.3	527.3	527.3
22.5°	514.6	516.6	518.5	519.7	519.9	520.2	520.5	520.8
25°	502.5	504.6	506.8	508.1	508.7	509.2	509.8	510.3
27.5°	489.1	491.8	494.6	496.1	496.5	496.9	497.3	497.6
30°	479.7	482.5	485.4	487.1	487.7	488.2	488.7	489.3
32.5°	469.5	472.9	476.1	478.2	479.3	480.2	481.2	482.1
35°	455.1	459.1	463.0	465.6	466.9	468.2	469.4	470.6
37.5°	440.3	444.7	449.1	451.9	453.3	454.6	455.9	457.2
40°	429.8	434.5	439.2	442.4	443.9	445.6	447.2	448.9
42.5°	419.7	424.8	429.9	433.3	434.9	436.6	438.2	439.7
45°	404.2	409.7	415.3	419.0	420.8	422.6	424.4	426.2
47.5°	388.0	393.9	399.7	403.5	405.5	407.5	409.5	411.5
50°	376.9	383.0	389.2	393.2	395.2	397.2	399.1	401.1
52.5°	365.0	371.2	377.5	381.7	383.7	385.9	388.0	390.1
55°	346.9	353.4	359.9	364.2	366.6	368.9	371.3	373.6
57.5°	327.9	334.9	341.8	346.5	348.9	351.3	353.6	356.0
60°	315.3	322.1	329.0	333.7	336.1	338.7	341.2	343.7
62.5°	301.9	309.2	316.5	321.3	323.6	326.0	328.4	330.7
65°	281.6	289.0	296.4	301.2	303.6	305.9	308.2	310.5
67.5°	261.0	268.5	275.9	280.9	283.3	285.7	288.2	290.7
70°	246.8	254.4	262.2	267.1	269.3	271.5	273.6	275.8
72.5°	232.9	240.4	248.0	253.1	255.7	258.3	260.9	263.5
75°	212.0	219.7	227.4	232.4	234.8	237.1	239.5	241.8
77.5°	191.5	199.2	206.9	212.0	214.5	217.1	219.5	222.0
80°	177.6	185.2	192.7	197.8	200.3	202.8	205.3	207.9
82.5°	164.7	172.2	179.8	184.7	187.1	189.5	191.9	194.2
85°	146.1	153.7	161.2	166.2	168.7	171.3	173.8	176.3
87.5°	133.3	140.5	148.1	153.0	155.3	157.6	159.9	162.2
90°	135.6	141.9	150.0	155.1	157.2	159.4	161.5	163.7
92.5°	154.4	155.8	159.1	160.9	162.7	163.4	166.0	167.4
95°	225.1	204.3	192.2	186.7	183.0	181.5	182.4	185.0
97.5°	375.6	332.0	289.7	261.5	242.0	233.1	228.5	226.9
100°	506.6	457.2	402.0	351.6	316.2	298.7	287.6	281.4
102.5°	591.1	584.9	546.2	492.5	453.8	422.6	408.2	399.1
105°	631.1	688.4	700.5	689.8	663.7	637.7	620.3	615.9
107.5°	589.9	672.9	725.9	751.8	757.2	757.7	755.8	749.3
110°	556.2	642.8	706.4	747.3	768.7	779.3	785.3	786.8



TEST NUMBER: P331344-927

CATALOG NUMBER: S122DIP-S675D530U927-4F0-1E-UDD-D4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	524.9	608.3	675.8	722.2	751.1	767.5	777.1	781.6
115°	485.3	560.3	624.9	675.1	709.2	731.9	745.6	751.6
117.5°	453.8	520.2	579.2	626.4	660.9	684.8	698.9	704.2
120°	437.0	498.1	551.0	595.6	629.2	652.4	667.5	674.0
122.5°	423.1	479.3	529.6	570.0	600.1	622.7	636.0	641.4
125°	402.3	453.6	498.2	535.4	563.2	581.9	594.8	600.1
127.5°	381.6	428.2	470.2	504.4	528.9	546.5	557.9	562.3
130°	368.4	411.5	451.5	484.3	507.9	524.7	535.1	540.2
132.5°	355.5	395.7	432.7	463.5	486.7	503.5	513.3	517.9
135°	337.6	371.2	404.8	432.8	453.6	469.9	479.5	482.8
137.5°	322.3	350.6	377.6	401.9	420.8	434.9	443.2	447.2
140°	312.8	337.3	361.0	382.9	398.4	411.2	419.1	422.9
142.5°	305.2	326.0	346.2	364.4	379.1	390.7	397.7	399.2
145°	295.3	311.3	326.5	340.5	352.3	360.8	366.2	368.5
147.5°	288.0	299.8	310.9	320.8	330.2	336.8	340.2	341.5
150°	283.7	293.7	303.2	311.2	318.1	323.4	326.1	326.6
152.5°	279.7	289.0	297.0	304.0	309.3	314.1	316.1	316.2
155°	274.3	281.5	288.2	293.2	298.2	301.3	303.2	302.2
157.5°	267.8	273.9	279.6	283.4	286.9	289.6	290.4	290.4
160°	263.8	268.8	273.8	276.9	280.1	282.3	282.8	282.8
162.5°	259.8	264.1	268.4	270.8	273.9	275.5	275.9	275.6
165°	253.9	257.1	260.2	262.1	263.8	265.6	265.6	265.2
167.5°	248.2	250.6	252.8	254.4	255.2	256.3	256.2	255.6
170°	245.3	246.7	248.5	249.4	249.9	251.2	250.7	249.9
172.5°	242.1	243.0	244.5	245.0	245.5	246.1	245.7	245.1
175°	238.5	239.0	239.5	239.9	239.9	240.3	239.9	239.0
177.5°	236.0	236.0	236.4	236.4	236.4	236.4	236.0	235.3
180°	234.9	234.9	234.9	234.9	234.9	234.9	234.9	234.9

(END OF REPORT)