

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331412-927

Luminaire Tested: **S122DIP-S865D1080U927-4F0-1E-UDD-A1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P331412-927  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S122DIP-S865D1080U927-4F0-1E-UDD-A1  
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 865 LUMENS PER FOOT, ASYMMETRIC DIFFUSER  
UPLIGHT 1080 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6070.9 lumens  
Efficiency: N/A  
Efficacy: 92.8 lumens/watt  
Spacing Criteria (0/90/45): 1.08 / 1.16 / 1.23  
Luminous Opening: Rectangular (W 4' x L: 0.17' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 65.4  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331412-927

CATALOG NUMBER: S122DIP-S865D1080U927-4F0-1E-UDD-A1

### Luminous Intensity Polar Plot

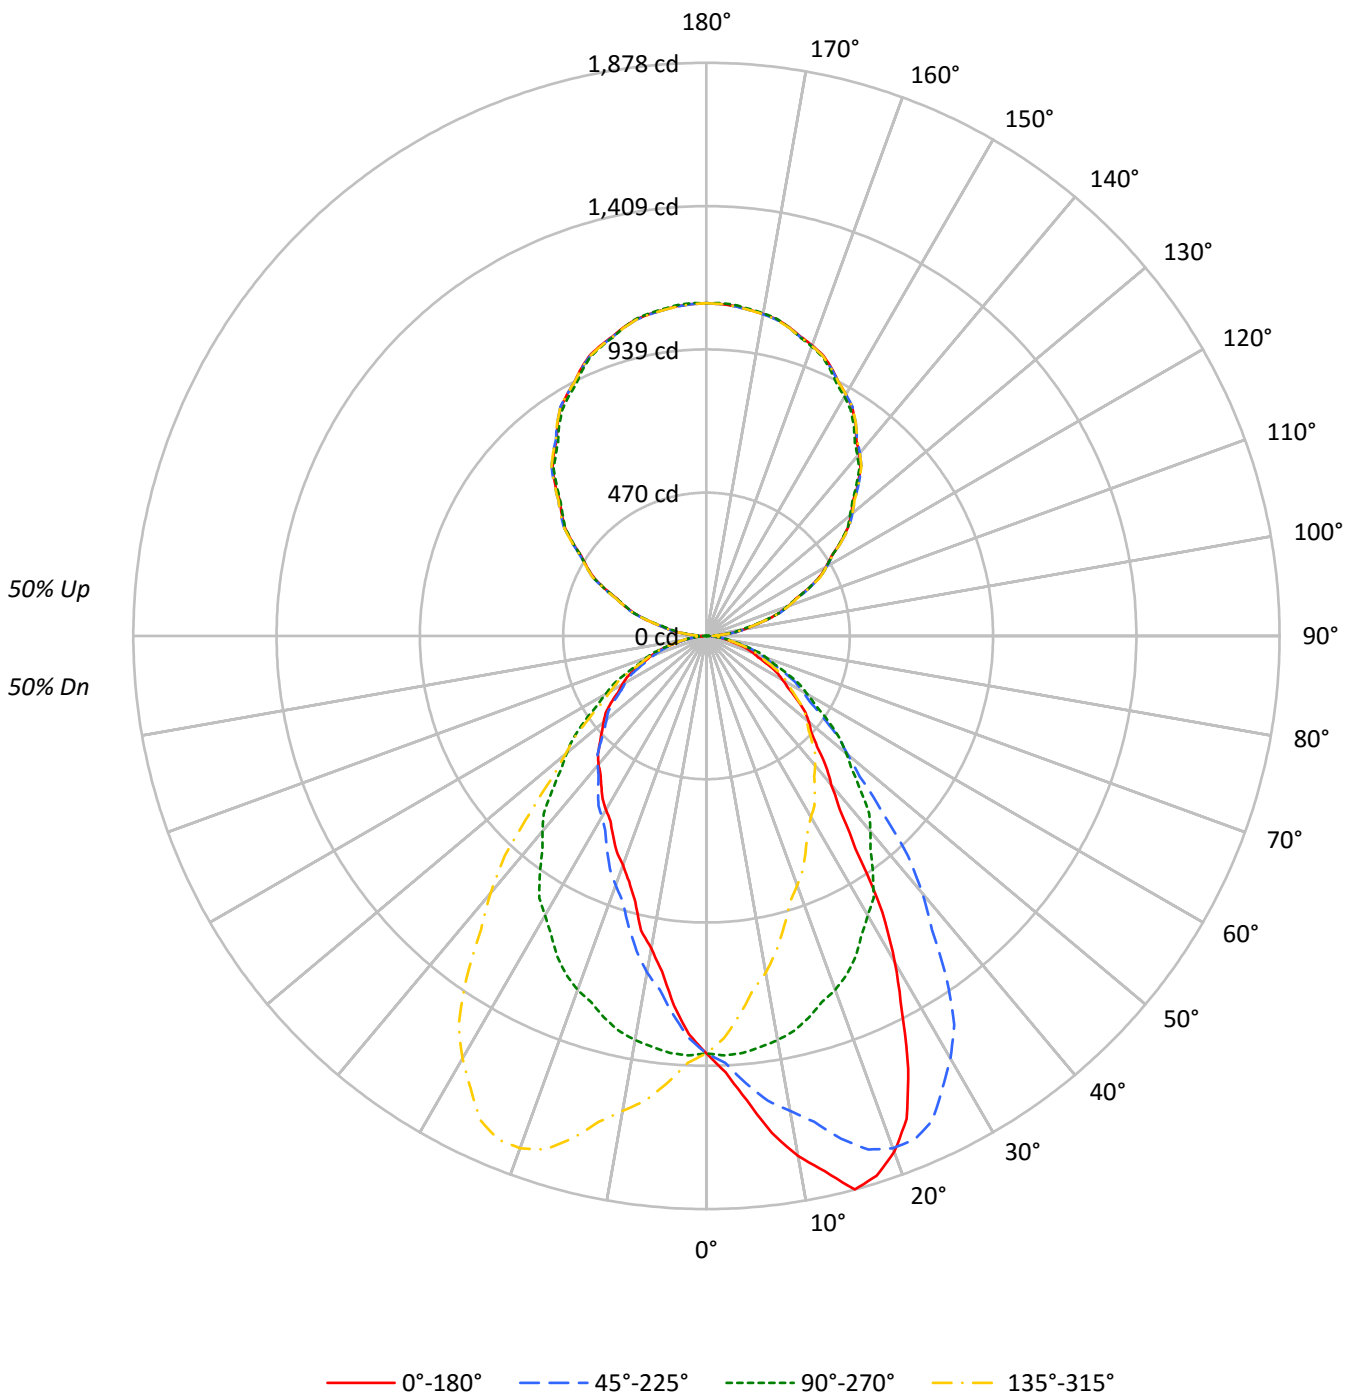



TEST NUMBER: P331412-927

CATALOG NUMBER: S122DIP-S865D1080U927-4F0-1E-UDD-A1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	107	107	107	107	99	99	99	99	83	83	83	69	69	69	56	56	56	50				
1	98	94	90	87	90	87	84	81	74	71	69	61	60	58	50	49	48	43				
2	90	83	77	72	83	77	71	67	65	61	58	54	52	49	45	43	41	37				
3	82	73	66	60	76	68	62	57	58	53	49	49	45	42	40	38	36	32				
4	75	65	57	52	69	60	54	48	52	47	43	44	40	37	36	33	31	28				
5	69	58	50	44	64	54	47	42	46	41	37	39	35	32	33	30	27	24				
6	64	52	44	39	59	49	42	37	42	37	33	36	32	28	30	27	24	22				
7	59	47	40	34	55	44	37	32	38	33	29	33	28	25	27	24	22	19				
8	55	43	36	30	51	40	34	29	35	30	26	30	26	23	25	22	20	17				
9	51	40	32	27	48	37	30	26	32	27	23	28	24	21	23	20	18	16				
10	48	36	29	25	45	34	28	23	30	25	21	26	22	19	22	19	16	14				

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	22083	22083	22083	22083
5°	24759	22227	19697	22227
10°	28370	22046	17046	22046
15°	31385	21641	15059	21641
20°	30907	21206	13728	21206
25°	27868	20630	12886	20630
30°	23029	19708	12269	19708
35°	16783	18743	11832	18743
40°	13405	17606	11590	17606
45°	11714	16287	11259	16287
50°	11012	15013	11037	15013
55°	10151	13717	10742	13717
60°	9300	12339	10285	12339
65°	8474	11106	9838	11106
70°	7695	9904	9182	9904
75°	6818	8559	8135	8559
80°	5867	7085	6546	7085
85°	5261	5261	3890	5261



TEST NUMBER: P331412-927

CATALOG NUMBER: S122DIP-S865D1080U927-4F0-1E-UDD-A1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	130.3	2.1
10°-20°	378.7	6.2
20°-30°	549.6	9.1
30°-40°	579.9	9.6
40°-50°	513.5	8.5
50°-60°	409.8	6.8
60°-70°	278.5	4.6
70°-80°	142.8	2.4
80°-90°	38.8	0.6
90°-100°	69.1	1.1
100°-110°	214.6	3.5
110°-120°	366.8	6.0
120°-130°	482.4	7.9
130°-140°	541.4	8.9
140°-150°	530.9	8.7
150°-160°	445.3	7.3
160°-170°	295.3	4.9
170°-180°	103.2	1.7
0°-30°	1058.5	17.4
0°-40°	1638.5	27.0
0°-60°	2561.8	42.2
0°-90°	3021.9	49.8
90°-120°	650.5	10.7
90°-150°	2205.2	36.3
90°-180°	3049.0	50.2
0°-180°	6070.9	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	1368	1368	1368	1368	1368	
5°	1528	1371	1215	1371	1528	153
15°	1878	1295	901	1295	1878	518
25°	1564	1158	723	1158	1564	707
35°	852	951	600	951	852	554
45°	513	713	493	713	513	403
55°	361	487	382	487	361	323
65°	222	291	258	291	222	221
75°	109	137	130	137	109	117
85°	28	28	21	28	28	32
90°	31	1	31	1	31	15
95°	57	48	57	48	57	64
105°	204	198	204	198	204	215
115°	368	368	368	368	368	363
125°	537	536	537	536	537	479
135°	701	693	701	693	701	540
145°	850	841	850	841	850	531
155°	969	962	969	962	969	446
165°	1047	1046	1047	1046	1047	295
175°	1085	1089	1085	1089	1085	103
180°	1090	1090	1090	1090	1090	



TEST NUMBER: P331412-927

CATALOG NUMBER: S122DIP-S865D1080U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7
2.5°	1430.8	1431.2	1432.1	1425.4	1424.5	1424.5	1418.6	1413.6	1407.7	1399.7	1400.6
5°	1527.6	1533.3	1535.4	1529.1	1519.6	1518.6	1509.7	1494.9	1481.3	1470.2	1462.4
7.5°	1643.0	1645.3	1640.1	1631.8	1624.8	1612.2	1595.5	1579.3	1556.5	1535.6	1520.0
10°	1730.4	1733.6	1724.7	1712.5	1702.6	1687.8	1663.7	1638.9	1609.0	1580.1	1557.0
12.5°	1796.9	1804.7	1793.2	1791.6	1774.5	1754.3	1725.5	1713.0	1670.9	1630.5	1605.8
15°	1877.6	1877.1	1878.2	1868.1	1855.5	1852.4	1821.9	1788.8	1729.4	1705.7	1664.8
17.5°	1854.3	1862.3	1866.0	1865.8	1865.5	1863.5	1853.8	1832.9	1803.1	1764.7	1717.4
20°	1798.8	1809.3	1810.8	1823.0	1829.8	1838.7	1842.4	1836.6	1818.2	1786.1	1745.2
22.5°	1713.0	1715.9	1720.9	1739.7	1754.5	1776.9	1788.6	1808.0	1800.9	1785.3	1751.0
25°	1564.3	1559.1	1577.5	1586.9	1621.1	1656.8	1682.6	1711.0	1736.2	1751.4	1741.5
27.5°	1385.8	1377.9	1405.5	1430.6	1458.3	1497.1	1537.2	1584.6	1624.1	1673.3	1690.3
30°	1235.2	1240.0	1266.3	1293.1	1335.1	1389.8	1435.0	1487.1	1543.3	1598.5	1636.9
32.5°	1072.9	1091.2	1107.8	1148.8	1185.9	1246.8	1313.0	1378.2	1448.3	1511.0	1570.4
35°	851.5	872.6	895.7	925.7	977.7	1038.2	1102.8	1190.6	1286.3	1372.0	1442.4
37.5°	716.8	713.4	726.7	748.3	790.4	839.2	913.7	1000.4	1113.0	1213.7	1313.0
40°	636.0	633.9	643.4	663.4	695.5	731.2	796.4	872.6	977.2	1100.2	1218.5
42.5°	580.5	581.8	587.0	601.1	623.1	652.5	701.3	766.2	862.0	977.8	1104.9
45°	513.0	516.7	522.5	529.3	541.9	566.1	593.4	639.7	715.4	812.1	937.2
47.5°	464.5	464.5	470.5	476.4	483.9	497.6	519.8	548.9	602.3	681.0	788.6
50°	438.4	434.7	438.9	443.6	451.5	461.0	475.7	503.0	538.8	602.4	692.3
52.5°	406.5	406.5	410.4	412.1	419.1	428.6	442.0	461.0	493.4	543.1	617.0
55°	360.6	363.2	365.4	368.4	374.8	381.6	392.1	404.7	430.0	467.3	522.0
57.5°	317.5	318.3	320.4	326.5	330.4	336.8	346.7	358.1	374.5	402.2	443.3
60°	288.0	288.0	292.2	294.9	300.2	306.4	314.3	325.3	340.1	362.7	395.9
62.5°	261.2	260.7	262.4	266.7	270.7	276.6	284.5	293.8	307.7	327.8	355.1
65°	221.8	220.8	223.9	225.0	229.2	235.0	241.3	251.3	262.3	277.0	301.2
67.5°	183.9	185.2	187.0	188.9	191.2	197.3	201.5	208.6	217.9	230.1	246.5
70°	163.0	163.0	163.0	164.5	167.7	170.9	175.1	180.9	189.7	200.3	215.0
72.5°	139.4	141.1	142.8	141.8	145.8	147.7	152.7	156.0	164.5	171.3	184.3
75°	109.3	109.3	109.3	111.9	113.5	115.1	118.3	121.4	125.6	134.0	140.9
77.5°	81.6	81.4	81.9	82.5	84.2	86.1	87.1	89.9	93.8	97.7	103.5
80°	63.1	64.2	64.6	65.7	65.7	66.8	67.3	71.0	73.6	76.2	79.9
82.5°	48.8	49.0	49.1	49.3	49.7	50.4	51.7	52.9	53.8	56.0	58.9
85°	28.4	27.9	27.9	28.9	28.4	28.4	29.5	30.5	30.5	31.0	32.6
87.5°	17.2	17.1	17.5	17.0	17.0	17.5	17.6	17.2	17.7	18.2	17.7
90°	31.3	31.1	30.9	30.7	30.5	30.6	31.0	31.4	31.8	32.2	27.7
92.5°	29.8	29.8	29.7	29.7	29.6	29.6	29.5	29.4	29.3	29.2	28.2
95°	57.0	57.4	57.9	58.3	58.7	58.9	58.9	58.9	58.9	58.9	58.5
97.5°	98.9	98.9	98.9	98.9	99.0	99.0	99.0	99.0	99.0	99.0	98.2
100°	126.0	126.3	126.5	126.7	126.9	127.0	127.0	127.0	127.0	127.0	126.4
102.5°	157.0	157.2	157.4	157.6	157.8	157.8	157.6	157.5	157.3	157.2	156.4
105°	204.3	204.3	204.3	204.3	204.3	204.1	203.7	203.3	202.9	202.4	202.0
107.5°	248.8	249.8	250.7	251.7	252.5	252.9	252.8	252.6	252.5	252.3	252.3
110°	283.4	284.0	284.6	285.3	285.9	286.2	286.2	286.2	286.2	286.2	286.2



TEST NUMBER: P331412-927

CATALOG NUMBER: S122DIP-S865D1080U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	316.6	317.0	317.4	317.9	318.4	318.9	319.3	319.8	320.3	320.8	320.9
115°	368.0	368.7	369.3	369.9	370.5	370.9	371.1	371.4	371.5	371.8	372.2
117.5°	417.2	417.8	418.4	419.1	419.7	420.3	420.7	421.2	421.7	422.2	423.3
120°	451.8	452.4	453.0	453.7	454.2	454.6	454.6	454.6	454.6	454.6	456.2
122.5°	485.7	486.2	486.6	487.0	487.5	487.9	488.5	488.9	489.4	489.9	491.1
125°	537.4	537.6	537.8	538.0	538.2	538.6	539.2	539.9	540.4	541.1	541.7
127.5°	584.5	585.2	585.8	586.5	587.1	587.8	588.5	589.3	590.0	590.7	591.5
130°	618.4	619.2	620.0	620.8	621.6	622.3	622.7	623.1	623.4	623.9	624.3
132.5°	650.8	651.4	652.0	652.8	653.4	654.2	655.1	655.9	656.9	657.7	657.7
135°	701.2	701.8	702.4	703.0	703.6	704.0	704.3	704.5	704.6	704.9	704.5
137.5°	746.8	747.7	748.5	749.2	750.1	750.6	750.8	750.9	751.1	751.2	750.7
140°	778.5	779.3	780.1	780.9	781.7	782.1	782.1	782.1	782.1	782.1	781.2
142.5°	807.2	808.0	808.8	809.6	810.5	810.8	810.6	810.5	810.3	810.2	809.5
145°	850.2	851.0	851.9	852.7	853.5	853.8	853.7	853.4	853.2	853.0	851.8
147.5°	888.7	889.5	890.3	891.0	891.8	892.0	891.5	891.1	890.7	890.2	889.4
150°	913.8	914.3	915.0	915.6	916.2	916.2	915.6	915.0	914.3	913.8	912.9
152.5°	937.3	938.1	938.9	939.6	940.4	940.4	939.6	938.9	938.1	937.3	936.4
155°	968.9	969.6	970.2	970.8	971.4	971.2	970.2	969.2	968.1	967.1	966.5
157.5°	996.2	997.2	998.1	999.1	1000.1	999.9	998.5	997.1	995.8	994.3	994.0
160°	1013.1	1013.9	1014.8	1015.6	1016.4	1016.2	1014.9	1013.8	1012.5	1011.3	1011.1
162.5°	1027.9	1028.8	1029.8	1030.8	1031.7	1031.6	1030.2	1028.8	1027.4	1026.0	1025.8
165°	1047.2	1048.2	1049.2	1050.3	1051.2	1051.1	1049.6	1048.2	1046.8	1045.4	1045.4
167.5°	1063.0	1064.1	1065.1	1066.2	1067.2	1067.1	1065.6	1064.2	1062.8	1061.4	1061.4
170°	1071.1	1072.3	1073.6	1074.8	1076.0	1075.9	1074.4	1073.0	1071.6	1070.2	1070.4
172.5°	1077.7	1079.0	1080.1	1081.4	1082.6	1082.5	1081.1	1079.7	1078.2	1076.8	1077.0
175°	1084.9	1086.2	1087.3	1088.6	1089.8	1089.7	1088.3	1086.9	1085.4	1083.9	1084.4
177.5°	1088.2	1089.2	1090.2	1091.2	1092.1	1092.1	1091.2	1090.2	1089.2	1088.2	1088.5
180°	1090.4	1090.4	1090.4	1090.4	1090.4	1090.4	1090.4	1090.4	1090.4	1090.4	1090.4



TEST NUMBER: P331412-927

CATALOG NUMBER: S122DIP-S865D1080U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7
2.5°	1403.5	1400.1	1398.0	1390.4	1383.7	1377.0	1374.9	1375.7	1366.5	1357.6	1353.8
5°	1458.2	1447.6	1437.7	1423.5	1406.7	1388.2	1378.8	1371.4	1353.0	1333.1	1321.5
7.5°	1507.1	1492.1	1472.9	1446.2	1421.7	1392.7	1374.4	1358.0	1331.2	1303.0	1285.7
10°	1537.0	1516.5	1491.8	1459.2	1429.3	1394.0	1369.3	1344.7	1313.0	1279.5	1258.4
12.5°	1562.7	1535.0	1510.7	1468.9	1433.5	1389.4	1360.1	1325.2	1292.0	1252.1	1231.5
15°	1623.7	1572.7	1526.5	1479.2	1435.5	1374.0	1341.5	1294.7	1251.0	1201.7	1178.0
17.5°	1671.0	1613.7	1540.8	1480.7	1429.7	1361.7	1313.8	1257.7	1206.2	1149.7	1117.5
20°	1697.9	1632.1	1553.8	1482.3	1421.3	1343.5	1291.5	1234.2	1173.8	1110.2	1075.5
22.5°	1713.8	1644.7	1567.3	1476.0	1404.5	1328.8	1263.4	1200.6	1139.3	1070.6	1034.3
25°	1718.9	1655.8	1573.8	1470.8	1383.5	1297.8	1219.0	1158.0	1083.9	1019.8	966.7
27.5°	1693.8	1648.6	1569.8	1460.9	1359.2	1259.0	1171.2	1102.1	1023.9	954.3	900.9
30°	1663.2	1636.9	1560.1	1450.8	1339.9	1232.2	1135.4	1057.1	979.3	908.9	854.2
32.5°	1615.7	1610.0	1542.5	1436.5	1319.3	1198.1	1098.0	1018.8	932.6	863.4	811.3
35°	1522.3	1547.5	1504.9	1404.5	1280.5	1149.6	1041.3	950.9	861.6	795.3	746.4
37.5°	1397.2	1459.8	1448.7	1357.7	1228.1	1096.9	977.3	882.8	797.6	730.8	682.8
40°	1311.0	1390.8	1402.4	1322.0	1191.1	1056.1	929.4	835.3	752.2	691.3	642.9
42.5°	1218.5	1311.8	1343.5	1279.1	1150.7	1013.1	886.5	789.0	706.8	647.5	604.6
45°	1063.4	1186.9	1244.2	1207.4	1083.4	942.5	812.1	713.3	638.7	583.0	549.9
47.5°	918.4	1053.4	1130.4	1117.5	1008.4	868.9	740.0	645.2	572.5	528.1	498.4
50°	815.8	954.6	1047.6	1051.9	954.6	816.3	687.1	597.7	530.9	489.4	465.2
52.5°	726.7	859.1	960.6	982.9	894.5	761.7	639.5	550.6	491.8	453.6	432.0
55°	610.3	722.2	834.7	875.8	804.8	678.6	565.6	487.3	432.1	405.8	386.9
57.5°	507.4	600.7	704.6	749.9	706.2	598.2	492.2	424.2	379.4	356.4	341.9
60°	453.1	526.7	619.2	673.4	635.5	539.3	446.8	382.1	345.4	324.9	311.2
62.5°	402.7	467.9	546.1	595.6	575.0	484.3	401.4	344.3	312.5	293.3	283.4
65°	332.2	383.7	444.2	489.9	476.3	407.3	339.6	290.7	265.5	250.2	242.3
67.5°	273.5	310.8	352.7	392.8	381.8	333.0	278.5	240.4	221.7	208.5	203.7
70°	236.5	264.9	302.2	334.3	325.3	285.4	242.3	209.8	193.5	182.4	177.7
72.5°	201.2	224.6	253.0	279.2	273.2	240.0	204.1	179.4	166.9	156.8	152.9
75°	151.9	169.8	187.1	204.5	202.9	177.1	156.1	137.2	127.2	119.3	117.7
77.5°	112.2	122.2	134.0	144.3	141.4	126.7	110.2	99.3	92.0	86.7	85.9
80°	85.7	91.5	99.9	107.3	103.5	97.3	84.1	76.2	71.0	65.7	63.6
82.5°	62.1	67.9	73.0	76.9	74.1	68.2	60.1	54.7	51.7	48.0	47.2
85°	32.6	35.7	37.9	38.9	37.9	34.1	30.5	28.4	25.7	24.2	23.7
87.5°	17.3	16.3	15.4	15.6	13.9	13.4	11.2	9.4	9.5	9.6	9.2
90°	23.2	18.7	14.2	10.8	8.3	5.9	3.4	1.0	3.4	5.9	8.3
92.5°	27.2	26.1	25.0	23.6	21.8	20.0	18.1	16.4	18.1	20.0	21.8
95°	58.1	57.7	57.3	56.0	53.9	52.0	49.9	47.8	49.9	52.0	53.9
97.5°	97.4	96.6	95.9	94.6	92.8	91.0	89.2	87.5	89.2	91.0	92.8
100°	125.7	125.2	124.5	123.4	121.8	120.2	118.5	116.8	118.5	120.2	121.8
102.5°	155.6	154.9	154.1	153.0	151.7	150.4	149.1	147.8	149.1	150.4	151.7
105°	201.6	201.2	200.8	200.3	199.7	199.1	198.4	197.8	198.4	199.1	199.7
107.5°	252.3	252.3	252.3	251.8	251.0	250.1	249.1	248.3	249.1	250.1	251.0
110°	286.2	286.2	286.2	285.6	284.3	283.1	281.9	280.7	281.9	283.1	284.3





TEST NUMBER: P331412-927

CATALOG NUMBER: S122DIP-S865D1080U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	321.1	321.2	321.5	320.9	319.6	318.5	317.2	316.0	317.2	318.5	319.6
115°	372.6	373.0	373.4	373.0	371.8	370.5	369.3	368.0	369.3	370.5	371.8
117.5°	424.5	425.6	426.7	426.5	424.8	423.3	421.6	419.9	421.6	423.3	424.8
120°	457.9	459.5	461.1	461.1	459.5	457.9	456.2	454.6	456.2	457.9	459.5
122.5°	492.2	493.4	494.5	494.1	492.1	490.1	488.2	486.2	488.2	490.1	492.1
125°	542.3	542.9	543.5	542.9	541.1	539.2	537.4	535.5	537.4	539.2	541.1
127.5°	592.2	592.9	593.7	592.9	590.6	588.3	585.9	583.6	585.9	588.3	590.6
130°	624.7	625.1	625.5	624.4	621.7	619.1	616.4	613.8	616.4	619.1	621.7
132.5°	657.6	657.5	657.4	656.3	654.1	652.0	649.8	647.6	649.8	652.0	654.1
135°	704.0	703.6	703.2	701.9	699.7	697.4	695.1	692.9	695.1	697.4	699.7
137.5°	750.2	749.6	749.1	747.9	746.1	744.3	742.4	740.5	742.4	744.3	746.1
140°	780.1	779.1	778.1	776.7	774.8	772.9	771.1	769.3	771.1	772.9	774.8
142.5°	808.7	808.0	807.3	806.0	804.2	802.4	800.6	798.8	800.6	802.4	804.2
145°	850.6	849.3	848.1	846.8	845.3	843.9	842.5	841.1	842.5	843.9	845.3
147.5°	888.6	887.7	886.9	885.7	883.9	882.2	880.5	878.8	880.5	882.2	883.9
150°	912.1	911.3	910.5	909.4	908.2	907.0	905.8	904.5	905.8	907.0	908.2
152.5°	935.3	934.4	933.3	932.2	931.1	929.8	928.6	927.3	928.6	929.8	931.1
155°	965.9	965.3	964.6	964.1	963.5	962.8	962.2	961.6	962.2	962.8	963.5
157.5°	993.6	993.2	992.8	992.5	992.0	991.7	991.3	990.9	991.3	991.7	992.0
160°	1010.9	1010.7	1010.4	1010.2	1009.7	1009.3	1008.9	1008.5	1008.9	1009.3	1009.7
162.5°	1025.6	1025.4	1025.2	1025.1	1024.9	1024.8	1024.8	1024.7	1024.8	1024.8	1024.9
165°	1045.4	1045.4	1045.4	1045.4	1045.6	1045.8	1046.1	1046.2	1046.1	1045.8	1045.6
167.5°	1061.4	1061.4	1061.5	1061.8	1062.5	1063.0	1063.7	1064.3	1063.7	1063.0	1062.5
170°	1070.6	1070.8	1071.0	1071.4	1072.0	1072.6	1073.2	1073.9	1073.2	1072.6	1072.0
172.5°	1077.2	1077.4	1077.6	1078.0	1078.6	1079.3	1079.9	1080.5	1079.9	1079.3	1078.6
175°	1084.8	1085.2	1085.6	1086.2	1086.7	1087.3	1088.0	1088.6	1088.0	1087.3	1086.7
177.5°	1088.9	1089.2	1089.5	1090.0	1090.4	1090.9	1091.4	1091.9	1091.4	1090.9	1090.4
180°	1090.4	1090.4	1090.4	1090.4	1090.4	1090.4	1090.4	1090.4	1090.4	1090.4	1090.4



TEST NUMBER: P331412-927

CATALOG NUMBER: S122DIP-S865D1080U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7
2.5°	1349.6	1347.1	1338.3	1333.7	1326.1	1319.0	1314.3	1316.4	1318.1	1317.2	1316.1
5°	1311.0	1301.0	1285.7	1272.6	1263.1	1245.8	1238.4	1234.8	1231.6	1227.9	1224.2
7.5°	1265.0	1249.2	1227.2	1208.6	1190.9	1169.3	1157.1	1149.7	1142.2	1133.9	1126.5
10°	1232.2	1210.1	1186.9	1160.6	1139.6	1120.1	1102.8	1091.2	1080.8	1070.7	1063.4
12.5°	1197.6	1172.2	1143.6	1107.6	1084.5	1056.7	1054.0	1033.6	1017.2	1011.1	1002.4
15°	1142.8	1107.0	1070.7	1028.2	1009.8	984.5	968.8	953.0	938.8	928.8	926.2
17.5°	1080.5	1034.2	998.1	967.5	937.3	911.5	897.0	884.4	872.7	859.4	857.5
20°	1032.9	992.9	953.5	926.7	895.7	869.4	851.5	838.9	828.9	821.1	814.2
22.5°	987.9	944.2	908.1	878.8	848.2	827.0	812.9	800.7	792.3	783.6	777.2
25°	915.7	881.5	842.1	809.0	783.7	770.1	758.5	748.0	742.8	737.0	729.6
27.5°	852.5	814.5	777.7	752.0	729.8	717.7	709.6	702.3	697.4	694.0	689.8
30°	807.9	769.5	740.6	715.4	697.0	684.9	679.7	675.5	669.7	667.6	665.5
32.5°	765.0	730.5	705.8	683.9	666.3	658.5	653.6	649.8	645.3	643.2	639.0
35°	704.4	675.5	651.3	639.2	625.0	618.1	614.5	609.3	605.0	602.9	602.4
37.5°	647.3	622.2	606.3	590.7	584.7	580.5	575.5	571.9	570.6	570.3	569.8
40°	610.3	589.8	575.6	563.0	560.3	554.1	549.9	546.7	546.7	547.2	546.7
42.5°	576.6	558.3	545.7	534.8	531.7	528.0	523.8	523.6	524.4	526.2	524.4
45°	525.6	512.5	503.6	498.3	492.5	488.9	488.3	489.9	490.4	491.0	492.5
47.5°	478.8	470.0	461.9	456.1	453.6	453.0	452.3	455.1	457.6	458.6	461.0
50°	451.0	441.0	434.2	430.5	428.4	427.4	428.4	431.6	433.6	436.3	437.8
52.5°	419.9	412.8	408.1	405.3	404.4	405.0	405.3	408.8	412.3	413.1	413.9
55°	376.9	371.6	370.6	365.8	368.0	367.4	370.0	372.2	375.3	378.5	379.0
57.5°	334.0	329.8	326.9	327.4	328.0	330.3	332.6	336.2	339.6	342.9	343.3
60°	305.4	303.3	301.7	301.7	302.8	305.9	308.6	312.2	314.3	316.5	318.0
62.5°	279.3	277.3	275.7	276.5	279.2	281.1	284.2	286.1	288.3	290.3	291.1
65°	238.1	237.1	238.7	239.7	240.2	242.9	246.5	248.1	250.2	251.3	254.9
67.5°	200.2	200.3	200.2	201.6	204.7	205.3	208.8	212.5	212.9	214.9	217.3
70°	174.5	175.5	176.7	177.7	180.3	181.3	183.9	185.5	187.7	189.3	190.8
72.5°	151.0	151.1	152.3	152.0	154.2	156.5	158.8	160.3	162.4	164.5	166.0
75°	116.1	116.1	117.2	117.7	120.4	123.0	122.5	123.5	125.6	127.7	128.8
77.5°	84.8	83.7	84.8	85.4	86.2	88.4	88.8	90.3	92.7	92.0	93.2
80°	64.6	63.1	64.6	65.2	65.2	67.8	67.8	68.8	70.4	68.8	70.4
82.5°	46.2	45.4	46.6	46.7	47.5	47.6	48.5	48.6	50.2	49.5	50.2
85°	23.1	22.6	23.1	22.6	23.1	23.7	23.7	23.1	23.1	24.2	22.6
87.5°	9.3	9.6	10.1	10.9	11.4	11.9	11.4	11.3	11.2	10.3	10.3
90°	10.8	14.2	18.7	23.2	27.7	32.2	31.8	31.4	31.0	30.6	30.5
92.5°	23.6	25.0	26.1	27.2	28.2	29.2	29.3	29.4	29.5	29.6	29.6
95°	56.0	57.3	57.7	58.1	58.5	58.9	58.9	58.9	58.9	58.9	58.7
97.5°	94.6	95.9	96.6	97.4	98.2	99.0	99.0	99.0	99.0	99.0	99.0
100°	123.4	124.5	125.2	125.7	126.4	127.0	127.0	127.0	127.0	127.0	126.9
102.5°	153.0	154.1	154.9	155.6	156.4	157.2	157.3	157.5	157.6	157.8	157.8
105°	200.3	200.8	201.2	201.6	202.0	202.4	202.9	203.3	203.7	204.1	204.3
107.5°	251.8	252.3	252.3	252.3	252.3	252.3	252.5	252.6	252.8	252.9	252.5
110°	285.6	286.2	286.2	286.2	286.2	286.2	286.2	286.2	286.2	286.2	285.9



TEST NUMBER: P331412-927

CATALOG NUMBER: S122DIP-S865D1080U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	320.9	321.5	321.2	321.1	320.9	320.8	320.3	319.8	319.3	318.9	318.4
115°	373.0	373.4	373.0	372.6	372.2	371.8	371.5	371.4	371.1	370.9	370.5
117.5°	426.5	426.7	425.6	424.5	423.3	422.2	421.7	421.2	420.7	420.3	419.7
120°	461.1	461.1	459.5	457.9	456.2	454.6	454.6	454.6	454.6	454.6	454.2
122.5°	494.1	494.5	493.4	492.2	491.1	489.9	489.4	488.9	488.5	487.9	487.5
125°	542.9	543.5	542.9	542.3	541.7	541.1	540.4	539.9	539.2	538.6	538.2
127.5°	592.9	593.7	592.9	592.2	591.5	590.7	590.0	589.3	588.5	587.8	587.1
130°	624.4	625.5	625.1	624.7	624.3	623.9	623.4	623.1	622.7	622.3	621.6
132.5°	656.3	657.4	657.5	657.6	657.7	657.7	656.9	655.9	655.1	654.2	653.4
135°	701.9	703.2	703.6	704.0	704.5	704.9	704.6	704.5	704.3	704.0	703.6
137.5°	747.9	749.1	749.6	750.2	750.7	751.2	751.1	750.9	750.8	750.6	750.1
140°	776.7	778.1	779.1	780.1	781.2	782.1	782.1	782.1	782.1	782.1	781.7
142.5°	806.0	807.3	808.0	808.7	809.5	810.2	810.3	810.5	810.6	810.8	810.5
145°	846.8	848.1	849.3	850.6	851.8	853.0	853.2	853.4	853.7	853.8	853.5
147.5°	885.7	886.9	887.7	888.6	889.4	890.2	890.7	891.1	891.5	892.0	891.8
150°	909.4	910.5	911.3	912.1	912.9	913.8	914.3	915.0	915.6	916.2	916.2
152.5°	932.2	933.3	934.4	935.3	936.4	937.3	938.1	938.9	939.6	940.4	940.4
155°	964.1	964.6	965.3	965.9	966.5	967.1	968.1	969.2	970.2	971.2	971.4
157.5°	992.5	992.8	993.2	993.6	994.0	994.3	995.8	997.1	998.5	999.9	1000.1
160°	1010.2	1010.4	1010.7	1010.9	1011.1	1011.3	1012.5	1013.8	1014.9	1016.2	1016.4
162.5°	1025.1	1025.2	1025.4	1025.6	1025.8	1026.0	1027.4	1028.8	1030.2	1031.6	1031.7
165°	1045.4	1045.4	1045.4	1045.4	1045.4	1045.4	1046.8	1048.2	1049.6	1051.1	1051.2
167.5°	1061.8	1061.5	1061.4	1061.4	1061.4	1061.4	1062.8	1064.2	1065.6	1067.1	1067.2
170°	1071.4	1071.0	1070.8	1070.6	1070.4	1070.2	1071.6	1073.0	1074.4	1075.9	1076.0
172.5°	1078.0	1077.6	1077.4	1077.2	1077.0	1076.8	1078.2	1079.7	1081.1	1082.5	1082.6
175°	1086.2	1085.6	1085.2	1084.8	1084.4	1083.9	1085.4	1086.9	1088.3	1089.7	1089.8
177.5°	1090.0	1089.5	1089.2	1088.9	1088.5	1088.2	1089.2	1090.2	1091.2	1092.1	1092.1
180°	1090.4	1090.4	1090.4	1090.4	1090.4	1090.4	1090.4	1090.4	1090.4	1090.4	1090.4



TEST NUMBER: P331412-927

CATALOG NUMBER: S122DIP-S865D1080U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7
2.5°	1311.8	1311.0	1311.0	1307.2	1311.0	1311.0	1311.8	1316.1	1317.2	1318.1	1316.4
5°	1216.9	1215.3	1212.7	1215.3	1212.7	1215.3	1216.9	1224.2	1227.9	1231.6	1234.8
7.5°	1123.0	1116.7	1115.7	1109.5	1115.7	1116.7	1123.0	1126.5	1133.9	1142.2	1149.7
10°	1054.5	1050.3	1049.7	1039.7	1049.7	1050.3	1054.5	1063.4	1070.7	1080.8	1091.2
12.5°	1002.3	992.2	994.2	988.4	994.2	992.2	1002.3	1002.4	1011.1	1017.2	1033.6
15°	912.0	912.0	909.9	900.9	909.9	912.0	912.0	926.2	928.8	938.8	953.0
17.5°	847.2	846.1	841.1	843.6	841.1	846.1	847.2	857.5	859.4	872.7	884.4
20°	808.4	805.3	799.0	799.0	799.0	805.3	808.4	814.2	821.1	828.9	838.9
22.5°	771.9	771.7	764.9	767.0	764.9	771.7	771.9	777.2	783.6	792.3	800.7
25°	729.0	724.8	721.8	723.3	721.8	724.8	729.0	729.6	737.0	742.8	748.0
27.5°	688.5	686.2	686.0	681.7	686.0	686.2	688.5	689.8	694.0	697.4	702.3
30°	665.0	659.7	660.8	658.1	660.8	659.7	665.0	665.5	667.6	669.7	675.5
32.5°	638.0	636.1	635.1	632.9	635.1	636.1	638.0	639.0	643.2	645.3	649.8
35°	601.3	601.9	599.2	600.3	599.2	601.9	601.3	602.4	602.9	605.0	609.3
37.5°	569.3	570.9	569.7	570.1	569.7	570.9	569.3	569.8	570.3	570.6	571.9
40°	548.3	548.3	548.3	549.9	548.3	548.3	548.3	546.7	547.2	546.7	546.7
42.5°	528.1	527.2	526.4	526.2	526.4	527.2	528.1	524.4	526.2	524.4	523.6
45°	493.6	495.2	495.7	493.1	495.7	495.2	493.6	492.5	491.0	490.4	489.9
47.5°	462.4	462.6	462.4	464.7	462.4	462.6	462.4	461.0	458.6	457.6	455.1
50°	440.5	439.4	440.5	439.4	440.5	439.4	440.5	437.8	436.3	433.6	431.6
52.5°	417.4	417.6	416.9	416.8	416.9	417.6	417.4	413.9	413.1	412.3	408.8
55°	381.1	382.1	381.6	381.6	381.6	382.1	381.1	379.0	378.5	375.3	372.2
57.5°	343.6	344.5	345.2	342.9	345.2	344.5	343.6	343.3	342.9	339.6	336.2
60°	317.5	320.1	319.6	318.5	319.6	320.1	317.5	318.0	316.5	314.3	312.2
62.5°	293.5	294.5	294.4	294.1	294.4	294.5	293.5	291.1	290.3	288.3	286.1
65°	256.5	257.5	256.0	257.5	256.0	257.5	256.5	254.9	251.3	250.2	248.1
67.5°	216.7	217.0	218.2	218.9	218.2	217.0	216.7	217.3	214.9	212.9	212.5
70°	191.9	191.3	192.9	194.5	192.9	191.3	191.9	190.8	189.3	187.7	185.5
72.5°	165.8	166.9	166.4	167.5	166.4	166.9	165.8	166.0	164.5	162.4	160.3
75°	127.7	129.3	128.8	130.4	128.8	129.3	127.7	128.8	127.7	125.6	123.5
77.5°	92.3	92.5	92.3	93.2	92.3	92.5	92.3	93.2	92.0	92.7	90.3
80°	70.4	69.4	68.4	70.4	68.4	69.4	70.4	70.4	68.8	70.4	68.8
82.5°	49.0	49.6	48.6	48.6	48.6	49.6	49.0	50.2	49.5	50.2	48.6
85°	22.6	22.1	21.0	21.0	21.0	22.1	22.6	22.6	24.2	23.1	23.1
87.5°	10.4	10.0	10.0	9.6	10.0	10.0	10.4	10.3	10.3	11.2	11.3
90°	30.7	30.9	31.1	31.3	31.1	30.9	30.7	30.5	30.6	31.0	31.4
92.5°	29.7	29.7	29.8	29.8	29.8	29.7	29.7	29.6	29.6	29.5	29.4
95°	58.3	57.9	57.4	57.0	57.4	57.9	58.3	58.7	58.9	58.9	58.9
97.5°	98.9	98.9	98.9	98.9	98.9	98.9	98.9	99.0	99.0	99.0	99.0
100°	126.7	126.5	126.3	126.0	126.3	126.5	126.7	126.9	127.0	127.0	127.0
102.5°	157.6	157.4	157.2	157.0	157.2	157.4	157.6	157.8	157.8	157.6	157.5
105°	204.3	204.3	204.3	204.3	204.3	204.3	204.3	204.3	204.1	203.7	203.3
107.5°	251.7	250.7	249.8	248.8	249.8	250.7	251.7	252.5	252.9	252.8	252.6
110°	285.3	284.6	284.0	283.4	284.0	284.6	285.3	285.9	286.2	286.2	286.2



TEST NUMBER: P331412-927

CATALOG NUMBER: S122DIP-S865D1080U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	317.9	317.4	317.0	316.6	317.0	317.4	317.9	318.4	318.9	319.3	319.8
115°	369.9	369.3	368.7	368.0	368.7	369.3	369.9	370.5	370.9	371.1	371.4
117.5°	419.1	418.4	417.8	417.2	417.8	418.4	419.1	419.7	420.3	420.7	421.2
120°	453.7	453.0	452.4	451.8	452.4	453.0	453.7	454.2	454.6	454.6	454.6
122.5°	487.0	486.6	486.2	485.7	486.2	486.6	487.0	487.5	487.9	488.5	488.9
125°	538.0	537.8	537.6	537.4	537.6	537.8	538.0	538.2	538.6	539.2	539.9
127.5°	586.5	585.8	585.2	584.5	585.2	585.8	586.5	587.1	587.8	588.5	589.3
130°	620.8	620.0	619.2	618.4	619.2	620.0	620.8	621.6	622.3	622.7	623.1
132.5°	652.8	652.0	651.4	650.8	651.4	652.0	652.8	653.4	654.2	655.1	655.9
135°	703.0	702.4	701.8	701.2	701.8	702.4	703.0	703.6	704.0	704.3	704.5
137.5°	749.2	748.5	747.7	746.8	747.7	748.5	749.2	750.1	750.6	750.8	750.9
140°	780.9	780.1	779.3	778.5	779.3	780.1	780.9	781.7	782.1	782.1	782.1
142.5°	809.6	808.8	808.0	807.2	808.0	808.8	809.6	810.5	810.8	810.6	810.5
145°	852.7	851.9	851.0	850.2	851.0	851.9	852.7	853.5	853.8	853.7	853.4
147.5°	891.0	890.3	889.5	888.7	889.5	890.3	891.0	891.8	892.0	891.5	891.1
150°	915.6	915.0	914.3	913.8	914.3	915.0	915.6	916.2	916.2	915.6	915.0
152.5°	939.6	938.9	938.1	937.3	938.1	938.9	939.6	940.4	940.4	939.6	938.9
155°	970.8	970.2	969.6	968.9	969.6	970.2	970.8	971.4	971.2	970.2	969.2
157.5°	999.1	998.1	997.2	996.2	997.2	998.1	999.1	1000.1	999.9	998.5	997.1
160°	1015.6	1014.8	1013.9	1013.1	1013.9	1014.8	1015.6	1016.4	1016.2	1014.9	1013.8
162.5°	1030.8	1029.8	1028.8	1027.9	1028.8	1029.8	1030.8	1031.7	1031.6	1030.2	1028.8
165°	1050.3	1049.2	1048.2	1047.2	1048.2	1049.2	1050.3	1051.2	1051.1	1049.6	1048.2
167.5°	1066.2	1065.1	1064.1	1063.0	1064.1	1065.1	1066.2	1067.2	1067.1	1065.6	1064.2
170°	1074.8	1073.6	1072.3	1071.1	1072.3	1073.6	1074.8	1076.0	1075.9	1074.4	1073.0
172.5°	1081.4	1080.1	1079.0	1077.7	1079.0	1080.1	1081.4	1082.6	1082.5	1081.1	1079.7
175°	1088.6	1087.3	1086.2	1084.9	1086.2	1087.3	1088.6	1089.8	1089.7	1088.3	1086.9
177.5°	1091.2	1090.2	1089.2	1088.2	1089.2	1090.2	1091.2	1092.1	1092.1	1091.2	1090.2
180°	1090.4	1090.4	1090.4	1090.4	1090.4	1090.4	1090.4	1090.4	1090.4	1090.4	1090.4



TEST NUMBER: P331412-927

CATALOG NUMBER: S122DIP-S865D1080U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7
2.5°	1314.3	1319.0	1326.1	1333.7	1338.3	1347.1	1349.6	1353.8	1357.6	1366.5	1375.7
5°	1238.4	1245.8	1263.1	1272.6	1285.7	1301.0	1311.0	1321.5	1333.1	1353.0	1371.4
7.5°	1157.1	1169.3	1190.9	1208.6	1227.2	1249.2	1265.0	1285.7	1303.0	1331.2	1358.0
10°	1102.8	1120.1	1139.6	1160.6	1186.9	1210.1	1232.2	1258.4	1279.5	1313.0	1344.7
12.5°	1054.0	1056.7	1084.5	1107.6	1143.6	1172.2	1197.6	1231.5	1252.1	1292.0	1325.2
15°	968.8	984.5	1009.8	1028.2	1070.7	1107.0	1142.8	1178.0	1201.7	1251.0	1294.7
17.5°	897.0	911.5	937.3	967.5	998.1	1034.2	1080.5	1117.5	1149.7	1206.2	1257.7
20°	851.5	869.4	895.7	926.7	953.5	992.9	1032.9	1075.5	1110.2	1173.8	1234.2
22.5°	812.9	827.0	848.2	878.8	908.1	944.2	987.9	1034.3	1070.6	1139.3	1200.6
25°	758.5	770.1	783.7	809.0	842.1	881.5	915.7	966.7	1019.8	1083.9	1158.0
27.5°	709.6	717.7	729.8	752.0	777.7	814.5	852.5	900.9	954.3	1023.9	1102.1
30°	679.7	684.9	697.0	715.4	740.6	769.5	807.9	854.2	908.9	979.3	1057.1
32.5°	653.6	658.5	666.3	683.9	705.8	730.5	765.0	811.3	863.4	932.6	1018.8
35°	614.5	618.1	625.0	639.2	651.3	675.5	704.4	746.4	795.3	861.6	950.9
37.5°	575.5	580.5	584.7	590.7	606.3	622.2	647.3	682.8	730.8	797.6	882.8
40°	549.9	554.1	560.3	563.0	575.6	589.8	610.3	642.9	691.3	752.2	835.3
42.5°	523.8	528.0	531.7	534.8	545.7	558.3	576.6	604.6	647.5	706.8	789.0
45°	488.3	488.9	492.5	498.3	503.6	512.5	525.6	549.9	583.0	638.7	713.3
47.5°	452.3	453.0	453.6	456.1	461.9	470.0	478.8	498.4	528.1	572.5	645.2
50°	428.4	427.4	428.4	430.5	434.2	441.0	451.0	465.2	489.4	530.9	597.7
52.5°	405.3	405.0	404.4	405.3	408.1	412.8	419.9	432.0	453.6	491.8	550.6
55°	370.0	367.4	368.0	365.8	370.6	371.6	376.9	386.9	405.8	432.1	487.3
57.5°	332.6	330.3	328.0	327.4	326.9	329.8	334.0	341.9	356.4	379.4	424.2
60°	308.6	305.9	302.8	301.7	301.7	303.3	305.4	311.2	324.9	345.4	382.1
62.5°	284.2	281.1	279.2	276.5	275.7	277.3	279.3	283.4	293.3	312.5	344.3
65°	246.5	242.9	240.2	239.7	238.7	237.1	238.1	242.3	250.2	265.5	290.7
67.5°	208.8	205.3	204.7	201.6	200.2	200.3	200.2	203.7	208.5	221.7	240.4
70°	183.9	181.3	180.3	177.7	176.7	175.5	174.5	177.7	182.4	193.5	209.8
72.5°	158.8	156.5	154.2	152.0	152.3	151.1	151.0	152.9	156.8	166.9	179.4
75°	122.5	123.0	120.4	117.7	117.2	116.1	116.1	117.7	119.3	127.2	137.2
77.5°	88.8	88.4	86.2	85.4	84.8	83.7	84.8	85.9	86.7	92.0	99.3
80°	67.8	67.8	65.2	65.2	64.6	63.1	64.6	63.6	65.7	71.0	76.2
82.5°	48.5	47.6	47.5	46.7	46.6	45.4	46.2	47.2	48.0	51.7	54.7
85°	23.7	23.7	23.1	22.6	23.1	22.6	23.1	23.7	24.2	25.7	28.4
87.5°	11.4	11.9	11.4	10.9	10.1	9.6	9.3	9.2	9.6	9.5	9.4
90°	31.8	32.2	27.7	23.2	18.7	14.2	10.8	8.3	5.9	3.4	1.0
92.5°	29.3	29.2	28.2	27.2	26.1	25.0	23.6	21.8	20.0	18.1	16.4
95°	58.9	58.9	58.5	58.1	57.7	57.3	56.0	53.9	52.0	49.9	47.8
97.5°	99.0	99.0	98.2	97.4	96.6	95.9	94.6	92.8	91.0	89.2	87.5
100°	127.0	127.0	126.4	125.7	125.2	124.5	123.4	121.8	120.2	118.5	116.8
102.5°	157.3	157.2	156.4	155.6	154.9	154.1	153.0	151.7	150.4	149.1	147.8
105°	202.9	202.4	202.0	201.6	201.2	200.8	200.3	199.7	199.1	198.4	197.8
107.5°	252.5	252.3	252.3	252.3	252.3	252.3	251.8	251.0	250.1	249.1	248.3
110°	286.2	286.2	286.2	286.2	286.2	286.2	285.6	284.3	283.1	281.9	280.7



TEST NUMBER: P331412-927

CATALOG NUMBER: S122DIP-S865D1080U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	320.3	320.8	320.9	321.1	321.2	321.5	320.9	319.6	318.5	317.2	316.0
115°	371.5	371.8	372.2	372.6	373.0	373.4	373.0	371.8	370.5	369.3	368.0
117.5°	421.7	422.2	423.3	424.5	425.6	426.7	426.5	424.8	423.3	421.6	419.9
120°	454.6	454.6	456.2	457.9	459.5	461.1	461.1	459.5	457.9	456.2	454.6
122.5°	489.4	489.9	491.1	492.2	493.4	494.5	494.1	492.1	490.1	488.2	486.2
125°	540.4	541.1	541.7	542.3	542.9	543.5	542.9	541.1	539.2	537.4	535.5
127.5°	590.0	590.7	591.5	592.2	592.9	593.7	592.9	590.6	588.3	585.9	583.6
130°	623.4	623.9	624.3	624.7	625.1	625.5	624.4	621.7	619.1	616.4	613.8
132.5°	656.9	657.7	657.7	657.6	657.5	657.4	656.3	654.1	652.0	649.8	647.6
135°	704.6	704.9	704.5	704.0	703.6	703.2	701.9	699.7	697.4	695.1	692.9
137.5°	751.1	751.2	750.7	750.2	749.6	749.1	747.9	746.1	744.3	742.4	740.5
140°	782.1	782.1	781.2	780.1	779.1	778.1	776.7	774.8	772.9	771.1	769.3
142.5°	810.3	810.2	809.5	808.7	808.0	807.3	806.0	804.2	802.4	800.6	798.8
145°	853.2	853.0	851.8	850.6	849.3	848.1	846.8	845.3	843.9	842.5	841.1
147.5°	890.7	890.2	889.4	888.6	887.7	886.9	885.7	883.9	882.2	880.5	878.8
150°	914.3	913.8	912.9	912.1	911.3	910.5	909.4	908.2	907.0	905.8	904.5
152.5°	938.1	937.3	936.4	935.3	934.4	933.3	932.2	931.1	929.8	928.6	927.3
155°	968.1	967.1	966.5	965.9	965.3	964.6	964.1	963.5	962.8	962.2	961.6
157.5°	995.8	994.3	994.0	993.6	993.2	992.8	992.5	992.0	991.7	991.3	990.9
160°	1012.5	1011.3	1011.1	1010.9	1010.7	1010.4	1010.2	1009.7	1009.3	1008.9	1008.5
162.5°	1027.4	1026.0	1025.8	1025.6	1025.4	1025.2	1025.1	1024.9	1024.8	1024.8	1024.7
165°	1046.8	1045.4	1045.4	1045.4	1045.4	1045.4	1045.4	1045.6	1045.8	1046.1	1046.2
167.5°	1062.8	1061.4	1061.4	1061.4	1061.4	1061.5	1061.8	1062.5	1063.0	1063.7	1064.3
170°	1071.6	1070.2	1070.4	1070.6	1070.8	1071.0	1071.4	1072.0	1072.6	1073.2	1073.9
172.5°	1078.2	1076.8	1077.0	1077.2	1077.4	1077.6	1078.0	1078.6	1079.3	1079.9	1080.5
175°	1085.4	1083.9	1084.4	1084.8	1085.2	1085.6	1086.2	1086.7	1087.3	1088.0	1088.6
177.5°	1089.2	1088.2	1088.5	1088.9	1089.2	1089.5	1090.0	1090.4	1090.9	1091.4	1091.9
180°	1090.4	1090.4	1090.4	1090.4	1090.4	1090.4	1090.4	1090.4	1090.4	1090.4	1090.4



TEST NUMBER: P331412-927

CATALOG NUMBER: S122DIP-S865D1080U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7
2.5°	1374.9	1377.0	1383.7	1390.4	1398.0	1400.1	1403.5	1400.6	1399.7	1407.7	1413.6
5°	1378.8	1388.2	1406.7	1423.5	1437.7	1447.6	1458.2	1462.4	1470.2	1481.3	1494.9
7.5°	1374.4	1392.7	1421.7	1446.2	1472.9	1492.1	1507.1	1520.0	1535.6	1556.5	1579.3
10°	1369.3	1394.0	1429.3	1459.2	1491.8	1516.5	1537.0	1557.0	1580.1	1609.0	1638.9
12.5°	1360.1	1389.4	1433.5	1468.9	1510.7	1535.0	1562.7	1605.8	1630.5	1670.9	1713.0
15°	1341.5	1374.0	1435.5	1479.2	1526.5	1572.7	1623.7	1664.8	1705.7	1729.4	1788.8
17.5°	1313.8	1361.7	1429.7	1480.7	1540.8	1613.7	1671.0	1717.4	1764.7	1803.1	1832.9
20°	1291.5	1343.5	1421.3	1482.3	1553.8	1632.1	1697.9	1745.2	1786.1	1818.2	1836.6
22.5°	1263.4	1328.8	1404.5	1476.0	1567.3	1644.7	1713.8	1751.0	1785.3	1800.9	1808.0
25°	1219.0	1297.8	1383.5	1470.8	1573.8	1655.8	1718.9	1741.5	1751.4	1736.2	1711.0
27.5°	1171.2	1259.0	1359.2	1460.9	1569.8	1648.6	1693.8	1690.3	1673.3	1624.1	1584.6
30°	1135.4	1232.2	1339.9	1450.8	1560.1	1636.9	1663.2	1636.9	1598.5	1543.3	1487.1
32.5°	1098.0	1198.1	1319.3	1436.5	1542.5	1610.0	1615.7	1570.4	1511.0	1448.3	1378.2
35°	1041.3	1149.6	1280.5	1404.5	1504.9	1547.5	1522.3	1442.4	1372.0	1286.3	1190.6
37.5°	977.3	1096.9	1228.1	1357.7	1448.7	1459.8	1397.2	1313.0	1213.7	1113.0	1000.4
40°	929.4	1056.1	1191.1	1322.0	1402.4	1390.8	1311.0	1218.5	1100.2	977.2	872.6
42.5°	886.5	1013.1	1150.7	1279.1	1343.5	1311.8	1218.5	1104.9	977.8	862.0	766.2
45°	812.1	942.5	1083.4	1207.4	1244.2	1186.9	1063.4	937.2	812.1	715.4	639.7
47.5°	740.0	868.9	1008.4	1117.5	1130.4	1053.4	918.4	788.6	681.0	602.3	548.9
50°	687.1	816.3	954.6	1051.9	1047.6	954.6	815.8	692.3	602.4	538.8	503.0
52.5°	639.5	761.7	894.5	982.9	960.6	859.1	726.7	617.0	543.1	493.4	461.0
55°	565.6	678.6	804.8	875.8	834.7	722.2	610.3	522.0	467.3	430.0	404.7
57.5°	492.2	598.2	706.2	749.9	704.6	600.7	507.4	443.3	402.2	374.5	358.1
60°	446.8	539.3	635.5	673.4	619.2	526.7	453.1	395.9	362.7	340.1	325.3
62.5°	401.4	484.3	575.0	595.6	546.1	467.9	402.7	355.1	327.8	307.7	293.8
65°	339.6	407.3	476.3	489.9	444.2	383.7	332.2	301.2	277.0	262.3	251.3
67.5°	278.5	333.0	381.8	392.8	352.7	310.8	273.5	246.5	230.1	217.9	208.6
70°	242.3	285.4	325.3	334.3	302.2	264.9	236.5	215.0	200.3	189.7	180.9
72.5°	204.1	240.0	273.2	279.2	253.0	224.6	201.2	184.3	171.3	164.5	156.0
75°	156.1	177.1	202.9	204.5	187.1	169.8	151.9	140.9	134.0	125.6	121.4
77.5°	110.2	126.7	141.4	144.3	134.0	122.2	112.2	103.5	97.7	93.8	89.9
80°	84.1	97.3	103.5	107.3	99.9	91.5	85.7	79.9	76.2	73.6	71.0
82.5°	60.1	68.2	74.1	76.9	73.0	67.9	62.1	58.9	56.0	53.8	52.9
85°	30.5	34.1	37.9	38.9	37.9	35.7	32.6	32.6	31.0	30.5	30.5
87.5°	11.2	13.4	13.9	15.6	15.4	16.3	17.3	17.7	18.2	17.7	17.2
90°	3.4	5.9	8.3	10.8	14.2	18.7	23.2	27.7	32.2	31.8	31.4
92.5°	18.1	20.0	21.8	23.6	25.0	26.1	27.2	28.2	29.2	29.3	29.4
95°	49.9	52.0	53.9	56.0	57.3	57.7	58.1	58.5	58.9	58.9	58.9
97.5°	89.2	91.0	92.8	94.6	95.9	96.6	97.4	98.2	99.0	99.0	99.0
100°	118.5	120.2	121.8	123.4	124.5	125.2	125.7	126.4	127.0	127.0	127.0
102.5°	149.1	150.4	151.7	153.0	154.1	154.9	155.6	156.4	157.2	157.3	157.5
105°	198.4	199.1	199.7	200.3	200.8	201.2	201.6	202.0	202.4	202.9	203.3
107.5°	249.1	250.1	251.0	251.8	252.3	252.3	252.3	252.3	252.3	252.5	252.6
110°	281.9	283.1	284.3	285.6	286.2	286.2	286.2	286.2	286.2	286.2	286.2





TEST NUMBER: P331412-927

CATALOG NUMBER: S122DIP-S865D1080U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	317.2	318.5	319.6	320.9	321.5	321.2	321.1	320.9	320.8	320.3	319.8
115°	369.3	370.5	371.8	373.0	373.4	373.0	372.6	372.2	371.8	371.5	371.4
117.5°	421.6	423.3	424.8	426.5	426.7	425.6	424.5	423.3	422.2	421.7	421.2
120°	456.2	457.9	459.5	461.1	461.1	459.5	457.9	456.2	454.6	454.6	454.6
122.5°	488.2	490.1	492.1	494.1	494.5	493.4	492.2	491.1	489.9	489.4	488.9
125°	537.4	539.2	541.1	542.9	543.5	542.9	542.3	541.7	541.1	540.4	539.9
127.5°	585.9	588.3	590.6	592.9	593.7	592.9	592.2	591.5	590.7	590.0	589.3
130°	616.4	619.1	621.7	624.4	625.5	625.1	624.7	624.3	623.9	623.4	623.1
132.5°	649.8	652.0	654.1	656.3	657.4	657.5	657.6	657.7	657.7	656.9	655.9
135°	695.1	697.4	699.7	701.9	703.2	703.6	704.0	704.5	704.9	704.6	704.5
137.5°	742.4	744.3	746.1	747.9	749.1	749.6	750.2	750.7	751.2	751.1	750.9
140°	771.1	772.9	774.8	776.7	778.1	779.1	780.1	781.2	782.1	782.1	782.1
142.5°	800.6	802.4	804.2	806.0	807.3	808.0	808.7	809.5	810.2	810.3	810.5
145°	842.5	843.9	845.3	846.8	848.1	849.3	850.6	851.8	853.0	853.2	853.4
147.5°	880.5	882.2	883.9	885.7	886.9	887.7	888.6	889.4	890.2	890.7	891.1
150°	905.8	907.0	908.2	909.4	910.5	911.3	912.1	912.9	913.8	914.3	915.0
152.5°	928.6	929.8	931.1	932.2	933.3	934.4	935.3	936.4	937.3	938.1	938.9
155°	962.2	962.8	963.5	964.1	964.6	965.3	965.9	966.5	967.1	968.1	969.2
157.5°	991.3	991.7	992.0	992.5	992.8	993.2	993.6	994.0	994.3	995.8	997.1
160°	1008.9	1009.3	1009.7	1010.2	1010.4	1010.7	1010.9	1011.1	1011.3	1012.5	1013.8
162.5°	1024.8	1024.8	1024.9	1025.1	1025.2	1025.4	1025.6	1025.8	1026.0	1027.4	1028.8
165°	1046.1	1045.8	1045.6	1045.4	1045.4	1045.4	1045.4	1045.4	1045.4	1046.8	1048.2
167.5°	1063.7	1063.0	1062.5	1061.8	1061.5	1061.4	1061.4	1061.4	1061.4	1062.8	1064.2
170°	1073.2	1072.6	1072.0	1071.4	1071.0	1070.8	1070.6	1070.4	1070.2	1071.6	1073.0
172.5°	1079.9	1079.3	1078.6	1078.0	1077.6	1077.4	1077.2	1077.0	1076.8	1078.2	1079.7
175°	1088.0	1087.3	1086.7	1086.2	1085.6	1085.2	1084.8	1084.4	1083.9	1085.4	1086.9
177.5°	1091.4	1090.9	1090.4	1090.0	1089.5	1089.2	1088.9	1088.5	1088.2	1089.2	1090.2
180°	1090.4	1090.4	1090.4	1090.4	1090.4	1090.4	1090.4	1090.4	1090.4	1090.4	1090.4



TEST NUMBER: P331412-927

CATALOG NUMBER: S122DIP-S865D1080U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
0°	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7
2.5°	1418.6	1424.5	1424.5	1425.4	1432.1	1431.2	1430.8
5°	1509.7	1518.6	1519.6	1529.1	1535.4	1533.3	1527.6
7.5°	1595.5	1612.2	1624.8	1631.8	1640.1	1645.3	1643.0
10°	1663.7	1687.8	1702.6	1712.5	1724.7	1733.6	1730.4
12.5°	1725.5	1754.3	1774.5	1791.6	1793.2	1804.7	1796.9
15°	1821.9	1852.4	1855.5	1868.1	1878.2	1877.1	1877.6
17.5°	1853.8	1863.5	1865.5	1865.8	1866.0	1862.3	1854.3
20°	1842.4	1838.7	1829.8	1823.0	1810.8	1809.3	1798.8
22.5°	1788.6	1776.9	1754.5	1739.7	1720.9	1715.9	1713.0
25°	1682.6	1656.8	1621.1	1586.9	1577.5	1559.1	1564.3
27.5°	1537.2	1497.1	1458.3	1430.6	1405.5	1377.9	1385.8
30°	1435.0	1389.8	1335.1	1293.1	1266.3	1240.0	1235.2
32.5°	1313.0	1246.8	1185.9	1148.8	1107.8	1091.2	1072.9
35°	1102.8	1038.2	977.7	925.7	895.7	872.6	851.5
37.5°	913.7	839.2	790.4	748.3	726.7	713.4	716.8
40°	796.4	731.2	695.5	663.4	643.4	633.9	636.0
42.5°	701.3	652.5	623.1	601.1	587.0	581.8	580.5
45°	593.4	566.1	541.9	529.3	522.5	516.7	513.0
47.5°	519.8	497.6	483.9	476.4	470.5	464.5	464.5
50°	475.7	461.0	451.5	443.6	438.9	434.7	438.4
52.5°	442.0	428.6	419.1	412.1	410.4	406.5	406.5
55°	392.1	381.6	374.8	368.4	365.4	363.2	360.6
57.5°	346.7	336.8	330.4	326.5	320.4	318.3	317.5
60°	314.3	306.4	300.2	294.9	292.2	288.0	288.0
62.5°	284.5	276.6	270.7	266.7	262.4	260.7	261.2
65°	241.3	235.0	229.2	225.0	223.9	220.8	221.8
67.5°	201.5	197.3	191.2	188.9	187.0	185.2	183.9
70°	175.1	170.9	167.7	164.5	163.0	163.0	163.0
72.5°	152.7	147.7	145.8	141.8	142.8	141.1	139.4
75°	118.3	115.1	113.5	111.9	109.3	109.3	109.3
77.5°	87.1	86.1	84.2	82.5	81.9	81.4	81.6
80°	67.3	66.8	65.7	65.7	64.6	64.2	63.1
82.5°	51.7	50.4	49.7	49.3	49.1	49.0	48.8
85°	29.5	28.4	28.4	28.9	27.9	27.9	28.4
87.5°	17.6	17.5	17.0	17.0	17.5	17.1	17.2
90°	31.0	30.6	30.5	30.7	30.9	31.1	31.3
92.5°	29.5	29.6	29.6	29.7	29.7	29.8	29.8
95°	58.9	58.9	58.7	58.3	57.9	57.4	57.0
97.5°	99.0	99.0	99.0	98.9	98.9	98.9	98.9
100°	127.0	127.0	126.9	126.7	126.5	126.3	126.0
102.5°	157.6	157.8	157.8	157.6	157.4	157.2	157.0
105°	203.7	204.1	204.3	204.3	204.3	204.3	204.3
107.5°	252.8	252.9	252.5	251.7	250.7	249.8	248.8
110°	286.2	286.2	285.9	285.3	284.6	284.0	283.4



TEST NUMBER: P331412-927

CATALOG NUMBER: S122DIP-S865D1080U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
112.5°	319.3	318.9	318.4	317.9	317.4	317.0	316.6
115°	371.1	370.9	370.5	369.9	369.3	368.7	368.0
117.5°	420.7	420.3	419.7	419.1	418.4	417.8	417.2
120°	454.6	454.6	454.2	453.7	453.0	452.4	451.8
122.5°	488.5	487.9	487.5	487.0	486.6	486.2	485.7
125°	539.2	538.6	538.2	538.0	537.8	537.6	537.4
127.5°	588.5	587.8	587.1	586.5	585.8	585.2	584.5
130°	622.7	622.3	621.6	620.8	620.0	619.2	618.4
132.5°	655.1	654.2	653.4	652.8	652.0	651.4	650.8
135°	704.3	704.0	703.6	703.0	702.4	701.8	701.2
137.5°	750.8	750.6	750.1	749.2	748.5	747.7	746.8
140°	782.1	782.1	781.7	780.9	780.1	779.3	778.5
142.5°	810.6	810.8	810.5	809.6	808.8	808.0	807.2
145°	853.7	853.8	853.5	852.7	851.9	851.0	850.2
147.5°	891.5	892.0	891.8	891.0	890.3	889.5	888.7
150°	915.6	916.2	916.2	915.6	915.0	914.3	913.8
152.5°	939.6	940.4	940.4	939.6	938.9	938.1	937.3
155°	970.2	971.2	971.4	970.8	970.2	969.6	968.9
157.5°	998.5	999.9	1000.1	999.1	998.1	997.2	996.2
160°	1014.9	1016.2	1016.4	1015.6	1014.8	1013.9	1013.1
162.5°	1030.2	1031.6	1031.7	1030.8	1029.8	1028.8	1027.9
165°	1049.6	1051.1	1051.2	1050.3	1049.2	1048.2	1047.2
167.5°	1065.6	1067.1	1067.2	1066.2	1065.1	1064.1	1063.0
170°	1074.4	1075.9	1076.0	1074.8	1073.6	1072.3	1071.1
172.5°	1081.1	1082.5	1082.6	1081.4	1080.1	1079.0	1077.7
175°	1088.3	1089.7	1089.8	1088.6	1087.3	1086.2	1084.9
177.5°	1091.2	1092.1	1092.1	1091.2	1090.2	1089.2	1088.2
180°	1090.4	1090.4	1090.4	1090.4	1090.4	1090.4	1090.4

(END OF REPORT)