

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331417-927

Luminaire Tested: **S122DIP-S865D1080U927-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331417-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIP-S865D1080U927-4F0-1E-UDD-F
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 865 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1080 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6194.8 lumens
Efficiency: N/A
Efficacy: 94.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 65.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331417-927

CATALOG NUMBER: S122DIP-S865D1080U927-4F0-1E-UDD-F

Luminous Intensity Polar Plot

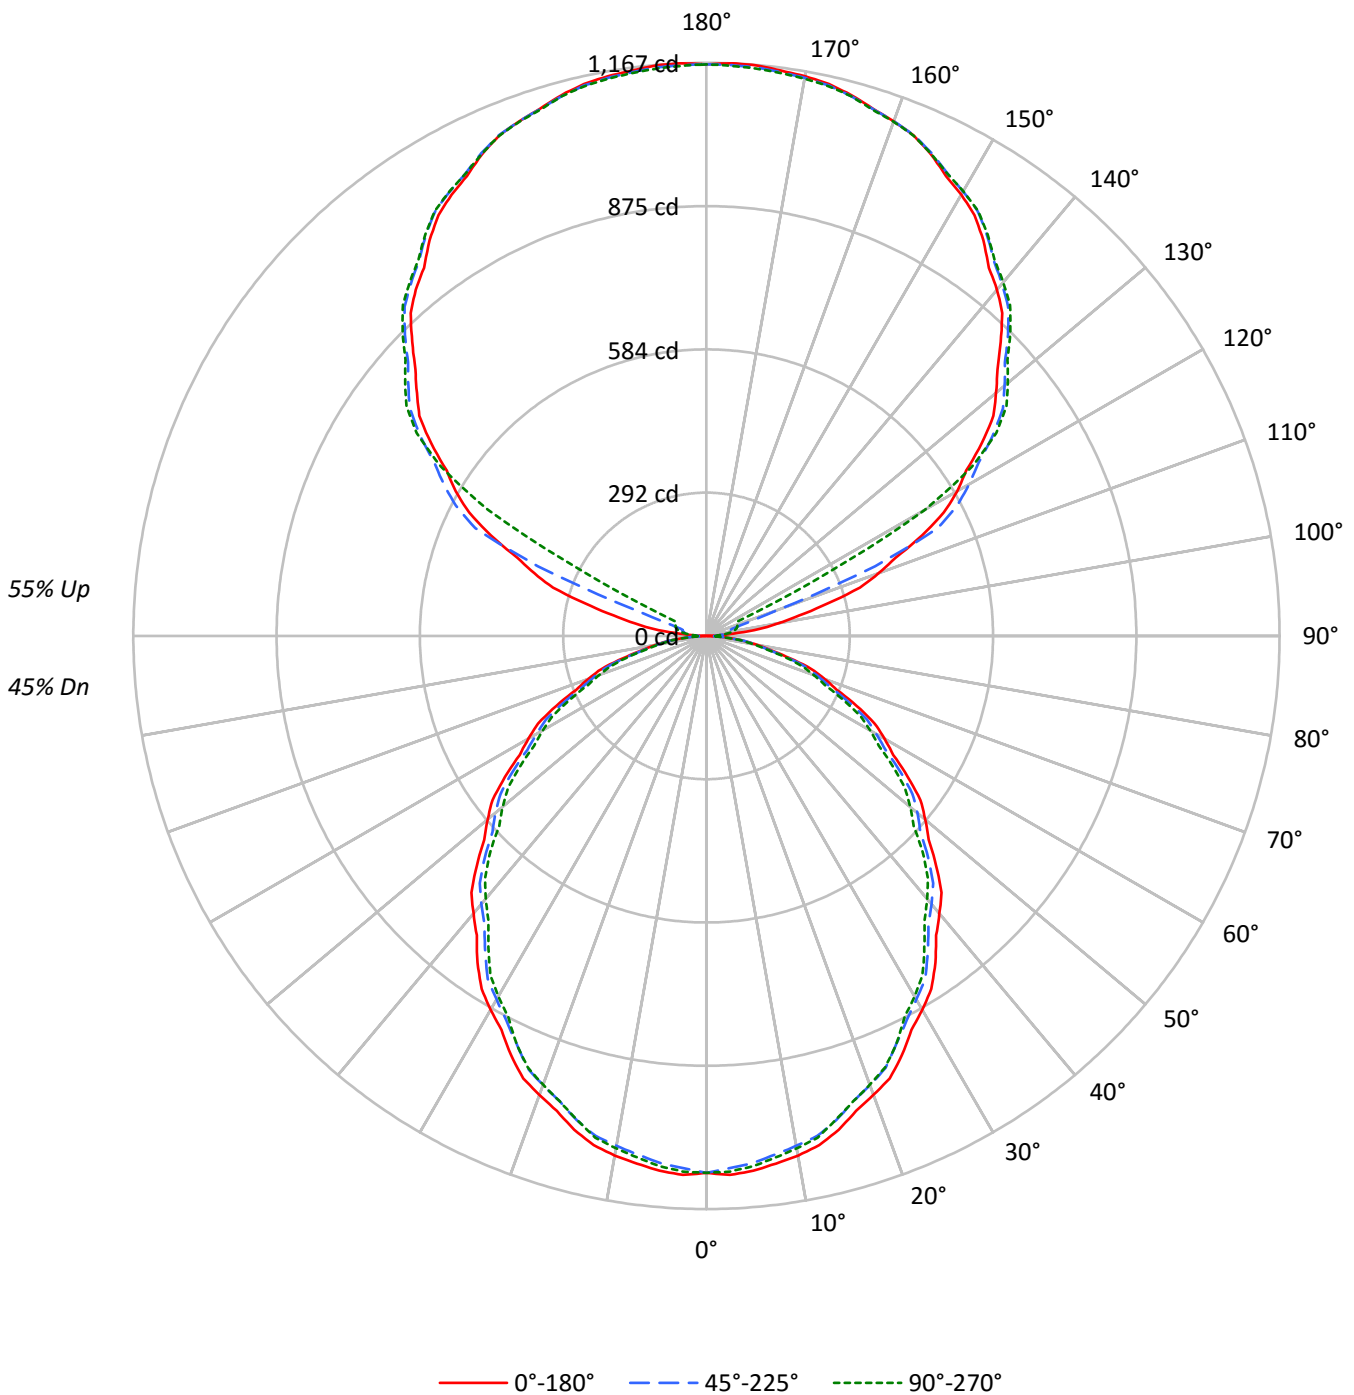



TEST NUMBER: P331417-927

CATALOG NUMBER: S122DIP-S865D1080U927-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	97	97	97	97	81	81	81	65	65	65	51	51	51	45
1	97	92	88	85	88	85	81	78	71	68	66	57	56	54	45	44	43	38
2	88	81	75	69	80	74	69	64	62	58	55	50	48	45	40	38	37	32
3	80	71	64	58	73	65	59	54	55	50	46	45	41	38	35	33	31	27
4	73	63	55	49	67	58	51	46	48	43	39	40	36	33	32	29	27	23
5	67	56	48	42	61	51	44	39	43	38	34	36	32	28	29	26	23	20
6	62	50	42	36	57	46	39	34	39	33	29	32	28	25	26	23	21	18
7	57	45	37	32	52	42	35	30	35	30	26	29	25	22	24	21	18	16
8	53	41	33	28	49	38	31	26	32	27	23	27	23	20	22	19	16	14
9	49	37	30	25	45	35	28	23	29	24	21	25	21	18	20	17	15	13
10	46	34	27	22	42	32	25	21	27	22	18	23	19	16	19	16	13	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	17651	17651	17651
5°	17718	17462	17566
10°	17613	17285	17372
15°	17396	17061	17043
20°	17086	16725	16706
25°	16778	16311	16311
30°	16384	15933	15795
35°	16015	15477	15248
40°	15553	15022	14733
45°	15098	14570	14209
50°	14601	14099	13599
55°	14083	13551	13050
60°	13511	12897	12426
65°	12894	12248	11687
70°	12109	11462	10914
75°	11017	10555	10293
80°	9772	9484	8991
85°	7984	7595	6817



TEST NUMBER: P331417-927

CATALOG NUMBER: S122DIP-S865D1080U927-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	102.8	1.7
10°-20°	289.3	4.7
20°-30°	425.2	6.9
30°-40°	493.9	8.0
40°-50°	493.3	8.0
50°-60°	430.2	6.9
60°-70°	318.1	5.1
70°-80°	180.2	2.9
80°-90°	51.3	0.8
90°-100°	38.8	0.6
100°-110°	142.4	2.3
110°-120°	380.6	6.1
120°-130°	628.2	10.1
130°-140°	668.1	10.8
140°-150°	620.9	10.0
150°-160°	499.2	8.1
160°-170°	321.7	5.2
170°-180°	110.7	1.8
0°-30°	817.2	13.2
0°-40°	1311.1	21.2
0°-60°	2234.6	36.1
0°-90°	2784.2	44.9
90°-120°	561.7	9.1
90°-150°	2478.9	40.0
90°-180°	3411.0	55.1
0°-180°	6194.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1093	1093	1093	1093	1093	
5°	1093	1089	1077	1085	1084	104
15°	1041	1034	1021	1024	1020	293
25°	942	933	916	917	916	433
35°	812	802	785	779	774	507
45°	661	653	638	627	622	510
55°	500	494	481	469	464	447
65°	338	331	321	311	306	334
75°	177	174	169	163	165	189
85°	43	42	41	38	37	49
90°	1	10	17	21	23	5
95°	55	29	33	37	36	67
105°	256	267	51	60	64	274
115°	484	499	520	148	69	477
125°	685	696	712	717	720	610
135°	847	860	868	876	875	654
145°	983	983	996	1002	998	614
155°	1082	1076	1085	1089	1083	498
165°	1140	1136	1138	1143	1138	322
175°	1166	1161	1162	1167	1160	111
180°	1164	1164	1164	1164	1164	



TEST NUMBER: P331417-927

CATALOG NUMBER: S122DIP-S865D1080U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1093.2	1093.2	1093.2	1093.2	1093.2	1093.2	1093.2	1093.2	1093.2	1093.2	1093.2
2.5°	1098.3	1097.3	1096.4	1095.5	1094.6	1093.1	1091.0	1088.9	1086.9	1084.8	1086.7
5°	1093.2	1092.3	1091.4	1090.4	1089.5	1087.7	1085.2	1082.6	1080.1	1077.4	1079.3
7.5°	1083.5	1082.1	1080.7	1079.2	1077.8	1075.7	1073.1	1070.5	1067.9	1065.2	1067.1
10°	1074.3	1072.7	1071.0	1069.4	1067.8	1065.6	1062.7	1059.9	1057.2	1054.3	1056.2
12.5°	1061.7	1060.3	1058.8	1057.3	1055.9	1053.8	1051.0	1048.1	1045.4	1042.6	1043.9
15°	1040.7	1039.3	1037.8	1036.5	1035.1	1032.8	1029.8	1026.7	1023.7	1020.7	1021.6
17.5°	1013.8	1012.3	1011.0	1009.6	1008.1	1005.9	1002.8	999.7	996.6	993.6	994.7
20°	994.4	993.0	991.7	990.2	988.8	986.5	983.2	979.9	976.7	973.4	974.1
22.5°	975.1	973.1	971.1	969.2	967.3	964.7	961.6	958.5	955.5	952.4	952.5
25°	941.8	940.0	938.1	936.3	934.4	931.4	927.5	923.5	919.6	915.6	916.1
27.5°	904.0	902.4	900.6	899.0	897.3	894.8	891.8	888.6	885.5	882.3	881.7
30°	878.8	876.9	875.0	873.2	871.3	868.6	865.1	861.7	858.1	854.6	853.9
32.5°	851.9	850.4	848.9	847.4	845.9	843.3	839.6	835.9	832.3	828.5	827.3
35°	812.5	810.2	807.9	805.6	803.2	800.2	796.5	792.7	788.9	785.2	783.9
37.5°	768.2	766.1	764.1	762.0	760.0	757.1	753.4	749.6	745.8	742.1	740.4
40°	737.9	736.1	734.2	732.3	730.5	727.6	723.9	720.2	716.4	712.7	710.6
42.5°	708.5	706.6	704.7	702.9	701.0	698.2	694.5	690.8	687.0	683.3	681.0
45°	661.2	659.6	657.9	656.3	654.7	652.0	648.6	645.1	641.6	638.1	635.5
47.5°	614.1	612.6	611.0	609.5	607.9	605.3	601.7	598.0	594.4	590.7	588.0
50°	581.3	580.1	579.0	577.8	576.6	574.4	571.2	567.8	564.6	561.3	558.1
52.5°	549.4	547.8	546.3	544.7	543.2	540.9	537.8	534.7	531.6	528.5	525.9
55°	500.3	499.0	497.6	496.1	494.7	492.7	489.9	487.0	484.3	481.4	478.6
57.5°	451.1	450.0	448.9	447.8	446.7	444.6	441.5	438.4	435.3	432.2	429.5
60°	418.4	417.4	416.5	415.6	414.6	412.6	409.2	406.0	402.7	399.4	396.9
62.5°	386.4	384.9	383.4	381.9	380.4	378.4	375.9	373.4	370.8	368.4	366.0
65°	337.5	336.0	334.6	333.2	331.8	329.9	327.6	325.3	323.0	320.6	318.5
67.5°	287.6	286.5	285.3	284.2	283.1	281.5	279.4	277.3	275.2	273.1	271.5
70°	256.5	255.6	254.6	253.7	252.8	251.2	249.1	247.0	244.9	242.8	241.2
72.5°	224.5	223.6	222.7	221.7	220.8	219.7	218.3	217.0	215.6	214.2	212.6
75°	176.6	176.1	175.6	175.2	174.8	173.9	172.8	171.6	170.4	169.2	167.9
77.5°	133.7	132.9	132.1	131.3	130.6	129.9	129.4	129.0	128.5	128.0	127.3
80°	105.1	104.9	104.6	104.4	104.2	103.9	103.4	102.9	102.4	102.0	101.2
82.5°	78.2	78.2	78.1	78.0	78.0	77.9	77.6	77.3	77.0	76.8	75.8
85°	43.1	42.9	42.6	42.4	42.1	41.9	41.7	41.4	41.2	41.0	40.3
87.5°	15.3	15.4	15.4	15.4	15.4	15.4	15.4	15.3	15.2	15.1	14.7
90°	0.9	2.9	5.0	7.1	9.1	10.9	12.4	13.9	15.4	16.9	17.7
92.5°	17.0	16.8	16.6	16.5	16.2	16.6	17.3	18.1	18.8	19.6	20.0
95°	54.7	48.6	42.4	36.2	30.0	27.6	28.9	30.3	31.5	32.9	33.7
97.5°	108.6	91.3	73.8	56.4	39.1	31.8	34.9	37.9	41.0	44.0	44.7
100°	149.1	123.4	97.8	72.2	46.5	35.3	38.4	41.7	44.8	48.0	49.5
102.5°	193.5	188.1	182.7	177.2	171.8	155.8	129.2	102.6	76.0	49.4	51.3
105°	256.0	261.7	267.2	272.8	278.5	255.7	204.6	153.5	102.4	51.3	53.4
107.5°	327.3	331.8	336.3	340.8	345.4	317.0	255.7	194.5	133.2	71.9	69.8
110°	373.0	377.0	381.0	384.8	388.8	363.7	309.6	255.6	201.5	147.3	128.7



TEST NUMBER: P331417-927

CATALOG NUMBER: S122DIP-S865D1080U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	416.2	419.7	423.1	426.6	430.1	425.2	411.8	398.5	385.1	371.7	303.5
115°	484.3	487.4	490.6	493.8	496.9	500.9	505.6	510.2	514.9	519.6	432.9
117.5°	545.0	548.6	552.2	555.7	559.3	562.6	565.9	569.1	572.3	575.5	554.5
120°	589.5	592.3	595.1	597.9	600.7	603.8	607.2	610.5	613.9	617.3	619.5
122.5°	627.2	630.2	633.1	636.1	639.1	642.4	646.0	649.7	653.4	657.0	658.4
125°	684.7	687.1	689.5	692.0	694.3	697.4	700.9	704.5	708.1	711.6	712.9
127.5°	736.7	739.4	742.1	744.8	747.5	750.1	752.8	755.4	758.1	760.8	762.7
130°	769.7	772.7	775.7	778.7	781.6	784.2	786.2	788.3	790.4	792.4	794.5
132.5°	803.4	806.0	808.5	811.0	813.6	815.9	817.9	820.0	822.0	824.1	825.9
135°	847.2	850.2	853.2	856.2	859.1	861.5	863.2	864.8	866.6	868.2	870.1
137.5°	891.4	893.6	895.6	897.8	899.8	901.8	903.8	905.7	907.6	909.5	911.3
140°	920.4	921.9	923.4	925.0	926.5	928.2	930.3	932.3	934.4	936.4	938.1
142.5°	944.7	946.0	947.4	948.7	950.1	952.0	954.3	956.6	959.0	961.4	962.9
145°	982.8	982.5	982.4	982.2	982.0	983.5	986.7	989.8	993.1	996.2	997.5
147.5°	1016.0	1015.3	1014.5	1013.8	1013.1	1014.3	1017.5	1020.6	1023.7	1026.9	1027.9
150°	1037.5	1036.2	1034.9	1033.6	1032.3	1033.1	1036.1	1039.1	1042.1	1045.0	1046.2
152.5°	1055.7	1054.2	1052.7	1051.3	1049.9	1050.5	1053.4	1056.2	1059.1	1061.9	1063.0
155°	1082.1	1080.5	1078.8	1077.1	1075.4	1075.7	1077.9	1080.1	1082.4	1084.7	1085.8
157.5°	1102.9	1101.5	1100.0	1098.6	1097.2	1097.3	1098.8	1100.3	1101.9	1103.5	1104.8
160°	1115.0	1113.9	1112.7	1111.6	1110.5	1110.5	1111.6	1112.7	1113.9	1115.0	1116.1
162.5°	1125.8	1124.7	1123.5	1122.4	1121.3	1121.2	1122.1	1123.2	1124.1	1125.1	1126.3
165°	1140.3	1139.1	1138.0	1136.9	1135.8	1135.4	1136.0	1136.6	1137.2	1137.7	1139.0
167.5°	1151.0	1149.9	1148.7	1147.6	1146.5	1146.2	1146.8	1147.2	1147.8	1148.3	1149.6
170°	1157.1	1156.0	1154.8	1153.7	1152.6	1152.2	1152.6	1152.9	1153.3	1153.7	1155.0
172.5°	1161.1	1160.0	1158.9	1157.8	1156.7	1156.3	1156.7	1157.0	1157.4	1157.8	1159.0
175°	1166.3	1165.1	1163.7	1162.4	1161.1	1160.6	1161.0	1161.4	1161.7	1162.1	1163.5
177.5°	1167.2	1166.2	1165.1	1164.0	1163.0	1162.5	1162.7	1162.8	1163.0	1163.2	1164.2
180°	1163.8	1163.8	1163.8	1163.8	1163.8	1163.8	1163.8	1163.8	1163.8	1163.8	1163.8



TEST NUMBER: P331417-927

CATALOG NUMBER: S122DIP-S865D1080U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1093.2	1093.2	1093.2	1093.2	1093.2	1093.2	1093.2	1093.2
2.5°	1088.5	1090.4	1092.3	1093.1	1092.7	1092.3	1091.9	1091.5
5°	1081.2	1083.1	1085.0	1085.6	1085.2	1084.7	1084.3	1083.8
7.5°	1069.0	1070.9	1072.8	1073.4	1072.9	1072.4	1071.9	1071.3
10°	1058.0	1059.9	1061.8	1062.4	1061.7	1061.0	1060.3	1059.6
12.5°	1045.2	1046.5	1047.8	1048.2	1047.7	1047.2	1046.6	1046.2
15°	1022.5	1023.5	1024.5	1024.3	1023.2	1022.0	1020.8	1019.6
17.5°	995.7	996.8	997.9	997.8	996.7	995.6	994.5	993.4
20°	974.8	975.5	976.2	976.0	975.2	974.2	973.3	972.3
22.5°	952.7	952.8	952.9	952.8	952.1	951.6	951.0	950.5
25°	916.6	917.0	917.4	917.4	917.0	916.6	916.1	915.6
27.5°	881.0	880.3	879.6	878.7	877.5	876.4	875.3	874.2
30°	853.2	852.5	851.8	851.0	850.1	849.1	848.2	847.2
32.5°	826.0	824.7	823.5	822.4	821.5	820.5	819.6	818.6
35°	782.4	781.0	779.7	778.3	777.2	776.0	774.8	773.6
37.5°	738.7	737.0	735.2	733.8	732.7	731.6	730.5	729.3
40°	708.5	706.4	704.3	702.7	701.9	700.9	700.0	699.0
42.5°	678.7	676.4	674.1	672.3	671.0	669.7	668.4	667.1
45°	633.0	630.3	627.8	626.1	625.1	624.2	623.2	622.3
47.5°	585.3	582.7	580.0	577.9	576.6	575.2	573.9	572.5
50°	554.8	551.5	548.3	546.1	544.9	543.7	542.6	541.4
52.5°	523.1	520.4	517.7	515.6	514.0	512.5	511.0	509.4
55°	475.9	473.0	470.2	468.3	467.1	465.9	464.8	463.6
57.5°	426.7	424.0	421.2	419.4	418.5	417.6	416.8	415.8
60°	394.3	391.7	389.2	387.5	386.8	386.1	385.4	384.8
62.5°	363.5	361.2	358.8	357.2	356.2	355.4	354.5	353.6
65°	316.4	314.3	312.2	310.5	309.4	308.2	307.0	305.9
67.5°	269.8	268.2	266.6	265.3	264.4	263.4	262.4	261.5
70°	239.6	237.9	236.3	235.0	234.1	233.1	232.2	231.2
72.5°	211.0	209.3	207.7	206.5	205.7	205.0	204.2	203.5
75°	166.4	165.0	163.7	163.2	163.7	164.1	164.5	165.0
77.5°	126.7	126.0	125.2	124.5	123.9	123.3	122.6	121.9
80°	100.5	99.9	99.2	98.5	98.1	97.7	97.2	96.7
82.5°	74.9	74.1	73.2	72.7	72.6	72.5	72.4	72.3
85°	39.6	38.9	38.2	37.7	37.5	37.2	37.0	36.8
87.5°	14.4	14.0	13.6	13.4	13.3	13.2	13.1	13.0
90°	18.7	19.6	20.6	21.2	21.6	22.0	22.3	22.7
92.5°	20.5	21.0	21.5	21.9	22.1	22.3	22.5	22.7
95°	34.7	35.6	36.6	37.0	36.8	36.6	36.4	36.2
97.5°	45.5	46.2	47.0	47.5	47.7	47.9	48.1	48.3
100°	51.0	52.5	54.0	54.9	55.3	55.7	56.1	56.4
102.5°	53.2	55.2	57.1	58.4	58.9	59.4	60.0	60.4
105°	55.5	57.5	59.6	61.0	61.8	62.5	63.2	64.0
107.5°	67.7	65.6	63.5	62.9	63.6	64.3	65.1	65.8
110°	110.0	91.3	72.5	63.5	64.2	65.0	65.8	66.5



TEST NUMBER: P331417-927

CATALOG NUMBER: S122DIP-S865D1080U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	235.2	166.9	98.6	64.8	65.4	66.0	66.6	67.2
115°	346.3	259.7	173.0	122.9	109.5	96.0	82.5	69.1
117.5°	533.6	512.6	491.7	459.1	414.8	370.5	326.2	281.9
120°	621.8	624.0	626.3	614.7	589.5	564.2	538.9	513.7
122.5°	659.7	661.1	662.4	660.6	655.8	650.9	645.9	641.0
125°	714.2	715.5	716.8	717.8	718.4	718.9	719.5	720.0
127.5°	764.6	766.5	768.4	769.4	769.5	769.7	769.8	769.8
130°	796.5	798.6	800.7	801.6	801.5	801.2	801.1	800.9
132.5°	827.6	829.4	831.2	831.9	831.7	831.6	831.4	831.2
135°	872.0	873.9	875.7	876.5	876.1	875.7	875.4	875.0
137.5°	913.1	915.0	916.8	917.4	916.8	916.2	915.5	914.9
140°	939.8	941.5	943.2	943.6	942.6	941.7	940.7	939.8
142.5°	964.4	966.0	967.5	967.8	966.9	965.9	965.0	964.1
145°	998.9	1000.1	1001.5	1001.6	1000.8	999.8	998.9	997.9
147.5°	1028.8	1029.8	1030.8	1030.9	1030.1	1029.3	1028.5	1027.7
150°	1047.3	1048.5	1049.6	1049.6	1048.7	1047.8	1046.9	1045.9
152.5°	1064.1	1065.3	1066.4	1066.4	1065.1	1063.9	1062.6	1061.4
155°	1086.9	1088.1	1089.2	1088.9	1087.4	1086.0	1084.5	1083.0
157.5°	1106.0	1107.3	1108.6	1108.5	1107.1	1105.6	1104.1	1102.6
160°	1117.2	1118.3	1119.4	1119.4	1118.1	1116.7	1115.5	1114.1
162.5°	1127.6	1128.9	1130.2	1130.0	1128.4	1126.8	1125.1	1123.6
165°	1140.3	1141.6	1143.0	1143.0	1141.6	1140.3	1139.0	1137.7
167.5°	1151.0	1152.2	1153.6	1153.3	1151.7	1150.0	1148.3	1146.6
170°	1156.3	1157.6	1159.0	1158.7	1157.1	1155.4	1153.7	1152.0
172.5°	1160.4	1161.7	1163.0	1162.8	1161.1	1159.4	1157.8	1156.0
175°	1164.7	1166.1	1167.4	1167.1	1165.2	1163.3	1161.5	1159.6
177.5°	1165.2	1166.3	1167.4	1167.2	1165.9	1164.5	1163.2	1161.8
180°	1163.8	1163.8	1163.8	1163.8	1163.8	1163.8	1163.8	1163.8

(END OF REPORT)