

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331401-927

Luminaire Tested: **S122DIP-S865D725U927-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331401-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-16,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIP-S865D725U927-4F0-1E-UDD-F4
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 865 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 725 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5025.0 lumens
Efficiency: N/A
Efficacy: 92.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 54.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331401-927

CATALOG NUMBER: S122DIP-S865D725U927-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

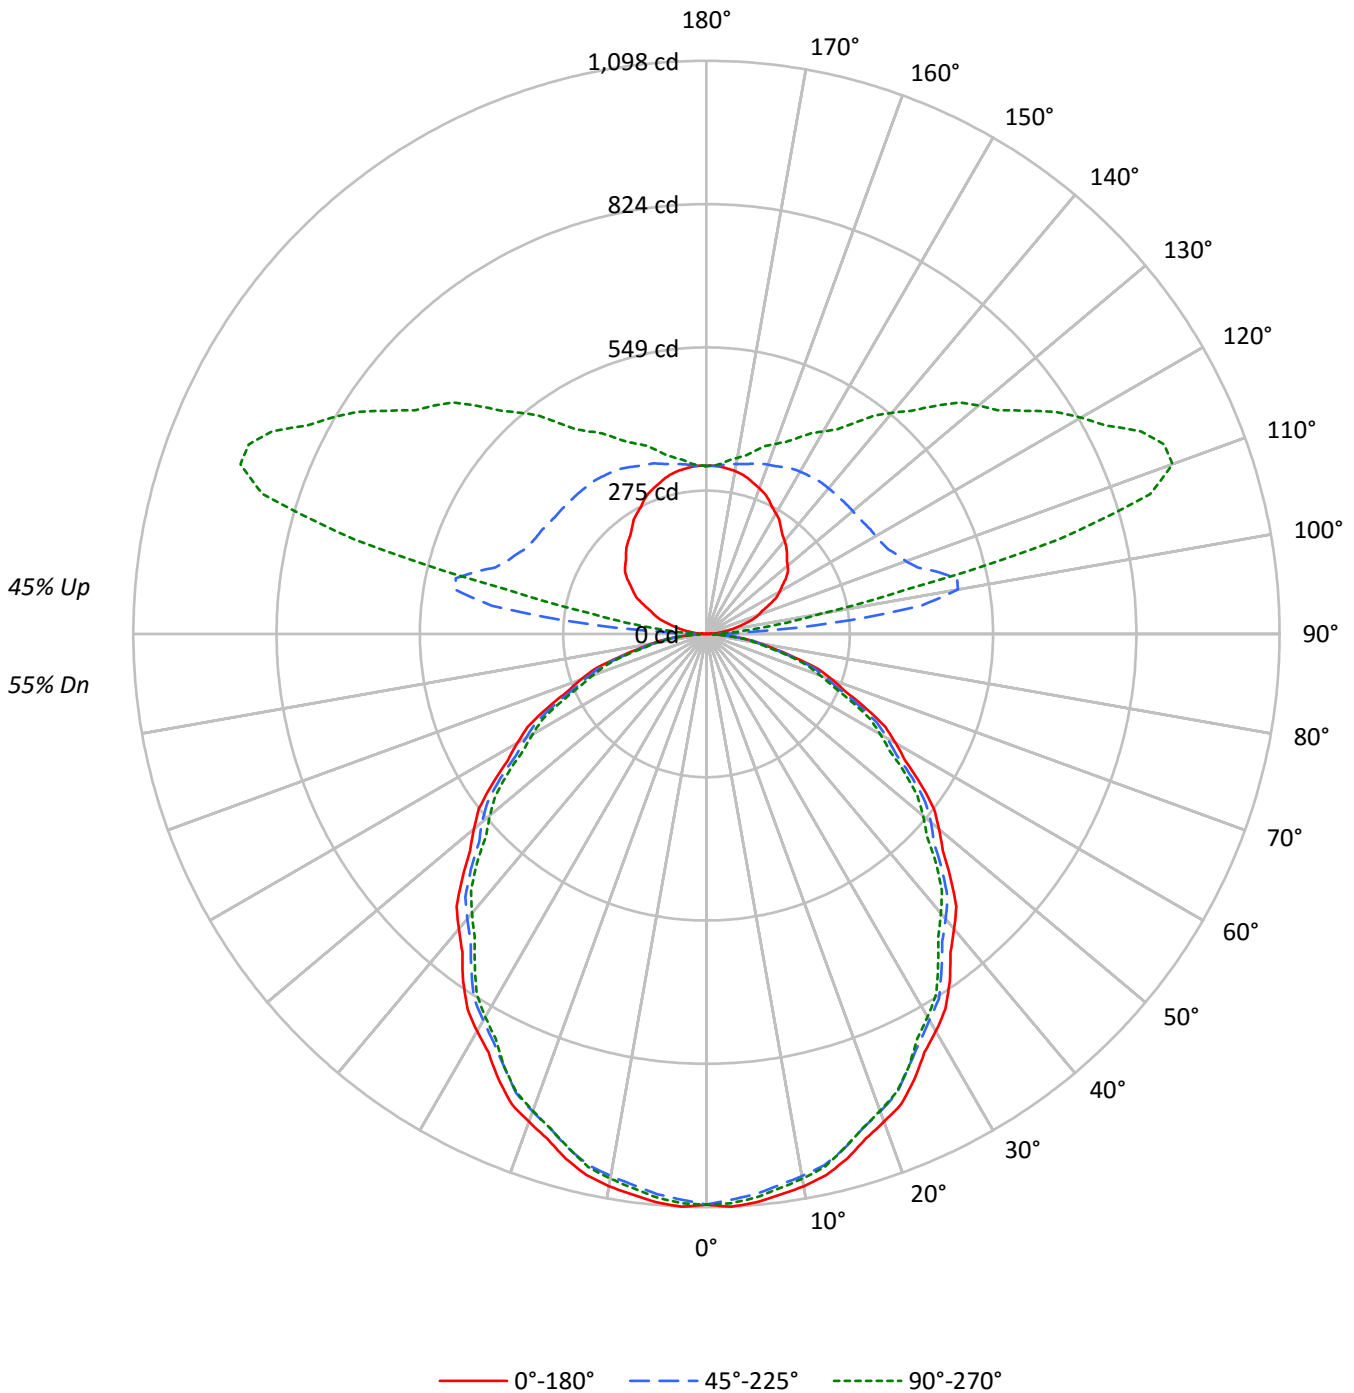



TEST NUMBER: P331401-927

CATALOG NUMBER: S122DIP-S865D725U927-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	101	101	101	101	86	86	86	73	73	73	61	61	61	55
1	99	95	91	87	92	88	85	82	76	73	71	64	63	61	54	53	52	47
2	90	83	76	71	83	77	72	67	66	62	59	57	54	51	48	45	43	39
3	82	73	65	59	76	68	61	56	59	54	49	50	46	43	42	39	37	33
4	75	64	56	50	70	60	53	47	52	47	42	45	40	37	38	34	32	28
5	69	57	49	43	64	54	46	41	47	41	36	40	36	32	34	31	28	25
6	64	51	43	37	59	48	41	36	42	36	32	36	32	28	31	27	24	22
7	59	47	38	33	55	44	36	31	38	32	28	33	28	25	28	25	22	19
8	55	42	34	29	51	40	33	28	35	29	25	30	26	22	26	22	20	17
9	51	39	31	26	47	36	29	25	32	26	22	28	23	20	24	20	18	16
10	48	35	28	23	44	33	27	22	29	24	20	26	21	18	22	19	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	17651	17651	17651
5°	17718	17462	17566
10°	17613	17285	17372
15°	17396	17061	17043
20°	17086	16725	16706
25°	16778	16311	16311
30°	16384	15933	15795
35°	16015	15477	15248
40°	15553	15022	14733
45°	15098	14570	14209
50°	14601	14099	13599
55°	14083	13551	13050
60°	13511	12897	12426
65°	12894	12248	11687
70°	12109	11462	10914
75°	11017	10555	10293
80°	9772	9484	8991
85°	7984	7595	6817



TEST NUMBER: P331401-927

CATALOG NUMBER: S122DIP-S865D725U927-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	102.8	2.0
10°-20°	289.3	5.8
20°-30°	425.2	8.5
30°-40°	493.9	9.8
40°-50°	493.3	9.8
50°-60°	430.2	8.6
60°-70°	318.1	6.3
70°-80°	180.2	3.6
80°-90°	51.3	1.0
90°-100°	128.7	2.6
100°-110°	436.9	8.7
110°-120°	464.2	9.2
120°-130°	382.1	7.6
130°-140°	306.8	6.1
140°-150°	231.9	4.6
150°-160°	163.0	3.2
160°-170°	95.9	1.9
170°-180°	31.2	0.6
0°-30°	817.2	16.3
0°-40°	1311.1	26.1
0°-60°	2234.6	44.5
0°-90°	2784.2	55.4
90°-120°	1029.8	20.5
90°-150°	1950.7	38.8
90°-180°	2241.0	44.6
0°-180°	5025.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1093	1093	1093	1093	1093	
5°	1093	1089	1077	1085	1084	104
15°	1041	1034	1021	1024	1020	293
25°	942	933	916	917	916	433
35°	812	802	785	779	774	507
45°	661	653	638	627	622	510
55°	500	494	481	469	464	447
65°	338	331	321	311	306	334
75°	177	174	169	163	165	189
85°	43	42	41	38	37	49
90°	1	8	21	20	20	3
95°	22	53	243	92	71	23
105°	76	114	459	820	698	80
115°	133	168	384	792	918	132
125°	186	220	369	642	745	165
135°	218	260	365	539	617	168
145°	249	286	363	451	493	156
155°	283	306	352	398	414	130
165°	308	318	338	358	364	87
175°	321	322	324	328	328	31
180°	322	322	322	322	322	



TEST NUMBER: P331401-927

CATALOG NUMBER: S122DIP-S865D725U927-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1093.2	1093.2	1093.2	1093.2	1093.2	1093.2	1093.2	1093.2	1093.2	1093.2	1093.2
2.5°	1098.3	1097.3	1096.4	1095.5	1094.6	1093.1	1091.0	1088.9	1086.9	1084.8	1086.7
5°	1093.2	1092.3	1091.4	1090.4	1089.5	1087.7	1085.2	1082.6	1080.1	1077.4	1079.3
7.5°	1083.5	1082.1	1080.7	1079.2	1077.8	1075.7	1073.1	1070.5	1067.9	1065.2	1067.1
10°	1074.3	1072.7	1071.0	1069.4	1067.8	1065.6	1062.7	1059.9	1057.2	1054.3	1056.2
12.5°	1061.7	1060.3	1058.8	1057.3	1055.9	1053.8	1051.0	1048.1	1045.4	1042.6	1043.9
15°	1040.7	1039.3	1037.8	1036.5	1035.1	1032.8	1029.8	1026.7	1023.7	1020.7	1021.6
17.5°	1013.8	1012.3	1011.0	1009.6	1008.1	1005.9	1002.8	999.7	996.6	993.6	994.7
20°	994.4	993.0	991.7	990.2	988.8	986.5	983.2	979.9	976.7	973.4	974.1
22.5°	975.1	973.1	971.1	969.2	967.3	964.7	961.6	958.5	955.5	952.4	952.5
25°	941.8	940.0	938.1	936.3	934.4	931.4	927.5	923.5	919.6	915.6	916.1
27.5°	904.0	902.4	900.6	899.0	897.3	894.8	891.8	888.6	885.5	882.3	881.7
30°	878.8	876.9	875.0	873.2	871.3	868.6	865.1	861.7	858.1	854.6	853.9
32.5°	851.9	850.4	848.9	847.4	845.9	843.3	839.6	835.9	832.3	828.5	827.3
35°	812.5	810.2	807.9	805.6	803.2	800.2	796.5	792.7	788.9	785.2	783.9
37.5°	768.2	766.1	764.1	762.0	760.0	757.1	753.4	749.6	745.8	742.1	740.4
40°	737.9	736.1	734.2	732.3	730.5	727.6	723.9	720.2	716.4	712.7	710.6
42.5°	708.5	706.6	704.7	702.9	701.0	698.2	694.5	690.8	687.0	683.3	681.0
45°	661.2	659.6	657.9	656.3	654.7	652.0	648.6	645.1	641.6	638.1	635.5
47.5°	614.1	612.6	611.0	609.5	607.9	605.3	601.7	598.0	594.4	590.7	588.0
50°	581.3	580.1	579.0	577.8	576.6	574.4	571.2	567.8	564.6	561.3	558.1
52.5°	549.4	547.8	546.3	544.7	543.2	540.9	537.8	534.7	531.6	528.5	525.9
55°	500.3	499.0	497.6	496.1	494.7	492.7	489.9	487.0	484.3	481.4	478.6
57.5°	451.1	450.0	448.9	447.8	446.7	444.6	441.5	438.4	435.3	432.2	429.5
60°	418.4	417.4	416.5	415.6	414.6	412.6	409.2	406.0	402.7	399.4	396.9
62.5°	386.4	384.9	383.4	381.9	380.4	378.4	375.9	373.4	370.8	368.4	366.0
65°	337.5	336.0	334.6	333.2	331.8	329.9	327.6	325.3	323.0	320.6	318.5
67.5°	287.6	286.5	285.3	284.2	283.1	281.5	279.4	277.3	275.2	273.1	271.5
70°	256.5	255.6	254.6	253.7	252.8	251.2	249.1	247.0	244.9	242.8	241.2
72.5°	224.5	223.6	222.7	221.7	220.8	219.7	218.3	217.0	215.6	214.2	212.6
75°	176.6	176.1	175.6	175.2	174.8	173.9	172.8	171.6	170.4	169.2	167.9
77.5°	133.7	132.9	132.1	131.3	130.6	129.9	129.4	129.0	128.5	128.0	127.3
80°	105.1	104.9	104.6	104.4	104.2	103.9	103.4	102.9	102.4	102.0	101.2
82.5°	78.2	78.2	78.1	78.0	78.0	77.9	77.6	77.3	77.0	76.8	75.8
85°	43.1	42.9	42.6	42.4	42.1	41.9	41.7	41.4	41.2	41.0	40.3
87.5°	15.3	15.3	15.4	15.3	15.1	15.1	15.4	15.8	16.2	16.0	15.3
90°	0.6	2.5	5.0	6.2	7.4	9.3	12.4	16.7	20.4	21.1	20.4
92.5°	7.5	10.9	15.4	18.1	22.3	28.1	42.1	61.8	79.4	80.5	68.0
95°	21.7	24.2	30.3	35.9	45.8	60.7	89.2	143.1	214.9	242.7	212.4
97.5°	35.3	38.7	45.2	53.6	65.0	81.8	117.6	192.7	312.1	414.4	434.7
100°	47.7	49.5	55.1	65.0	77.4	94.7	127.5	203.1	336.8	489.2	578.4
102.5°	59.1	60.4	66.0	75.9	88.8	106.2	136.5	203.6	327.5	491.7	631.8
105°	75.6	78.0	82.4	91.7	105.3	122.6	151.7	206.8	309.0	458.8	623.6
107.5°	93.4	95.4	99.6	108.1	121.6	139.1	167.3	215.4	299.8	423.7	569.2
110°	105.3	107.7	111.5	119.5	132.5	150.5	177.7	222.3	297.9	406.9	535.0



TEST NUMBER: P331401-927

CATALOG NUMBER: S122DIP-S865D725U927-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	116.1	118.7	122.9	130.4	142.9	161.4	187.7	229.7	298.3	395.9	511.3
115°	133.2	136.3	140.0	147.3	159.8	176.5	203.1	240.9	301.0	384.0	481.8
117.5°	150.8	153.2	156.9	163.5	175.4	192.7	217.4	252.8	305.4	378.1	463.2
120°	161.6	164.1	167.8	173.4	185.8	203.1	227.3	260.7	308.4	374.6	453.3
122.5°	172.1	174.0	177.7	183.8	196.1	214.0	236.7	267.7	311.9	372.6	444.9
125°	185.8	187.7	191.3	198.8	211.2	228.5	250.8	278.7	317.0	369.1	432.8
127.5°	196.7	199.2	204.4	212.5	224.4	242.2	264.0	288.9	322.4	366.9	421.7
130°	203.1	205.6	211.8	220.5	232.8	250.2	271.9	295.4	326.4	366.0	414.3
132.5°	209.1	212.1	218.7	227.9	240.7	258.1	278.8	301.8	330.3	365.5	408.4
135°	218.0	220.5	227.9	237.2	251.4	268.8	288.6	310.2	335.0	364.7	400.1
137.5°	226.4	229.3	236.8	246.7	260.9	276.9	296.5	316.7	339.2	364.6	394.2
140°	232.8	235.3	242.7	252.6	266.3	282.4	301.0	320.1	341.2	364.1	390.8
142.5°	239.2	241.3	248.2	258.1	271.2	286.4	304.4	323.1	342.7	364.1	387.3
145°	248.9	251.4	257.6	266.9	279.2	292.9	309.7	326.9	344.3	362.9	382.7
147.5°	259.4	261.2	267.1	275.7	286.0	298.1	313.9	329.1	344.8	360.7	378.0
150°	266.3	268.2	273.1	281.1	290.4	301.6	315.8	330.0	344.3	359.2	374.0
152.5°	273.2	274.1	279.0	286.1	294.9	305.1	317.8	330.6	343.3	356.7	370.6
155°	283.0	283.6	287.3	294.1	301.0	310.2	320.8	331.3	341.8	352.4	364.1
157.5°	291.2	291.8	294.8	300.7	306.2	313.9	322.9	331.3	339.0	347.9	358.1
160°	296.6	297.2	299.7	304.7	309.7	316.4	323.8	331.3	337.5	344.9	353.6
162.5°	302.1	301.7	304.2	308.2	312.6	317.9	324.4	330.8	336.0	342.5	349.6
165°	308.4	307.8	309.0	312.8	315.8	319.6	325.1	329.5	333.2	337.5	343.1
167.5°	313.6	312.8	313.9	316.3	318.5	320.9	325.0	328.6	330.3	333.2	336.6
170°	317.0	315.8	316.4	318.3	319.6	321.4	324.5	327.6	328.8	330.7	333.2
172.5°	319.0	318.3	317.9	319.8	320.5	321.9	324.0	326.1	326.9	327.7	329.7
175°	321.4	320.8	320.1	321.4	321.4	322.0	323.2	324.5	323.8	324.5	325.1
177.5°	322.5	321.5	321.0	322.0	322.0	322.0	322.5	323.5	322.5	322.0	322.5
180°	322.0	322.0	322.0	322.0	322.0	322.0	322.0	322.0	322.0	322.0	322.0



TEST NUMBER: P331401-927

CATALOG NUMBER: S122DIP-S865D725U927-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1093.2	1093.2	1093.2	1093.2	1093.2	1093.2	1093.2	1093.2
2.5°	1088.5	1090.4	1092.3	1093.1	1092.7	1092.3	1091.9	1091.5
5°	1081.2	1083.1	1085.0	1085.6	1085.2	1084.7	1084.3	1083.8
7.5°	1069.0	1070.9	1072.8	1073.4	1072.9	1072.4	1071.9	1071.3
10°	1058.0	1059.9	1061.8	1062.4	1061.7	1061.0	1060.3	1059.6
12.5°	1045.2	1046.5	1047.8	1048.2	1047.7	1047.2	1046.6	1046.2
15°	1022.5	1023.5	1024.5	1024.3	1023.2	1022.0	1020.8	1019.6
17.5°	995.7	996.8	997.9	997.8	996.7	995.6	994.5	993.4
20°	974.8	975.5	976.2	976.0	975.2	974.2	973.3	972.3
22.5°	952.7	952.8	952.9	952.8	952.1	951.6	951.0	950.5
25°	916.6	917.0	917.4	917.4	917.0	916.6	916.1	915.6
27.5°	881.0	880.3	879.6	878.7	877.5	876.4	875.3	874.2
30°	853.2	852.5	851.8	851.0	850.1	849.1	848.2	847.2
32.5°	826.0	824.7	823.5	822.4	821.5	820.5	819.6	818.6
35°	782.4	781.0	779.7	778.3	777.2	776.0	774.8	773.6
37.5°	738.7	737.0	735.2	733.8	732.7	731.6	730.5	729.3
40°	708.5	706.4	704.3	702.7	701.9	700.9	700.0	699.0
42.5°	678.7	676.4	674.1	672.3	671.0	669.7	668.4	667.1
45°	633.0	630.3	627.8	626.1	625.1	624.2	623.2	622.3
47.5°	585.3	582.7	580.0	577.9	576.6	575.2	573.9	572.5
50°	554.8	551.5	548.3	546.1	544.9	543.7	542.6	541.4
52.5°	523.1	520.4	517.7	515.6	514.0	512.5	511.0	509.4
55°	475.9	473.0	470.2	468.3	467.1	465.9	464.8	463.6
57.5°	426.7	424.0	421.2	419.4	418.5	417.6	416.8	415.8
60°	394.3	391.7	389.2	387.5	386.8	386.1	385.4	384.8
62.5°	363.5	361.2	358.8	357.2	356.2	355.4	354.5	353.6
65°	316.4	314.3	312.2	310.5	309.4	308.2	307.0	305.9
67.5°	269.8	268.2	266.6	265.3	264.4	263.4	262.4	261.5
70°	239.6	237.9	236.3	235.0	234.1	233.1	232.2	231.2
72.5°	211.0	209.3	207.7	206.5	205.7	205.0	204.2	203.5
75°	166.4	165.0	163.7	163.2	163.7	164.1	164.5	165.0
77.5°	126.7	126.0	125.2	124.5	123.9	123.3	122.6	121.9
80°	100.5	99.9	99.2	98.5	98.1	97.7	97.2	96.7
82.5°	74.9	74.1	73.2	72.7	72.6	72.5	72.4	72.3
85°	39.6	38.9	38.2	37.7	37.5	37.2	37.0	36.8
87.5°	14.6	13.8	13.5	13.2	13.1	12.8	12.7	12.5
90°	19.8	18.6	19.8	20.4	20.4	20.4	20.4	20.4
92.5°	54.0	46.3	41.1	37.3	36.8	34.8	35.3	34.3
95°	162.2	124.5	98.5	84.8	76.8	71.9	69.9	70.6
97.5°	378.6	309.7	242.7	198.0	168.4	153.2	144.2	138.9
100°	565.4	488.6	403.8	328.8	277.4	250.8	232.8	221.7
102.5°	687.8	670.4	608.3	528.9	473.1	427.6	405.2	390.1
105°	752.4	822.4	830.4	810.0	771.6	733.2	706.5	697.9
107.5°	705.8	811.2	875.6	905.6	910.5	908.3	903.0	891.4
110°	665.7	776.6	855.8	906.6	933.2	945.0	950.5	949.9



TEST NUMBER: P331401-927

CATALOG NUMBER: S122DIP-S865D725U927-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	629.1	735.4	820.1	878.4	915.4	935.1	945.6	949.0
115°	583.9	679.3	760.4	824.2	868.2	896.7	912.8	918.4
117.5°	550.0	633.7	707.3	767.1	812.0	842.1	859.0	863.7
120°	533.1	610.0	675.6	732.0	775.3	804.4	822.4	828.5
122.5°	519.8	590.2	652.3	703.2	742.1	770.7	786.7	791.9
125°	500.3	564.1	618.6	665.0	701.0	724.5	740.0	745.0
127.5°	481.2	538.8	590.3	633.1	664.5	686.5	699.9	703.9
130°	468.7	522.0	570.9	611.8	642.1	663.2	675.6	680.6
132.5°	456.9	506.2	551.1	589.5	619.4	640.4	651.8	656.2
135°	440.3	481.2	522.0	556.7	583.4	603.8	614.9	617.4
137.5°	427.1	461.2	493.7	523.9	548.2	565.8	575.5	579.2
140°	418.6	448.4	476.8	504.1	523.9	540.0	549.3	553.0
142.5°	411.7	437.0	461.4	484.3	503.1	517.7	526.0	526.7
145°	401.9	422.3	441.6	459.5	474.4	484.9	491.1	492.9
147.5°	394.3	410.4	425.4	438.6	450.8	459.2	463.4	464.5
150°	388.9	402.5	415.5	426.7	435.9	443.4	447.1	447.7
152.5°	383.4	396.1	407.1	416.8	424.1	430.5	433.2	433.3
155°	375.9	385.8	395.1	401.9	408.7	413.0	415.5	414.3
157.5°	367.1	375.4	383.2	388.5	393.3	397.0	398.1	398.1
160°	361.6	368.4	375.3	379.6	384.0	387.1	387.6	387.6
162.5°	356.2	362.0	367.8	371.2	375.5	377.6	378.3	377.7
165°	348.0	352.4	356.7	359.2	361.6	364.1	364.1	363.5
167.5°	340.2	343.6	346.5	348.8	349.9	351.3	351.1	350.4
170°	336.3	338.1	340.6	341.8	342.5	344.3	343.6	342.5
172.5°	331.8	333.2	335.2	335.9	336.5	337.4	336.8	336.0
175°	326.9	327.6	328.2	328.8	328.8	329.5	328.8	327.6
177.5°	323.5	323.5	324.0	324.0	324.0	324.0	323.5	322.5
180°	322.0	322.0	322.0	322.0	322.0	322.0	322.0	322.0

(END OF REPORT)