

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331752-927

Luminaire Tested: **S122RDIP-S1005D725U927-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331752-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-16,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122RDIP-S1005D725U927-4F0-1E-UDD-F4
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1005 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 725 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5002.8 lumens
Efficiency: N/A
Efficacy: 82.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 60.7
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331752-927

CATALOG NUMBER: S122RDIP-S1005D725U927-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

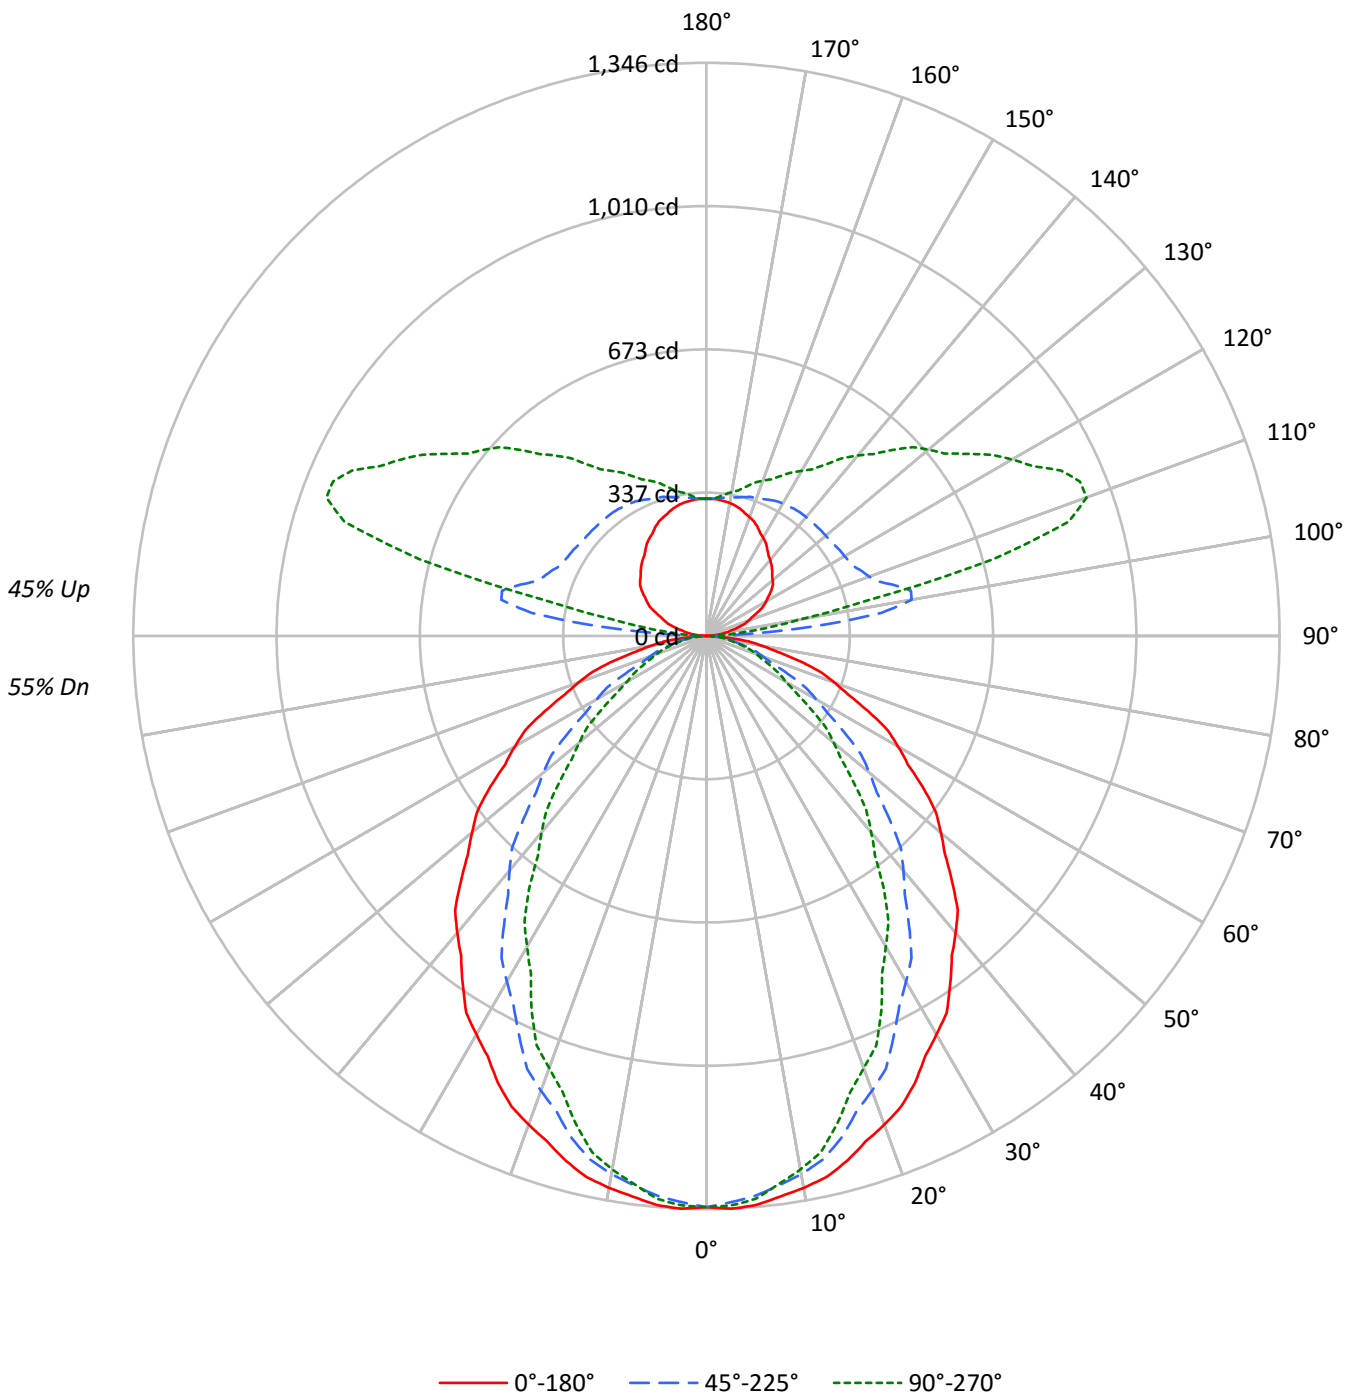



TEST NUMBER: P331752-927

CATALOG NUMBER: S122RDIP-S1005D725U927-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	101	101	101	101	86	86	86	73	73	73	61	61	61	55
1	99	95	92	88	92	89	86	83	76	74	72	65	63	62	55	54	52	48
2	91	84	78	73	84	78	73	69	68	64	60	58	55	53	49	47	45	41
3	83	74	67	61	77	69	63	58	60	55	51	52	48	45	44	41	39	35
4	77	66	58	52	71	62	55	50	54	48	44	46	42	39	39	36	34	31
5	70	59	51	45	65	55	48	43	48	43	39	42	38	34	36	33	30	27
6	65	53	45	40	60	50	43	38	44	38	34	38	34	30	33	29	27	24
7	60	48	40	35	56	45	38	33	40	34	30	35	30	27	30	27	24	21
8	56	44	36	31	52	41	35	30	37	31	27	32	28	24	28	24	22	19
9	52	40	33	28	49	38	31	27	34	28	24	30	25	22	26	22	20	18
10	49	37	30	25	46	35	29	24	31	26	22	27	23	20	24	20	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	21660	21660	21660
5°	21742	21389	21507
10°	21577	21040	20859
15°	21329	20415	19826
20°	20984	19524	18545
25°	20633	18513	17302
30°	20144	17473	15709
35°	19669	16344	14310
40°	19191	15173	12690
45°	18630	13860	11227
50°	18053	12534	9789
55°	17464	11108	8408
60°	16779	9607	6978
65°	16000	8073	6357
70°	15073	6652	5844
75°	13936	6057	5452
80°	12301	5421	4965
85°	9670	4279	4279



TEST NUMBER: P331752-927

CATALOG NUMBER: S122RDIP-S1005D725U927-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	125.6	2.5
10°-20°	344.8	6.9
20°-30°	484.2	9.7
30°-40°	528.0	10.6
40°-50°	485.4	9.7
50°-60°	381.3	7.6
60°-70°	248.6	5.0
70°-80°	128.2	2.6
80°-90°	36.2	0.7
90°-100°	128.7	2.6
100°-110°	436.9	8.7
110°-120°	464.2	9.3
120°-130°	382.1	7.6
130°-140°	306.8	6.1
140°-150°	231.9	4.6
150°-160°	163.0	3.3
160°-170°	95.9	1.9
170°-180°	31.2	0.6
0°-30°	954.5	19.1
0°-40°	1482.5	29.6
0°-60°	2349.2	47.0
0°-90°	2762.1	55.2
90°-120°	1029.8	20.6
90°-150°	1950.7	39.0
90°-180°	2241.0	44.8
0°-180°	5002.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1342	1342	1342	1342	1342	
5°	1342	1335	1320	1330	1327	127
15°	1276	1261	1221	1199	1186	359
25°	1158	1117	1039	991	971	532
35°	998	934	829	755	726	624
45°	816	732	607	524	492	630
55°	620	524	395	324	299	554
65°	419	320	211	172	166	415
75°	223	141	97	89	87	236
85°	52	28	23	23	23	62
90°	1	8	21	20	20	3
95°	22	53	243	92	71	23
105°	76	114	459	820	698	80
115°	133	168	384	792	918	132
125°	186	220	369	642	745	165
135°	218	260	365	539	617	168
145°	249	286	363	451	493	156
155°	283	306	352	398	414	130
165°	308	318	338	358	364	87
175°	321	322	324	328	328	31
180°	322	322	322	322	322	



TEST NUMBER: P331752-927

CATALOG NUMBER: S122RDIP-S1005D725U927-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1341.5	1341.5	1341.5	1341.5	1341.5	1341.5	1341.5	1341.5	1341.5	1341.5	1341.5
2.5°	1346.4	1345.3	1344.2	1343.1	1342.0	1340.3	1337.9	1335.6	1333.2	1330.9	1333.0
5°	1341.5	1340.1	1338.8	1337.4	1336.1	1333.7	1330.2	1326.7	1323.2	1319.7	1322.1
7.5°	1327.7	1326.0	1324.4	1322.6	1321.0	1318.1	1314.0	1309.9	1305.8	1301.7	1302.4
10°	1316.1	1314.2	1312.2	1310.3	1308.4	1304.8	1299.4	1294.0	1288.6	1283.3	1282.5
12.5°	1301.5	1299.1	1296.8	1294.5	1292.2	1287.5	1280.6	1273.7	1266.9	1260.0	1258.5
15°	1276.0	1273.0	1270.0	1267.0	1264.1	1258.0	1248.9	1239.7	1230.5	1221.3	1216.2
17.5°	1244.6	1240.1	1235.6	1231.1	1226.5	1218.4	1206.6	1194.8	1183.0	1171.3	1165.2
20°	1221.3	1215.9	1210.5	1205.1	1199.8	1190.3	1176.8	1163.3	1149.9	1136.3	1129.6
22.5°	1196.0	1190.0	1184.0	1178.0	1171.9	1161.3	1146.1	1130.8	1115.6	1100.4	1091.7
25°	1158.2	1149.5	1140.9	1132.3	1123.6	1110.5	1092.7	1074.8	1057.0	1039.2	1028.2
27.5°	1112.5	1103.2	1093.8	1084.4	1075.0	1060.3	1040.2	1020.1	1000.1	980.0	967.1
30°	1080.5	1070.2	1060.0	1049.7	1039.5	1023.6	1002.0	980.4	958.9	937.2	923.4
32.5°	1049.4	1037.4	1025.5	1013.5	1001.5	984.5	962.5	940.5	918.5	896.4	880.7
35°	997.9	984.2	970.4	956.6	942.9	924.2	900.4	876.7	852.9	829.2	812.2
37.5°	946.5	931.4	916.2	901.1	886.1	865.9	840.5	815.2	789.9	764.6	745.9
40°	910.5	894.4	878.1	862.0	845.8	824.6	798.4	772.3	746.1	719.9	700.8
42.5°	873.6	856.6	839.6	822.4	805.4	783.4	756.4	729.3	702.3	675.3	655.5
45°	815.9	797.7	779.7	761.6	743.5	720.3	692.0	663.7	635.3	607.0	587.9
47.5°	759.5	740.4	721.2	702.0	682.9	658.7	629.5	600.2	570.9	541.7	522.7
50°	718.7	699.6	680.4	661.2	642.1	617.7	588.0	558.3	528.6	499.0	480.4
52.5°	678.9	658.9	638.9	618.9	598.8	574.3	545.3	516.3	487.2	458.2	440.2
55°	620.4	599.4	578.3	557.2	536.2	511.1	482.0	452.8	423.7	394.6	378.3
57.5°	560.4	538.8	517.2	495.7	474.0	449.2	421.3	393.2	365.3	337.2	322.4
60°	519.6	498.0	476.4	454.9	433.2	408.6	380.8	353.0	325.2	297.5	283.7
62.5°	479.8	458.2	436.7	415.0	393.5	369.4	342.9	316.4	289.9	263.5	250.3
65°	418.8	397.0	375.2	353.3	331.4	308.4	284.1	259.8	235.5	211.3	202.1
67.5°	360.0	338.4	316.7	295.0	273.3	251.5	229.7	207.9	186.0	164.1	159.9
70°	319.3	298.3	277.2	256.2	235.1	215.3	196.7	178.1	159.5	140.9	138.2
72.5°	280.4	260.2	240.1	219.9	199.7	182.1	167.2	152.3	137.3	122.4	120.1
75°	223.4	204.5	185.6	166.8	147.8	133.8	124.6	115.5	106.3	97.1	95.2
77.5°	167.3	150.8	134.2	117.6	101.0	90.5	86.1	81.7	77.2	72.9	71.8
80°	132.3	118.6	104.8	91.0	77.3	69.1	66.4	63.7	61.0	58.3	57.2
82.5°	100.3	89.5	78.8	68.0	57.4	51.0	49.2	47.4	45.6	43.7	43.1
85°	52.2	46.5	40.9	35.2	29.5	26.3	25.5	24.7	23.8	23.1	23.1
87.5°	15.7	14.3	13.1	11.6	10.1	9.7	10.2	11.1	11.9	12.0	11.6
90°	0.6	2.5	5.0	6.2	7.4	9.3	12.4	16.7	20.4	21.1	20.4
92.5°	7.5	10.9	15.4	18.1	22.3	28.1	42.1	61.8	79.4	80.5	68.0
95°	21.7	24.2	30.3	35.9	45.8	60.7	89.2	143.1	214.9	242.7	212.4
97.5°	35.3	38.7	45.2	53.6	65.0	81.8	117.6	192.7	312.1	414.4	434.7
100°	47.7	49.5	55.1	65.0	77.4	94.7	127.5	203.1	336.8	489.2	578.4
102.5°	59.1	60.4	66.0	75.9	88.8	106.2	136.5	203.6	327.5	491.7	631.8
105°	75.6	78.0	82.4	91.7	105.3	122.6	151.7	206.8	309.0	458.8	623.6
107.5°	93.4	95.4	99.6	108.1	121.6	139.1	167.3	215.4	299.8	423.7	569.2
110°	105.3	107.7	111.5	119.5	132.5	150.5	177.7	222.3	297.9	406.9	535.0



TEST NUMBER: P331752-927

CATALOG NUMBER: S122RDIP-S1005D725U927-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	116.1	118.7	122.9	130.4	142.9	161.4	187.7	229.7	298.3	395.9	511.3
115°	133.2	136.3	140.0	147.3	159.8	176.5	203.1	240.9	301.0	384.0	481.8
117.5°	150.8	153.2	156.9	163.5	175.4	192.7	217.4	252.8	305.4	378.1	463.2
120°	161.6	164.1	167.8	173.4	185.8	203.1	227.3	260.7	308.4	374.6	453.3
122.5°	172.1	174.0	177.7	183.8	196.1	214.0	236.7	267.7	311.9	372.6	444.9
125°	185.8	187.7	191.3	198.8	211.2	228.5	250.8	278.7	317.0	369.1	432.8
127.5°	196.7	199.2	204.4	212.5	224.4	242.2	264.0	288.9	322.4	366.9	421.7
130°	203.1	205.6	211.8	220.5	232.8	250.2	271.9	295.4	326.4	366.0	414.3
132.5°	209.1	212.1	218.7	227.9	240.7	258.1	278.8	301.8	330.3	365.5	408.4
135°	218.0	220.5	227.9	237.2	251.4	268.8	288.6	310.2	335.0	364.7	400.1
137.5°	226.4	229.3	236.8	246.7	260.9	276.9	296.5	316.7	339.2	364.6	394.2
140°	232.8	235.3	242.7	252.6	266.3	282.4	301.0	320.1	341.2	364.1	390.8
142.5°	239.2	241.3	248.2	258.1	271.2	286.4	304.4	323.1	342.7	364.1	387.3
145°	248.9	251.4	257.6	266.9	279.2	292.9	309.7	326.9	344.3	362.9	382.7
147.5°	259.4	261.2	267.1	275.7	286.0	298.1	313.9	329.1	344.8	360.7	378.0
150°	266.3	268.2	273.1	281.1	290.4	301.6	315.8	330.0	344.3	359.2	374.0
152.5°	273.2	274.1	279.0	286.1	294.9	305.1	317.8	330.6	343.3	356.7	370.6
155°	283.0	283.6	287.3	294.1	301.0	310.2	320.8	331.3	341.8	352.4	364.1
157.5°	291.2	291.8	294.8	300.7	306.2	313.9	322.9	331.3	339.0	347.9	358.1
160°	296.6	297.2	299.7	304.7	309.7	316.4	323.8	331.3	337.5	344.9	353.6
162.5°	302.1	301.7	304.2	308.2	312.6	317.9	324.4	330.8	336.0	342.5	349.6
165°	308.4	307.8	309.0	312.8	315.8	319.6	325.1	329.5	333.2	337.5	343.1
167.5°	313.6	312.8	313.9	316.3	318.5	320.9	325.0	328.6	330.3	333.2	336.6
170°	317.0	315.8	316.4	318.3	319.6	321.4	324.5	327.6	328.8	330.7	333.2
172.5°	319.0	318.3	317.9	319.8	320.5	321.9	324.0	326.1	326.9	327.7	329.7
175°	321.4	320.8	320.1	321.4	321.4	322.0	323.2	324.5	323.8	324.5	325.1
177.5°	322.5	321.5	321.0	322.0	322.0	322.0	322.5	323.5	322.5	322.0	322.5
180°	322.0	322.0	322.0	322.0	322.0	322.0	322.0	322.0	322.0	322.0	322.0



TEST NUMBER: P331752-927

CATALOG NUMBER: S122RDIP-S1005D725U927-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1341.5	1341.5	1341.5	1341.5	1341.5	1341.5	1341.5	1341.5
2.5°	1335.1	1337.3	1339.5	1340.3	1339.9	1339.5	1339.0	1338.6
5°	1324.5	1327.0	1329.4	1330.2	1329.4	1328.6	1327.8	1327.0
7.5°	1303.1	1303.8	1304.5	1304.2	1302.7	1301.3	1300.0	1298.5
10°	1281.6	1280.8	1280.0	1278.8	1277.2	1275.6	1273.9	1272.3
12.5°	1257.0	1255.5	1254.1	1252.0	1249.4	1246.7	1244.0	1241.3
15°	1211.1	1205.9	1200.8	1196.9	1194.2	1191.5	1188.8	1186.1
17.5°	1159.1	1153.0	1146.9	1141.5	1136.9	1132.3	1127.6	1123.0
20°	1122.8	1116.1	1109.4	1103.0	1097.1	1091.2	1085.2	1079.3
22.5°	1083.1	1074.4	1065.6	1059.1	1054.7	1050.3	1045.8	1041.4
25°	1017.1	1006.1	995.0	987.5	983.3	979.3	975.3	971.2
27.5°	954.2	941.3	928.4	918.7	912.3	905.9	899.4	893.0
30°	909.7	896.0	882.2	871.7	864.4	857.1	849.9	842.6
32.5°	865.1	849.4	833.6	822.4	815.6	808.7	801.8	795.0
35°	795.2	778.2	761.2	749.7	743.8	737.8	731.9	726.0
37.5°	727.1	708.4	689.7	676.9	670.2	663.4	656.6	649.7
40°	681.6	662.4	643.3	630.3	623.2	616.2	609.2	602.1
42.5°	635.6	615.8	596.0	582.7	575.9	569.1	562.4	555.6
45°	568.7	549.5	530.4	517.6	511.1	504.6	498.1	491.7
47.5°	503.6	484.6	465.5	453.0	447.2	441.3	435.4	429.5
50°	461.8	443.1	424.5	412.3	406.7	401.0	395.4	389.7
52.5°	422.2	404.3	386.3	374.7	369.5	364.2	359.0	353.8
55°	362.2	346.0	329.8	319.2	314.0	308.9	303.8	298.7
57.5°	307.6	292.7	277.9	268.3	264.0	259.7	255.4	251.0
60°	269.9	256.2	242.4	233.4	229.0	224.7	220.4	216.1
62.5°	237.3	224.1	211.0	203.1	200.6	198.0	195.4	192.8
65°	192.9	183.7	174.5	169.5	168.7	167.9	167.2	166.4
67.5°	155.7	151.5	147.3	144.7	143.9	143.1	142.2	141.3
70°	135.5	132.8	130.1	128.2	127.1	126.0	124.9	123.8
72.5°	117.9	115.6	113.3	111.9	111.2	110.6	109.9	109.2
75°	93.3	91.5	89.6	88.5	88.2	87.9	87.7	87.4
77.5°	70.7	69.6	68.5	67.7	67.3	66.9	66.5	66.1
80°	56.1	55.1	53.9	53.4	53.4	53.4	53.4	53.4
82.5°	42.4	41.7	41.1	40.8	40.8	40.8	40.8	40.8
85°	23.1	23.1	23.1	23.1	23.1	23.1	23.1	23.1
87.5°	11.3	10.9	10.9	10.9	10.9	10.9	10.9	10.9
90°	19.8	18.6	19.8	20.4	20.4	20.4	20.4	20.4
92.5°	54.0	46.3	41.1	37.3	36.8	34.8	35.3	34.3
95°	162.2	124.5	98.5	84.8	76.8	71.9	69.9	70.6
97.5°	378.6	309.7	242.7	198.0	168.4	153.2	144.2	138.9
100°	565.4	488.6	403.8	328.8	277.4	250.8	232.8	221.7
102.5°	687.8	670.4	608.3	528.9	473.1	427.6	405.2	390.1
105°	752.4	822.4	830.4	810.0	771.6	733.2	706.5	697.9
107.5°	705.8	811.2	875.6	905.6	910.5	908.3	903.0	891.4
110°	665.7	776.6	855.8	906.6	933.2	945.0	950.5	949.9



TEST NUMBER: P331752-927

CATALOG NUMBER: S122RDIP-S1005D725U927-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	629.1	735.4	820.1	878.4	915.4	935.1	945.6	949.0
115°	583.9	679.3	760.4	824.2	868.2	896.7	912.8	918.4
117.5°	550.0	633.7	707.3	767.1	812.0	842.1	859.0	863.7
120°	533.1	610.0	675.6	732.0	775.3	804.4	822.4	828.5
122.5°	519.8	590.2	652.3	703.2	742.1	770.7	786.7	791.9
125°	500.3	564.1	618.6	665.0	701.0	724.5	740.0	745.0
127.5°	481.2	538.8	590.3	633.1	664.5	686.5	699.9	703.9
130°	468.7	522.0	570.9	611.8	642.1	663.2	675.6	680.6
132.5°	456.9	506.2	551.1	589.5	619.4	640.4	651.8	656.2
135°	440.3	481.2	522.0	556.7	583.4	603.8	614.9	617.4
137.5°	427.1	461.2	493.7	523.9	548.2	565.8	575.5	579.2
140°	418.6	448.4	476.8	504.1	523.9	540.0	549.3	553.0
142.5°	411.7	437.0	461.4	484.3	503.1	517.7	526.0	526.7
145°	401.9	422.3	441.6	459.5	474.4	484.9	491.1	492.9
147.5°	394.3	410.4	425.4	438.6	450.8	459.2	463.4	464.5
150°	388.9	402.5	415.5	426.7	435.9	443.4	447.1	447.7
152.5°	383.4	396.1	407.1	416.8	424.1	430.5	433.2	433.3
155°	375.9	385.8	395.1	401.9	408.7	413.0	415.5	414.3
157.5°	367.1	375.4	383.2	388.5	393.3	397.0	398.1	398.1
160°	361.6	368.4	375.3	379.6	384.0	387.1	387.6	387.6
162.5°	356.2	362.0	367.8	371.2	375.5	377.6	378.3	377.7
165°	348.0	352.4	356.7	359.2	361.6	364.1	364.1	363.5
167.5°	340.2	343.6	346.5	348.8	349.9	351.3	351.1	350.4
170°	336.3	338.1	340.6	341.8	342.5	344.3	343.6	342.5
172.5°	331.8	333.2	335.2	335.9	336.5	337.4	336.8	336.0
175°	326.9	327.6	328.2	328.8	328.8	329.5	328.8	327.6
177.5°	323.5	323.5	324.0	324.0	324.0	324.0	323.5	322.5
180°	322.0	322.0	322.0	322.0	322.0	322.0	322.0	322.0

(END OF REPORT)