

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331437-830

Luminaire Tested: **S122DIP-S1005D530U830-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331437-830
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-16,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIP-S1005D530U830-4F0-1E-UDD-F4
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1005 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 530 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5769.5 lumens
Efficiency: N/A
Efficacy: 104.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 55.1
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331437-830

CATALOG NUMBER: S122DIP-S1005D530U830-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

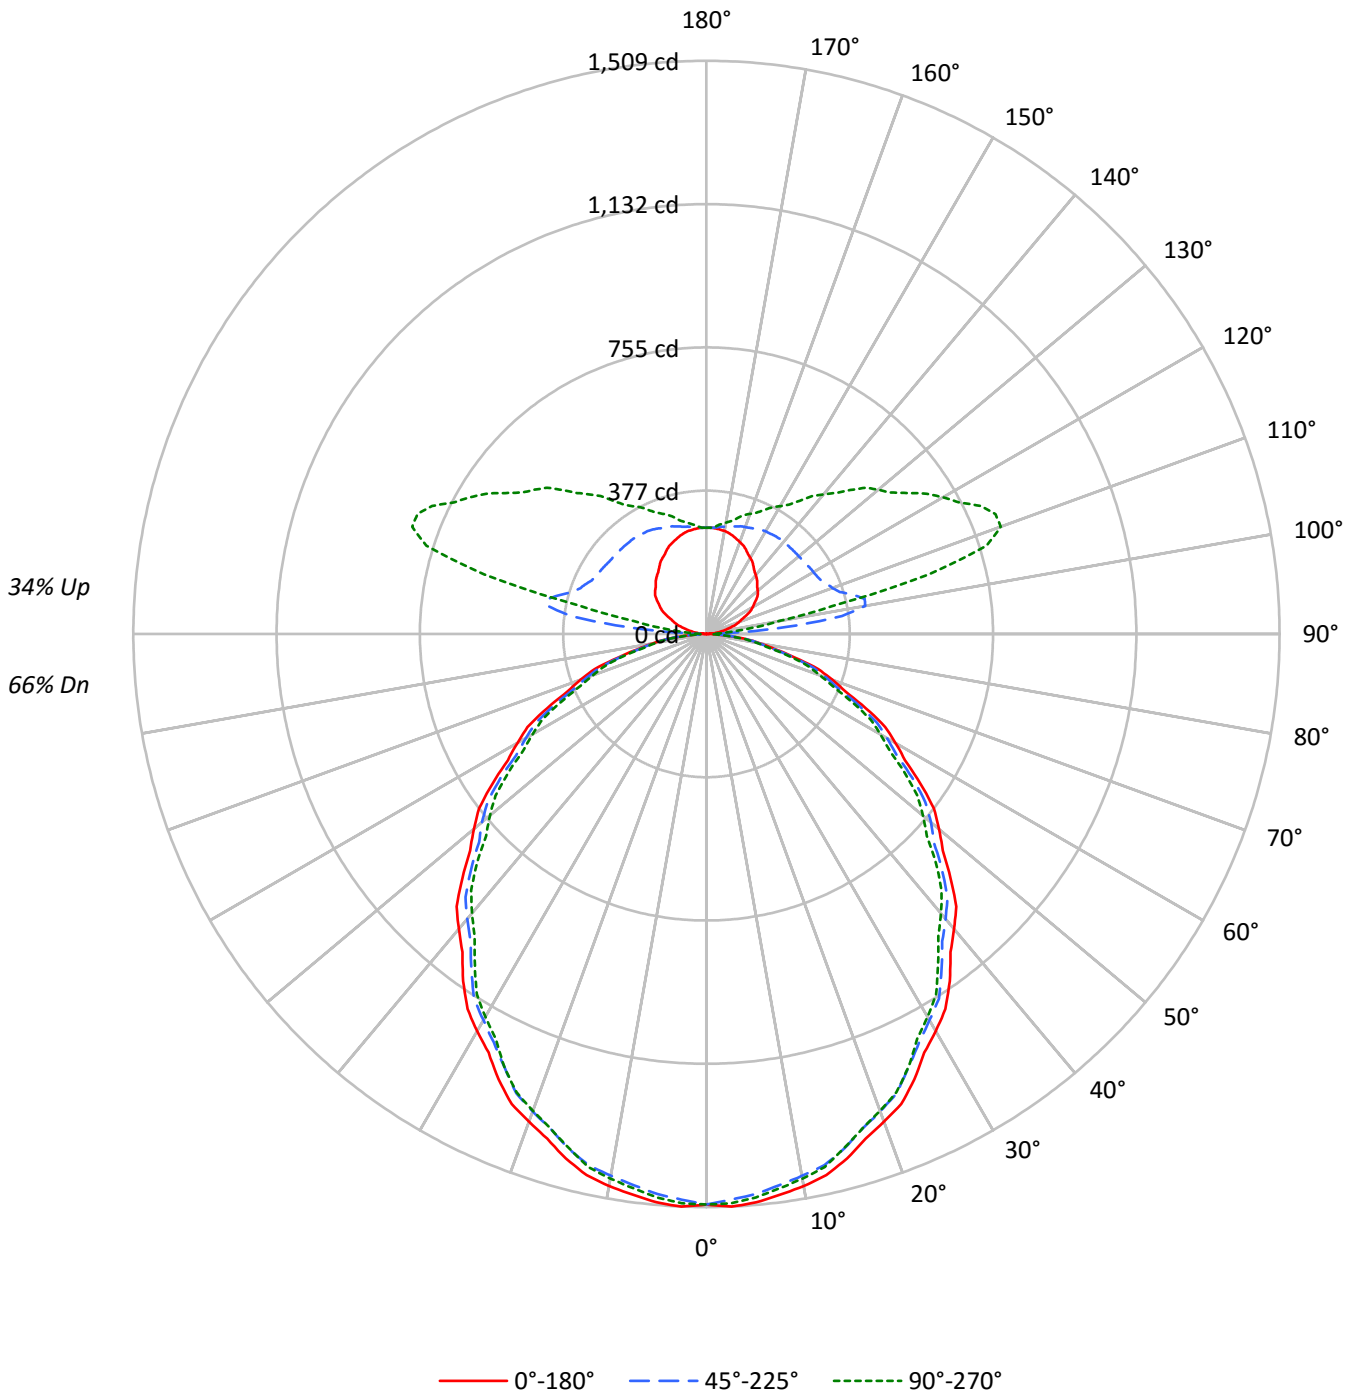



TEST NUMBER: P331437-830

CATALOG NUMBER: S122DIP-S1005D530U830-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	111	111	111	111	105	105	105	105	92	92	92	81	81	81	71	71	71	66
1	101	97	93	89	95	91	88	85	81	78	76	72	70	68	63	61	60	56
2	92	85	78	73	87	80	74	70	71	67	63	63	60	57	55	53	51	47
3	84	75	67	61	79	70	64	58	63	57	53	56	51	48	49	46	43	40
4	77	66	58	52	72	63	55	50	56	50	45	50	45	41	44	40	37	34
5	71	59	51	44	67	56	48	43	50	44	39	45	40	36	40	36	32	30
6	65	53	45	39	61	50	43	37	45	39	34	40	35	31	36	32	29	26
7	61	48	40	34	57	46	38	33	41	35	30	37	32	28	33	29	25	23
8	56	44	36	30	53	42	34	29	38	31	27	34	29	25	30	26	23	21
9	53	40	32	27	49	38	31	26	34	28	24	31	26	22	28	24	21	19
10	49	37	29	24	46	35	28	24	32	26	22	29	24	20	26	22	19	17

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	24254	24254	24254
5°	24347	23995	24136
10°	24202	23753	23871
15°	23903	23445	23422
20°	23479	22983	22957
25°	23058	22413	22413
30°	22514	21893	21705
35°	22007	21268	20954
40°	21372	20643	20244
45°	20747	20021	19527
50°	20065	19376	18686
55°	19356	18624	17931
60°	18564	17725	17073
65°	17712	16829	16061
70°	16636	15753	15002
75°	15140	14504	14148
80°	13436	13036	12357
85°	10967	10448	9355



TEST NUMBER: P331437-830

CATALOG NUMBER: S122DIP-S1005D530U830-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	141.3	2.4
10°-20°	397.5	6.9
20°-30°	584.2	10.1
30°-40°	678.6	11.8
40°-50°	677.9	11.7
50°-60°	591.2	10.2
60°-70°	437.1	7.6
70°-80°	247.6	4.3
80°-90°	69.1	1.2
90°-100°	111.8	1.9
100°-110°	379.3	6.6
110°-120°	402.9	7.0
120°-130°	331.7	5.7
130°-140°	266.3	4.6
140°-150°	201.3	3.5
150°-160°	141.4	2.5
160°-170°	83.3	1.4
170°-180°	27.1	0.5
0°-30°	1123.0	19.5
0°-40°	1801.6	31.2
0°-60°	3070.7	53.2
0°-90°	3824.5	66.3
90°-120°	893.9	15.5
90°-150°	1693.2	29.3
90°-180°	1945.0	33.7
0°-180°	5769.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1502	1502	1502	1502	1502	
5°	1502	1496	1480	1491	1489	142
15°	1430	1421	1403	1408	1401	402
25°	1294	1282	1258	1261	1258	595
35°	1116	1102	1079	1070	1063	697
45°	909	898	877	862	855	701
55°	688	678	662	645	637	615
65°	464	455	440	428	420	458
75°	243	240	232	225	227	259
85°	59	58	56	52	50	68
90°	1	7	18	17	18	4
95°	19	46	211	80	61	20
105°	66	99	398	712	606	70
115°	116	146	333	688	797	115
125°	161	191	320	557	647	143
135°	189	226	317	468	536	146
145°	216	248	315	391	428	136
155°	246	265	306	346	360	113
165°	268	276	293	311	316	75
175°	279	279	282	285	284	26
180°	280	280	280	280	280	



TEST NUMBER: P331437-830

CATALOG NUMBER: S122DIP-S1005D530U830-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1502.2	1502.2	1502.2	1502.2	1502.2	1502.2	1502.2	1502.2	1502.2	1502.2	1502.2
2.5°	1509.2	1507.9	1506.7	1505.3	1504.0	1502.0	1499.2	1496.4	1493.6	1490.7	1493.3
5°	1502.2	1501.0	1499.7	1498.4	1497.1	1494.7	1491.2	1487.6	1484.1	1480.5	1483.2
7.5°	1488.9	1487.0	1485.0	1483.0	1481.0	1478.2	1474.6	1471.0	1467.4	1463.9	1466.4
10°	1476.2	1474.0	1471.8	1469.5	1467.3	1464.2	1460.4	1456.5	1452.6	1448.8	1451.4
12.5°	1459.0	1456.9	1454.9	1452.9	1451.0	1448.0	1444.2	1440.3	1436.5	1432.7	1434.5
15°	1430.0	1428.1	1426.2	1424.3	1422.3	1419.3	1415.1	1410.9	1406.7	1402.6	1403.9
17.5°	1393.1	1391.1	1389.2	1387.2	1385.3	1382.2	1378.0	1373.8	1369.5	1365.4	1366.8
20°	1366.5	1364.5	1362.6	1360.7	1358.8	1355.6	1351.0	1346.6	1342.1	1337.6	1338.5
22.5°	1339.9	1337.2	1334.5	1331.8	1329.1	1325.7	1321.4	1317.2	1313.0	1308.7	1308.9
25°	1294.3	1291.7	1289.1	1286.6	1284.0	1280.0	1274.5	1269.0	1263.6	1258.1	1258.8
27.5°	1242.3	1239.9	1237.7	1235.3	1233.0	1229.7	1225.4	1221.1	1216.8	1212.5	1211.5
30°	1207.6	1205.0	1202.4	1199.9	1197.3	1193.6	1188.8	1184.0	1179.2	1174.3	1173.4
32.5°	1170.6	1168.6	1166.5	1164.4	1162.3	1158.9	1153.8	1148.7	1143.6	1138.5	1136.8
35°	1116.5	1113.3	1110.1	1106.9	1103.7	1099.6	1094.4	1089.3	1084.2	1079.0	1077.1
37.5°	1055.6	1052.8	1050.0	1047.2	1044.3	1040.4	1035.2	1030.1	1024.9	1019.8	1017.4
40°	1014.0	1011.4	1008.9	1006.4	1003.7	999.9	994.8	989.7	984.5	979.4	976.5
42.5°	973.6	971.0	968.5	965.9	963.3	959.4	954.3	949.1	944.1	938.9	935.8
45°	908.6	906.3	904.1	901.8	899.6	896.1	891.3	886.5	881.7	876.8	873.3
47.5°	843.9	841.8	839.6	837.5	835.4	831.8	826.8	821.8	816.8	811.8	808.0
50°	798.8	797.2	795.6	794.0	792.4	789.3	784.9	780.3	775.8	771.4	766.9
52.5°	754.9	752.8	750.6	748.6	746.4	743.2	739.0	734.7	730.6	726.3	722.6
55°	687.6	685.6	683.7	681.8	679.9	676.9	673.2	669.3	665.4	661.6	657.7
57.5°	620.0	618.4	616.9	615.4	613.8	611.0	606.7	602.5	598.2	594.0	590.2
60°	574.9	573.6	572.3	571.1	569.8	566.8	562.4	557.9	553.4	548.9	545.4
62.5°	531.0	529.0	526.9	524.8	522.7	520.0	516.5	513.1	509.6	506.1	502.8
65°	463.6	461.8	459.9	457.9	456.0	453.4	450.2	447.0	443.7	440.5	437.7
67.5°	395.2	393.7	392.1	390.6	389.1	386.8	383.9	381.1	378.1	375.3	373.1
70°	352.4	351.2	349.9	348.6	347.3	345.3	342.3	339.4	336.6	333.7	331.4
72.5°	308.5	307.3	305.9	304.7	303.4	301.8	300.0	298.1	296.2	294.4	292.1
75°	242.7	242.0	241.4	240.7	240.1	238.9	237.3	235.7	234.1	232.5	230.6
77.5°	183.7	182.7	181.5	180.5	179.4	178.5	177.9	177.2	176.5	176.0	174.9
80°	144.5	144.1	143.8	143.5	143.2	142.7	142.0	141.4	140.7	140.2	139.1
82.5°	107.4	107.4	107.4	107.3	107.2	107.0	106.6	106.2	105.8	105.5	104.2
85°	59.2	58.9	58.6	58.2	58.0	57.6	57.3	56.9	56.6	56.4	55.3
87.5°	20.9	20.7	20.6	20.4	20.1	19.9	19.9	20.1	20.3	19.8	18.9
90°	0.6	2.2	4.3	5.4	6.4	8.1	10.7	14.5	17.7	18.3	17.7
92.5°	6.6	9.4	13.3	15.7	19.3	24.4	36.6	53.6	68.9	69.8	59.0
95°	18.9	20.9	26.3	31.2	39.8	52.7	77.4	124.1	186.5	210.8	184.4
97.5°	30.6	33.6	39.2	46.6	56.5	71.1	102.2	167.3	270.9	359.7	377.3
100°	41.4	43.0	47.9	56.5	67.2	82.3	110.7	176.3	292.4	424.6	502.0
102.5°	51.3	52.5	57.3	65.9	77.1	92.1	118.5	176.7	284.3	426.8	548.5
105°	65.6	67.8	71.4	79.6	91.3	106.4	131.7	179.6	268.2	398.3	541.3
107.5°	81.1	82.8	86.4	93.9	105.6	120.7	145.2	186.9	260.2	367.8	494.1
110°	91.3	93.5	96.8	103.8	115.0	130.6	154.3	192.9	258.5	353.2	464.4



TEST NUMBER: P331437-830

CATALOG NUMBER: S122DIP-S1005D530U830-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	100.9	103.0	106.6	113.2	124.0	140.1	162.9	199.4	259.0	343.7	443.7
115°	115.6	118.3	121.5	127.9	138.6	153.2	176.3	209.1	261.3	333.3	418.2
117.5°	130.8	133.0	136.2	141.9	152.2	167.3	188.7	219.4	265.1	328.2	402.1
120°	140.3	142.4	145.6	150.5	161.3	176.3	197.3	226.3	267.7	325.2	393.5
122.5°	149.3	151.1	154.3	159.6	170.3	185.8	205.5	232.3	270.7	323.5	386.2
125°	161.3	162.9	166.1	172.6	183.3	198.3	217.7	241.9	275.2	320.4	375.7
127.5°	170.7	172.9	177.4	184.5	194.8	210.3	229.1	250.8	279.8	318.6	366.1
130°	176.3	178.4	183.8	191.3	202.1	217.2	236.0	256.4	283.2	317.6	359.6
132.5°	181.4	184.1	189.8	197.8	209.0	224.0	242.0	262.0	286.7	317.3	354.4
135°	189.2	191.3	197.8	205.9	218.2	233.3	250.5	269.3	290.8	316.6	347.2
137.5°	196.5	199.1	205.6	214.1	226.4	240.3	257.4	274.8	294.5	316.5	342.1
140°	202.1	204.2	210.8	219.3	231.1	245.2	261.3	277.9	296.1	316.0	339.2
142.5°	207.7	209.4	215.5	224.0	235.4	248.5	264.3	280.5	297.5	316.0	336.2
145°	216.1	218.2	223.6	231.7	242.4	254.2	268.7	283.8	298.9	315.0	332.2
147.5°	225.1	226.7	231.9	239.3	248.3	258.7	272.4	285.7	299.3	313.0	328.1
150°	231.1	232.7	237.0	244.0	252.1	261.7	274.1	286.5	298.9	311.8	324.7
152.5°	237.1	237.9	242.2	248.4	256.0	264.8	275.9	286.9	298.0	309.6	321.7
155°	245.6	246.2	249.4	255.3	261.3	269.3	278.4	287.6	296.7	305.9	316.0
157.5°	252.7	253.3	255.9	261.0	265.8	272.5	280.2	287.6	294.3	302.0	310.8
160°	257.5	258.0	260.1	264.5	268.7	274.7	281.2	287.6	292.9	299.4	306.9
162.5°	262.2	261.8	264.0	267.5	271.4	276.0	281.5	287.1	291.6	297.3	303.5
165°	267.7	267.1	268.2	271.5	274.1	277.4	282.2	286.0	289.2	292.9	297.7
167.5°	272.2	271.5	272.5	274.6	276.5	278.5	282.1	285.2	286.7	289.2	292.2
170°	275.2	274.1	274.7	276.3	277.4	279.0	281.6	284.4	285.4	287.0	289.2
172.5°	276.9	276.3	276.0	277.6	278.2	279.4	281.3	283.0	283.7	284.5	286.2
175°	279.0	278.4	277.9	279.0	279.0	279.5	280.6	281.6	281.2	281.6	282.2
177.5°	279.9	279.1	278.6	279.5	279.5	279.5	279.9	280.8	279.9	279.5	279.9
180°	279.5	279.5	279.5	279.5	279.5	279.5	279.5	279.5	279.5	279.5	279.5



TEST NUMBER: P331437-830

CATALOG NUMBER: S122DIP-S1005D530U830-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1502.2	1502.2	1502.2	1502.2	1502.2	1502.2	1502.2	1502.2
2.5°	1495.8	1498.4	1501.0	1502.0	1501.5	1501.0	1500.4	1500.0
5°	1485.7	1488.3	1490.8	1491.9	1491.2	1490.5	1489.9	1489.2
7.5°	1469.0	1471.5	1474.1	1475.1	1474.3	1473.7	1472.9	1472.3
10°	1454.0	1456.5	1459.1	1459.9	1459.0	1457.9	1457.0	1456.0
12.5°	1436.2	1438.0	1439.8	1440.4	1439.6	1439.0	1438.2	1437.6
15°	1405.1	1406.5	1407.7	1407.6	1406.0	1404.4	1402.8	1401.2
17.5°	1368.3	1369.8	1371.2	1371.2	1369.6	1368.1	1366.6	1365.0
20°	1339.5	1340.5	1341.4	1341.2	1340.0	1338.7	1337.5	1336.1
22.5°	1309.1	1309.3	1309.5	1309.2	1308.4	1307.7	1306.8	1306.1
25°	1259.4	1260.1	1260.7	1260.7	1260.1	1259.4	1258.8	1258.1
27.5°	1210.6	1209.6	1208.6	1207.4	1205.9	1204.3	1202.8	1201.3
30°	1172.4	1171.5	1170.5	1169.4	1168.1	1166.8	1165.5	1164.2
32.5°	1135.1	1133.3	1131.6	1130.1	1128.8	1127.6	1126.2	1124.9
35°	1075.2	1073.3	1071.3	1069.6	1068.0	1066.4	1064.7	1063.1
37.5°	1015.0	1012.7	1010.3	1008.3	1006.8	1005.2	1003.7	1002.2
40°	973.6	970.7	967.8	965.7	964.4	963.2	961.9	960.5
42.5°	932.6	929.4	926.3	923.9	922.1	920.3	918.5	916.6
45°	869.8	866.2	862.7	860.3	858.9	857.7	856.4	855.2
47.5°	804.4	800.6	796.9	794.1	792.2	790.4	788.5	786.6
50°	762.3	757.9	753.4	750.4	748.8	747.2	745.6	743.9
52.5°	718.9	715.1	711.4	708.5	706.3	704.3	702.1	700.0
55°	653.8	650.0	646.2	643.5	641.9	640.3	638.7	637.0
57.5°	586.4	582.6	578.8	576.3	575.1	573.9	572.7	571.5
60°	541.9	538.3	534.8	532.5	531.6	530.7	529.6	528.7
62.5°	499.6	496.3	493.0	490.8	489.6	488.3	487.1	485.9
65°	434.8	431.9	429.0	426.8	425.2	423.6	422.0	420.4
67.5°	370.8	368.5	366.3	364.5	363.3	361.9	360.7	359.4
70°	329.1	327.0	324.7	322.9	321.6	320.4	319.1	317.8
72.5°	289.9	287.7	285.4	283.8	282.8	281.7	280.7	279.7
75°	228.8	226.8	224.9	224.2	224.9	225.5	226.1	226.8
77.5°	174.0	173.1	172.1	171.2	170.2	169.4	168.4	167.6
80°	138.2	137.2	136.3	135.4	134.8	134.2	133.6	132.9
82.5°	103.0	101.8	100.6	99.9	99.7	99.6	99.5	99.3
85°	54.4	53.4	52.5	51.8	51.6	51.2	50.9	50.5
87.5°	18.1	17.1	16.5	16.1	15.8	15.6	15.4	15.1
90°	17.2	16.1	17.2	17.7	17.7	17.7	17.7	17.7
92.5°	46.8	40.2	35.7	32.3	32.0	30.3	30.6	29.8
95°	140.8	108.0	85.5	73.6	66.6	62.4	60.7	61.3
97.5°	328.7	268.9	210.8	171.9	146.2	133.0	125.2	120.6
100°	490.8	424.1	350.4	285.4	240.8	217.7	202.1	192.5
102.5°	597.0	581.9	528.1	459.1	410.7	371.2	351.8	338.7
105°	653.1	713.8	720.9	703.0	669.8	636.4	613.3	605.8
107.5°	612.7	704.2	760.1	786.1	790.2	788.4	783.8	773.8
110°	577.9	674.0	742.8	786.9	810.0	820.3	825.1	824.5



TEST NUMBER: P331437-830

CATALOG NUMBER: S122DIP-S1005D530U830-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	546.0	638.4	711.9	762.4	794.6	811.6	820.8	823.7
115°	506.9	589.7	660.1	715.5	753.6	778.4	792.3	797.1
117.5°	477.4	550.1	614.0	665.9	704.8	730.9	745.6	749.7
120°	462.8	529.4	586.4	635.4	673.0	698.2	713.8	719.2
122.5°	451.2	512.3	566.2	610.4	644.1	669.0	682.9	687.4
125°	434.3	489.7	537.0	577.3	608.5	628.9	642.3	646.7
127.5°	417.6	467.8	512.4	549.6	576.7	595.9	607.5	611.0
130°	406.9	453.2	495.6	531.0	557.4	575.7	586.4	590.7
132.5°	396.6	439.4	478.4	511.7	537.6	555.9	565.8	569.7
135°	382.2	417.6	453.2	483.2	506.3	524.1	533.8	535.9
137.5°	370.7	400.4	428.5	454.8	475.8	491.1	499.5	502.8
140°	363.4	389.2	413.9	437.5	454.8	468.7	476.7	480.0
142.5°	357.3	379.3	400.6	420.4	436.7	449.4	456.6	457.2
145°	348.8	366.6	383.2	398.9	411.7	420.8	426.2	427.8
147.5°	342.3	356.3	369.3	380.7	391.3	398.6	402.3	403.2
150°	337.5	349.4	360.7	370.3	378.4	384.8	388.0	388.6
152.5°	332.8	343.8	353.4	361.7	368.1	373.7	376.1	376.2
155°	326.3	334.9	342.9	348.8	354.8	358.5	360.7	359.6
157.5°	318.7	325.8	332.6	337.2	341.4	344.6	345.5	345.5
160°	313.9	319.8	325.7	329.5	333.3	335.9	336.5	336.5
162.5°	309.2	314.2	319.3	322.2	325.9	327.8	328.3	327.9
165°	302.1	305.9	309.6	311.8	313.9	316.0	316.0	315.6
167.5°	295.3	298.2	300.8	302.7	303.7	304.9	304.8	304.2
170°	291.9	293.5	295.7	296.7	297.3	298.9	298.3	297.3
172.5°	288.0	289.2	290.9	291.5	292.1	292.8	292.3	291.6
175°	283.8	284.4	284.9	285.4	285.4	286.0	285.4	284.4
177.5°	280.8	280.8	281.3	281.3	281.3	281.3	280.8	279.9
180°	279.5	279.5	279.5	279.5	279.5	279.5	279.5	279.5

(END OF REPORT)