

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331455-830

Luminaire Tested: **S122DIP-S1005D925U830-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331455-830
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-16,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIP-S1005D925U830-4F0-1E-UDD-F4
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1005 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 925 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7230.2 lumens
Efficiency: N/A
Efficacy: 108.2 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 66.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331455-830

CATALOG NUMBER: S122DIP-S1005D925U830-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

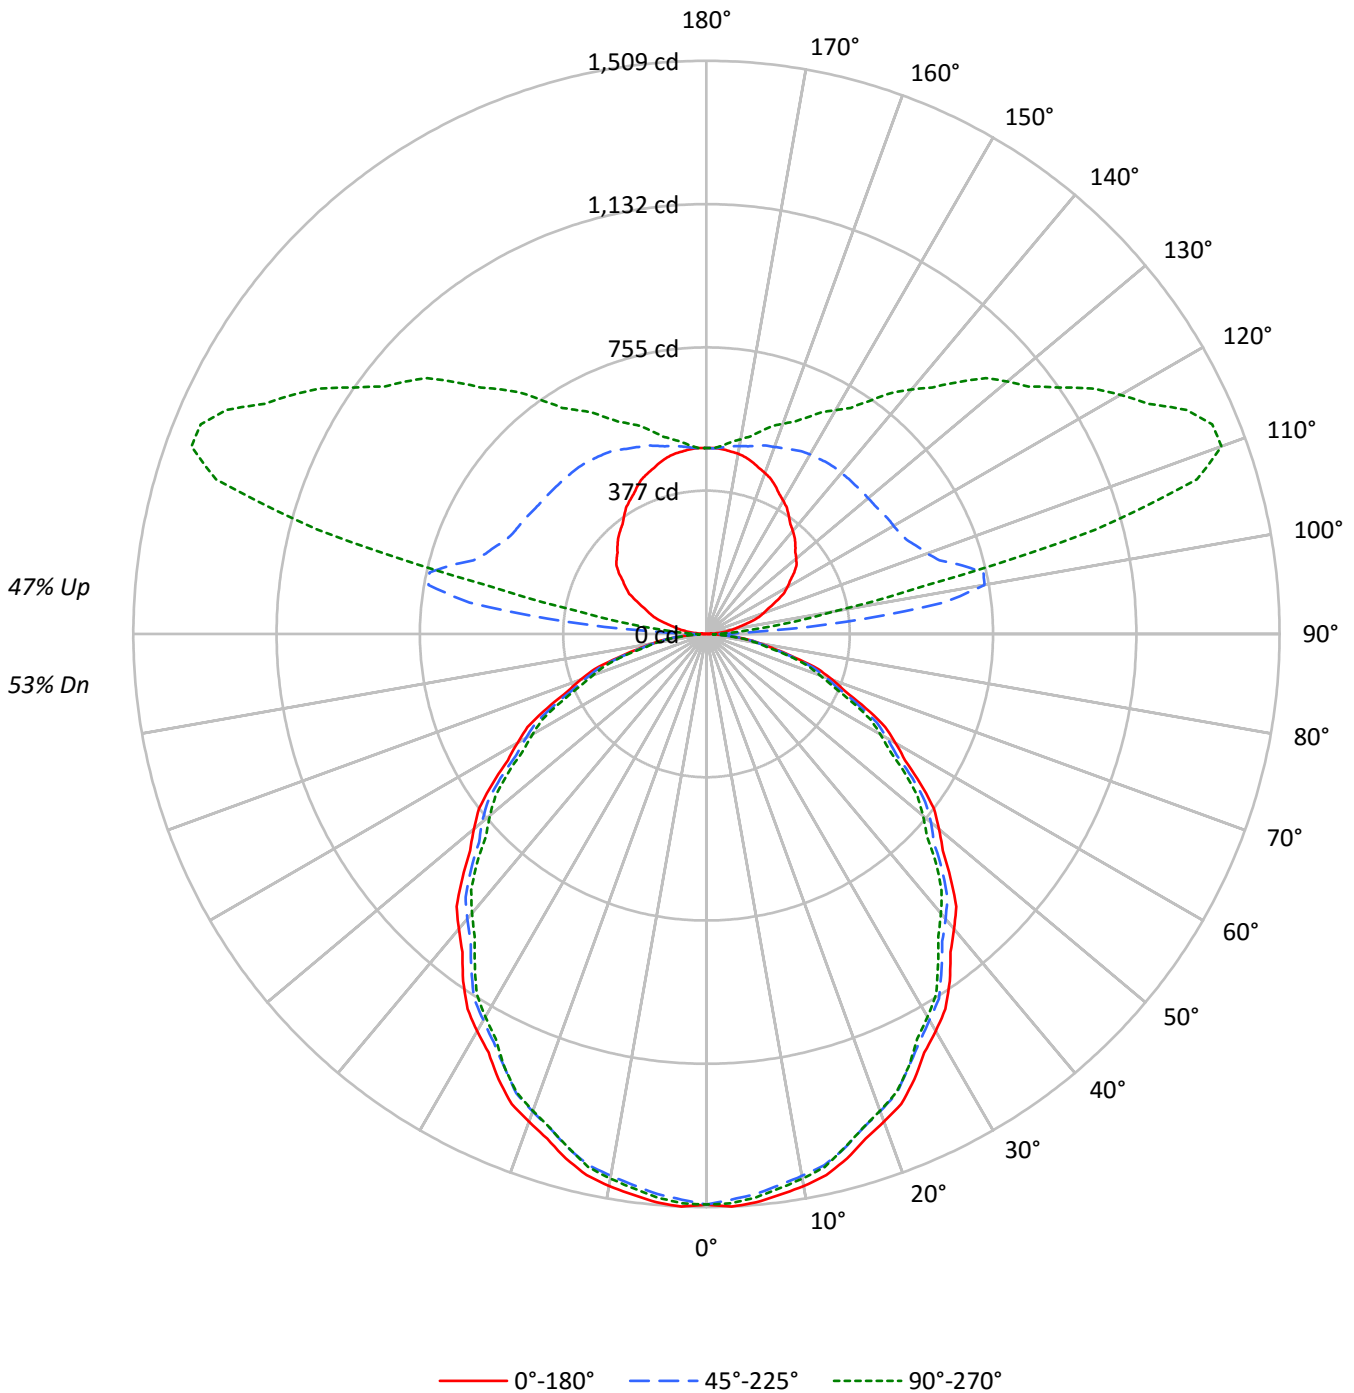



TEST NUMBER: P331455-830

CATALOG NUMBER: S122DIP-S1005D925U830-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	100	100	100	100	85	85	85	71	71	71	59	59	59	53
1	98	94	90	87	91	87	84	81	74	72	70	63	61	59	52	51	50	45
2	90	82	76	71	83	76	71	66	65	61	58	55	52	50	46	44	42	37
3	82	72	65	59	75	67	61	55	58	53	49	49	45	42	41	38	36	32
4	75	64	56	50	69	60	52	47	51	46	41	43	39	36	36	33	31	27
5	69	57	49	43	63	53	46	40	46	40	36	39	35	31	33	29	27	24
6	63	51	43	37	58	48	40	35	41	36	31	35	31	27	30	26	24	21
7	59	46	38	33	54	43	36	31	37	32	28	32	28	24	27	24	21	18
8	54	42	34	29	50	39	32	27	34	29	24	29	25	22	25	21	19	16
9	51	38	31	26	47	36	29	24	31	26	22	27	23	19	23	20	17	15
10	47	35	28	23	44	33	26	22	29	23	20	25	21	18	21	18	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	24254	24254	24254
5°	24347	23995	24136
10°	24202	23753	23871
15°	23903	23445	23422
20°	23479	22983	22957
25°	23058	22413	22413
30°	22514	21893	21705
35°	22007	21268	20954
40°	21372	20643	20244
45°	20747	20021	19527
50°	20065	19376	18686
55°	19356	18624	17931
60°	18564	17725	17073
65°	17712	16829	16061
70°	16636	15753	15002
75°	15140	14504	14148
80°	13436	13036	12357
85°	10967	10448	9355



TEST NUMBER: P331455-830

CATALOG NUMBER: S122DIP-S1005D925U830-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	141.3	2.0
10°-20°	397.5	5.5
20°-30°	584.2	8.1
30°-40°	678.6	9.4
40°-50°	677.9	9.4
50°-60°	591.2	8.2
60°-70°	437.1	6.0
70°-80°	247.6	3.4
80°-90°	71.0	1.0
90°-100°	195.6	2.7
100°-110°	663.7	9.2
110°-120°	705.1	9.8
120°-130°	580.4	8.0
130°-140°	466.1	6.4
140°-150°	352.2	4.9
150°-160°	247.5	3.4
160°-170°	145.7	2.0
170°-180°	47.4	0.7
0°-30°	1123.0	15.5
0°-40°	1801.6	24.9
0°-60°	3070.7	42.5
0°-90°	3826.4	52.9
90°-120°	1564.4	21.6
90°-150°	2963.2	41.0
90°-180°	3404.0	47.1
0°-180°	7230.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1502	1502	1502	1502	1502	
5°	1502	1496	1480	1491	1489	142
15°	1430	1421	1403	1408	1401	402
25°	1294	1282	1258	1261	1258	595
35°	1116	1102	1079	1070	1063	697
45°	909	898	877	862	855	701
55°	688	678	662	645	637	615
65°	464	455	440	428	420	458
75°	243	240	232	225	227	259
85°	59	58	56	52	50	68
90°	1	13	32	31	31	5
95°	33	81	369	139	107	35
105°	115	173	697	1246	1060	122
115°	202	255	583	1204	1395	200
125°	282	334	561	975	1132	251
135°	331	395	554	819	938	256
145°	378	435	551	684	749	237
155°	430	464	535	605	629	198
165°	468	483	513	544	552	132
175°	488	489	493	499	498	46
180°	489	489	489	489	489	



TEST NUMBER: P331455-830

CATALOG NUMBER: S122DIP-S1005D925U830-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1502.2	1502.2	1502.2	1502.2	1502.2	1502.2	1502.2	1502.2	1502.2	1502.2	1502.2
2.5°	1509.2	1507.9	1506.7	1505.3	1504.0	1502.0	1499.2	1496.4	1493.6	1490.7	1493.3
5°	1502.2	1501.0	1499.7	1498.4	1497.1	1494.7	1491.2	1487.6	1484.1	1480.5	1483.2
7.5°	1488.9	1487.0	1485.0	1483.0	1481.0	1478.2	1474.6	1471.0	1467.4	1463.9	1466.4
10°	1476.2	1474.0	1471.8	1469.5	1467.3	1464.2	1460.4	1456.5	1452.6	1448.8	1451.4
12.5°	1459.0	1456.9	1454.9	1452.9	1451.0	1448.0	1444.2	1440.3	1436.5	1432.7	1434.5
15°	1430.0	1428.1	1426.2	1424.3	1422.3	1419.3	1415.1	1410.9	1406.7	1402.6	1403.9
17.5°	1393.1	1391.1	1389.2	1387.2	1385.3	1382.2	1378.0	1373.8	1369.5	1365.4	1366.8
20°	1366.5	1364.5	1362.6	1360.7	1358.8	1355.6	1351.0	1346.6	1342.1	1337.6	1338.5
22.5°	1339.9	1337.2	1334.5	1331.8	1329.1	1325.7	1321.4	1317.2	1313.0	1308.7	1308.9
25°	1294.3	1291.7	1289.1	1286.6	1284.0	1280.0	1274.5	1269.0	1263.6	1258.1	1258.8
27.5°	1242.3	1239.9	1237.7	1235.3	1233.0	1229.7	1225.4	1221.1	1216.8	1212.5	1211.5
30°	1207.6	1205.0	1202.4	1199.9	1197.3	1193.6	1188.8	1184.0	1179.2	1174.3	1173.4
32.5°	1170.6	1168.6	1166.5	1164.4	1162.3	1158.9	1153.8	1148.7	1143.6	1138.5	1136.8
35°	1116.5	1113.3	1110.1	1106.9	1103.7	1099.6	1094.4	1089.3	1084.2	1079.0	1077.1
37.5°	1055.6	1052.8	1050.0	1047.2	1044.3	1040.4	1035.2	1030.1	1024.9	1019.8	1017.4
40°	1014.0	1011.4	1008.9	1006.4	1003.7	999.9	994.8	989.7	984.5	979.4	976.5
42.5°	973.6	971.0	968.5	965.9	963.3	959.4	954.3	949.1	944.1	938.9	935.8
45°	908.6	906.3	904.1	901.8	899.6	896.1	891.3	886.5	881.7	876.8	873.3
47.5°	843.9	841.8	839.6	837.5	835.4	831.8	826.8	821.8	816.8	811.8	808.0
50°	798.8	797.2	795.6	794.0	792.4	789.3	784.9	780.3	775.8	771.4	766.9
52.5°	754.9	752.8	750.6	748.6	746.4	743.2	739.0	734.7	730.6	726.3	722.6
55°	687.6	685.6	683.7	681.8	679.9	676.9	673.2	669.3	665.4	661.6	657.7
57.5°	620.0	618.4	616.9	615.4	613.8	611.0	606.7	602.5	598.2	594.0	590.2
60°	574.9	573.6	572.3	571.1	569.8	566.8	562.4	557.9	553.4	548.9	545.4
62.5°	531.0	529.0	526.9	524.8	522.7	520.0	516.5	513.1	509.6	506.1	502.8
65°	463.6	461.8	459.9	457.9	456.0	453.4	450.2	447.0	443.7	440.5	437.7
67.5°	395.2	393.7	392.1	390.6	389.1	386.8	383.9	381.1	378.1	375.3	373.1
70°	352.4	351.2	349.9	348.6	347.3	345.3	342.3	339.4	336.6	333.7	331.4
72.5°	308.5	307.3	305.9	304.7	303.4	301.8	300.0	298.1	296.2	294.4	292.1
75°	242.7	242.0	241.4	240.7	240.1	238.9	237.3	235.7	234.1	232.5	230.6
77.5°	183.7	182.7	181.5	180.5	179.4	178.5	177.9	177.2	176.5	176.0	174.9
80°	144.5	144.1	143.8	143.5	143.2	142.7	142.0	141.4	140.7	140.2	139.1
82.5°	107.4	107.4	107.4	107.3	107.2	107.0	106.6	106.2	105.8	105.5	104.2
85°	59.2	58.9	58.6	58.2	58.0	57.6	57.3	56.9	56.6	56.4	55.3
87.5°	21.0	21.0	21.3	21.1	21.0	21.0	21.5	22.2	22.9	22.6	21.6
90°	0.9	3.8	7.5	9.4	11.3	14.1	18.9	25.4	31.0	32.0	31.0
92.5°	11.5	16.6	23.4	27.4	33.8	42.7	64.0	93.9	120.6	122.2	103.3
95°	32.9	36.7	46.1	54.6	69.7	92.2	135.4	217.3	326.4	368.7	322.6
97.5°	53.6	58.7	68.7	81.4	98.8	124.3	178.7	292.8	474.1	629.5	660.3
100°	72.4	75.2	83.7	98.8	117.6	143.9	193.8	308.6	511.7	743.1	878.6
102.5°	89.7	91.8	100.3	115.4	134.9	161.3	207.4	309.3	497.5	746.9	959.9
105°	114.8	118.6	125.1	139.2	159.9	186.2	230.5	314.1	469.4	697.0	947.3
107.5°	141.9	144.9	151.3	164.3	184.7	211.3	254.2	327.2	455.4	643.7	864.7
110°	159.9	163.7	169.3	181.5	201.3	228.6	269.9	337.7	452.5	618.0	812.8



TEST NUMBER: P331455-830

CATALOG NUMBER: S122DIP-S1005D925U830-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	176.4	180.2	186.6	198.1	217.1	245.2	285.0	349.0	453.2	601.4	776.7
115°	202.3	207.0	212.6	223.9	242.7	268.1	308.6	365.9	457.1	583.2	731.9
117.5°	228.9	232.7	238.4	248.4	266.4	292.8	330.2	384.0	463.9	574.4	703.6
120°	245.5	249.3	255.0	263.3	282.2	308.6	345.3	396.1	468.4	569.1	688.6
122.5°	261.4	264.3	269.9	279.2	298.0	325.1	359.5	406.5	473.7	566.1	675.8
125°	282.2	285.0	290.7	302.0	320.7	347.1	381.0	423.3	481.6	560.6	657.5
127.5°	298.8	302.6	310.4	322.8	340.9	368.0	401.0	438.9	489.7	557.4	640.6
130°	308.6	312.3	321.7	334.9	353.7	380.0	412.9	448.7	495.8	555.9	629.3
132.5°	317.5	322.1	332.2	346.2	365.7	392.1	423.5	458.5	501.7	555.2	620.3
135°	331.1	334.9	346.2	360.2	381.9	408.2	438.4	471.3	508.9	554.0	607.7
137.5°	343.9	348.5	359.7	374.8	396.2	420.7	450.4	481.1	515.3	553.8	598.8
140°	353.7	357.5	368.7	383.8	404.5	429.0	457.1	486.4	518.3	553.1	593.6
142.5°	363.4	366.5	377.0	392.1	412.0	435.0	462.4	490.9	520.6	553.1	588.3
145°	378.1	381.9	391.3	405.5	424.2	445.0	470.3	496.7	523.0	551.2	581.4
147.5°	394.0	396.8	405.8	418.8	434.4	452.9	476.7	499.9	523.8	547.9	574.2
150°	404.5	407.3	414.8	427.1	441.2	458.1	479.8	501.3	523.0	545.6	568.2
152.5°	415.0	416.3	423.9	434.6	448.0	463.4	482.8	502.1	521.5	541.9	562.9
155°	429.9	430.8	436.5	446.9	457.1	471.3	487.3	503.2	519.2	535.3	553.1
157.5°	442.3	443.3	447.8	456.8	465.1	476.9	490.5	503.2	514.9	528.5	543.9
160°	450.6	451.6	455.2	462.8	470.3	480.7	492.0	503.2	512.6	524.0	537.2
162.5°	458.8	458.3	462.0	468.1	474.9	483.0	492.8	502.5	510.4	520.2	531.1
165°	468.4	467.5	469.4	475.0	479.8	485.4	493.9	500.5	506.1	512.6	521.1
167.5°	476.4	475.2	476.9	480.5	483.9	487.5	493.7	499.2	501.7	506.1	511.3
170°	481.6	479.8	480.7	483.5	485.4	488.2	492.9	497.7	499.5	502.3	506.1
172.5°	484.7	483.5	483.0	485.8	486.9	489.0	492.2	495.4	496.5	497.9	500.9
175°	488.2	487.3	486.4	488.2	488.2	489.2	491.1	492.9	492.0	492.9	493.9
177.5°	489.9	488.4	487.7	489.2	489.2	489.2	489.9	491.4	489.9	489.2	489.9
180°	489.2	489.2	489.2	489.2	489.2	489.2	489.2	489.2	489.2	489.2	489.2



TEST NUMBER: P331455-830

CATALOG NUMBER: S122DIP-S1005D925U830-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1502.2	1502.2	1502.2	1502.2	1502.2	1502.2	1502.2	1502.2
2.5°	1495.8	1498.4	1501.0	1502.0	1501.5	1501.0	1500.4	1500.0
5°	1485.7	1488.3	1490.8	1491.9	1491.2	1490.5	1489.9	1489.2
7.5°	1469.0	1471.5	1474.1	1475.1	1474.3	1473.7	1472.9	1472.3
10°	1454.0	1456.5	1459.1	1459.9	1459.0	1457.9	1457.0	1456.0
12.5°	1436.2	1438.0	1439.8	1440.4	1439.6	1439.0	1438.2	1437.6
15°	1405.1	1406.5	1407.7	1407.6	1406.0	1404.4	1402.8	1401.2
17.5°	1368.3	1369.8	1371.2	1371.2	1369.6	1368.1	1366.6	1365.0
20°	1339.5	1340.5	1341.4	1341.2	1340.0	1338.7	1337.5	1336.1
22.5°	1309.1	1309.3	1309.5	1309.2	1308.4	1307.7	1306.8	1306.1
25°	1259.4	1260.1	1260.7	1260.7	1260.1	1259.4	1258.8	1258.1
27.5°	1210.6	1209.6	1208.6	1207.4	1205.9	1204.3	1202.8	1201.3
30°	1172.4	1171.5	1170.5	1169.4	1168.1	1166.8	1165.5	1164.2
32.5°	1135.1	1133.3	1131.6	1130.1	1128.8	1127.6	1126.2	1124.9
35°	1075.2	1073.3	1071.3	1069.6	1068.0	1066.4	1064.7	1063.1
37.5°	1015.0	1012.7	1010.3	1008.3	1006.8	1005.2	1003.7	1002.2
40°	973.6	970.7	967.8	965.7	964.4	963.2	961.9	960.5
42.5°	932.6	929.4	926.3	923.9	922.1	920.3	918.5	916.6
45°	869.8	866.2	862.7	860.3	858.9	857.7	856.4	855.2
47.5°	804.4	800.6	796.9	794.1	792.2	790.4	788.5	786.6
50°	762.3	757.9	753.4	750.4	748.8	747.2	745.6	743.9
52.5°	718.9	715.1	711.4	708.5	706.3	704.3	702.1	700.0
55°	653.8	650.0	646.2	643.5	641.9	640.3	638.7	637.0
57.5°	586.4	582.6	578.8	576.3	575.1	573.9	572.7	571.5
60°	541.9	538.3	534.8	532.5	531.6	530.7	529.6	528.7
62.5°	499.6	496.3	493.0	490.8	489.6	488.3	487.1	485.9
65°	434.8	431.9	429.0	426.8	425.2	423.6	422.0	420.4
67.5°	370.8	368.5	366.3	364.5	363.3	361.9	360.7	359.4
70°	329.1	327.0	324.7	322.9	321.6	320.4	319.1	317.8
72.5°	289.9	287.7	285.4	283.8	282.8	281.7	280.7	279.7
75°	228.8	226.8	224.9	224.2	224.9	225.5	226.1	226.8
77.5°	174.0	173.1	172.1	171.2	170.2	169.4	168.4	167.6
80°	138.2	137.2	136.3	135.4	134.8	134.2	133.6	132.9
82.5°	103.0	101.8	100.6	99.9	99.7	99.6	99.5	99.3
85°	54.4	53.4	52.5	51.8	51.6	51.2	50.9	50.5
87.5°	20.6	19.5	19.1	18.8	18.6	18.3	18.0	17.7
90°	30.1	28.2	30.1	31.0	31.0	31.0	31.0	31.0
92.5°	82.0	70.4	62.5	56.6	55.9	52.9	53.6	52.1
95°	246.5	189.1	149.6	128.8	116.7	109.1	106.3	107.3
97.5°	575.1	470.5	368.7	300.9	255.9	232.7	219.0	211.1
100°	858.8	742.2	613.3	499.5	421.4	381.0	353.7	336.8
102.5°	1044.7	1018.4	924.2	803.5	718.7	649.6	615.6	592.7
105°	1142.9	1249.2	1261.5	1230.4	1172.1	1113.8	1073.3	1060.2
107.5°	1072.2	1232.3	1330.1	1375.6	1383.0	1379.8	1371.7	1354.2
110°	1011.3	1179.6	1300.0	1377.1	1417.6	1435.5	1444.0	1443.0



TEST NUMBER: P331455-830

CATALOG NUMBER: S122DIP-S1005D925U830-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	955.5	1117.2	1245.9	1334.3	1390.5	1420.4	1436.4	1441.5
115°	887.0	1031.9	1155.2	1252.1	1318.8	1362.1	1386.6	1395.1
117.5°	835.5	962.7	1074.4	1165.4	1233.4	1279.1	1305.0	1312.0
120°	809.9	926.6	1026.2	1111.9	1177.7	1221.9	1249.2	1258.7
122.5°	789.6	896.5	990.9	1068.3	1127.3	1170.7	1195.0	1203.0
125°	760.1	857.0	939.7	1010.3	1064.9	1100.6	1124.1	1131.6
127.5°	730.9	818.6	896.6	961.8	1009.4	1042.8	1063.2	1069.2
130°	712.1	793.0	867.3	929.4	975.5	1007.5	1026.2	1033.8
132.5°	694.0	768.9	837.2	895.5	940.8	972.9	990.1	996.9
135°	668.8	730.9	793.0	845.6	886.1	917.2	934.1	937.8
137.5°	648.7	700.6	749.9	795.8	832.7	859.4	874.3	880.0
140°	635.9	681.1	724.3	765.7	795.8	820.3	834.4	840.0
142.5°	625.4	663.7	701.0	735.7	764.2	786.5	799.0	800.1
145°	610.5	641.6	670.7	698.0	720.6	736.6	745.9	748.8
147.5°	599.0	623.5	646.2	666.2	684.9	697.6	704.0	705.7
150°	590.8	611.4	631.2	648.1	662.2	673.5	679.2	680.1
152.5°	582.5	601.6	618.4	633.1	644.1	653.9	658.1	658.3
155°	571.0	586.1	600.1	610.5	620.9	627.5	631.2	629.3
157.5°	557.6	570.2	582.1	590.2	597.5	602.9	604.6	604.6
160°	549.3	559.7	570.0	576.6	583.2	588.0	588.9	588.9
162.5°	541.1	549.9	558.7	563.8	570.4	573.6	574.6	573.8
165°	528.7	535.3	541.9	545.6	549.3	553.1	553.1	552.1
167.5°	516.8	521.9	526.4	529.8	531.5	533.6	533.4	532.3
170°	510.8	513.6	517.4	519.2	520.2	523.0	522.1	520.2
172.5°	504.0	506.1	509.1	510.2	511.1	512.5	511.5	510.4
175°	496.7	497.7	498.6	499.5	499.5	500.5	499.5	497.7
177.5°	491.4	491.4	492.2	492.2	492.2	492.2	491.4	489.9
180°	489.2	489.2	489.2	489.2	489.2	489.2	489.2	489.2

(END OF REPORT)