

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331280-830

Luminaire Tested: **S122DIP-S290D1080U830-4F0-1E-UDD-D1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P331280-830  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S122DIP-S290D1080U830-4F0-1E-UDD-D1  
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 290 LUMENS PER FOOT, DROP SATIN WHITE DIFFUSER  
UPLIGHT 1080 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4760.0 lumens  
Efficiency: N/A  
Efficacy: 112.8 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.31 / 1.42  
Luminous Opening: Rectangular w/ Sides (W: 0.17' x L: 4' x H: 0.08')  
CIE Type: Semi-Indirect


Input Watts (W): 42.2  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331280-830

CATALOG NUMBER: S122DIP-S290D1080U830-4F0-1E-UDD-D1

### Luminous Intensity Polar Plot

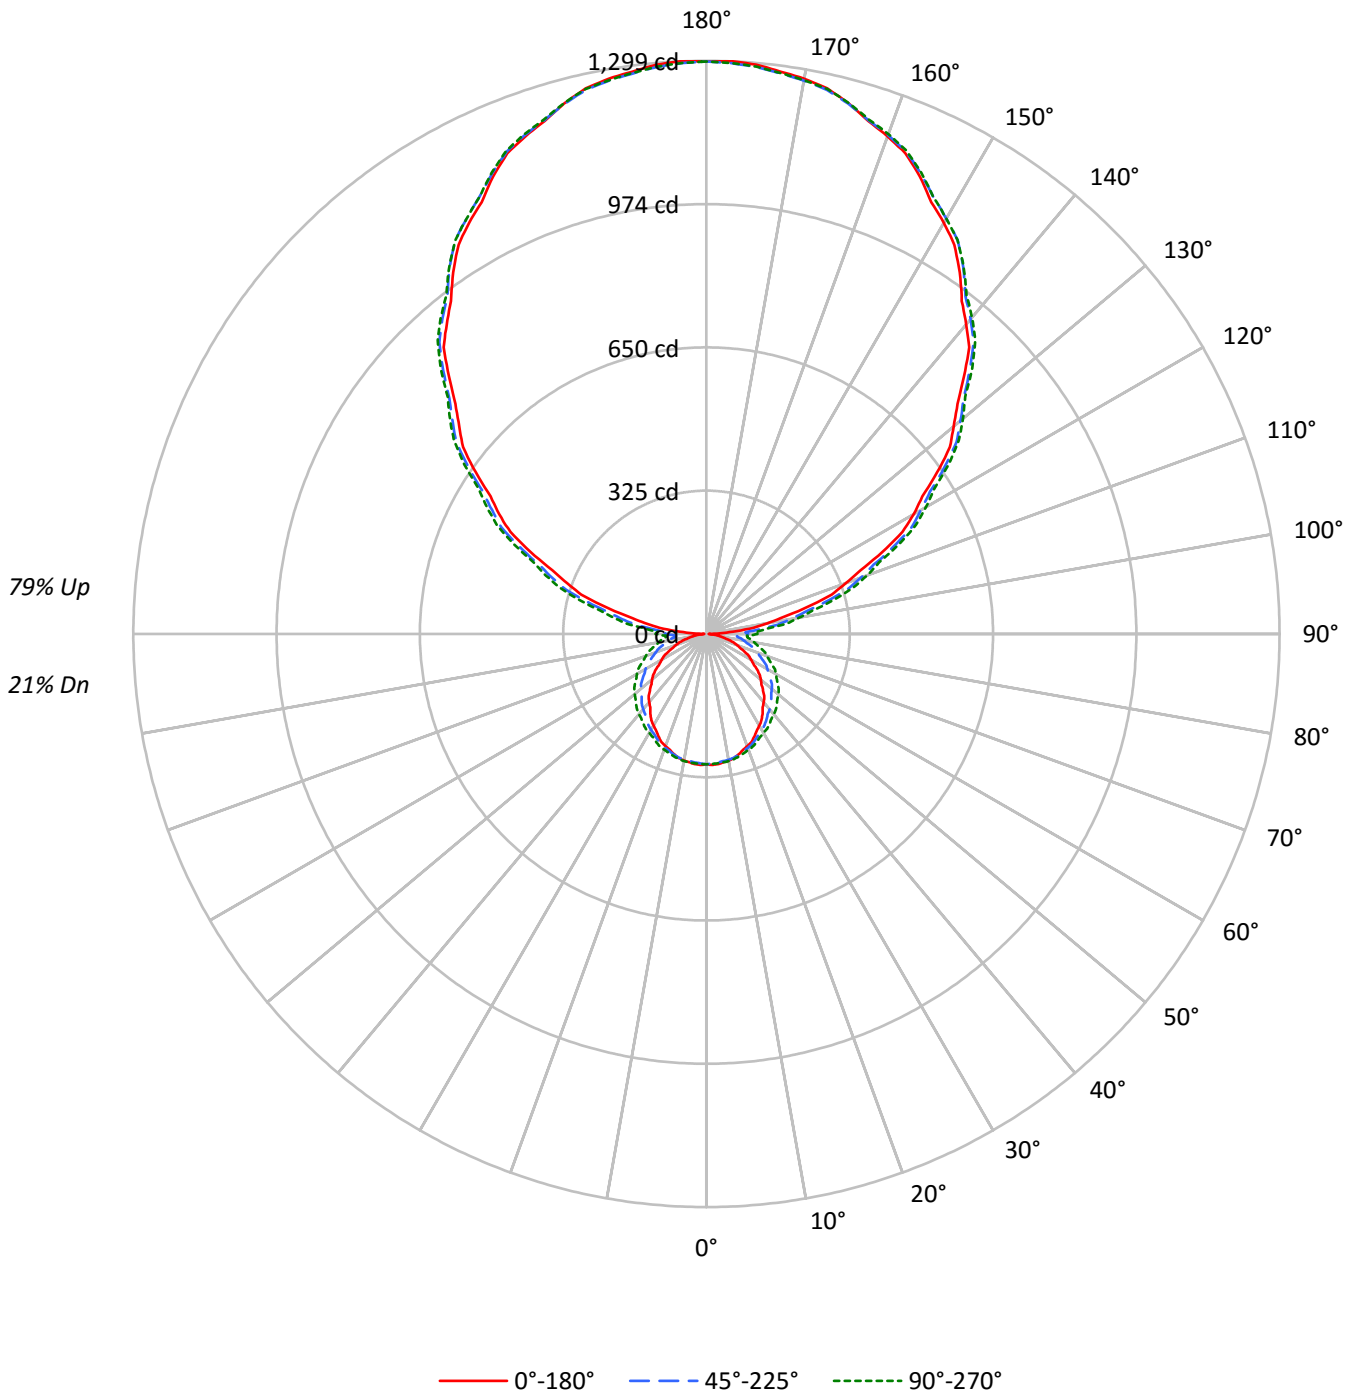



TEST NUMBER: P331280-830

CATALOG NUMBER: S122DIP-S290D1080U830-4F0-1E-UDD-D1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	100	100	100	100	89	89	89	89	67	67	67	48	48	48	30	30	30	21				
1	91	86	82	79	80	76	73	70	58	56	54	41	39	38	25	24	24	16				
2	82	75	69	64	72	66	61	57	50	47	44	35	33	31	22	20	19	13				
3	75	66	58	53	66	58	52	47	44	40	36	31	28	26	19	17	16	11				
4	68	58	50	44	60	51	45	40	39	34	31	27	24	22	17	15	14	9				
5	62	51	43	37	55	45	39	34	35	30	26	24	21	19	15	13	12	8				
6	57	46	38	32	50	41	34	29	31	26	23	22	19	16	14	12	10	7				
7	53	41	33	28	46	36	30	25	28	23	20	20	17	14	12	10	9	6				
8	49	37	29	24	43	33	26	22	25	21	17	18	15	13	11	9	8	5				
9	45	34	26	21	40	30	24	19	23	18	15	16	13	11	10	9	7	5				
10	42	31	24	19	37	27	21	17	21	17	14	15	12	10	10	8	6	4				

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	4771	4771	4771
5°	4794	4593	4573
10°	4763	4457	4407
15°	4698	4312	4229
20°	4614	4159	4059
25°	4533	4009	3902
30°	4418	3857	3747
35°	4301	3711	3638
40°	4178	3584	3528
45°	4060	3473	3434
50°	3936	3371	3343
55°	3802	3261	3248
60°	3643	3149	3150
65°	3474	3016	3031
70°	3286	2872	2904
75°	3050	2735	2786
80°	2669	2592	2667
85°	2319	2468	2574



TEST NUMBER: P331280-830

CATALOG NUMBER: S122DIP-S290D1080U830-4F0-1E-UDD-D1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	28.0	0.6
10°-20°	80.3	1.7
20°-30°	121.6	2.6
30°-40°	148.2	3.1
40°-50°	159.4	3.3
50°-60°	154.8	3.3
60°-70°	135.2	2.8
70°-80°	104.1	2.2
80°-90°	75.0	1.6
90°-100°	130.3	2.7
100°-110°	290.5	6.1
110°-120°	459.7	9.7
120°-130°	586.9	12.3
130°-140°	649.6	13.6
140°-150°	632.6	13.3
150°-160°	529.8	11.1
160°-170°	351.4	7.4
170°-180°	122.8	2.6
0°-30°	229.9	4.8
0°-40°	378.1	7.9
0°-60°	692.3	14.5
0°-90°	1006.5	21.1
90°-120°	880.4	18.5
90°-150°	2749.5	57.8
90°-180°	3753.0	78.8
0°-180°	4760.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	296	296	296	296	296	
5°	296	295	292	295	294	28
15°	283	283	283	287	287	80
25°	257	260	264	269	270	118
35°	221	229	237	246	249	138
45°	182	193	208	221	226	140
55°	139	155	177	192	198	124
65°	95	116	141	158	164	94
75°	53	77	104	122	128	56
85°	16	42	69	87	93	17
90°	5	44	95	109	116	6
95°	60	91	119	135	139	68
105°	238	254	278	294	300	251
115°	440	451	468	479	481	435
125°	638	648	658	666	669	570
135°	825	837	843	851	851	637
145°	1001	1008	1015	1018	1016	625
155°	1144	1147	1151	1156	1153	526
165°	1245	1244	1244	1251	1246	351
175°	1295	1292	1290	1297	1291	123
180°	1297	1297	1297	1297	1297	



TEST NUMBER: P331280-830

CATALOG NUMBER: S122DIP-S290D1080U830-4F0-1E-UDD-D1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	295.5	295.5	295.5	295.5	295.5	295.5	295.5	295.5	295.5	295.5	295.5
2.5°	297.2	296.9	296.7	296.4	296.2	295.9	295.3	294.8	294.3	293.7	294.1
5°	296.3	296.1	295.8	295.5	295.1	294.7	294.2	293.6	293.0	292.5	293.0
7.5°	293.6	293.4	293.2	293.0	292.8	292.6	292.1	291.7	291.2	290.8	291.5
10°	291.6	291.4	291.2	291.1	290.9	290.6	290.3	290.0	289.7	289.5	290.2
12.5°	288.1	288.2	288.2	288.3	288.3	288.2	288.0	287.9	287.6	287.4	288.1
15°	282.6	282.8	283.0	283.1	283.3	283.4	283.4	283.4	283.4	283.4	284.3
17.5°	275.4	275.8	276.2	276.6	277.0	277.4	277.7	278.0	278.2	278.6	279.5
20°	270.6	271.1	271.5	272.0	272.5	273.0	273.3	273.7	274.1	274.5	275.5
22.5°	265.5	266.0	266.6	267.1	267.7	268.2	268.7	269.3	269.8	270.3	271.4
25°	256.9	257.6	258.3	258.9	259.6	260.3	261.2	262.0	262.9	263.7	264.9
27.5°	246.7	247.7	248.8	249.9	251.0	252.0	253.0	254.0	255.1	256.1	257.5
30°	239.8	241.0	242.2	243.5	244.7	246.0	247.2	248.5	249.7	250.9	252.4
32.5°	232.2	233.7	235.0	236.4	237.8	239.2	240.7	242.1	243.6	245.1	246.9
35°	221.4	223.0	224.6	226.2	227.8	229.5	231.4	233.2	235.0	236.8	238.8
37.5°	209.5	211.4	213.3	215.2	217.0	219.1	221.5	223.8	226.1	228.5	230.8
40°	201.7	203.8	205.9	207.9	210.0	212.4	214.9	217.5	220.1	222.6	225.1
42.5°	194.2	196.2	198.3	200.4	202.6	205.0	208.0	210.9	213.9	216.8	219.5
45°	181.5	184.1	186.7	189.3	191.8	194.7	198.1	201.4	204.7	208.1	211.0
47.5°	169.1	171.9	174.7	177.5	180.3	183.7	187.6	191.4	195.4	199.3	202.4
50°	160.6	163.5	166.5	169.4	172.4	176.0	180.3	184.5	188.8	193.1	196.3
52.5°	152.3	155.4	158.5	161.6	164.8	168.5	173.1	177.6	182.1	186.6	189.9
55°	139.1	142.6	146.0	149.4	152.9	157.0	162.0	166.9	171.9	176.8	180.3
57.5°	126.1	130.0	133.8	137.7	141.6	146.0	151.1	156.1	161.2	166.3	169.9
60°	116.9	121.0	125.1	129.1	133.3	138.0	143.5	148.8	154.3	159.7	163.3
62.5°	108.7	112.9	117.2	121.4	125.6	130.4	135.9	141.3	146.8	152.2	156.0
65°	95.0	99.7	104.3	109.1	113.7	118.9	124.4	130.1	135.7	141.3	145.2
67.5°	82.6	87.5	92.3	97.2	102.1	107.4	113.1	118.9	124.6	130.4	134.3
70°	73.6	78.6	83.5	88.5	93.4	98.9	104.7	110.7	116.6	122.4	126.6
72.5°	65.4	70.5	75.6	80.7	85.9	91.3	97.4	103.3	109.3	115.3	119.3
75°	52.7	58.0	63.3	68.6	74.0	79.6	85.8	91.9	97.9	104.1	108.1
77.5°	40.3	45.9	51.5	57.0	62.7	68.5	74.7	80.9	87.1	93.2	97.4
80°	32.1	37.9	43.7	49.5	55.3	61.4	67.5	73.7	79.8	86.1	90.0
82.5°	25.3	31.0	36.8	42.4	48.2	54.2	60.4	66.7	73.0	79.2	83.2
85°	15.5	21.3	27.2	33.1	39.0	45.0	51.1	57.2	63.2	69.4	73.3
87.5°	8.6	14.9	21.1	27.3	33.6	40.3	47.5	54.7	61.8	69.0	72.8
90°	5.4	13.9	22.2	30.7	39.1	49.1	60.5	71.9	83.4	94.8	98.1
92.5°	23.5	30.7	38.0	45.2	52.5	59.8	66.8	74.0	81.2	88.2	92.1
95°	60.3	67.3	74.2	81.1	87.9	94.5	100.8	106.9	113.1	119.3	122.9
97.5°	107.0	113.1	119.2	125.4	131.5	137.7	144.1	150.5	156.9	163.3	166.9
100°	142.0	147.5	153.0	158.4	163.9	169.7	175.7	181.8	187.8	193.9	197.5
102.5°	178.5	183.2	188.0	192.8	197.6	203.0	209.2	215.2	221.3	227.4	231.0
105°	237.5	241.0	244.5	248.0	251.5	256.0	261.4	266.8	272.3	277.7	281.5
107.5°	297.5	300.8	304.0	307.3	310.6	314.5	319.3	324.0	328.8	333.5	336.9
110°	335.6	339.0	342.3	345.7	349.1	353.1	357.8	362.4	367.1	371.7	374.8



TEST NUMBER: P331280-830

CATALOG NUMBER: S122DIP-S290D1080U830-4F0-1E-UDD-D1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	377.7	380.7	383.8	386.8	389.9	393.6	397.8	402.1	406.2	410.5	413.0
115°	439.7	442.1	444.7	447.1	449.7	452.8	456.7	460.4	464.2	468.0	470.6
117.5°	501.0	503.6	506.2	508.9	511.5	514.2	516.7	519.3	521.9	524.5	526.7
120°	542.2	544.5	546.8	549.1	551.5	553.6	555.4	557.2	559.1	561.0	563.6
122.5°	579.8	582.3	584.8	587.3	589.7	592.1	594.3	596.5	598.7	601.0	602.9
125°	638.1	640.3	642.4	644.6	646.8	649.0	651.4	653.7	656.0	658.4	660.2
127.5°	695.2	697.9	700.6	703.2	706.0	708.0	709.6	711.2	712.8	714.4	715.9
130°	731.1	734.1	737.3	740.3	743.4	745.6	747.2	748.7	750.2	751.7	753.6
132.5°	771.4	773.9	776.4	778.8	781.4	783.4	785.0	786.6	788.3	789.9	791.1
135°	824.8	827.6	830.2	832.8	835.6	837.6	839.1	840.5	841.9	843.4	845.1
137.5°	881.6	883.7	885.9	888.1	890.2	891.8	892.9	893.9	895.0	896.1	897.6
140°	915.7	917.8	919.9	922.0	924.1	925.9	927.3	928.7	930.1	931.5	933.0
142.5°	950.7	952.8	955.0	957.1	959.1	960.6	961.5	962.3	963.2	964.0	965.4
145°	1000.7	1002.4	1004.1	1005.8	1007.5	1009.1	1010.5	1012.0	1013.4	1014.9	1015.8
147.5°	1045.6	1047.6	1049.6	1051.7	1053.8	1055.3	1056.2	1057.2	1058.2	1059.1	1059.8
150°	1076.2	1077.7	1079.1	1080.6	1082.0	1083.3	1084.3	1085.2	1086.2	1087.2	1087.9
152.5°	1103.3	1104.8	1106.3	1107.8	1109.2	1110.5	1111.7	1112.9	1114.1	1115.2	1116.2
155°	1144.2	1144.8	1145.6	1146.3	1147.1	1147.7	1148.5	1149.2	1150.0	1150.7	1151.9
157.5°	1178.9	1179.4	1179.9	1180.3	1180.9	1181.3	1181.8	1182.2	1182.6	1183.1	1184.8
160°	1200.0	1200.4	1200.9	1201.4	1201.9	1202.2	1202.5	1202.8	1203.0	1203.2	1204.7
162.5°	1219.2	1219.3	1219.4	1219.5	1219.7	1219.7	1220.0	1220.2	1220.5	1220.8	1222.4
165°	1244.8	1244.6	1244.3	1244.1	1243.9	1243.8	1243.8	1243.8	1243.8	1243.8	1245.5
167.5°	1266.3	1265.6	1264.8	1264.1	1263.4	1263.0	1262.9	1262.9	1262.8	1262.8	1264.5
170°	1277.7	1277.0	1276.2	1275.4	1274.8	1274.3	1274.0	1273.8	1273.6	1273.3	1275.0
172.5°	1285.5	1284.9	1284.1	1283.4	1282.6	1282.1	1282.0	1281.7	1281.4	1281.2	1282.9
175°	1295.2	1294.5	1293.7	1293.0	1292.3	1291.7	1291.2	1290.7	1290.2	1289.7	1291.5
177.5°	1299.1	1298.5	1298.0	1297.4	1296.8	1296.3	1295.9	1295.5	1295.1	1294.8	1295.9
180°	1297.4	1297.4	1297.4	1297.4	1297.4	1297.4	1297.4	1297.4	1297.4	1297.4	1297.4



TEST NUMBER: P331280-830

CATALOG NUMBER: S122DIP-S290D1080U830-4F0-1E-UDD-D1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	295.5	295.5	295.5	295.5	295.5	295.5	295.5	295.5
2.5°	294.5	294.8	295.2	295.4	295.2	295.0	294.9	294.7
5°	293.6	294.2	294.7	294.9	294.8	294.7	294.6	294.5
7.5°	292.2	292.8	293.6	293.9	293.8	293.7	293.6	293.5
10°	291.0	291.7	292.5	292.8	292.8	292.7	292.6	292.5
12.5°	288.9	289.6	290.4	290.8	290.7	290.6	290.5	290.4
15°	285.1	286.1	286.9	287.3	287.2	287.1	287.0	286.9
17.5°	280.4	281.3	282.1	282.6	282.6	282.6	282.6	282.6
20°	276.5	277.6	278.6	279.2	279.2	279.2	279.2	279.2
22.5°	272.5	273.5	274.6	275.1	275.3	275.4	275.6	275.8
25°	266.1	267.2	268.3	269.0	269.3	269.6	269.8	270.1
27.5°	258.9	260.4	261.8	262.7	262.9	263.1	263.3	263.5
30°	253.9	255.5	257.0	257.9	258.2	258.4	258.7	259.0
32.5°	248.5	250.3	252.1	253.3	253.7	254.3	254.8	255.2
35°	241.0	243.1	245.2	246.6	247.2	247.9	248.5	249.2
37.5°	233.1	235.4	237.8	239.3	240.0	240.7	241.4	242.0
40°	227.6	230.1	232.5	234.2	235.1	235.9	236.8	237.6
42.5°	222.3	224.9	227.6	229.4	230.3	231.1	232.0	232.8
45°	214.0	217.0	219.9	221.9	222.8	223.8	224.7	225.6
47.5°	205.5	208.5	211.6	213.7	214.7	215.7	216.8	217.8
50°	199.5	202.8	206.0	208.2	209.2	210.3	211.3	212.4
52.5°	193.2	196.5	199.8	202.1	203.2	204.3	205.5	206.5
55°	183.7	187.1	190.6	192.8	194.1	195.4	196.6	197.8
57.5°	173.6	177.3	181.0	183.4	184.7	186.0	187.2	188.5
60°	166.9	170.6	174.2	176.6	178.0	179.3	180.7	182.0
62.5°	159.9	163.7	167.6	170.1	171.4	172.6	173.9	175.1
65°	149.1	153.0	156.9	159.5	160.7	161.9	163.2	164.4
67.5°	138.2	142.1	146.1	148.7	150.0	151.3	152.6	153.9
70°	130.6	134.7	138.8	141.5	142.6	143.7	144.9	146.0
72.5°	123.3	127.3	131.3	134.0	135.3	136.8	138.2	139.5
75°	112.3	116.3	120.5	123.1	124.3	125.5	126.8	128.0
77.5°	101.4	105.5	109.5	112.3	113.6	114.9	116.2	117.5
80°	94.1	98.0	102.1	104.7	106.0	107.4	108.7	110.0
82.5°	87.2	91.2	95.2	97.8	99.1	100.4	101.6	102.8
85°	77.4	81.3	85.4	88.0	89.4	90.7	92.0	93.3
87.5°	76.5	80.3	84.1	86.6	87.9	89.2	90.5	91.7
90°	101.5	104.8	108.1	110.5	111.9	113.2	114.6	116.0
92.5°	96.0	99.7	103.6	106.0	107.3	108.5	109.6	110.8
95°	126.6	130.2	133.7	135.9	136.6	137.2	137.9	138.6
97.5°	170.4	173.9	177.5	179.7	180.8	181.9	182.9	184.1
100°	201.0	204.4	208.0	210.2	210.9	211.8	212.5	213.4
102.5°	234.7	238.4	242.0	244.2	245.0	245.8	246.6	247.4
105°	285.3	289.2	292.9	295.4	296.4	297.5	298.5	299.5
107.5°	340.3	343.7	347.0	348.7	348.6	348.6	348.6	348.5
110°	377.9	380.9	383.9	385.6	386.0	386.3	386.5	386.9





TEST NUMBER: P331280-830

CATALOG NUMBER: S122DIP-S290D1080U830-4F0-1E-UDD-D1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	415.5	417.9	420.4	421.9	422.4	422.9	423.4	423.9
115°	473.3	475.8	478.4	479.9	480.2	480.5	480.9	481.2
117.5°	529.0	531.2	533.4	534.7	534.9	535.2	535.4	535.6
120°	566.3	569.0	571.7	573.2	573.4	573.7	574.1	574.4
122.5°	605.0	607.0	609.0	610.2	610.5	610.9	611.2	611.6
125°	662.0	663.8	665.7	666.9	667.5	668.2	668.7	669.4
127.5°	717.4	718.8	720.3	721.0	721.1	721.2	721.2	721.3
130°	755.4	757.1	758.9	759.7	759.5	759.3	759.0	758.8
132.5°	792.2	793.3	794.5	795.0	795.0	795.0	795.0	795.0
135°	846.9	848.7	850.4	851.3	851.3	851.3	851.4	851.4
137.5°	899.2	900.7	902.3	902.9	902.6	902.2	901.9	901.6
140°	934.5	936.0	937.5	938.1	937.7	937.4	936.9	936.5
142.5°	966.9	968.3	969.7	970.2	969.7	969.2	968.7	968.3
145°	1016.5	1017.4	1018.1	1018.3	1017.9	1017.4	1016.8	1016.3
147.5°	1060.4	1061.0	1061.6	1061.6	1060.8	1060.2	1059.4	1058.8
150°	1088.6	1089.4	1090.1	1090.1	1089.4	1088.6	1087.9	1087.2
152.5°	1117.1	1117.9	1118.9	1118.9	1117.9	1117.1	1116.2	1115.2
155°	1153.1	1154.3	1155.6	1155.7	1155.1	1154.3	1153.6	1152.8
157.5°	1186.4	1188.1	1189.7	1190.0	1188.7	1187.6	1186.5	1185.2
160°	1206.2	1207.6	1209.1	1209.3	1208.3	1207.4	1206.4	1205.4
162.5°	1224.1	1225.7	1227.4	1227.6	1226.4	1225.3	1224.1	1222.9
165°	1247.2	1248.9	1250.6	1250.8	1249.6	1248.4	1247.2	1245.9
167.5°	1266.2	1267.9	1269.6	1269.8	1268.6	1267.2	1266.0	1264.8
170°	1276.7	1278.4	1280.1	1280.3	1278.7	1277.3	1275.8	1274.4
172.5°	1284.6	1286.3	1288.0	1288.1	1286.7	1285.2	1283.7	1282.2
175°	1293.2	1294.9	1296.6	1296.7	1295.2	1293.7	1292.3	1290.8
177.5°	1297.1	1298.3	1299.4	1299.4	1298.3	1297.1	1295.9	1294.8
180°	1297.4	1297.4	1297.4	1297.4	1297.4	1297.4	1297.4	1297.4

(END OF REPORT)