

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331372-830

Luminaire Tested: **S122DIP-S675D1080U830-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331372-830
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIP-S675D1080U830-4F0-1E-UDD-F
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 675 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1080 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6607.3 lumens
Efficiency: N/A
Efficacy: 116.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 56.9
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331372-830

CATALOG NUMBER: S122DIP-S675D1080U830-4F0-1E-UDD-F

Luminous Intensity Polar Plot

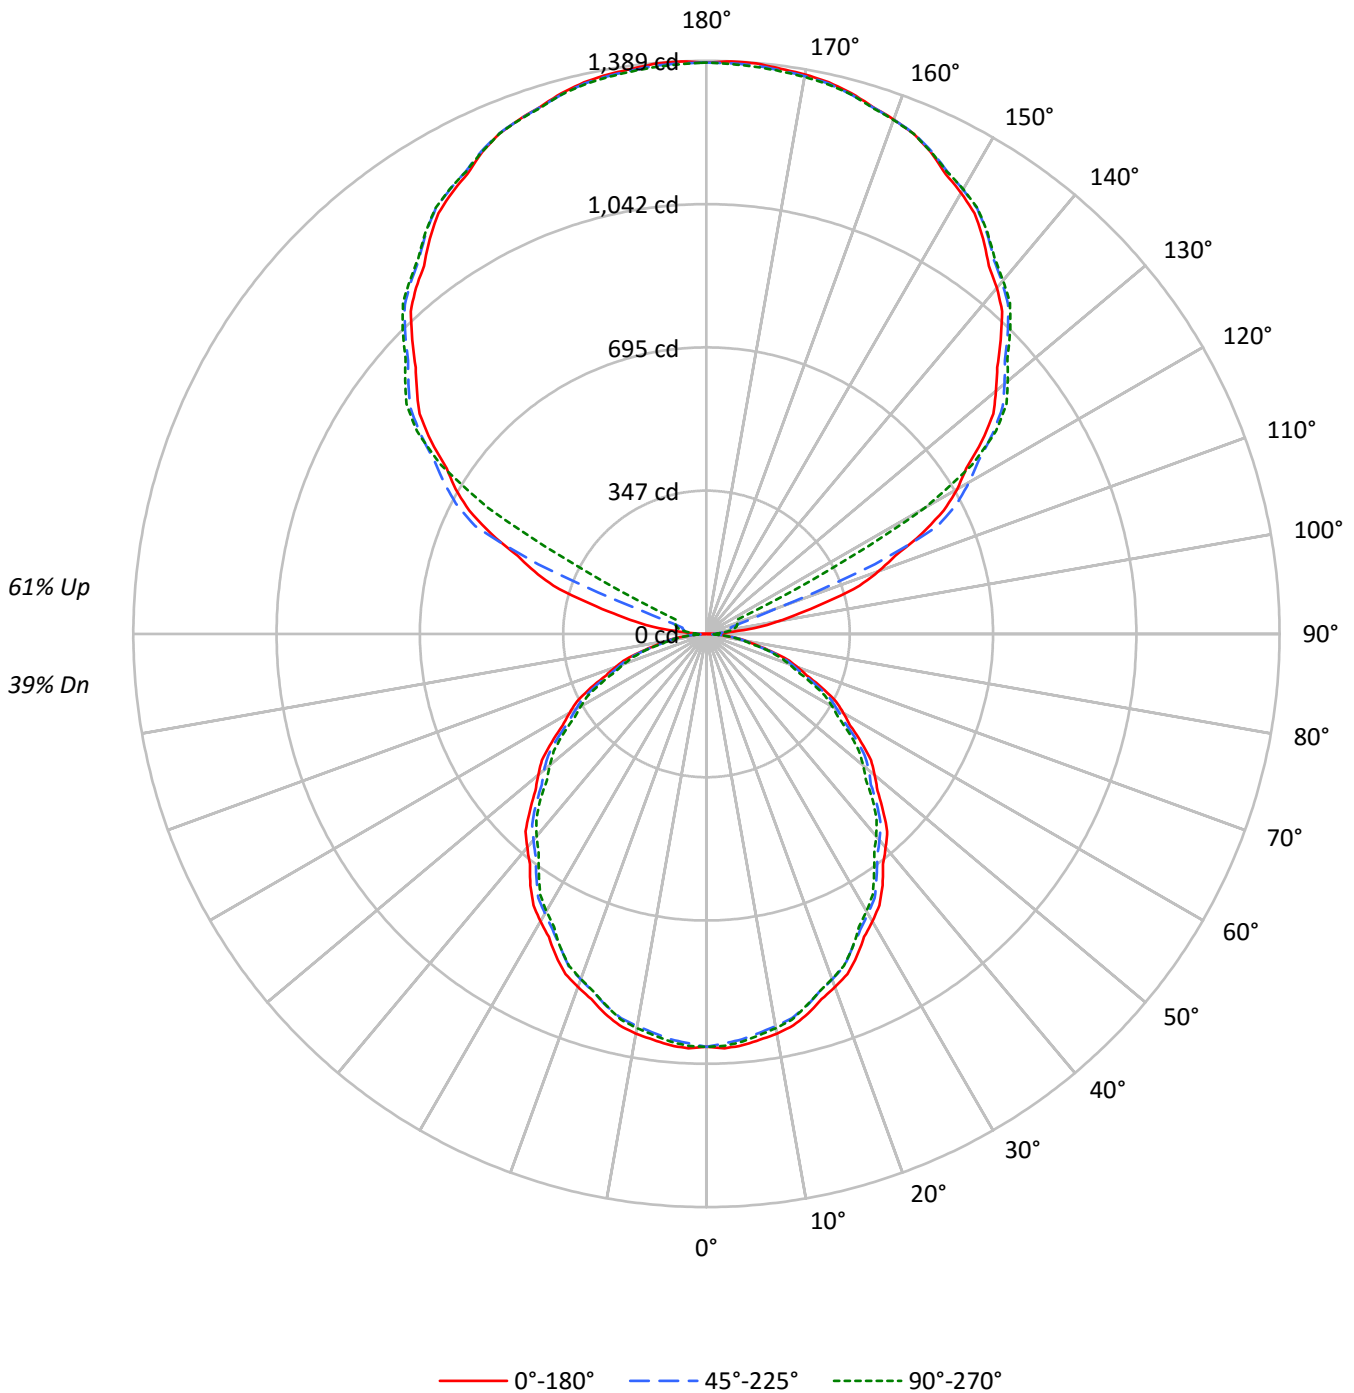



TEST NUMBER: P331372-830

CATALOG NUMBER: S122DIP-S675D1080U830-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	104	104	104	104	95	95	95	95	77	77	77	61	61	61	46	46	46	39
1	95	91	87	84	86	83	80	77	67	65	63	53	52	50	40	39	38	32
2	87	79	73	68	78	72	67	63	59	55	52	47	44	42	35	34	32	27
3	79	70	63	57	72	64	57	52	52	48	44	41	38	36	31	29	28	23
4	72	62	54	48	65	56	50	44	46	41	37	37	33	30	28	26	24	20
5	66	55	47	41	60	50	43	38	41	36	32	33	29	26	25	23	21	17
6	61	49	41	35	55	45	38	33	37	32	28	30	26	23	23	20	18	15
7	56	44	36	31	51	41	34	29	34	28	25	27	23	20	21	18	16	13
8	52	40	33	27	47	37	30	25	31	25	22	25	21	18	19	16	14	12
9	49	37	29	24	44	34	27	23	28	23	19	23	19	16	18	15	13	11
10	45	33	26	22	41	31	25	20	26	21	17	21	17	15	16	14	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	16157	16157	16157
5°	16219	15985	16078
10°	16123	15823	15901
15°	15921	15616	15600
20°	15639	15309	15292
25°	15358	14931	14931
30°	14997	14585	14458
35°	14661	14168	13957
40°	14235	13748	13487
45°	13819	13337	13006
50°	13366	12906	12446
55°	12892	12405	11944
60°	12368	11806	11370
65°	11801	11213	10697
70°	11084	10494	9994
75°	10081	9669	9426
80°	8945	8675	8229
85°	7317	6947	6224



TEST NUMBER: P331372-830

CATALOG NUMBER: S122DIP-S675D1080U830-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	94.1	1.4
10°-20°	264.8	4.0
20°-30°	389.2	5.9
30°-40°	452.1	6.8
40°-50°	451.6	6.8
50°-60°	393.8	6.0
60°-70°	291.2	4.4
70°-80°	164.9	2.5
80°-90°	47.8	0.7
90°-100°	46.2	0.7
100°-110°	169.4	2.6
110°-120°	452.8	6.9
120°-130°	747.4	11.3
130°-140°	794.9	12.0
140°-150°	738.8	11.2
150°-160°	594.0	9.0
160°-170°	382.8	5.8
170°-180°	131.8	2.0
0°-30°	748.0	11.3
0°-40°	1200.1	18.2
0°-60°	2045.4	31.0
0°-90°	2549.3	38.6
90°-120°	668.4	10.1
90°-150°	2949.4	44.6
90°-180°	4058.0	61.4
0°-180°	6607.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1001	1001	1001	1001	1001	
5°	1001	996	986	993	992	95
15°	952	946	934	938	933	268
25°	862	854	838	840	838	396
35°	744	734	719	713	708	464
45°	605	598	584	574	570	467
55°	458	452	441	430	424	409
65°	309	303	294	285	280	305
75°	162	160	155	150	151	173
85°	40	38	38	35	34	45
90°	1	12	20	25	27	5
95°	65	34	39	44	43	80
105°	305	318	61	72	76	325
115°	576	594	618	176	82	567
125°	815	828	847	853	857	726
135°	1008	1024	1033	1042	1041	778
145°	1169	1169	1185	1192	1187	731
155°	1288	1280	1290	1296	1288	593
165°	1357	1351	1354	1360	1354	383
175°	1388	1381	1383	1389	1380	132
180°	1385	1385	1385	1385	1385	



TEST NUMBER: P331372-830

CATALOG NUMBER: S122DIP-S675D1080U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1000.7	1000.7	1000.7	1000.7	1000.7	1000.7	1000.7	1000.7	1000.7	1000.7	1000.7
2.5°	1005.3	1004.5	1003.6	1002.8	1001.9	1000.5	998.6	996.7	994.9	993.0	994.7
5°	1000.7	999.8	999.0	998.2	997.3	995.7	993.3	991.0	988.6	986.3	988.0
7.5°	991.8	990.5	989.2	987.9	986.6	984.7	982.3	979.9	977.5	975.1	976.8
10°	983.4	981.8	980.3	978.8	977.4	975.3	972.8	970.3	967.6	965.1	966.8
12.5°	971.9	970.5	969.1	967.8	966.5	964.6	962.0	959.4	956.9	954.3	955.5
15°	952.5	951.3	950.0	948.8	947.4	945.4	942.6	939.8	937.1	934.2	935.2
17.5°	927.9	926.6	925.4	924.1	922.8	920.8	917.9	915.1	912.3	909.5	910.5
20°	910.2	909.0	907.7	906.3	905.1	903.0	899.9	897.0	894.0	891.0	891.6
22.5°	892.5	890.7	888.9	887.1	885.3	883.1	880.2	877.4	874.6	871.8	871.9
25°	862.1	860.4	858.8	857.0	855.3	852.6	848.9	845.4	841.7	838.1	838.5
27.5°	827.5	826.0	824.4	822.8	821.3	819.2	816.2	813.4	810.5	807.7	807.0
30°	804.4	802.7	801.0	799.3	797.6	795.1	791.9	788.7	785.5	782.3	781.7
32.5°	779.8	778.4	777.0	775.6	774.3	771.9	768.5	765.2	761.8	758.4	757.2
35°	743.8	741.7	739.5	737.4	735.2	732.4	729.1	725.6	722.2	718.8	717.5
37.5°	703.1	701.3	699.4	697.5	695.7	693.0	689.6	686.2	682.8	679.3	677.7
40°	675.4	673.7	672.0	670.3	668.6	666.1	662.6	659.2	655.8	652.3	650.4
42.5°	648.6	646.8	645.1	643.4	641.7	639.1	635.7	632.3	628.9	625.5	623.3
45°	605.2	603.7	602.2	600.8	599.3	596.9	593.7	590.5	587.3	584.1	581.7
47.5°	562.1	560.7	559.3	557.9	556.5	554.1	550.7	547.4	544.1	540.7	538.3
50°	532.1	531.0	530.0	528.9	527.8	525.8	522.8	519.8	516.8	513.8	510.9
52.5°	502.8	501.4	500.0	498.6	497.2	495.1	492.3	489.5	486.6	483.8	481.4
55°	458.0	456.8	455.4	454.1	452.9	450.9	448.4	445.8	443.3	440.7	438.1
57.5°	412.9	412.0	410.9	409.9	408.9	407.0	404.2	401.3	398.5	395.7	393.1
60°	383.0	382.1	381.3	380.4	379.6	377.6	374.7	371.6	368.6	365.6	363.3
62.5°	353.7	352.3	351.0	349.6	348.3	346.4	344.1	341.8	339.5	337.1	335.0
65°	308.9	307.6	306.3	305.0	303.7	302.0	299.9	297.7	295.6	293.5	291.5
67.5°	263.3	262.2	261.2	260.1	259.1	257.7	255.7	253.8	251.9	250.0	248.5
70°	234.8	233.9	233.1	232.2	231.4	230.0	228.0	226.1	224.2	222.3	220.7
72.5°	205.6	204.6	203.8	202.9	202.1	201.0	199.8	198.6	197.4	196.0	194.6
75°	161.6	161.2	160.8	160.3	159.9	159.2	158.2	157.0	156.0	155.0	153.6
77.5°	122.4	121.7	120.9	120.2	119.5	118.9	118.5	118.0	117.6	117.2	116.6
80°	96.2	96.0	95.8	95.6	95.4	95.0	94.6	94.2	93.8	93.3	92.7
82.5°	71.6	71.5	71.5	71.4	71.4	71.3	71.0	70.8	70.5	70.2	69.5
85°	39.5	39.2	39.0	38.8	38.5	38.4	38.2	38.0	37.7	37.5	36.9
87.5°	14.0	14.2	14.3	14.5	14.6	14.7	14.7	14.8	14.8	14.8	14.5
90°	1.0	3.5	5.9	8.4	10.8	12.9	14.7	16.5	18.3	20.1	21.1
92.5°	20.3	20.0	19.8	19.6	19.3	19.7	20.5	21.5	22.3	23.3	23.8
95°	65.1	57.8	50.4	43.1	35.7	32.8	34.4	36.0	37.5	39.1	40.2
97.5°	129.2	108.6	87.8	67.1	46.5	37.9	41.5	45.1	48.7	52.3	53.2
100°	177.4	146.8	116.3	85.9	55.3	41.9	45.7	49.6	53.3	57.1	58.9
102.5°	230.3	223.8	217.4	210.8	204.4	185.4	153.7	122.1	90.4	58.7	61.1
105°	304.6	311.3	317.9	324.6	331.3	304.3	243.5	182.7	121.9	61.1	63.5
107.5°	389.4	394.7	400.1	405.5	410.9	377.2	304.3	231.4	158.4	85.6	83.0
110°	443.8	448.6	453.3	457.9	462.6	432.7	368.3	304.1	239.7	175.3	153.1



TEST NUMBER: P331372-830

CATALOG NUMBER: S122DIP-S675D1080U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	495.2	499.4	503.4	507.6	511.7	505.9	489.9	474.1	458.2	442.2	361.1
115°	576.2	579.9	583.7	587.5	591.3	596.0	601.5	607.1	612.7	618.2	515.1
117.5°	648.5	652.7	657.0	661.2	665.4	669.4	673.3	677.1	680.9	684.8	659.8
120°	701.3	704.7	708.0	711.4	714.7	718.4	722.5	726.4	730.5	734.4	737.1
122.5°	746.3	749.8	753.3	756.9	760.3	764.3	768.6	773.0	777.4	781.7	783.3
125°	814.6	817.5	820.4	823.3	826.1	829.7	834.0	838.2	842.4	846.7	848.2
127.5°	876.6	879.8	883.0	886.2	889.4	892.5	895.7	898.8	902.0	905.2	907.5
130°	915.8	919.4	922.9	926.5	930.0	933.0	935.5	937.9	940.4	942.8	945.3
132.5°	955.8	958.9	962.0	965.0	968.0	970.7	973.2	975.6	978.1	980.5	982.6
135°	1008.0	1011.5	1015.1	1018.7	1022.2	1025.0	1027.0	1029.0	1031.0	1033.0	1035.3
137.5°	1060.6	1063.2	1065.6	1068.2	1070.6	1073.0	1075.3	1077.6	1079.9	1082.1	1084.3
140°	1095.1	1096.9	1098.7	1100.5	1102.3	1104.4	1106.8	1109.3	1111.7	1114.2	1116.2
142.5°	1124.0	1125.6	1127.2	1128.8	1130.4	1132.7	1135.4	1138.2	1141.0	1143.9	1145.7
145°	1169.3	1169.0	1168.8	1168.7	1168.4	1170.2	1173.9	1177.7	1181.6	1185.3	1186.8
147.5°	1208.8	1208.0	1207.1	1206.3	1205.4	1206.8	1210.6	1214.3	1218.0	1221.8	1222.9
150°	1234.4	1232.8	1231.3	1229.7	1228.2	1229.2	1232.8	1236.3	1239.9	1243.4	1244.8
152.5°	1256.0	1254.3	1252.5	1250.8	1249.2	1249.9	1253.3	1256.7	1260.1	1263.5	1264.8
155°	1287.5	1285.5	1283.6	1281.5	1279.5	1279.9	1282.5	1285.2	1287.9	1290.5	1291.8
157.5°	1312.2	1310.5	1308.8	1307.1	1305.4	1305.5	1307.4	1309.2	1311.1	1313.0	1314.5
160°	1326.6	1325.3	1323.9	1322.6	1321.3	1321.3	1322.6	1323.9	1325.3	1326.6	1327.9
162.5°	1339.4	1338.1	1336.7	1335.4	1334.1	1334.0	1335.1	1336.3	1337.5	1338.6	1340.1
165°	1356.7	1355.3	1354.0	1352.6	1351.3	1350.9	1351.6	1352.4	1353.0	1353.7	1355.2
167.5°	1369.5	1368.2	1366.8	1365.5	1364.1	1363.8	1364.4	1365.0	1365.6	1366.3	1367.8
170°	1376.7	1375.4	1374.0	1372.7	1371.4	1370.9	1371.4	1371.8	1372.2	1372.7	1374.2
172.5°	1381.5	1380.2	1378.8	1377.5	1376.2	1375.7	1376.2	1376.6	1377.1	1377.5	1379.0
175°	1387.7	1386.2	1384.6	1383.1	1381.5	1380.9	1381.4	1381.9	1382.2	1382.7	1384.3
177.5°	1388.7	1387.5	1386.2	1385.0	1383.7	1383.2	1383.4	1383.6	1383.7	1383.9	1385.2
180°	1384.7	1384.7	1384.7	1384.7	1384.7	1384.7	1384.7	1384.7	1384.7	1384.7	1384.7



TEST NUMBER: P331372-830

CATALOG NUMBER: S122DIP-S675D1080U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1000.7	1000.7	1000.7	1000.7	1000.7	1000.7	1000.7	1000.7
2.5°	996.4	998.2	999.8	1000.5	1000.1	999.8	999.5	999.2
5°	989.7	991.4	993.1	993.7	993.3	992.9	992.5	992.0
7.5°	978.5	980.2	981.9	982.5	982.0	981.7	981.2	980.7
10°	968.5	970.3	971.9	972.4	971.9	971.2	970.5	969.9
12.5°	956.7	957.9	959.1	959.4	958.9	958.6	958.1	957.6
15°	936.0	936.9	937.7	937.6	936.5	935.5	934.4	933.3
17.5°	911.4	912.4	913.4	913.4	912.4	911.3	910.3	909.3
20°	892.3	893.0	893.5	893.4	892.6	891.7	890.9	890.0
22.5°	872.0	872.1	872.2	872.0	871.6	871.0	870.5	870.1
25°	839.0	839.3	839.8	839.8	839.3	839.0	838.5	838.1
27.5°	806.3	805.8	805.1	804.3	803.2	802.2	801.2	800.1
30°	781.0	780.3	779.7	778.9	778.1	777.2	776.4	775.5
32.5°	756.1	755.0	753.8	752.8	752.0	751.1	750.2	749.3
35°	716.2	714.9	713.6	712.5	711.4	710.3	709.3	708.1
37.5°	676.2	674.6	673.0	671.7	670.6	669.6	668.6	667.6
40°	648.6	646.6	644.7	643.3	642.4	641.6	640.7	639.9
42.5°	621.2	619.2	617.1	615.4	614.2	613.0	611.8	610.6
45°	579.4	577.0	574.7	573.1	572.2	571.4	570.5	569.6
47.5°	535.8	533.3	530.8	529.0	527.7	526.5	525.3	524.1
50°	507.8	504.8	501.8	499.8	498.7	497.7	496.6	495.5
52.5°	478.8	476.4	473.9	471.9	470.5	469.1	467.7	466.3
55°	435.5	433.0	430.5	428.6	427.5	426.5	425.4	424.3
57.5°	390.6	388.0	385.6	383.9	383.0	382.3	381.4	380.6
60°	360.9	358.5	356.2	354.8	354.1	353.5	352.8	352.1
62.5°	332.8	330.6	328.5	327.0	326.1	325.3	324.5	323.7
65°	289.6	287.7	285.8	284.3	283.2	282.1	281.1	280.0
67.5°	246.9	245.5	244.0	242.8	242.0	241.1	240.3	239.4
70°	219.2	217.8	216.3	215.1	214.2	213.4	212.5	211.7
72.5°	193.1	191.6	190.1	189.0	188.3	187.7	187.0	186.2
75°	152.3	151.1	149.8	149.4	149.8	150.2	150.6	151.1
77.5°	115.9	115.3	114.6	114.0	113.4	112.8	112.3	111.6
80°	92.1	91.4	90.8	90.2	89.8	89.4	89.0	88.5
82.5°	68.6	67.8	67.0	66.5	66.4	66.4	66.3	66.2
85°	36.3	35.6	35.0	34.5	34.3	34.1	33.9	33.6
87.5°	14.2	13.9	13.7	13.5	13.4	13.3	13.2	13.1
90°	22.2	23.4	24.5	25.3	25.7	26.2	26.6	27.1
92.5°	24.4	25.0	25.5	26.0	26.3	26.5	26.8	27.1
95°	41.3	42.4	43.5	44.0	43.7	43.5	43.3	43.1
97.5°	54.1	55.0	55.9	56.5	56.7	57.0	57.2	57.5
100°	60.7	62.5	64.3	65.3	65.8	66.3	66.7	67.1
102.5°	63.3	65.7	68.0	69.5	70.0	70.7	71.4	71.9
105°	66.0	68.4	70.9	72.6	73.5	74.4	75.2	76.2
107.5°	80.6	78.0	75.6	74.8	75.7	76.5	77.5	78.3
110°	130.8	108.6	86.2	75.6	76.4	77.4	78.2	79.2



TEST NUMBER: P331372-830

CATALOG NUMBER: S122DIP-S675D1080U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	279.8	198.6	117.3	77.1	77.9	78.5	79.3	79.9
115°	412.0	309.0	205.9	146.3	130.3	114.2	98.2	82.2
117.5°	634.9	609.9	585.0	546.2	493.5	440.8	388.1	335.5
120°	739.8	742.4	745.2	731.4	701.3	671.3	641.2	611.2
122.5°	784.9	786.6	788.2	786.0	780.2	774.4	768.5	762.7
125°	849.8	851.3	852.9	854.0	854.7	855.4	856.0	856.7
127.5°	909.7	912.0	914.3	915.5	915.6	915.8	915.9	916.0
130°	947.7	950.2	952.6	953.8	953.6	953.3	953.1	952.9
132.5°	984.7	986.8	988.9	989.9	989.6	989.4	989.2	988.9
135°	1037.5	1039.7	1041.9	1042.8	1042.4	1041.9	1041.5	1041.0
137.5°	1086.5	1088.6	1090.8	1091.6	1090.8	1090.1	1089.3	1088.5
140°	1118.2	1120.2	1122.2	1122.7	1121.5	1120.4	1119.3	1118.2
142.5°	1147.5	1149.3	1151.1	1151.5	1150.4	1149.2	1148.2	1147.1
145°	1188.5	1190.0	1191.6	1191.8	1190.7	1189.6	1188.5	1187.3
147.5°	1224.1	1225.3	1226.4	1226.5	1225.6	1224.6	1223.7	1222.8
150°	1246.1	1247.5	1248.8	1248.9	1247.7	1246.7	1245.6	1244.4
152.5°	1266.1	1267.5	1268.9	1268.8	1267.2	1265.8	1264.3	1262.9
155°	1293.2	1294.6	1295.9	1295.6	1293.8	1292.1	1290.3	1288.5
157.5°	1316.0	1317.5	1319.0	1318.9	1317.2	1315.4	1313.7	1311.9
160°	1329.3	1330.6	1331.9	1331.8	1330.3	1328.7	1327.2	1325.6
162.5°	1341.6	1343.1	1344.7	1344.4	1342.6	1340.7	1338.7	1336.8
165°	1356.8	1358.3	1359.9	1359.9	1358.3	1356.8	1355.2	1353.7
167.5°	1369.4	1370.9	1372.5	1372.2	1370.3	1368.3	1366.3	1364.2
170°	1375.8	1377.3	1378.9	1378.7	1376.7	1374.7	1372.7	1370.6
172.5°	1380.6	1382.1	1383.7	1383.6	1381.5	1379.5	1377.5	1375.5
175°	1385.8	1387.4	1388.9	1388.6	1386.4	1384.1	1382.0	1379.7
177.5°	1386.4	1387.6	1388.9	1388.7	1387.1	1385.5	1383.9	1382.3
180°	1384.7	1384.7	1384.7	1384.7	1384.7	1384.7	1384.7	1384.7

(END OF REPORT)