

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331764-830

Luminaire Tested: **S122RDIP-S1005D1080U830-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331764-830
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-16,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122RDIP-S1005D1080U830-4F0-1E-UDD-F4
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1005 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1080 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7250.0 lumens
Efficiency: N/A
Efficacy: 101.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 71.7
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331764-830
CATALOG NUMBER: S122RDIP-S1005D1080U830-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

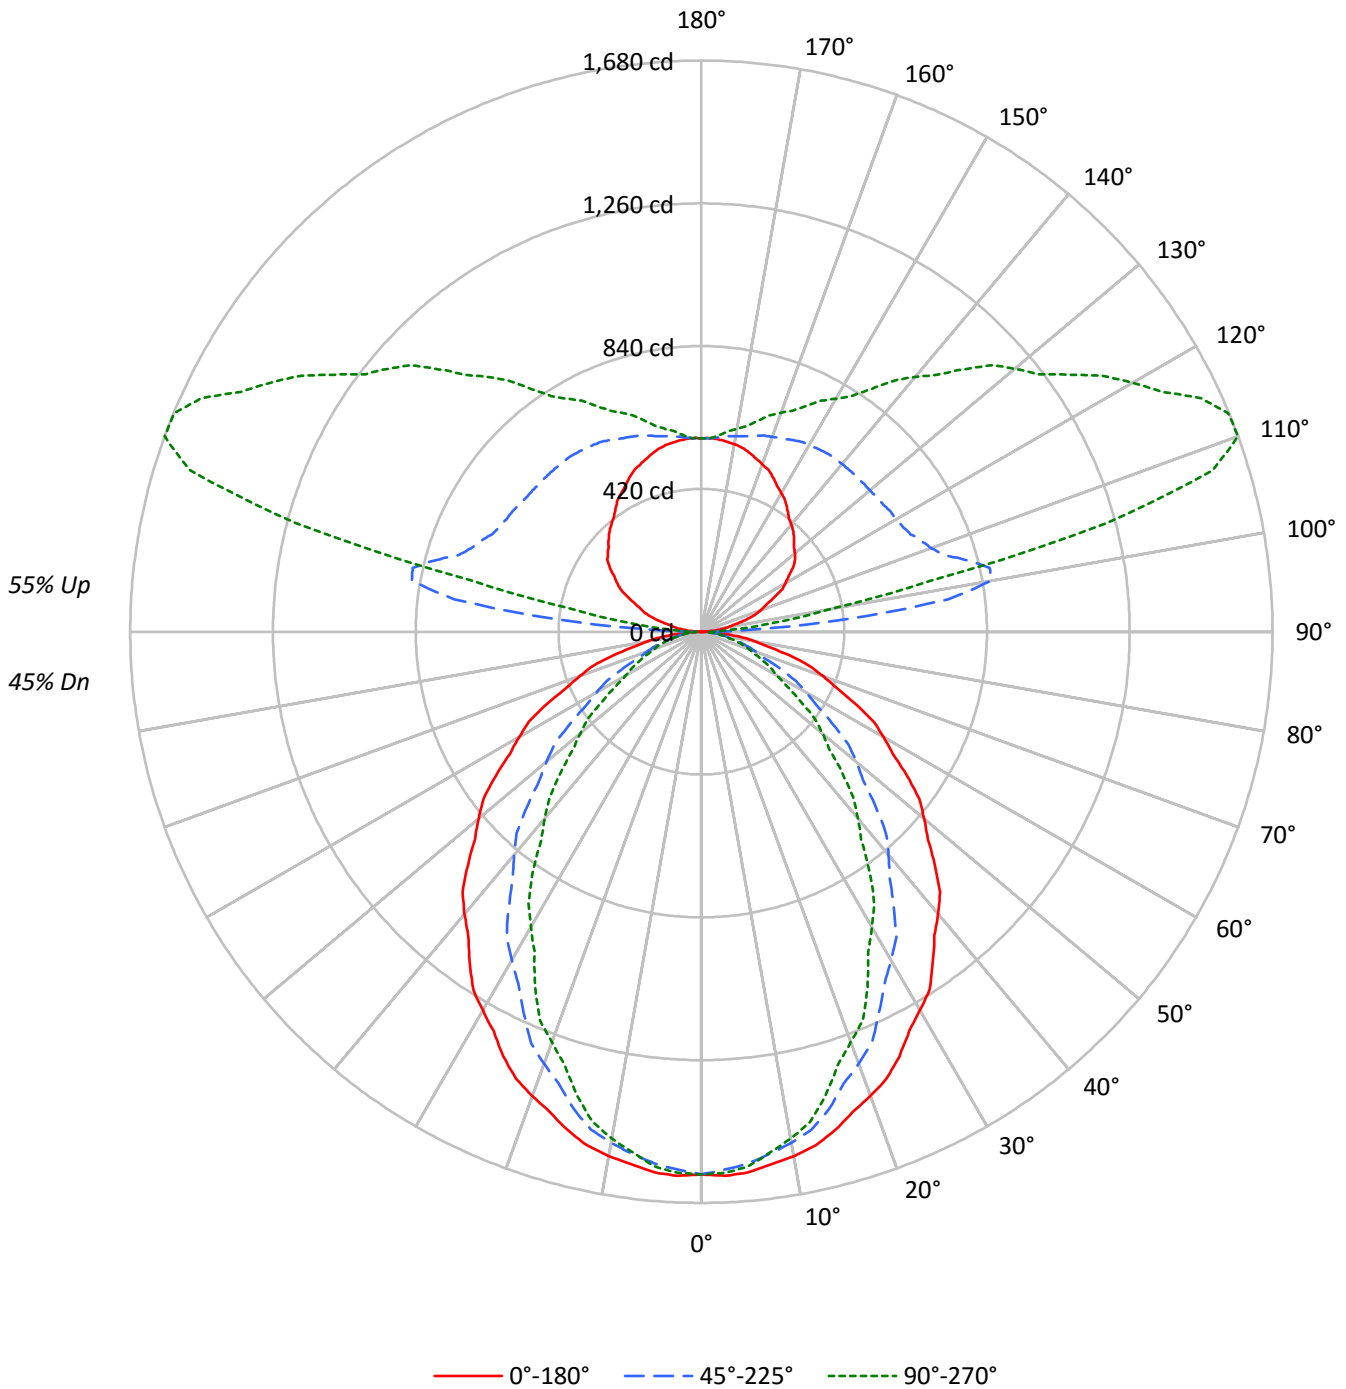



TEST NUMBER: P331764-830

CATALOG NUMBER: S122RDIP-S1005D1080U830-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	106	106	106	106	97	97	97	97	81	81	81	66	66	66	52	52	52	45				45
1	97	93	89	86	89	85	82	79	71	69	67	58	57	55	46	45	45	39				39
2	89	82	76	71	81	75	70	66	63	59	56	52	49	47	41	40	38	33				33
3	81	72	65	60	74	67	60	56	56	51	48	46	43	40	37	35	33	29				29
4	75	64	57	51	68	59	53	47	50	45	41	41	38	35	33	31	29	25				25
5	69	57	50	44	63	53	46	41	45	40	36	37	34	30	30	28	25	22				22
6	63	52	44	38	58	48	41	36	41	35	31	34	30	27	28	25	23	20				20
7	59	47	39	34	54	43	36	32	37	32	28	31	27	24	25	22	20	18				18
8	54	42	35	30	50	39	33	28	34	29	25	28	24	21	23	20	18	16				16
9	51	39	32	27	47	36	30	25	31	26	22	26	22	19	22	19	17	14				14
10	47	36	29	24	44	33	27	23	29	24	20	24	20	18	20	17	15	13				13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	25770	25770	25770
5°	25869	25449	25590
10°	25671	25032	24819
15°	25377	24289	23590
20°	24967	23230	22063
25°	24549	22026	20587
30°	23968	20789	18690
35°	23402	19446	17026
40°	22835	18054	15099
45°	22165	16493	13358
50°	21481	14913	11645
55°	20777	13216	10001
60°	19963	11428	8302
65°	19037	9605	7561
70°	17934	7912	6954
75°	16581	7211	6488
80°	14635	6453	5904
85°	11504	5076	5076



TEST NUMBER: P331764-830

CATALOG NUMBER: S122RDIP-S1005D1080U830-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	149.4	2.1
10°-20°	410.2	5.7
20°-30°	576.1	7.9
30°-40°	628.2	8.7
40°-50°	577.6	8.0
50°-60°	453.6	6.3
60°-70°	295.8	4.1
70°-80°	152.5	2.1
80°-90°	44.7	0.6
90°-100°	227.7	3.1
100°-110°	772.5	10.7
110°-120°	820.7	11.3
120°-130°	675.6	9.3
130°-140°	542.5	7.5
140°-150°	410.0	5.7
150°-160°	288.1	4.0
160°-170°	169.6	2.3
170°-180°	55.2	0.8
0°-30°	1135.7	15.7
0°-40°	1763.9	24.3
0°-60°	2795.1	38.6
0°-90°	3288.0	45.4
90°-120°	1820.9	25.1
90°-150°	3449.0	47.6
90°-180°	3962.0	54.6
0°-180°	7250.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1596	1596	1596	1596	1596	
5°	1596	1588	1570	1582	1579	151
15°	1518	1500	1453	1426	1411	427
25°	1378	1329	1236	1179	1156	633
35°	1187	1111	987	899	864	743
45°	971	871	722	623	585	749
55°	738	623	470	386	355	659
65°	498	381	251	205	198	494
75°	266	168	116	106	104	281
85°	62	33	27	27	27	73
90°	1	15	37	36	36	5
95°	38	94	429	162	125	41
105°	134	202	811	1450	1234	142
115°	235	297	679	1401	1624	233
125°	328	389	653	1135	1317	292
135°	385	460	645	954	1092	298
145°	440	506	642	797	872	276
155°	500	540	623	705	732	230
165°	545	562	597	633	643	154
175°	568	569	574	581	579	54
180°	569	569	569	569	569	



TEST NUMBER: P331764-830

CATALOG NUMBER: S122RDIP-S1005D1080U830-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1596.1	1596.1	1596.1	1596.1	1596.1	1596.1	1596.1	1596.1	1596.1	1596.1	1596.1
2.5°	1601.9	1600.6	1599.3	1598.1	1596.8	1594.7	1591.9	1589.1	1586.3	1583.5	1586.0
5°	1596.1	1594.5	1592.9	1591.3	1589.7	1586.9	1582.6	1578.5	1574.3	1570.2	1573.0
7.5°	1579.7	1577.7	1575.7	1573.7	1571.7	1568.3	1563.4	1558.5	1553.7	1548.8	1549.6
10°	1565.8	1563.6	1561.3	1559.1	1556.8	1552.5	1546.1	1539.6	1533.2	1526.8	1525.9
12.5°	1548.5	1545.7	1542.9	1540.2	1537.5	1531.9	1523.7	1515.5	1507.3	1499.1	1497.3
15°	1518.2	1514.6	1511.1	1507.5	1504.0	1496.8	1485.9	1475.0	1464.1	1453.1	1447.1
17.5°	1480.8	1475.5	1470.1	1464.7	1459.3	1449.6	1435.6	1421.6	1407.6	1393.6	1386.4
20°	1453.1	1446.7	1440.3	1433.9	1427.5	1416.3	1400.1	1384.1	1368.1	1352.0	1344.0
22.5°	1423.1	1415.9	1408.7	1401.6	1394.3	1381.7	1363.6	1345.5	1327.4	1309.3	1298.9
25°	1378.0	1367.7	1357.4	1347.2	1336.9	1321.3	1300.0	1278.8	1257.6	1236.4	1223.3
27.5°	1323.7	1312.6	1301.4	1290.2	1279.0	1261.5	1237.7	1213.7	1189.9	1166.0	1150.7
30°	1285.6	1273.4	1261.2	1249.0	1236.8	1217.9	1192.1	1166.5	1140.9	1115.1	1098.7
32.5°	1248.6	1234.4	1220.1	1205.9	1191.6	1171.4	1145.2	1119.0	1092.8	1066.6	1047.9
35°	1187.3	1171.0	1154.6	1138.2	1121.9	1099.6	1071.3	1043.1	1014.8	986.6	966.4
37.5°	1126.1	1108.1	1090.1	1072.1	1054.2	1030.2	1000.0	970.0	939.8	909.7	887.5
40°	1083.4	1064.1	1044.8	1025.6	1006.4	981.1	950.0	918.9	887.7	856.6	833.8
42.5°	1039.4	1019.2	998.9	978.5	958.3	932.1	899.9	867.7	835.6	803.4	779.9
45°	970.7	949.1	927.7	906.2	884.7	857.1	823.3	789.7	755.9	722.3	699.5
47.5°	903.6	880.9	858.1	835.3	812.5	783.7	748.9	714.1	679.3	644.5	621.9
50°	855.2	832.4	809.5	786.7	763.9	734.9	699.6	664.3	629.0	593.7	571.6
52.5°	807.8	783.9	760.2	736.3	712.5	683.3	648.8	614.3	579.7	545.2	523.8
55°	738.1	713.1	688.1	663.0	638.0	608.1	573.4	538.8	504.2	469.5	450.2
57.5°	666.8	641.1	615.4	589.7	564.0	534.5	501.2	467.9	434.6	401.2	383.6
60°	618.2	592.6	566.8	541.2	515.5	486.2	453.1	420.0	386.9	353.9	337.5
62.5°	570.9	545.2	519.5	493.8	468.2	439.5	408.0	376.5	345.0	313.5	297.8
65°	498.3	472.3	446.4	420.4	394.4	366.9	338.0	309.2	280.2	251.4	240.4
67.5°	428.4	402.7	376.8	351.0	325.2	299.3	273.3	247.3	221.3	195.3	190.3
70°	379.9	354.9	329.8	304.8	279.7	256.2	234.0	211.9	189.7	167.6	164.4
72.5°	333.7	309.6	285.7	261.6	237.6	216.7	199.0	181.2	163.3	145.6	142.9
75°	265.8	243.3	220.8	198.4	175.9	159.2	148.3	137.4	126.5	115.6	113.3
77.5°	199.1	179.4	159.7	140.0	120.2	107.7	102.5	97.2	91.9	86.7	85.4
80°	157.4	141.1	124.7	108.3	92.0	82.2	79.0	75.8	72.6	69.4	68.1
82.5°	119.3	106.5	93.8	81.0	68.2	60.7	58.5	56.4	54.2	52.0	51.3
85°	62.1	55.3	48.6	41.8	35.2	31.3	30.3	29.4	28.4	27.4	27.4
87.5°	18.7	17.3	16.1	14.5	12.9	12.5	13.7	15.2	16.5	16.7	16.2
90°	1.1	4.3	8.8	10.9	13.1	16.4	21.9	29.6	36.1	37.2	36.1
92.5°	13.4	19.2	27.1	32.0	39.4	49.7	74.5	109.2	140.3	142.3	120.3
95°	38.4	42.7	53.6	63.5	81.1	107.3	157.7	252.9	379.9	429.2	375.6
97.5°	62.4	68.3	79.9	94.8	115.0	144.8	208.0	340.7	551.9	732.7	768.6
100°	84.3	87.6	97.5	115.0	136.9	167.5	225.6	359.1	595.6	865.0	1022.7
102.5°	104.4	106.9	116.7	134.2	157.0	187.7	241.3	360.1	579.0	869.4	1117.3
105°	133.6	138.0	145.6	162.0	186.2	216.8	268.2	365.7	546.4	811.3	1102.6
107.5°	165.1	168.6	176.1	191.1	215.1	245.9	295.9	380.8	530.2	749.1	1006.4
110°	186.2	190.5	197.1	211.3	234.3	266.1	314.2	393.0	526.7	719.3	946.0



TEST NUMBER: P331764-830

CATALOG NUMBER: S122RDIP-S1005D1080U830-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	205.4	209.8	217.3	230.5	252.7	285.3	331.8	406.2	527.5	700.1	904.0
115°	235.4	240.9	247.4	260.6	282.5	312.1	359.1	425.9	532.2	678.8	851.9
117.5°	266.6	270.9	277.5	289.1	310.1	340.7	384.3	447.0	540.0	668.5	819.0
120°	285.8	290.1	296.7	306.6	328.5	359.1	401.8	461.0	545.3	662.4	801.4
122.5°	304.2	307.6	314.2	325.0	346.9	378.4	418.5	473.3	551.4	658.9	786.6
125°	328.5	331.8	338.4	351.5	373.3	404.1	443.5	492.8	560.6	652.6	765.3
127.5°	347.7	352.1	361.4	375.8	396.8	428.3	466.7	510.9	570.0	648.8	745.6
130°	359.1	363.5	374.5	389.8	411.7	442.3	480.7	522.3	577.0	647.1	732.5
132.5°	369.7	374.9	386.7	402.9	425.7	456.4	492.9	533.7	584.0	646.2	722.0
135°	385.4	389.8	402.9	419.3	444.5	475.2	510.2	548.6	592.4	644.9	707.3
137.5°	400.3	405.6	418.7	436.2	461.2	489.7	524.2	560.0	599.8	644.7	697.0
140°	411.7	416.0	429.2	446.8	470.8	499.3	532.2	566.1	603.3	643.9	690.9
142.5°	423.1	426.6	438.8	456.4	479.6	506.3	538.3	571.4	606.0	643.9	684.8
145°	440.2	444.5	455.5	471.9	493.8	517.9	547.4	578.2	608.8	641.6	676.7
147.5°	458.5	461.8	472.3	487.5	505.7	527.1	554.9	581.8	609.6	637.7	668.4
150°	470.8	474.1	482.9	497.1	513.5	533.2	558.5	583.6	608.8	635.1	661.3
152.5°	483.1	484.7	493.3	505.9	521.4	539.3	561.9	584.5	607.0	630.7	655.2
155°	500.4	501.4	508.0	520.1	532.2	548.6	567.1	585.8	604.4	623.0	643.9
157.5°	514.8	515.9	521.2	531.7	541.3	555.2	570.9	585.8	599.4	615.1	633.1
160°	524.4	525.6	529.9	538.7	547.4	559.5	572.7	585.8	596.7	609.9	625.2
162.5°	534.1	533.5	537.8	544.8	552.7	562.1	573.5	584.9	594.1	605.5	618.2
165°	545.3	544.2	546.4	552.9	558.5	565.0	574.9	582.5	589.1	596.7	606.6
167.5°	554.5	553.2	555.2	559.3	563.3	567.4	574.6	581.0	584.0	589.1	595.2
170°	560.6	558.5	559.5	562.8	565.0	568.3	573.7	579.2	581.4	584.7	589.1
172.5°	564.1	562.8	562.1	565.4	566.8	569.1	572.9	576.6	577.9	579.5	583.0
175°	568.3	567.1	566.1	568.3	568.3	569.4	571.6	573.7	572.7	573.7	574.9
177.5°	570.2	568.4	567.6	569.4	569.4	569.4	570.2	572.0	570.2	569.4	570.2
180°	569.4	569.4	569.4	569.4	569.4	569.4	569.4	569.4	569.4	569.4	569.4



TEST NUMBER: P331764-830

CATALOG NUMBER: S122RDIP-S1005D1080U830-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1596.1	1596.1	1596.1	1596.1	1596.1	1596.1	1596.1	1596.1
2.5°	1588.6	1591.1	1593.7	1594.7	1594.2	1593.7	1593.2	1592.7
5°	1575.9	1578.9	1581.7	1582.6	1581.7	1580.7	1579.8	1578.9
7.5°	1550.4	1551.2	1552.1	1551.7	1550.0	1548.3	1546.7	1545.0
10°	1524.8	1523.9	1523.0	1521.5	1519.6	1517.7	1515.7	1513.8
12.5°	1495.6	1493.8	1492.1	1489.7	1486.5	1483.3	1480.1	1476.9
15°	1441.0	1434.8	1428.7	1424.1	1420.9	1417.7	1414.5	1411.3
17.5°	1379.1	1371.9	1364.6	1358.2	1352.7	1347.2	1341.6	1336.1
20°	1336.0	1327.9	1319.9	1312.4	1305.3	1298.3	1291.2	1284.1
22.5°	1288.6	1278.3	1267.9	1260.1	1254.9	1249.6	1244.3	1239.1
25°	1210.1	1197.0	1183.8	1174.9	1170.0	1165.2	1160.4	1155.6
27.5°	1135.3	1119.9	1104.6	1093.1	1085.4	1077.8	1070.2	1062.5
30°	1082.4	1066.0	1049.6	1037.2	1028.5	1019.8	1011.2	1002.5
32.5°	1029.3	1010.6	991.8	978.5	970.3	962.1	953.9	945.8
35°	946.1	926.0	905.7	892.0	885.0	877.9	870.8	863.8
37.5°	865.2	842.9	820.6	805.4	797.4	789.3	781.2	773.1
40°	811.0	788.2	765.4	749.9	741.5	733.1	724.8	716.4
42.5°	756.3	732.7	709.2	693.3	685.2	677.1	669.1	661.0
45°	676.7	653.8	631.0	615.9	608.1	600.4	592.7	585.0
47.5°	599.2	576.6	553.8	539.0	532.1	525.1	518.0	511.0
50°	549.4	527.3	505.1	490.6	483.9	477.1	470.4	463.6
52.5°	502.4	481.0	459.7	445.8	439.6	433.4	427.2	420.9
55°	430.9	411.7	392.4	379.8	373.6	367.5	361.5	355.3
57.5°	366.0	348.3	330.6	319.2	314.1	309.0	303.9	298.7
60°	321.1	304.8	288.4	277.7	272.5	267.4	262.2	257.1
62.5°	282.3	266.6	251.1	241.7	238.7	235.5	232.4	229.4
65°	229.5	218.6	207.6	201.7	200.8	199.8	198.9	197.9
67.5°	185.3	180.3	175.2	172.2	171.3	170.2	169.2	168.1
70°	161.2	158.0	154.8	152.5	151.2	149.9	148.6	147.3
72.5°	140.3	137.5	134.8	133.1	132.3	131.6	130.7	130.0
75°	111.0	108.9	106.6	105.3	105.0	104.6	104.3	104.0
77.5°	84.1	82.8	81.5	80.6	80.1	79.6	79.1	78.6
80°	66.7	65.5	64.2	63.5	63.5	63.5	63.5	63.5
82.5°	50.4	49.7	48.9	48.5	48.5	48.5	48.5	48.5
85°	27.4	27.4	27.4	27.4	27.4	27.4	27.4	27.4
87.5°	15.7	15.1	15.3	15.3	15.3	15.3	15.3	15.3
90°	35.1	32.9	35.1	36.1	36.1	36.1	36.1	36.1
92.5°	95.5	81.9	72.7	65.9	65.0	61.5	62.4	60.7
95°	286.9	220.1	174.1	150.0	135.7	127.1	123.8	124.8
97.5°	669.4	547.7	429.2	350.2	297.8	270.9	254.9	245.7
100°	999.7	863.9	713.9	581.4	490.5	443.5	411.7	392.0
102.5°	1216.1	1185.3	1075.6	935.3	836.5	756.2	716.5	689.8
105°	1330.3	1454.1	1468.3	1432.2	1364.2	1296.4	1249.3	1234.0
107.5°	1248.0	1434.4	1548.2	1601.2	1609.8	1606.0	1596.6	1576.2
110°	1177.0	1373.0	1513.2	1603.0	1650.0	1670.8	1680.7	1679.6



TEST NUMBER: P331764-830

CATALOG NUMBER: S122RDIP-S1005D1080U830-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	1112.2	1300.3	1450.1	1553.0	1618.5	1653.3	1672.0	1677.8
115°	1032.6	1201.2	1344.5	1457.4	1535.1	1585.5	1613.9	1623.8
117.5°	972.5	1120.6	1250.7	1356.4	1435.7	1488.8	1518.9	1527.2
120°	942.7	1078.5	1194.6	1294.2	1370.8	1422.3	1454.1	1465.0
122.5°	919.1	1043.5	1153.4	1243.4	1312.1	1362.7	1391.0	1400.1
125°	884.7	997.5	1093.8	1175.9	1239.4	1281.1	1308.4	1317.2
127.5°	850.7	952.8	1043.7	1119.5	1174.9	1213.8	1237.5	1244.5
130°	828.9	923.0	1009.6	1081.8	1135.5	1172.7	1194.6	1203.3
132.5°	807.9	895.0	974.5	1042.4	1095.1	1132.4	1152.5	1160.4
135°	778.4	850.7	923.0	984.3	1031.4	1067.5	1087.2	1091.7
137.5°	755.1	815.5	872.9	926.3	969.2	1000.3	1017.7	1024.2
140°	740.2	792.8	843.1	891.3	926.3	954.8	971.2	977.8
142.5°	727.9	772.6	816.0	856.2	889.5	915.4	930.0	931.3
145°	710.6	746.8	780.7	812.5	838.7	857.3	868.3	871.6
147.5°	697.3	725.8	752.2	775.4	797.1	812.0	819.4	821.4
150°	687.6	711.7	734.7	754.4	770.8	784.0	790.5	791.6
152.5°	678.0	700.3	719.8	736.9	749.8	761.2	766.0	766.2
155°	664.6	682.1	698.5	710.6	722.6	730.3	734.7	732.5
157.5°	649.0	663.7	677.5	686.9	695.5	701.8	703.8	703.8
160°	639.4	651.5	663.5	671.2	678.8	684.3	685.4	685.4
162.5°	629.8	640.1	650.4	656.3	663.9	667.7	668.7	667.9
165°	615.4	623.0	630.7	635.1	639.4	643.9	643.9	642.7
167.5°	601.5	607.5	612.7	616.7	618.6	621.0	620.9	619.5
170°	594.6	597.9	602.2	604.4	605.5	608.8	607.7	605.5
172.5°	586.6	589.1	592.6	593.9	595.0	596.5	595.4	594.1
175°	578.2	579.2	580.3	581.4	581.4	582.5	581.4	579.2
177.5°	572.0	572.0	572.9	572.9	572.9	572.9	572.0	570.2
180°	569.4	569.4	569.4	569.4	569.4	569.4	569.4	569.4

(END OF REPORT)