

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331636-830

Luminaire Tested: **S122RDIP-S290D925U830-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P331636-830  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S122RDIP-S290D925U830-4F0-1E-UDD-F  
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 290 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 925 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4462.3 lumens  
Efficiency: N/A  
Efficacy: 119.6 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: Semi-Indirect


Input Watts (W): 37.3  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331636-830

CATALOG NUMBER: S122RDIP-S290D925U830-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

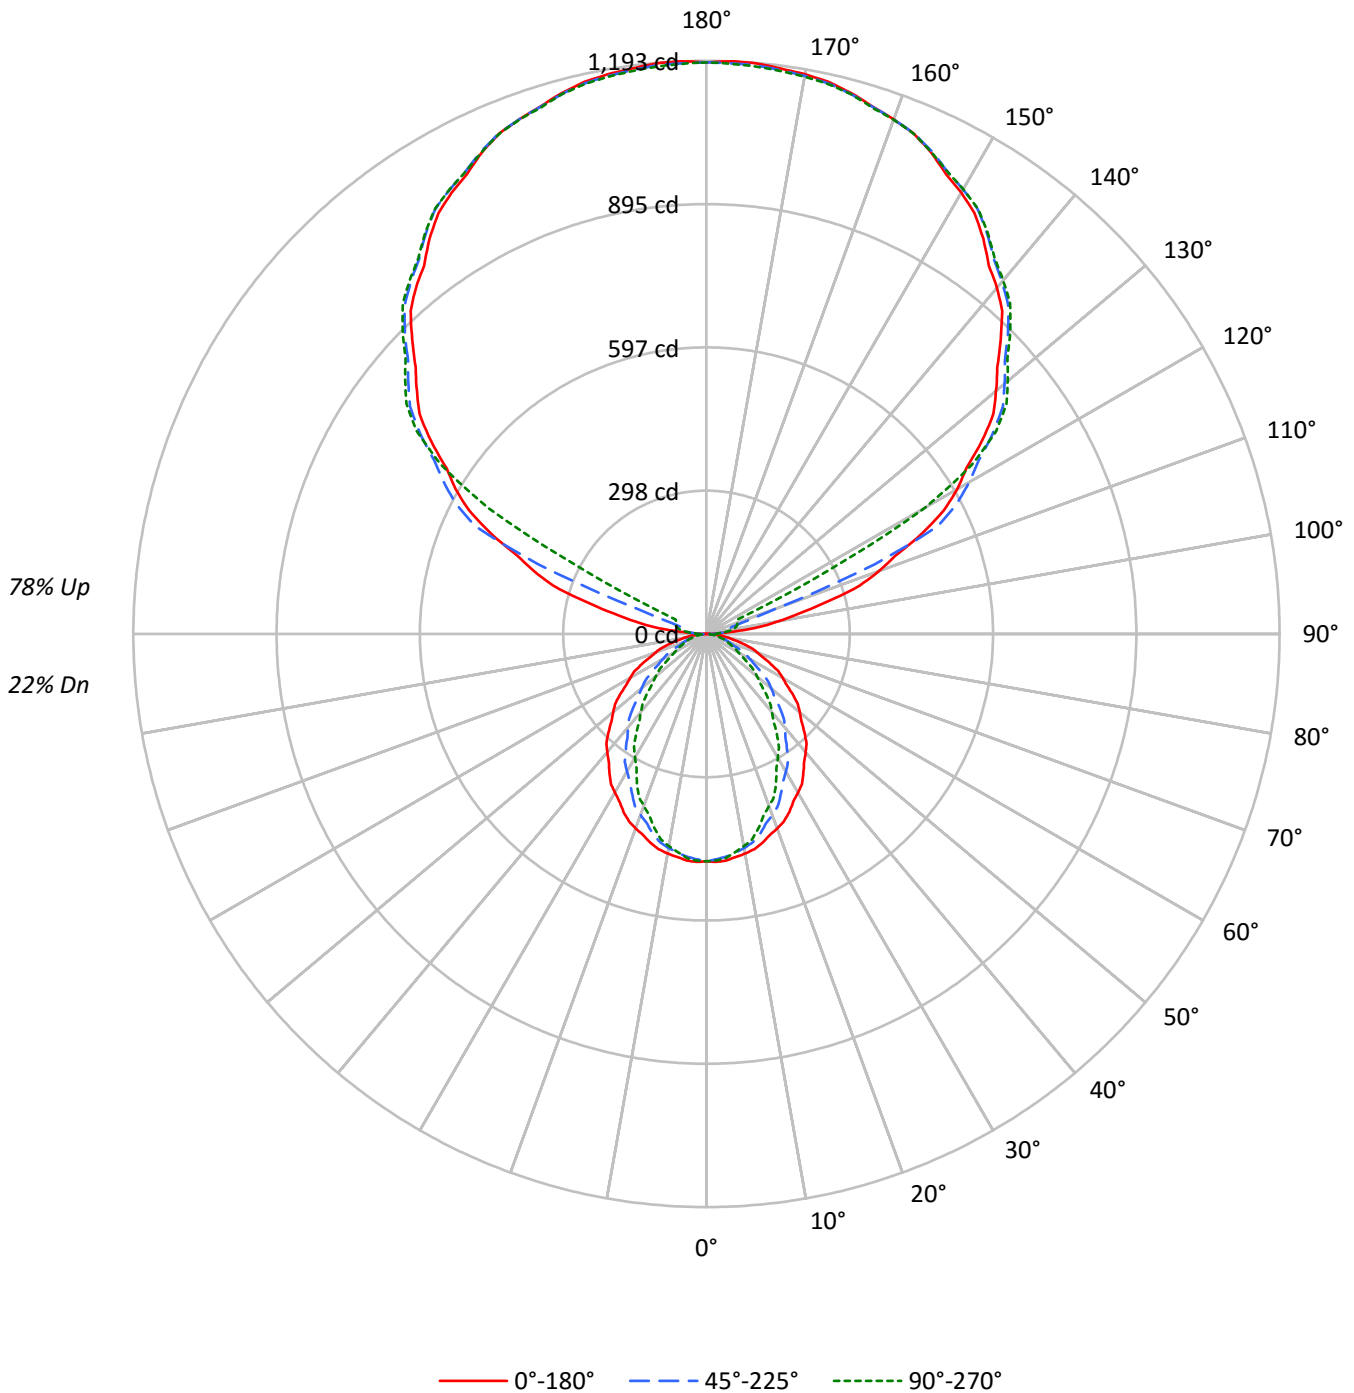



TEST NUMBER: P331636-830

CATALOG NUMBER: S122RDIP-S290D925U830-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	100	100	100	100	89	89	89	89	68	68	68	48	48	48	30	30	30	22
1	92	88	84	81	81	78	75	72	59	57	56	43	41	40	27	26	26	19
2	84	77	71	66	74	68	63	59	52	49	46	38	36	34	24	23	22	16
3	76	67	61	55	67	60	54	50	46	42	39	33	31	29	21	20	19	14
4	70	60	52	47	62	53	47	42	41	37	33	30	27	25	19	18	17	12
5	64	53	46	40	57	47	41	36	37	32	29	27	24	22	17	16	14	11
6	59	48	40	34	52	43	36	31	33	28	25	24	21	19	16	14	13	9
7	54	43	35	30	48	38	32	27	30	25	22	22	19	17	14	13	11	8
8	50	39	31	26	45	35	28	24	27	23	19	20	17	15	13	12	10	8
9	47	35	28	23	41	32	26	21	25	20	17	18	15	13	12	11	9	7
10	44	32	25	21	39	29	23	19	23	18	15	17	14	12	11	10	8	6

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	7640	7640	7640
5°	7669	7543	7585
10°	7609	7420	7356
15°	7522	7199	6992
20°	7400	6887	6541
25°	7277	6531	6102
30°	7105	6162	5541
35°	6936	5765	5048
40°	6768	5351	4477
45°	6572	4889	3959
50°	6365	4421	3451
55°	6159	3916	2967
60°	5916	3387	2464
65°	5643	2846	2239
70°	5316	2346	2058
75°	4916	2133	1921
80°	4342	1906	1757
85°	3409	1501	1501



TEST NUMBER: P331636-830

CATALOG NUMBER: S122RDIP-S290D925U830-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	44.3	1.0
10°-20°	121.6	2.7
20°-30°	170.8	3.8
30°-40°	186.2	4.2
40°-50°	171.2	3.8
50°-60°	134.5	3.0
60°-70°	87.7	2.0
70°-80°	45.2	1.0
80°-90°	14.7	0.3
90°-100°	39.7	0.9
100°-110°	145.5	3.3
110°-120°	389.0	8.7
120°-130°	642.1	14.4
130°-140°	682.9	15.3
140°-150°	634.7	14.2
150°-160°	510.3	11.4
160°-170°	328.8	7.4
170°-180°	113.2	2.5
0°-30°	336.6	7.5
0°-40°	522.8	11.7
0°-60°	828.5	18.6
0°-90°	976.0	21.9
90°-120°	574.2	12.9
90°-150°	2533.9	56.8
90°-180°	3486.0	78.1
0°-180°	4462.3	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	473	473	473	473	473	
5°	473	471	465	469	468	45
15°	450	445	431	423	418	127
25°	408	394	367	350	342	188
35°	352	329	292	266	256	220
45°	288	258	214	185	173	222
55°	219	185	139	114	105	195
65°	148	113	74	61	59	146
75°	79	50	34	31	31	83
85°	18	10	8	8	8	22
90°	1	10	17	21	23	3
95°	56	29	34	38	37	68
105°	262	273	52	62	65	280
115°	495	510	531	151	71	487
125°	700	711	727	733	736	624
135°	866	879	888	896	894	669
145°	1005	1005	1018	1024	1020	628
155°	1106	1099	1109	1113	1107	509
165°	1166	1161	1163	1168	1163	329
175°	1192	1187	1188	1193	1185	113
180°	1190	1190	1190	1190	1190	



TEST NUMBER: P331636-830

CATALOG NUMBER: S122RDIP-S290D925U830-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	473.2	473.2	473.2	473.2	473.2	473.2	473.2	473.2	473.2	473.2	473.2
2.5°	474.9	474.5	474.1	473.7	473.3	472.7	471.8	471.1	470.2	469.4	470.1
5°	473.2	472.7	472.2	471.7	471.3	470.3	469.1	467.9	466.7	465.4	466.3
7.5°	468.3	467.7	467.0	466.5	465.9	464.9	463.4	461.9	460.5	459.1	459.3
10°	464.1	463.4	462.8	462.1	461.5	460.1	458.3	456.4	454.5	452.6	452.3
12.5°	459.0	458.2	457.3	456.6	455.7	454.1	451.7	449.2	446.8	444.3	443.8
15°	450.0	448.9	447.9	446.9	445.8	443.7	440.5	437.2	433.9	430.7	429.0
17.5°	438.9	437.3	435.7	434.1	432.5	429.7	425.6	421.4	417.3	413.1	410.9
20°	430.7	428.9	427.0	425.0	423.1	419.8	415.0	410.3	405.6	400.8	398.4
22.5°	421.9	419.7	417.5	415.5	413.3	409.5	404.2	398.8	393.5	388.1	385.0
25°	408.5	405.4	402.4	399.4	396.3	391.6	385.3	379.1	372.8	366.6	362.6
27.5°	392.4	389.1	385.8	382.5	379.1	373.9	366.8	359.8	352.7	345.6	341.1
30°	381.1	377.5	373.8	370.2	366.6	361.0	353.4	345.8	338.2	330.5	325.7
32.5°	370.1	365.9	361.7	357.4	353.2	347.2	339.5	331.7	324.0	316.1	310.7
35°	351.9	347.1	342.2	337.4	332.5	325.9	317.5	309.2	300.9	292.5	286.4
37.5°	333.8	328.5	323.1	317.8	312.5	305.4	296.4	287.5	278.6	269.7	263.1
40°	321.1	315.5	309.7	304.0	298.3	290.9	281.6	272.4	263.2	253.9	247.1
42.5°	308.1	302.1	296.1	290.1	284.1	276.3	266.7	257.2	247.7	238.2	231.2
45°	287.8	281.3	274.9	268.6	262.2	254.0	244.0	234.0	224.0	214.1	207.4
47.5°	267.9	261.1	254.4	247.6	240.8	232.3	222.0	211.7	201.3	191.1	184.4
50°	253.4	246.8	240.0	233.2	226.5	217.8	207.4	196.9	186.4	176.0	169.4
52.5°	239.4	232.3	225.4	218.3	211.2	202.6	192.3	182.1	171.8	161.6	155.2
55°	218.8	211.4	204.0	196.5	189.1	180.3	169.9	159.7	149.4	139.1	133.5
57.5°	197.7	190.0	182.4	174.8	167.2	158.4	148.5	138.7	128.8	118.9	113.7
60°	183.2	175.7	168.1	160.4	152.8	144.1	134.3	124.5	114.7	104.9	100.0
62.5°	169.2	161.6	154.0	146.4	138.7	130.3	120.9	111.6	102.3	92.9	88.3
65°	147.7	140.0	132.3	124.6	116.9	108.8	100.2	91.6	83.0	74.5	71.3
67.5°	127.0	119.3	111.7	104.1	96.4	88.7	81.0	73.3	65.6	57.9	56.4
70°	112.6	105.2	97.7	90.4	82.9	76.0	69.4	62.8	56.3	49.7	48.7
72.5°	98.9	91.8	84.6	77.6	70.4	64.3	59.0	53.7	48.4	43.2	42.3
75°	78.8	72.1	65.5	58.8	52.1	47.2	43.9	40.7	37.5	34.2	33.6
77.5°	59.0	53.2	47.3	41.5	35.6	32.0	30.3	28.8	27.2	25.7	25.4
80°	46.7	41.8	36.9	32.1	27.2	24.3	23.4	22.4	21.5	20.5	20.2
82.5°	35.3	31.6	27.8	24.0	20.3	18.0	17.3	16.7	16.0	15.5	15.2
85°	18.4	16.4	14.4	12.4	10.5	9.2	9.0	8.7	8.4	8.1	8.1
87.5°	5.7	5.5	5.3	5.1	4.9	5.0	5.3	5.6	5.8	6.2	6.3
90°	0.8	2.9	5.1	7.2	9.2	11.1	12.6	14.1	15.6	17.2	18.2
92.5°	17.3	17.2	17.0	16.8	16.6	16.9	17.7	18.5	19.2	20.0	20.5
95°	56.0	49.7	43.4	37.0	30.7	28.2	29.6	30.9	32.2	33.6	34.5
97.5°	111.0	93.2	75.5	57.7	39.9	32.5	35.6	38.7	41.8	45.0	45.7
100°	152.4	126.1	99.9	73.7	47.5	36.1	39.3	42.6	45.8	49.1	50.6
102.5°	197.8	192.3	186.7	181.2	175.6	159.3	132.1	104.8	77.7	50.4	52.4
105°	261.6	267.4	273.1	278.9	284.6	261.4	209.2	156.9	104.7	52.5	54.6
107.5°	334.5	339.1	343.7	348.4	353.1	324.0	261.4	198.8	136.1	73.5	71.4
110°	381.4	385.4	389.4	393.4	397.4	371.7	316.5	261.2	205.9	150.6	131.5



TEST NUMBER: P331636-830

CATALOG NUMBER: S122RDIP-S290D925U830-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	425.4	429.0	432.5	436.1	439.6	434.6	420.9	407.3	393.6	379.9	310.2
115°	494.9	498.2	501.4	504.7	507.9	512.0	516.8	521.6	526.3	531.1	442.5
117.5°	557.1	560.7	564.4	568.1	571.7	575.1	578.4	581.7	585.0	588.2	566.8
120°	602.6	605.4	608.3	611.1	614.1	617.2	620.7	624.1	627.5	630.9	633.3
122.5°	641.1	644.1	647.1	650.2	653.2	656.6	660.3	664.1	667.9	671.7	673.0
125°	699.8	702.3	704.8	707.3	709.8	712.8	716.5	720.1	723.8	727.4	728.8
127.5°	753.0	755.8	758.6	761.3	764.0	766.8	769.5	772.2	775.0	777.7	779.6
130°	786.8	789.9	792.9	796.0	799.0	801.6	803.7	805.8	807.9	810.0	812.1
132.5°	821.2	823.8	826.4	829.1	831.6	834.0	836.1	838.2	840.3	842.4	844.2
135°	866.0	869.0	872.1	875.2	878.3	880.6	882.3	884.1	885.8	887.5	889.4
137.5°	911.3	913.4	915.6	917.7	919.8	921.9	923.8	925.8	927.7	929.7	931.5
140°	940.8	942.4	944.0	945.5	947.0	948.9	950.9	953.0	955.2	957.2	958.9
142.5°	965.6	967.0	968.5	969.8	971.2	973.1	975.4	977.9	980.3	982.7	984.3
145°	1004.6	1004.4	1004.2	1004.0	1003.8	1005.3	1008.6	1011.8	1015.1	1018.3	1019.6
147.5°	1038.5	1037.7	1037.1	1036.3	1035.6	1036.8	1040.0	1043.3	1046.5	1049.7	1050.7
150°	1060.5	1059.2	1057.8	1056.5	1055.2	1056.0	1059.1	1062.2	1065.3	1068.3	1069.4
152.5°	1079.1	1077.6	1076.1	1074.7	1073.2	1073.8	1076.8	1079.7	1082.6	1085.5	1086.7
155°	1106.2	1104.5	1102.7	1101.0	1099.3	1099.6	1101.8	1104.2	1106.5	1108.7	1109.8
157.5°	1127.3	1125.9	1124.5	1122.9	1121.5	1121.6	1123.2	1124.8	1126.4	1128.0	1129.4
160°	1139.7	1138.6	1137.5	1136.2	1135.1	1135.1	1136.2	1137.5	1138.6	1139.7	1140.9
162.5°	1150.8	1149.6	1148.5	1147.3	1146.1	1146.0	1147.1	1148.0	1149.1	1150.1	1151.3
165°	1165.5	1164.4	1163.3	1162.1	1160.9	1160.6	1161.2	1161.8	1162.4	1163.0	1164.3
167.5°	1176.6	1175.4	1174.3	1173.1	1172.0	1171.7	1172.2	1172.7	1173.3	1173.8	1175.2
170°	1182.8	1181.6	1180.4	1179.3	1178.2	1177.8	1178.2	1178.6	1178.9	1179.3	1180.6
172.5°	1186.8	1185.7	1184.6	1183.5	1182.3	1181.9	1182.3	1182.7	1183.1	1183.5	1184.8
175°	1192.2	1190.9	1189.6	1188.2	1186.8	1186.4	1186.8	1187.1	1187.5	1187.9	1189.3
177.5°	1193.1	1192.0	1191.0	1189.9	1188.8	1188.4	1188.5	1188.6	1188.8	1188.9	1190.1
180°	1189.7	1189.7	1189.7	1189.7	1189.7	1189.7	1189.7	1189.7	1189.7	1189.7	1189.7



TEST NUMBER: P331636-830

CATALOG NUMBER: S122RDIP-S290D925U830-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	473.2	473.2	473.2	473.2	473.2	473.2	473.2	473.2
2.5°	470.9	471.6	472.4	472.7	472.6	472.4	472.2	472.1
5°	467.1	468.0	468.8	469.1	468.8	468.5	468.3	468.0
7.5°	459.6	459.9	460.1	460.0	459.5	458.9	458.5	458.0
10°	452.0	451.8	451.5	451.0	450.4	449.9	449.3	448.7
12.5°	443.4	442.8	442.3	441.6	440.6	439.7	438.8	437.8
15°	427.2	425.3	423.5	422.2	421.2	420.2	419.2	418.3
17.5°	408.8	406.6	404.5	402.7	401.0	399.4	397.7	396.1
20°	396.1	393.6	391.2	389.0	386.9	384.8	382.8	380.7
22.5°	382.0	378.9	375.9	373.5	371.9	370.4	368.8	367.3
25°	358.7	354.8	350.9	348.3	346.9	345.3	343.9	342.5
27.5°	336.5	332.0	327.4	324.0	321.8	319.5	317.3	315.0
30°	320.8	316.0	311.1	307.5	304.8	302.3	299.7	297.2
32.5°	305.1	299.5	294.0	290.0	287.7	285.2	282.8	280.4
35°	280.5	274.5	268.4	264.4	262.3	260.2	258.2	256.1
37.5°	256.5	249.9	243.3	238.7	236.4	233.9	231.6	229.1
40°	240.4	233.7	226.9	222.3	219.8	217.4	214.8	212.4
42.5°	224.1	217.2	210.2	205.6	203.1	200.8	198.3	196.0
45°	200.6	193.8	187.1	182.6	180.3	178.0	175.7	173.4
47.5°	177.6	170.9	164.2	159.8	157.7	155.6	153.5	151.5
50°	162.9	156.3	149.7	145.4	143.5	141.5	139.4	137.4
52.5°	148.9	142.6	136.3	132.1	130.4	128.5	126.6	124.8
55°	127.7	122.1	116.3	112.5	110.7	109.0	107.2	105.4
57.5°	108.5	103.2	98.0	94.6	93.1	91.6	90.1	88.5
60°	95.2	90.4	85.5	82.3	80.8	79.3	77.8	76.3
62.5°	83.7	79.1	74.5	71.6	70.7	69.8	68.9	68.0
65°	68.1	64.8	61.5	59.8	59.5	59.2	58.9	58.6
67.5°	55.0	53.4	51.9	51.1	50.7	50.4	50.1	49.9
70°	47.8	46.8	45.9	45.2	44.8	44.4	44.0	43.6
72.5°	41.6	40.7	40.0	39.5	39.2	39.0	38.7	38.5
75°	32.9	32.2	31.6	31.2	31.1	31.0	30.9	30.8
77.5°	24.9	24.5	24.1	23.9	23.8	23.6	23.5	23.3
80°	19.8	19.4	19.0	18.9	18.9	18.9	18.9	18.9
82.5°	15.0	14.7	14.5	14.4	14.4	14.4	14.4	14.4
85°	8.1	8.1	8.1	8.1	8.1	8.1	8.1	8.1
87.5°	6.4	6.5	6.6	6.8	6.8	6.9	7.0	7.1
90°	19.1	20.1	21.0	21.7	22.1	22.4	22.9	23.3
92.5°	20.9	21.5	22.0	22.3	22.5	22.8	23.0	23.3
95°	35.4	36.5	37.4	37.8	37.6	37.4	37.2	37.0
97.5°	46.5	47.2	48.0	48.4	48.7	48.9	49.2	49.4
100°	52.1	53.6	55.2	56.2	56.6	56.9	57.3	57.7
102.5°	54.4	56.5	58.4	59.7	60.2	60.7	61.3	61.8
105°	56.7	58.8	60.9	62.4	63.2	63.9	64.7	65.4
107.5°	69.2	67.1	64.9	64.3	65.0	65.8	66.5	67.3
110°	112.4	93.2	74.1	64.9	65.7	66.4	67.2	68.1





TEST NUMBER: P331636-830

CATALOG NUMBER: S122RDIP-S290D925U830-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	240.4	170.6	100.9	66.3	66.8	67.5	68.1	68.7
115°	354.0	265.4	176.8	125.6	111.9	98.1	84.4	70.6
117.5°	545.4	524.1	502.6	469.2	424.0	378.7	333.5	288.2
120°	635.6	637.9	640.2	628.4	602.6	576.7	550.9	525.1
122.5°	674.4	675.7	677.1	675.3	670.3	665.2	660.3	655.3
125°	730.1	731.4	732.7	733.7	734.2	734.8	735.5	736.0
127.5°	781.6	783.5	785.5	786.5	786.6	786.7	786.8	786.9
130°	814.3	816.3	818.4	819.4	819.3	819.0	818.8	818.6
132.5°	846.0	847.8	849.6	850.4	850.2	850.0	849.8	849.6
135°	891.4	893.2	895.1	895.9	895.5	895.1	894.8	894.4
137.5°	933.4	935.3	937.2	937.8	937.2	936.5	935.9	935.2
140°	960.6	962.4	964.1	964.5	963.6	962.6	961.7	960.6
142.5°	985.8	987.4	989.0	989.3	988.4	987.4	986.5	985.4
145°	1021.1	1022.4	1023.7	1023.9	1022.9	1022.0	1021.1	1020.1
147.5°	1051.7	1052.6	1053.7	1053.8	1052.9	1052.2	1051.3	1050.6
150°	1070.5	1071.8	1072.9	1073.0	1072.0	1071.0	1070.1	1069.1
152.5°	1087.8	1088.9	1090.1	1090.1	1088.7	1087.5	1086.3	1085.0
155°	1111.1	1112.2	1113.3	1113.1	1111.6	1110.0	1108.5	1107.0
157.5°	1130.6	1131.9	1133.2	1133.1	1131.6	1130.1	1128.6	1127.2
160°	1142.0	1143.2	1144.3	1144.2	1142.8	1141.5	1140.2	1138.9
162.5°	1152.6	1154.0	1155.3	1155.1	1153.5	1151.8	1150.2	1148.5
165°	1165.6	1167.0	1168.3	1168.3	1167.0	1165.6	1164.3	1163.0
167.5°	1176.5	1177.8	1179.2	1178.9	1177.2	1175.5	1173.8	1172.1
170°	1182.0	1183.4	1184.7	1184.5	1182.8	1181.0	1179.3	1177.6
172.5°	1186.1	1187.5	1188.8	1188.6	1186.8	1185.2	1183.5	1181.8
175°	1190.6	1191.9	1193.3	1193.0	1191.1	1189.2	1187.2	1185.3
177.5°	1191.1	1192.2	1193.3	1193.1	1191.8	1190.3	1188.9	1187.6
180°	1189.7	1189.7	1189.7	1189.7	1189.7	1189.7	1189.7	1189.7

(END OF REPORT)