

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331664-830

Luminaire Tested: **S122RDIP-S485D925U830-4F0-1E-UDD-A1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P331664-830  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S122RDIP-S485D925U830-4F0-1E-UDD-A1  
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 485 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING  
UPLIGHT 925 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4871.8 lumens  
Efficiency: N/A  
Efficacy: 109.5 lumens/watt  
Spacing Criteria (0/90/45): 0.86 / 1.16 / 1.02  
Luminous Opening: Rectangular (W 4' x L: 0.17' x H: 0')  
CIE Type: Semi-Indirect


Input Watts (W): 44.5  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331664-830

CATALOG NUMBER: S122RDIP-S485D925U830-4F0-1E-UDD-A1

### Luminous Intensity Polar Plot

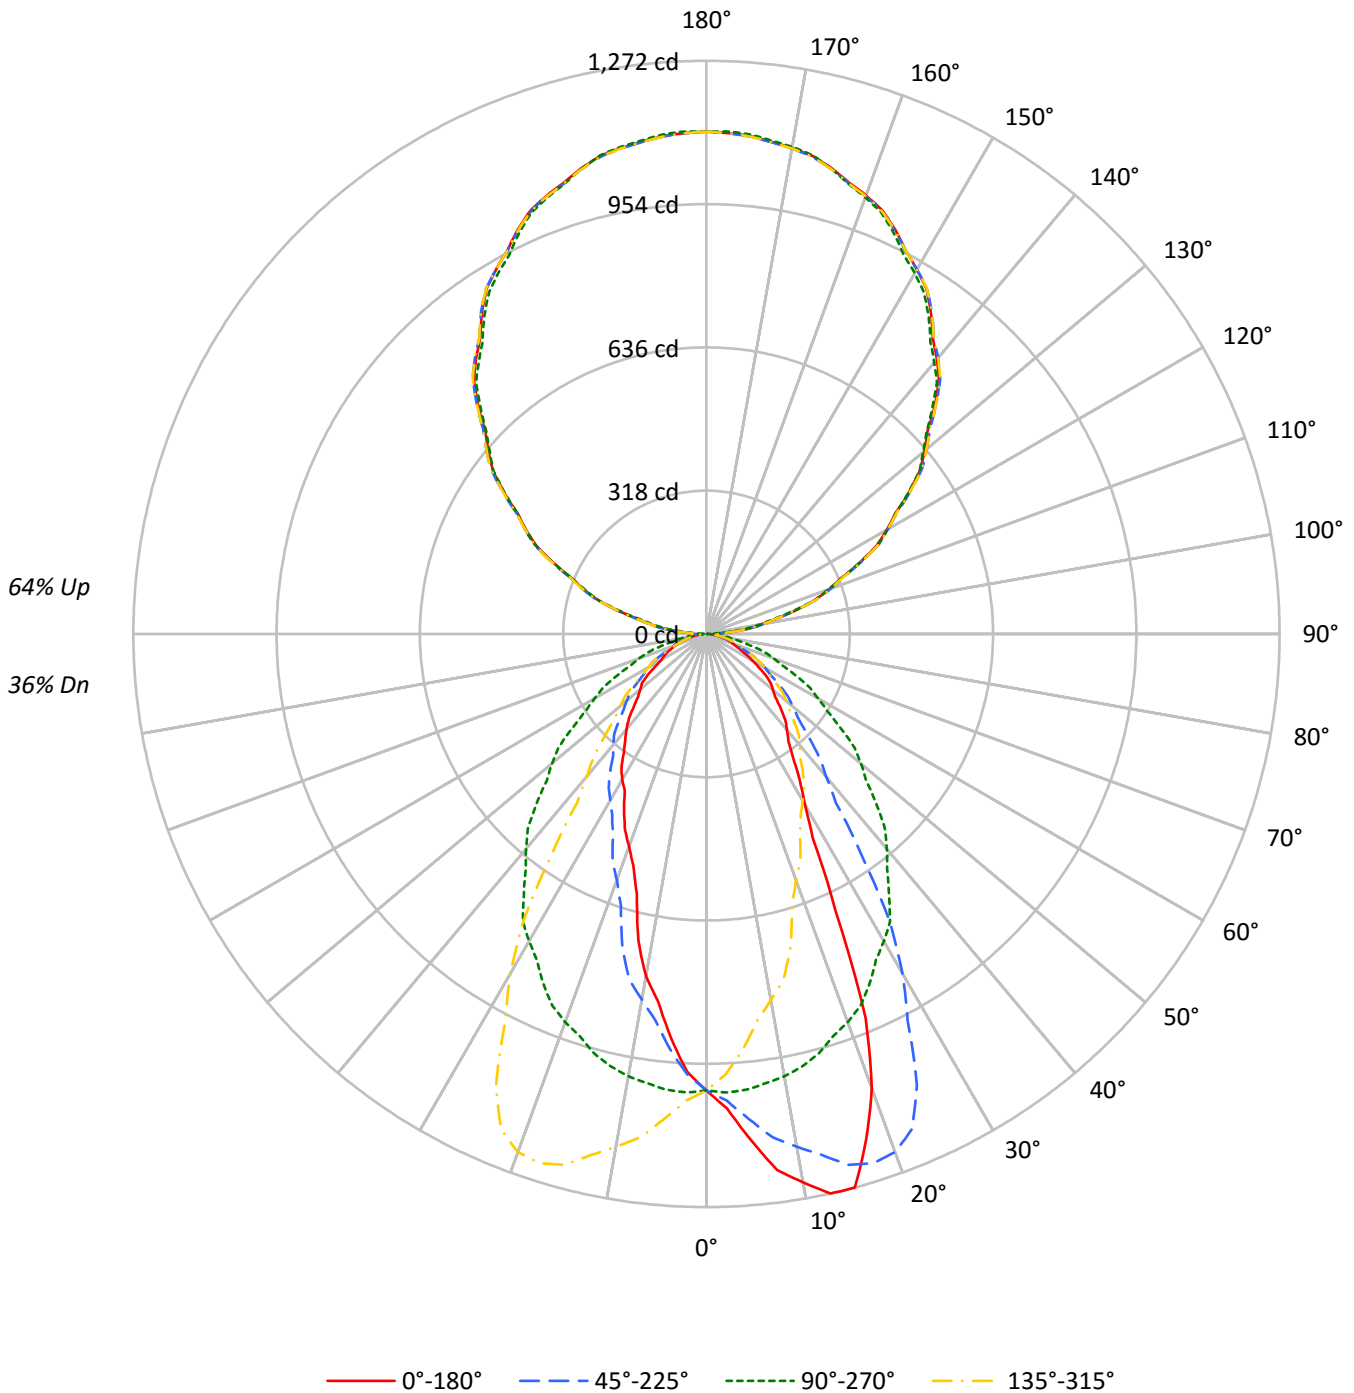



TEST NUMBER: P331664-830

CATALOG NUMBER: S122RDIP-S485D925U830-4F0-1E-UDD-A1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	104	104	104	104	94	94	94	94	76	76	76	59	59	59	43	43	43	36					36			
1	95	91	88	84	86	83	80	77	67	65	63	52	51	50	39	38	38	31					31			
2	87	80	75	70	79	73	68	64	59	56	53	47	44	43	35	34	33	27					27			
3	80	71	64	59	72	65	59	54	53	49	45	42	39	37	32	30	28	24					24			
4	73	63	56	50	66	58	51	46	47	43	39	38	35	32	29	27	25	21					21			
5	67	57	49	43	61	52	45	40	43	38	34	34	31	28	26	24	22	19					19			
6	62	51	43	38	56	47	40	35	39	34	30	31	28	25	24	22	20	17					17			
7	58	46	39	33	52	42	36	31	35	30	27	28	25	22	22	20	18	15					15			
8	54	42	35	30	49	39	32	28	32	27	24	26	23	20	20	18	16	14					14			
9	50	38	31	27	45	35	29	25	30	25	21	24	21	18	19	17	15	13					13			
10	47	35	28	24	43	33	27	22	27	23	19	22	19	17	18	15	14	12					12			

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	16356	16356	16356	16356
5°	18266	16459	14593	16459
10°	20266	16342	12650	16342
15°	21264	16104	9967	16104
20°	18433	15747	8624	15747
25°	12089	15262	7701	15262
30°	8138	14673	6969	14673
35°	6591	13931	6286	13931
40°	5861	13122	5817	13122
45°	5304	12177	5190	12177
50°	4828	11235	4808	11235
55°	4538	10196	4479	10196
60°	3794	9242	3749	9242
65°	3202	8390	3629	8390
70°	2960	7492	3423	7492
75°	2770	6519	3163	6519
80°	2548	5365	2817	5365
85°	2334	4242	2482	4242



TEST NUMBER: P331664-830

CATALOG NUMBER: S122RDIP-S485D925U830-4F0-1E-UDD-A1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	96.0	2.0
10°-20°	267.6	5.5
20°-30°	344.8	7.1
30°-40°	327.7	6.7
40°-50°	280.7	5.8
50°-60°	213.8	4.4
60°-70°	135.1	2.8
70°-80°	67.5	1.4
80°-90°	22.0	0.5
90°-100°	70.6	1.4
100°-110°	219.4	4.5
110°-120°	375.0	7.7
120°-130°	493.1	10.1
130°-140°	553.4	11.4
140°-150°	542.7	11.1
150°-160°	455.2	9.3
160°-170°	301.9	6.2
170°-180°	105.5	2.2
0°-30°	708.4	14.5
0°-40°	1036.1	21.3
0°-60°	1530.5	31.4
0°-90°	1755.1	36.0
90°-120°	665.0	13.6
90°-150°	2254.1	46.3
90°-180°	3117.0	64.0
0°-180°	4871.8	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	1013	1013	1013	1013	1013	
5°	1127	1016	900	1016	1127	111
15°	1272	963	596	963	1272	343
25°	679	857	432	857	679	322
35°	334	707	319	707	334	214
45°	232	533	227	533	232	180
55°	161	362	159	362	161	141
65°	84	220	95	220	84	85
75°	44	104	51	104	44	47
85°	13	23	13	23	13	14
90°	32	1	32	1	32	14
95°	58	49	58	49	58	65
105°	209	202	209	202	209	220
115°	376	376	376	376	376	372
125°	549	547	549	547	549	490
135°	717	708	717	708	717	552
145°	869	860	869	860	869	543
155°	990	983	990	983	990	456
165°	1070	1070	1070	1070	1070	302
175°	1109	1113	1109	1113	1109	105
180°	1115	1115	1115	1115	1115	



TEST NUMBER: P331664-830

CATALOG NUMBER: S122RDIP-S485D925U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0
2.5°	1054.1	1055.0	1055.8	1053.9	1053.9	1052.2	1048.5	1045.7	1037.7	1036.6	1036.6
5°	1127.0	1126.3	1127.8	1123.1	1116.8	1115.4	1108.7	1099.9	1090.8	1080.5	1078.5
7.5°	1199.6	1198.5	1195.7	1194.9	1190.1	1179.4	1168.7	1157.2	1142.0	1127.1	1119.6
10°	1236.1	1247.7	1240.8	1228.4	1230.9	1214.4	1205.5	1190.4	1177.7	1155.6	1150.7
12.5°	1272.1	1276.8	1274.5	1267.5	1264.4	1252.9	1241.0	1227.9	1204.5	1184.6	1167.2
15°	1272.1	1278.7	1280.5	1278.4	1280.2	1279.4	1273.1	1262.2	1241.8	1219.9	1201.0
17.5°	1178.2	1182.8	1194.3	1202.1	1212.0	1232.8	1243.1	1247.2	1244.1	1231.6	1218.2
20°	1072.8	1065.1	1097.5	1114.0	1128.1	1163.3	1193.5	1205.1	1223.8	1223.5	1219.9
22.5°	923.6	925.4	956.1	975.7	1016.9	1052.1	1086.6	1130.3	1166.4	1190.2	1204.2
25°	678.6	692.0	722.6	749.3	795.1	860.6	920.1	989.1	1054.1	1105.6	1154.5
27.5°	509.6	510.7	534.9	559.7	586.8	640.5	715.4	797.8	890.6	967.1	1055.3
30°	436.5	434.3	444.6	459.7	483.0	524.4	580.8	661.8	754.3	869.8	972.5
32.5°	384.7	384.7	392.5	403.7	422.9	450.9	489.6	555.3	642.8	756.3	876.8
35°	334.4	334.0	339.7	347.8	355.8	373.8	400.2	434.7	494.9	600.9	724.1
37.5°	298.3	299.9	302.7	307.7	316.6	326.6	342.5	365.6	408.5	471.2	574.7
40°	278.1	278.8	282.7	286.9	292.2	299.9	312.9	331.6	362.9	412.8	488.5
42.5°	259.5	260.1	263.0	266.8	271.0	278.8	289.5	305.7	331.1	370.0	432.5
45°	232.3	232.3	234.8	236.5	241.1	248.2	256.9	270.3	287.9	316.8	358.4
47.5°	206.8	206.9	208.5	211.5	214.4	219.9	228.6	239.5	252.3	274.7	310.1
50°	192.2	192.6	193.6	196.0	197.8	202.7	209.4	219.0	232.3	249.6	279.1
52.5°	180.3	180.1	181.4	182.6	183.7	187.3	192.3	200.7	212.6	227.6	252.1
55°	161.2	159.8	161.9	163.6	164.8	166.2	168.9	174.3	184.5	197.1	215.4
57.5°	137.2	136.7	138.2	139.8	143.1	146.9	149.3	152.7	158.0	167.0	185.2
60°	117.5	117.5	120.7	121.8	125.6	130.5	135.5	138.4	143.6	149.6	163.0
62.5°	100.1	100.4	101.9	102.9	105.1	111.1	118.1	124.2	129.2	135.0	143.8
65°	83.8	84.5	84.5	85.2	86.6	88.0	90.8	95.8	104.5	112.6	119.3
67.5°	71.1	71.4	71.5	72.2	72.6	74.1	75.2	77.5	79.5	87.2	95.5
70°	62.7	63.7	63.3	64.1	64.4	65.1	66.5	67.6	70.8	72.5	77.5
72.5°	54.8	55.5	55.5	55.9	56.8	56.9	58.1	59.1	61.2	62.7	65.3
75°	44.4	44.0	44.4	45.1	45.4	45.7	45.7	47.1	48.3	49.7	51.4
77.5°	34.2	34.6	34.5	34.6	34.6	35.3	35.2	35.8	36.9	37.6	38.5
80°	27.4	27.8	27.4	27.8	28.2	28.5	28.2	28.5	29.6	30.3	30.3
82.5°	21.3	21.3	21.6	21.6	21.7	21.8	22.2	22.3	23.1	22.9	23.2
85°	12.6	12.3	12.3	12.3	12.6	13.0	12.6	12.6	13.0	13.0	13.0
87.5°	10.9	11.1	11.1	11.0	11.0	11.0	11.1	11.5	11.3	11.7	10.5
90°	32.0	31.8	31.6	31.4	31.1	31.3	31.7	32.0	32.5	32.9	28.3
92.5°	30.4	30.4	30.3	30.3	30.3	30.3	30.2	30.1	30.0	29.9	28.8
95°	58.3	58.7	59.2	59.6	59.9	60.2	60.2	60.2	60.2	60.2	59.8
97.5°	101.0	101.0	101.1	101.1	101.2	101.2	101.2	101.2	101.2	101.2	100.4
100°	128.8	129.0	129.3	129.5	129.7	129.8	129.8	129.8	129.8	129.8	129.2
102.5°	160.5	160.7	160.9	161.1	161.3	161.4	161.2	161.0	160.8	160.7	159.9
105°	208.8	208.8	208.8	208.8	208.8	208.6	208.2	207.7	207.4	206.9	206.5
107.5°	254.3	255.3	256.3	257.2	258.2	258.5	258.4	258.3	258.1	257.9	257.9
110°	289.7	290.3	291.0	291.6	292.2	292.6	292.6	292.6	292.6	292.6	292.6



TEST NUMBER: P331664-830

CATALOG NUMBER: S122RDIP-S485D925U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	323.6	324.0	324.5	325.0	325.4	325.9	326.4	326.9	327.4	327.9	328.1
115°	376.3	376.8	377.5	378.1	378.7	379.2	379.4	379.6	379.8	380.0	380.4
117.5°	426.5	427.1	427.7	428.4	429.0	429.5	430.1	430.6	431.0	431.6	432.7
120°	461.8	462.5	463.1	463.7	464.4	464.7	464.7	464.7	464.7	464.7	466.4
122.5°	496.4	496.9	497.4	497.9	498.3	498.8	499.3	499.7	500.3	500.8	502.0
125°	549.3	549.5	549.7	550.0	550.2	550.5	551.2	551.9	552.4	553.1	553.7
127.5°	597.5	598.1	598.8	599.5	600.1	600.9	601.6	602.4	603.1	603.9	604.6
130°	632.1	632.9	633.8	634.6	635.5	636.0	636.5	636.9	637.3	637.7	638.2
132.5°	665.2	665.9	666.6	667.2	667.9	668.6	669.6	670.5	671.5	672.3	672.2
135°	716.7	717.4	718.0	718.6	719.3	719.6	719.9	720.1	720.3	720.5	720.1
137.5°	763.4	764.2	765.1	765.9	766.8	767.2	767.4	767.6	767.8	767.9	767.4
140°	795.8	796.6	797.4	798.2	799.1	799.6	799.6	799.6	799.6	799.6	798.5
142.5°	825.1	826.0	826.8	827.6	828.5	828.8	828.6	828.5	828.3	828.1	827.4
145°	869.1	870.0	870.8	871.7	872.5	872.8	872.6	872.3	872.1	871.9	870.7
147.5°	908.4	909.3	910.0	910.9	911.6	911.8	911.3	910.9	910.4	909.9	909.1
150°	934.1	934.6	935.3	935.9	936.5	936.5	935.9	935.3	934.6	934.1	933.2
152.5°	958.1	958.9	959.7	960.5	961.3	961.3	960.5	959.7	958.9	958.1	957.1
155°	990.4	991.1	991.7	992.3	993.0	992.8	991.7	990.7	989.7	988.5	988.0
157.5°	1018.3	1019.3	1020.3	1021.3	1022.3	1022.1	1020.7	1019.3	1017.9	1016.4	1016.1
160°	1035.6	1036.4	1037.3	1038.1	1039.0	1038.8	1037.5	1036.2	1035.0	1033.7	1033.5
162.5°	1050.7	1051.7	1052.6	1053.7	1054.7	1054.4	1053.0	1051.6	1050.2	1048.8	1048.6
165°	1070.4	1071.5	1072.5	1073.6	1074.6	1074.4	1072.9	1071.5	1070.0	1068.6	1068.6
167.5°	1086.6	1087.7	1088.7	1089.9	1090.9	1090.7	1089.3	1087.8	1086.4	1084.9	1085.0
170°	1094.9	1096.1	1097.4	1098.6	1099.9	1099.8	1098.3	1096.8	1095.4	1093.9	1094.1
172.5°	1101.6	1102.9	1104.2	1105.4	1106.6	1106.5	1105.1	1103.6	1102.2	1100.7	1100.9
175°	1109.0	1110.2	1111.4	1112.8	1114.0	1113.9	1112.4	1111.0	1109.5	1108.1	1108.4
177.5°	1112.4	1113.3	1114.4	1115.4	1116.3	1116.3	1115.4	1114.4	1113.3	1112.4	1112.7
180°	1114.7	1114.7	1114.7	1114.7	1114.7	1114.7	1114.7	1114.7	1114.7	1114.7	1114.7



TEST NUMBER: P331664-830

CATALOG NUMBER: S122RDIP-S485D925U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0
2.5°	1037.2	1035.0	1033.0	1027.9	1025.4	1019.7	1018.9	1018.6	1011.3	1004.3	1002.3
5°	1072.8	1067.2	1058.8	1048.9	1038.7	1028.1	1021.1	1015.5	1001.4	988.0	980.2
7.5°	1108.7	1096.6	1082.0	1063.4	1047.8	1030.4	1017.5	1005.8	985.8	966.7	953.8
10°	1135.5	1115.8	1096.5	1070.7	1050.7	1031.0	1012.7	996.8	974.3	949.0	930.9
12.5°	1152.1	1130.4	1103.7	1078.6	1052.6	1027.6	1003.1	982.7	956.3	930.1	908.7
15°	1174.6	1151.3	1119.0	1083.1	1049.6	1016.9	988.7	963.4	928.9	897.6	871.5
17.5°	1193.0	1160.9	1126.1	1084.7	1045.9	1004.4	968.1	935.7	897.3	859.5	828.9
20°	1198.8	1167.2	1127.0	1085.5	1039.7	990.8	951.8	916.5	875.3	834.2	799.0
22.5°	1195.1	1170.5	1125.9	1076.2	1029.4	978.2	934.1	893.2	847.5	805.5	764.7
25°	1170.4	1161.9	1119.6	1065.5	1011.9	952.4	901.4	856.7	804.6	759.6	715.2
27.5°	1112.4	1130.7	1104.5	1046.7	987.2	923.4	866.1	815.2	761.1	710.4	666.2
30°	1056.7	1098.5	1087.2	1033.8	967.2	904.6	840.2	787.0	729.3	677.2	633.6
32.5°	980.3	1049.5	1060.5	1015.8	947.0	878.1	810.6	757.7	697.5	642.5	600.0
35°	858.8	962.3	1009.8	981.3	912.3	838.1	768.4	706.8	646.2	592.0	549.8
37.5°	713.9	854.8	934.1	936.0	872.7	795.5	719.6	658.5	596.4	543.3	497.6
40°	619.8	772.6	875.7	898.6	845.1	761.7	684.9	622.6	562.1	510.0	457.6
42.5°	535.4	687.6	814.4	854.1	811.6	728.8	651.8	586.6	527.7	478.4	424.9
45°	432.9	566.0	705.7	776.8	753.3	676.5	595.2	533.3	478.0	435.4	384.0
47.5°	365.2	459.0	594.2	690.4	689.9	619.9	540.0	480.6	429.3	389.5	347.8
50°	326.6	408.3	522.7	631.8	640.9	582.2	506.1	447.3	399.5	357.6	324.1
52.5°	292.0	359.3	462.1	566.8	592.8	541.9	468.2	413.9	367.4	328.9	300.2
55°	246.8	298.8	377.0	474.9	514.3	478.3	412.8	362.2	324.5	292.2	267.5
57.5°	208.7	247.8	310.5	389.3	435.2	412.6	358.6	317.4	285.2	255.9	236.5
60°	184.8	216.8	269.9	335.8	386.4	370.6	324.5	286.2	258.7	233.4	215.1
62.5°	162.3	189.8	235.4	288.8	335.3	328.7	291.1	258.8	234.8	211.7	196.2
65°	130.5	150.6	186.2	228.1	265.4	268.5	241.5	219.6	198.1	179.8	166.2
67.5°	104.0	117.1	142.1	177.4	205.4	215.4	198.8	182.1	165.0	150.9	139.0
70°	87.7	98.2	116.5	145.1	170.7	181.3	171.7	158.7	143.9	132.3	122.2
72.5°	71.1	81.3	94.8	115.7	137.8	149.2	145.9	136.5	124.5	114.9	105.3
75°	53.5	56.6	65.8	79.9	97.2	107.0	109.4	104.5	95.0	87.7	82.0
77.5°	39.6	41.5	45.8	53.3	64.5	73.2	76.9	76.3	69.7	65.5	60.2
80°	31.7	32.7	34.9	38.0	46.5	55.2	57.7	57.7	53.2	51.4	46.1
82.5°	24.0	24.9	26.1	27.9	31.9	39.5	42.2	42.8	39.9	37.6	33.5
85°	13.8	13.4	14.0	15.2	15.8	17.9	22.1	22.9	22.1	19.3	18.3
87.5°	9.5	8.9	8.0	7.0	6.8	6.5	7.4	8.4	7.7	7.4	7.4
90°	23.8	19.1	14.5	10.9	8.5	5.9	3.5	0.9	3.5	5.9	8.5
92.5°	27.7	26.7	25.5	24.1	22.2	20.5	18.6	16.8	18.6	20.5	22.2
95°	59.4	58.9	58.5	57.3	55.1	53.1	51.0	48.9	51.0	53.1	55.1
97.5°	99.6	98.9	98.0	96.7	94.9	93.0	91.2	89.4	91.2	93.0	94.9
100°	128.6	127.9	127.3	126.1	124.5	122.8	121.1	119.4	121.1	122.8	124.5
102.5°	159.1	158.3	157.5	156.4	155.0	153.7	152.4	151.1	152.4	153.7	155.0
105°	206.1	205.7	205.3	204.7	204.2	203.5	202.8	202.3	202.8	203.5	204.2
107.5°	257.9	257.9	257.9	257.5	256.6	255.6	254.7	253.7	254.7	255.6	256.6
110°	292.6	292.6	292.6	291.9	290.7	289.4	288.1	286.9	288.1	289.4	290.7





TEST NUMBER: P331664-830

CATALOG NUMBER: S122RDIP-S485D925U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	328.2	328.4	328.6	328.0	326.8	325.6	324.2	323.0	324.2	325.6	326.8
115°	380.9	381.3	381.6	381.3	380.0	378.7	377.5	376.3	377.5	378.7	380.0
117.5°	433.9	435.1	436.2	436.0	434.3	432.6	430.9	429.3	430.9	432.6	434.3
120°	468.0	469.7	471.4	471.4	469.7	468.0	466.4	464.7	466.4	468.0	469.7
122.5°	503.1	504.3	505.5	505.0	503.0	501.1	499.0	497.0	499.0	501.1	503.0
125°	554.3	555.0	555.6	555.0	553.1	551.2	549.3	547.4	549.3	551.2	553.1
127.5°	605.4	606.1	606.9	606.1	603.7	601.3	598.9	596.5	598.9	601.3	603.7
130°	638.6	638.9	639.4	638.3	635.6	632.8	630.1	627.4	630.1	632.8	635.6
132.5°	672.2	672.1	672.0	670.9	668.6	666.5	664.2	662.0	664.2	666.5	668.6
135°	719.6	719.3	718.9	717.5	715.2	712.8	710.6	708.3	710.6	712.8	715.2
137.5°	766.9	766.3	765.7	764.5	762.6	760.7	758.8	757.1	758.8	760.7	762.6
140°	797.4	796.4	795.3	793.9	792.0	790.1	788.2	786.4	788.2	790.1	792.0
142.5°	826.7	826.0	825.3	824.0	822.1	820.2	818.3	816.4	818.3	820.2	822.1
145°	869.4	868.2	867.0	865.5	864.1	862.6	861.2	859.7	861.2	862.6	864.1
147.5°	908.2	907.5	906.6	905.3	903.5	901.8	900.0	898.2	900.0	901.8	903.5
150°	932.4	931.5	930.7	929.6	928.4	927.1	925.9	924.6	925.9	927.1	928.4
152.5°	956.1	955.1	954.1	953.0	951.7	950.5	949.2	947.9	949.2	950.5	951.7
155°	987.3	986.7	986.1	985.4	984.9	984.2	983.5	983.0	983.5	984.2	984.9
157.5°	1015.7	1015.3	1014.9	1014.6	1014.1	1013.7	1013.2	1012.9	1013.2	1013.7	1014.1
160°	1033.3	1033.1	1032.9	1032.6	1032.2	1031.7	1031.3	1031.0	1031.3	1031.7	1032.2
162.5°	1048.4	1048.2	1047.9	1047.8	1047.7	1047.6	1047.5	1047.4	1047.5	1047.6	1047.7
165°	1068.6	1068.6	1068.6	1068.7	1068.8	1069.0	1069.3	1069.5	1069.3	1069.0	1068.8
167.5°	1085.0	1085.1	1085.1	1085.4	1086.0	1086.7	1087.3	1087.9	1087.3	1086.7	1086.0
170°	1094.4	1094.6	1094.8	1095.1	1095.8	1096.5	1097.0	1097.7	1097.0	1096.5	1095.8
172.5°	1101.1	1101.4	1101.5	1101.9	1102.6	1103.2	1103.8	1104.5	1103.8	1103.2	1102.6
175°	1108.9	1109.3	1109.7	1110.2	1110.9	1111.4	1112.1	1112.8	1112.1	1111.4	1110.9
177.5°	1113.0	1113.3	1113.7	1114.1	1114.7	1115.1	1115.6	1116.2	1115.6	1115.1	1114.7
180°	1114.7	1114.7	1114.7	1114.7	1114.7	1114.7	1114.7	1114.7	1114.7	1114.7	1114.7



TEST NUMBER: P331664-830

CATALOG NUMBER: S122RDIP-S485D925U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0
2.5°	998.6	996.6	993.0	987.4	984.0	978.1	974.1	976.4	976.9	976.4	975.8
5°	971.9	964.4	954.2	944.3	935.2	925.4	919.7	917.3	912.3	909.6	908.1
7.5°	939.3	926.6	912.2	895.0	880.4	865.2	857.3	853.5	843.4	837.9	833.1
10°	915.1	895.0	880.6	858.1	844.4	824.3	810.6	811.0	797.2	789.5	783.8
12.5°	888.4	866.4	842.4	822.1	803.0	786.9	770.3	763.6	749.0	741.6	726.4
15°	844.0	818.3	793.1	765.5	746.2	721.2	697.3	668.1	644.5	624.1	618.4
17.5°	795.6	763.8	738.4	706.2	673.0	630.9	603.2	586.3	572.0	561.3	553.3
20°	762.4	730.0	702.9	654.3	609.6	581.1	560.7	547.7	532.9	521.3	514.9
22.5°	727.5	693.7	656.8	602.5	567.7	544.8	526.6	511.6	501.6	492.6	486.8
25°	677.9	640.9	580.0	542.7	514.6	490.7	478.0	468.8	458.3	445.9	440.4
27.5°	625.6	566.8	523.0	495.3	468.4	452.9	441.5	427.8	418.4	412.8	407.0
30°	586.4	527.6	493.5	463.2	444.2	427.0	413.6	405.9	396.7	387.2	383.3
32.5°	542.7	495.8	463.1	437.9	418.6	403.9	393.3	380.8	374.2	368.3	360.2
35°	488.5	453.0	423.1	402.7	384.4	372.4	360.1	352.7	340.7	335.8	332.6
37.5°	442.6	411.8	389.5	368.0	353.5	340.3	332.7	320.9	315.8	308.9	302.2
40°	416.7	386.4	365.0	347.4	331.2	321.3	311.9	302.4	294.6	291.4	283.3
42.5°	390.3	365.6	344.1	324.9	314.1	303.6	291.6	284.6	276.5	271.5	266.5
45°	353.7	332.0	313.6	297.7	285.8	274.9	267.1	255.5	251.0	240.7	236.5
47.5°	321.6	301.3	283.9	268.8	257.1	250.1	238.7	229.6	222.3	216.0	210.7
50°	298.8	281.9	265.0	251.7	241.1	230.9	219.3	214.7	203.4	200.3	197.1
52.5°	278.0	261.9	246.5	233.4	222.8	212.9	202.6	196.7	189.1	185.9	183.6
55°	248.8	233.4	218.6	207.0	196.4	186.2	179.8	172.5	168.9	166.5	163.6
57.5°	219.5	205.7	194.3	182.6	171.9	163.8	156.5	152.0	148.4	145.2	141.8
60°	201.0	187.6	177.4	166.5	155.6	148.9	143.3	138.0	133.7	128.8	127.4
62.5°	181.3	169.6	160.2	149.6	140.1	133.9	128.7	123.7	118.6	111.4	109.4
65°	154.2	145.1	135.2	126.4	117.9	112.0	104.2	98.6	96.4	95.8	95.4
67.5°	129.7	121.0	112.5	103.6	95.9	90.3	86.3	85.5	84.1	83.6	82.7
70°	113.3	105.3	96.8	88.3	81.0	79.9	78.5	77.1	75.3	74.6	73.9
72.5°	98.7	90.3	81.9	75.1	71.9	70.6	69.2	67.8	66.6	65.9	65.5
75°	75.7	68.0	62.3	59.9	58.1	57.0	55.0	53.8	53.2	52.1	51.7
77.5°	54.5	50.1	47.5	46.0	44.1	43.0	41.8	40.7	40.0	39.8	39.2
80°	41.6	39.4	37.7	35.5	34.9	33.5	33.1	32.0	32.4	31.3	31.3
82.5°	32.2	29.6	28.1	27.1	26.4	25.3	24.9	24.4	24.5	23.8	23.8
85°	16.6	15.8	15.2	14.4	14.4	13.4	13.8	13.4	13.4	12.6	12.3
87.5°	7.5	8.0	8.3	9.2	10.2	10.8	10.7	10.4	10.3	10.2	9.9
90°	10.9	14.5	19.1	23.8	28.3	32.9	32.5	32.0	31.7	31.3	31.1
92.5°	24.1	25.5	26.7	27.7	28.8	29.9	30.0	30.1	30.2	30.3	30.3
95°	57.3	58.5	58.9	59.4	59.8	60.2	60.2	60.2	60.2	60.2	59.9
97.5°	96.7	98.0	98.9	99.6	100.4	101.2	101.2	101.2	101.2	101.2	101.2
100°	126.1	127.3	127.9	128.6	129.2	129.8	129.8	129.8	129.8	129.8	129.7
102.5°	156.4	157.5	158.3	159.1	159.9	160.7	160.8	161.0	161.2	161.4	161.3
105°	204.7	205.3	205.7	206.1	206.5	206.9	207.4	207.7	208.2	208.6	208.8
107.5°	257.5	257.9	257.9	257.9	257.9	257.9	258.1	258.3	258.4	258.5	258.2
110°	291.9	292.6	292.6	292.6	292.6	292.6	292.6	292.6	292.6	292.6	292.2



TEST NUMBER: P331664-830

CATALOG NUMBER: S122RDIP-S485D925U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	328.0	328.6	328.4	328.2	328.1	327.9	327.4	326.9	326.4	325.9	325.4
115°	381.3	381.6	381.3	380.9	380.4	380.0	379.8	379.6	379.4	379.2	378.7
117.5°	436.0	436.2	435.1	433.9	432.7	431.6	431.0	430.6	430.1	429.5	429.0
120°	471.4	471.4	469.7	468.0	466.4	464.7	464.7	464.7	464.7	464.7	464.4
122.5°	505.0	505.5	504.3	503.1	502.0	500.8	500.3	499.7	499.3	498.8	498.3
125°	555.0	555.6	555.0	554.3	553.7	553.1	552.4	551.9	551.2	550.5	550.2
127.5°	606.1	606.9	606.1	605.4	604.6	603.9	603.1	602.4	601.6	600.9	600.1
130°	638.3	639.4	638.9	638.6	638.2	637.7	637.3	636.9	636.5	636.0	635.5
132.5°	670.9	672.0	672.1	672.2	672.2	672.3	671.5	670.5	669.6	668.6	667.9
135°	717.5	718.9	719.3	719.6	720.1	720.5	720.3	720.1	719.9	719.6	719.3
137.5°	764.5	765.7	766.3	766.9	767.4	767.9	767.8	767.6	767.4	767.2	766.8
140°	793.9	795.3	796.4	797.4	798.5	799.6	799.6	799.6	799.6	799.6	799.1
142.5°	824.0	825.3	826.0	826.7	827.4	828.1	828.3	828.5	828.6	828.8	828.5
145°	865.5	867.0	868.2	869.4	870.7	871.9	872.1	872.3	872.6	872.8	872.5
147.5°	905.3	906.6	907.5	908.2	909.1	909.9	910.4	910.9	911.3	911.8	911.6
150°	929.6	930.7	931.5	932.4	933.2	934.1	934.6	935.3	935.9	936.5	936.5
152.5°	953.0	954.1	955.1	956.1	957.1	958.1	958.9	959.7	960.5	961.3	961.3
155°	985.4	986.1	986.7	987.3	988.0	988.5	989.7	990.7	991.7	992.8	993.0
157.5°	1014.6	1014.9	1015.3	1015.7	1016.1	1016.4	1017.9	1019.3	1020.7	1022.1	1022.3
160°	1032.6	1032.9	1033.1	1033.3	1033.5	1033.7	1035.0	1036.2	1037.5	1038.8	1039.0
162.5°	1047.8	1047.9	1048.2	1048.4	1048.6	1048.8	1050.2	1051.6	1053.0	1054.4	1054.7
165°	1068.7	1068.6	1068.6	1068.6	1068.6	1068.6	1070.0	1071.5	1072.9	1074.4	1074.6
167.5°	1085.4	1085.1	1085.1	1085.0	1085.0	1084.9	1086.4	1087.8	1089.3	1090.7	1090.9
170°	1095.1	1094.8	1094.6	1094.4	1094.1	1093.9	1095.4	1096.8	1098.3	1099.8	1099.9
172.5°	1101.9	1101.5	1101.4	1101.1	1100.9	1100.7	1102.2	1103.6	1105.1	1106.5	1106.6
175°	1110.2	1109.7	1109.3	1108.9	1108.4	1108.1	1109.5	1111.0	1112.4	1113.9	1114.0
177.5°	1114.1	1113.7	1113.3	1113.0	1112.7	1112.4	1113.3	1114.4	1115.4	1116.3	1116.3
180°	1114.7	1114.7	1114.7	1114.7	1114.7	1114.7	1114.7	1114.7	1114.7	1114.7	1114.7



TEST NUMBER: P331664-830

CATALOG NUMBER: S122RDIP-S485D925U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0
2.5°	972.7	973.3	972.4	973.0	972.4	973.3	972.7	975.8	976.4	976.9	976.4
5°	906.3	902.1	901.4	900.4	901.4	902.1	906.3	908.1	909.6	912.3	917.3
7.5°	827.1	826.4	824.7	822.2	824.7	826.4	827.1	833.1	837.9	843.4	853.5
10°	776.1	774.4	774.0	771.6	774.0	774.4	776.1	783.8	789.5	797.2	811.0
12.5°	716.4	705.1	703.9	697.8	703.9	705.1	716.4	726.4	741.6	749.0	763.6
15°	610.0	607.8	600.9	596.3	600.9	607.8	610.0	618.4	624.1	644.5	668.1
17.5°	549.1	542.2	540.1	539.1	540.1	542.2	549.1	553.3	561.3	572.0	586.3
20°	510.0	503.7	502.7	501.9	502.7	503.7	510.0	514.9	521.3	532.9	547.7
22.5°	483.0	476.4	473.6	471.6	473.6	476.4	483.0	486.8	492.6	501.6	511.6
25°	436.8	434.3	432.9	432.3	432.9	434.3	436.8	440.4	445.9	458.3	468.8
27.5°	400.7	395.3	394.2	392.4	394.2	395.3	400.7	407.0	412.8	418.4	427.8
30°	380.1	378.3	375.9	373.8	375.9	378.3	380.1	383.3	387.2	396.7	405.9
32.5°	355.9	354.5	352.2	351.3	352.2	354.5	355.9	360.2	368.3	374.2	380.8
35°	329.1	324.1	322.1	318.9	322.1	324.1	329.1	332.6	335.8	340.7	352.7
37.5°	300.8	298.1	295.2	296.2	295.2	298.1	300.8	302.2	308.9	315.8	320.9
40°	278.8	277.0	276.3	276.0	276.3	277.0	278.8	283.3	291.4	294.6	302.4
42.5°	261.3	256.5	254.6	254.6	254.6	256.5	261.3	266.5	271.5	276.5	284.6
45°	234.8	230.2	227.1	227.3	227.1	230.2	234.8	236.5	240.7	251.0	255.5
47.5°	207.6	207.5	205.5	206.1	205.5	207.5	207.6	210.7	216.0	222.3	229.6
50°	194.6	192.6	191.1	191.4	191.1	192.6	194.6	197.1	200.3	203.4	214.7
52.5°	182.3	180.4	179.3	180.8	179.3	180.4	182.3	183.6	185.9	189.1	196.7
55°	161.9	159.8	159.5	159.1	159.5	159.8	161.9	163.6	166.5	168.9	172.5
57.5°	139.2	137.8	135.6	134.8	135.6	137.8	139.2	141.8	145.2	148.4	152.0
60°	122.8	120.0	116.5	116.1	116.5	120.0	122.8	127.4	128.8	133.7	138.0
62.5°	107.9	107.4	106.7	106.6	106.7	107.4	107.9	109.4	111.4	118.6	123.7
65°	94.7	94.3	94.7	95.0	94.7	94.3	94.7	95.4	95.8	96.4	98.6
67.5°	82.5	81.9	81.2	81.5	81.2	81.9	82.5	82.7	83.6	84.1	85.5
70°	73.2	72.9	72.5	72.5	72.5	72.9	73.2	73.9	74.6	75.3	77.1
72.5°	64.2	64.1	63.8	63.5	63.8	64.1	64.2	65.5	65.9	66.6	67.8
75°	51.4	50.7	50.7	50.7	50.7	50.7	51.4	51.7	52.1	53.2	53.8
77.5°	39.1	38.8	38.5	38.2	38.5	38.8	39.1	39.2	39.8	40.0	40.7
80°	31.0	30.6	30.3	30.3	30.3	30.6	31.0	31.3	31.3	32.4	32.0
82.5°	23.7	23.3	23.2	22.9	23.2	23.3	23.7	23.8	23.8	24.5	24.4
85°	12.6	13.0	12.6	13.4	12.6	13.0	12.6	12.3	12.6	13.4	13.4
87.5°	9.9	9.7	10.0	9.8	10.0	9.7	9.9	9.9	10.2	10.3	10.4
90°	31.4	31.6	31.8	32.0	31.8	31.6	31.4	31.1	31.3	31.7	32.0
92.5°	30.3	30.3	30.4	30.4	30.4	30.3	30.3	30.3	30.3	30.2	30.1
95°	59.6	59.2	58.7	58.3	58.7	59.2	59.6	59.9	60.2	60.2	60.2
97.5°	101.1	101.1	101.0	101.0	101.0	101.1	101.1	101.2	101.2	101.2	101.2
100°	129.5	129.3	129.0	128.8	129.0	129.3	129.5	129.7	129.8	129.8	129.8
102.5°	161.1	160.9	160.7	160.5	160.7	160.9	161.1	161.3	161.4	161.2	161.0
105°	208.8	208.8	208.8	208.8	208.8	208.8	208.8	208.8	208.6	208.2	207.7
107.5°	257.2	256.3	255.3	254.3	255.3	256.3	257.2	258.2	258.5	258.4	258.3
110°	291.6	291.0	290.3	289.7	290.3	291.0	291.6	292.2	292.6	292.6	292.6



TEST NUMBER: P331664-830

CATALOG NUMBER: S122RDIP-S485D925U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	325.0	324.5	324.0	323.6	324.0	324.5	325.0	325.4	325.9	326.4	326.9
115°	378.1	377.5	376.8	376.3	376.8	377.5	378.1	378.7	379.2	379.4	379.6
117.5°	428.4	427.7	427.1	426.5	427.1	427.7	428.4	429.0	429.5	430.1	430.6
120°	463.7	463.1	462.5	461.8	462.5	463.1	463.7	464.4	464.7	464.7	464.7
122.5°	497.9	497.4	496.9	496.4	496.9	497.4	497.9	498.3	498.8	499.3	499.7
125°	550.0	549.7	549.5	549.3	549.5	549.7	550.0	550.2	550.5	551.2	551.9
127.5°	599.5	598.8	598.1	597.5	598.1	598.8	599.5	600.1	600.9	601.6	602.4
130°	634.6	633.8	632.9	632.1	632.9	633.8	634.6	635.5	636.0	636.5	636.9
132.5°	667.2	666.6	665.9	665.2	665.9	666.6	667.2	667.9	668.6	669.6	670.5
135°	718.6	718.0	717.4	716.7	717.4	718.0	718.6	719.3	719.6	719.9	720.1
137.5°	765.9	765.1	764.2	763.4	764.2	765.1	765.9	766.8	767.2	767.4	767.6
140°	798.2	797.4	796.6	795.8	796.6	797.4	798.2	799.1	799.6	799.6	799.6
142.5°	827.6	826.8	826.0	825.1	826.0	826.8	827.6	828.5	828.8	828.6	828.5
145°	871.7	870.8	870.0	869.1	870.0	870.8	871.7	872.5	872.8	872.6	872.3
147.5°	910.9	910.0	909.3	908.4	909.3	910.0	910.9	911.6	911.8	911.3	910.9
150°	935.9	935.3	934.6	934.1	934.6	935.3	935.9	936.5	936.5	935.9	935.3
152.5°	960.5	959.7	958.9	958.1	958.9	959.7	960.5	961.3	961.3	960.5	959.7
155°	992.3	991.7	991.1	990.4	991.1	991.7	992.3	993.0	992.8	991.7	990.7
157.5°	1021.3	1020.3	1019.3	1018.3	1019.3	1020.3	1021.3	1022.3	1022.1	1020.7	1019.3
160°	1038.1	1037.3	1036.4	1035.6	1036.4	1037.3	1038.1	1039.0	1038.8	1037.5	1036.2
162.5°	1053.7	1052.6	1051.7	1050.7	1051.7	1052.6	1053.7	1054.7	1054.4	1053.0	1051.6
165°	1073.6	1072.5	1071.5	1070.4	1071.5	1072.5	1073.6	1074.6	1074.4	1072.9	1071.5
167.5°	1089.9	1088.7	1087.7	1086.6	1087.7	1088.7	1089.9	1090.9	1090.7	1089.3	1087.8
170°	1098.6	1097.4	1096.1	1094.9	1096.1	1097.4	1098.6	1099.9	1099.8	1098.3	1096.8
172.5°	1105.4	1104.2	1102.9	1101.6	1102.9	1104.2	1105.4	1106.6	1106.5	1105.1	1103.6
175°	1112.8	1111.4	1110.2	1109.0	1110.2	1111.4	1112.8	1114.0	1113.9	1112.4	1111.0
177.5°	1115.4	1114.4	1113.3	1112.4	1113.3	1114.4	1115.4	1116.3	1116.3	1115.4	1114.4
180°	1114.7	1114.7	1114.7	1114.7	1114.7	1114.7	1114.7	1114.7	1114.7	1114.7	1114.7



TEST NUMBER: P331664-830

CATALOG NUMBER: S122RDIP-S485D925U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0
2.5°	974.1	978.1	984.0	987.4	993.0	996.6	998.6	1002.3	1004.3	1011.3	1018.6
5°	919.7	925.4	935.2	944.3	954.2	964.4	971.9	980.2	988.0	1001.4	1015.5
7.5°	857.3	865.2	880.4	895.0	912.2	926.6	939.3	953.8	966.7	985.8	1005.8
10°	810.6	824.3	844.4	858.1	880.6	895.0	915.1	930.9	949.0	974.3	996.8
12.5°	770.3	786.9	803.0	822.1	842.4	866.4	888.4	908.7	930.1	956.3	982.7
15°	697.3	721.2	746.2	765.5	793.1	818.3	844.0	871.5	897.6	928.9	963.4
17.5°	603.2	630.9	673.0	706.2	738.4	763.8	795.6	828.9	859.5	897.3	935.7
20°	560.7	581.1	609.6	654.3	702.9	730.0	762.4	799.0	834.2	875.3	916.5
22.5°	526.6	544.8	567.7	602.5	656.8	693.7	727.5	764.7	805.5	847.5	893.2
25°	478.0	490.7	514.6	542.7	580.0	640.9	677.9	715.2	759.6	804.6	856.7
27.5°	441.5	452.9	468.4	495.3	523.0	566.8	625.6	666.2	710.4	761.1	815.2
30°	413.6	427.0	444.2	463.2	493.5	527.6	586.4	633.6	677.2	729.3	787.0
32.5°	393.3	403.9	418.6	437.9	463.1	495.8	542.7	600.0	642.5	697.5	757.7
35°	360.1	372.4	384.4	402.7	423.1	453.0	488.5	549.8	592.0	646.2	706.8
37.5°	332.7	340.3	353.5	368.0	389.5	411.8	442.6	497.6	543.3	596.4	658.5
40°	311.9	321.3	331.2	347.4	365.0	386.4	416.7	457.6	510.0	562.1	622.6
42.5°	291.6	303.6	314.1	324.9	344.1	365.6	390.3	424.9	478.4	527.7	586.6
45°	267.1	274.9	285.8	297.7	313.6	332.0	353.7	384.0	435.4	478.0	533.3
47.5°	238.7	250.1	257.1	268.8	283.9	301.3	321.6	347.8	389.5	429.3	480.6
50°	219.3	230.9	241.1	251.7	265.0	281.9	298.8	324.1	357.6	399.5	447.3
52.5°	202.6	212.9	222.8	233.4	246.5	261.9	278.0	300.2	328.9	367.4	413.9
55°	179.8	186.2	196.4	207.0	218.6	233.4	248.8	267.5	292.2	324.5	362.2
57.5°	156.5	163.8	171.9	182.6	194.3	205.7	219.5	236.5	255.9	285.2	317.4
60°	143.3	148.9	155.6	166.5	177.4	187.6	201.0	215.1	233.4	258.7	286.2
62.5°	128.7	133.9	140.1	149.6	160.2	169.6	181.3	196.2	211.7	234.8	258.8
65°	104.2	112.0	117.9	126.4	135.2	145.1	154.2	166.2	179.8	198.1	219.6
67.5°	86.3	90.3	95.9	103.6	112.5	121.0	129.7	139.0	150.9	165.0	182.1
70°	78.5	79.9	81.0	88.3	96.8	105.3	113.3	122.2	132.3	143.9	158.7
72.5°	69.2	70.6	71.9	75.1	81.9	90.3	98.7	105.3	114.9	124.5	136.5
75°	55.0	57.0	58.1	59.9	62.3	68.0	75.7	82.0	87.7	95.0	104.5
77.5°	41.8	43.0	44.1	46.0	47.5	50.1	54.5	60.2	65.5	69.7	76.3
80°	33.1	33.5	34.9	35.5	37.7	39.4	41.6	46.1	51.4	53.2	57.7
82.5°	24.9	25.3	26.4	27.1	28.1	29.6	32.2	33.5	37.6	39.9	42.8
85°	13.8	13.4	14.4	14.4	15.2	15.8	16.6	18.3	19.3	22.1	22.9
87.5°	10.7	10.8	10.2	9.2	8.3	8.0	7.5	7.4	7.4	7.7	8.4
90°	32.5	32.9	28.3	23.8	19.1	14.5	10.9	8.5	5.9	3.5	0.9
92.5°	30.0	29.9	28.8	27.7	26.7	25.5	24.1	22.2	20.5	18.6	16.8
95°	60.2	60.2	59.8	59.4	58.9	58.5	57.3	55.1	53.1	51.0	48.9
97.5°	101.2	101.2	100.4	99.6	98.9	98.0	96.7	94.9	93.0	91.2	89.4
100°	129.8	129.8	129.2	128.6	127.9	127.3	126.1	124.5	122.8	121.1	119.4
102.5°	160.8	160.7	159.9	159.1	158.3	157.5	156.4	155.0	153.7	152.4	151.1
105°	207.4	206.9	206.5	206.1	205.7	205.3	204.7	204.2	203.5	202.8	202.3
107.5°	258.1	257.9	257.9	257.9	257.9	257.9	257.5	256.6	255.6	254.7	253.7
110°	292.6	292.6	292.6	292.6	292.6	292.6	291.9	290.7	289.4	288.1	286.9



TEST NUMBER: P331664-830

CATALOG NUMBER: S122RDIP-S485D925U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	327.4	327.9	328.1	328.2	328.4	328.6	328.0	326.8	325.6	324.2	323.0
115°	379.8	380.0	380.4	380.9	381.3	381.6	381.3	380.0	378.7	377.5	376.3
117.5°	431.0	431.6	432.7	433.9	435.1	436.2	436.0	434.3	432.6	430.9	429.3
120°	464.7	464.7	466.4	468.0	469.7	471.4	471.4	469.7	468.0	466.4	464.7
122.5°	500.3	500.8	502.0	503.1	504.3	505.5	505.0	503.0	501.1	499.0	497.0
125°	552.4	553.1	553.7	554.3	555.0	555.6	555.0	553.1	551.2	549.3	547.4
127.5°	603.1	603.9	604.6	605.4	606.1	606.9	606.1	603.7	601.3	598.9	596.5
130°	637.3	637.7	638.2	638.6	638.9	639.4	638.3	635.6	632.8	630.1	627.4
132.5°	671.5	672.3	672.2	672.2	672.1	672.0	670.9	668.6	666.5	664.2	662.0
135°	720.3	720.5	720.1	719.6	719.3	718.9	717.5	715.2	712.8	710.6	708.3
137.5°	767.8	767.9	767.4	766.9	766.3	765.7	764.5	762.6	760.7	758.8	757.1
140°	799.6	799.6	798.5	797.4	796.4	795.3	793.9	792.0	790.1	788.2	786.4
142.5°	828.3	828.1	827.4	826.7	826.0	825.3	824.0	822.1	820.2	818.3	816.4
145°	872.1	871.9	870.7	869.4	868.2	867.0	865.5	864.1	862.6	861.2	859.7
147.5°	910.4	909.9	909.1	908.2	907.5	906.6	905.3	903.5	901.8	900.0	898.2
150°	934.6	934.1	933.2	932.4	931.5	930.7	929.6	928.4	927.1	925.9	924.6
152.5°	958.9	958.1	957.1	956.1	955.1	954.1	953.0	951.7	950.5	949.2	947.9
155°	989.7	988.5	988.0	987.3	986.7	986.1	985.4	984.9	984.2	983.5	983.0
157.5°	1017.9	1016.4	1016.1	1015.7	1015.3	1014.9	1014.6	1014.1	1013.7	1013.2	1012.9
160°	1035.0	1033.7	1033.5	1033.3	1033.1	1032.9	1032.6	1032.2	1031.7	1031.3	1031.0
162.5°	1050.2	1048.8	1048.6	1048.4	1048.2	1047.9	1047.8	1047.7	1047.6	1047.5	1047.4
165°	1070.0	1068.6	1068.6	1068.6	1068.6	1068.6	1068.7	1068.8	1069.0	1069.3	1069.5
167.5°	1086.4	1084.9	1085.0	1085.0	1085.1	1085.1	1085.4	1086.0	1086.7	1087.3	1087.9
170°	1095.4	1093.9	1094.1	1094.4	1094.6	1094.8	1095.1	1095.8	1096.5	1097.0	1097.7
172.5°	1102.2	1100.7	1100.9	1101.1	1101.4	1101.5	1101.9	1102.6	1103.2	1103.8	1104.5
175°	1109.5	1108.1	1108.4	1108.9	1109.3	1109.7	1110.2	1110.9	1111.4	1112.1	1112.8
177.5°	1113.3	1112.4	1112.7	1113.0	1113.3	1113.7	1114.1	1114.7	1115.1	1115.6	1116.2
180°	1114.7	1114.7	1114.7	1114.7	1114.7	1114.7	1114.7	1114.7	1114.7	1114.7	1114.7



TEST NUMBER: P331664-830

CATALOG NUMBER: S122RDIP-S485D925U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0
2.5°	1018.9	1019.7	1025.4	1027.9	1033.0	1035.0	1037.2	1036.6	1036.6	1037.7	1045.7
5°	1021.1	1028.1	1038.7	1048.9	1058.8	1067.2	1072.8	1078.5	1080.5	1090.8	1099.9
7.5°	1017.5	1030.4	1047.8	1063.4	1082.0	1096.6	1108.7	1119.6	1127.1	1142.0	1157.2
10°	1012.7	1031.0	1050.7	1070.7	1096.5	1115.8	1135.5	1150.7	1155.6	1177.7	1190.4
12.5°	1003.1	1027.6	1052.6	1078.6	1103.7	1130.4	1152.1	1167.2	1184.6	1204.5	1227.9
15°	988.7	1016.9	1049.6	1083.1	1119.0	1151.3	1174.6	1201.0	1219.9	1241.8	1262.2
17.5°	968.1	1004.4	1045.9	1084.7	1126.1	1160.9	1193.0	1218.2	1231.6	1244.1	1247.2
20°	951.8	990.8	1039.7	1085.5	1127.0	1167.2	1198.8	1219.9	1223.5	1223.8	1205.1
22.5°	934.1	978.2	1029.4	1076.2	1125.9	1170.5	1195.1	1204.2	1190.2	1166.4	1130.3
25°	901.4	952.4	1011.9	1065.5	1119.6	1161.9	1170.4	1154.5	1105.6	1054.1	989.1
27.5°	866.1	923.4	987.2	1046.7	1104.5	1130.7	1112.4	1055.3	967.1	890.6	797.8
30°	840.2	904.6	967.2	1033.8	1087.2	1098.5	1056.7	972.5	869.8	754.3	661.8
32.5°	810.6	878.1	947.0	1015.8	1060.5	1049.5	980.3	876.8	756.3	642.8	555.3
35°	768.4	838.1	912.3	981.3	1009.8	962.3	858.8	724.1	600.9	494.9	434.7
37.5°	719.6	795.5	872.7	936.0	934.1	854.8	713.9	574.7	471.2	408.5	365.6
40°	684.9	761.7	845.1	898.6	875.7	772.6	619.8	488.5	412.8	362.9	331.6
42.5°	651.8	728.8	811.6	854.1	814.4	687.6	535.4	432.5	370.0	331.1	305.7
45°	595.2	676.5	753.3	776.8	705.7	566.0	432.9	358.4	316.8	287.9	270.3
47.5°	540.0	619.9	689.9	690.4	594.2	459.0	365.2	310.1	274.7	252.3	239.5
50°	506.1	582.2	640.9	631.8	522.7	408.3	326.6	279.1	249.6	232.3	219.0
52.5°	468.2	541.9	592.8	566.8	462.1	359.3	292.0	252.1	227.6	212.6	200.7
55°	412.8	478.3	514.3	474.9	377.0	298.8	246.8	215.4	197.1	184.5	174.3
57.5°	358.6	412.6	435.2	389.3	310.5	247.8	208.7	185.2	167.0	158.0	152.7
60°	324.5	370.6	386.4	335.8	269.9	216.8	184.8	163.0	149.6	143.6	138.4
62.5°	291.1	328.7	335.3	288.8	235.4	189.8	162.3	143.8	135.0	129.2	124.2
65°	241.5	268.5	265.4	228.1	186.2	150.6	130.5	119.3	112.6	104.5	95.8
67.5°	198.8	215.4	205.4	177.4	142.1	117.1	104.0	95.5	87.2	79.5	77.5
70°	171.7	181.3	170.7	145.1	116.5	98.2	87.7	77.5	72.5	70.8	67.6
72.5°	145.9	149.2	137.8	115.7	94.8	81.3	71.1	65.3	62.7	61.2	59.1
75°	109.4	107.0	97.2	79.9	65.8	56.6	53.5	51.4	49.7	48.3	47.1
77.5°	76.9	73.2	64.5	53.3	45.8	41.5	39.6	38.5	37.6	36.9	35.8
80°	57.7	55.2	46.5	38.0	34.9	32.7	31.7	30.3	30.3	29.6	28.5
82.5°	42.2	39.5	31.9	27.9	26.1	24.9	24.0	23.2	22.9	23.1	22.3
85°	22.1	17.9	15.8	15.2	14.0	13.4	13.8	13.0	13.0	13.0	12.6
87.5°	7.4	6.5	6.8	7.0	8.0	8.9	9.5	10.5	11.7	11.3	11.5
90°	3.5	5.9	8.5	10.9	14.5	19.1	23.8	28.3	32.9	32.5	32.0
92.5°	18.6	20.5	22.2	24.1	25.5	26.7	27.7	28.8	29.9	30.0	30.1
95°	51.0	53.1	55.1	57.3	58.5	58.9	59.4	59.8	60.2	60.2	60.2
97.5°	91.2	93.0	94.9	96.7	98.0	98.9	99.6	100.4	101.2	101.2	101.2
100°	121.1	122.8	124.5	126.1	127.3	127.9	128.6	129.2	129.8	129.8	129.8
102.5°	152.4	153.7	155.0	156.4	157.5	158.3	159.1	159.9	160.7	160.8	161.0
105°	202.8	203.5	204.2	204.7	205.3	205.7	206.1	206.5	206.9	207.4	207.7
107.5°	254.7	255.6	256.6	257.5	257.9	257.9	257.9	257.9	257.9	258.1	258.3
110°	288.1	289.4	290.7	291.9	292.6	292.6	292.6	292.6	292.6	292.6	292.6





TEST NUMBER: P331664-830

CATALOG NUMBER: S122RDIP-S485D925U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	324.2	325.6	326.8	328.0	328.6	328.4	328.2	328.1	327.9	327.4	326.9
115°	377.5	378.7	380.0	381.3	381.6	381.3	380.9	380.4	380.0	379.8	379.6
117.5°	430.9	432.6	434.3	436.0	436.2	435.1	433.9	432.7	431.6	431.0	430.6
120°	466.4	468.0	469.7	471.4	471.4	469.7	468.0	466.4	464.7	464.7	464.7
122.5°	499.0	501.1	503.0	505.0	505.5	504.3	503.1	502.0	500.8	500.3	499.7
125°	549.3	551.2	553.1	555.0	555.6	555.0	554.3	553.7	553.1	552.4	551.9
127.5°	598.9	601.3	603.7	606.1	606.9	606.1	605.4	604.6	603.9	603.1	602.4
130°	630.1	632.8	635.6	638.3	639.4	638.9	638.6	638.2	637.7	637.3	636.9
132.5°	664.2	666.5	668.6	670.9	672.0	672.1	672.2	672.2	672.3	671.5	670.5
135°	710.6	712.8	715.2	717.5	718.9	719.3	719.6	720.1	720.5	720.3	720.1
137.5°	758.8	760.7	762.6	764.5	765.7	766.3	766.9	767.4	767.9	767.8	767.6
140°	788.2	790.1	792.0	793.9	795.3	796.4	797.4	798.5	799.6	799.6	799.6
142.5°	818.3	820.2	822.1	824.0	825.3	826.0	826.7	827.4	828.1	828.3	828.5
145°	861.2	862.6	864.1	865.5	867.0	868.2	869.4	870.7	871.9	872.1	872.3
147.5°	900.0	901.8	903.5	905.3	906.6	907.5	908.2	909.1	909.9	910.4	910.9
150°	925.9	927.1	928.4	929.6	930.7	931.5	932.4	933.2	934.1	934.6	935.3
152.5°	949.2	950.5	951.7	953.0	954.1	955.1	956.1	957.1	958.1	958.9	959.7
155°	983.5	984.2	984.9	985.4	986.1	986.7	987.3	988.0	988.5	989.7	990.7
157.5°	1013.2	1013.7	1014.1	1014.6	1014.9	1015.3	1015.7	1016.1	1016.4	1017.9	1019.3
160°	1031.3	1031.7	1032.2	1032.6	1032.9	1033.1	1033.3	1033.5	1033.7	1035.0	1036.2
162.5°	1047.5	1047.6	1047.7	1047.8	1047.9	1048.2	1048.4	1048.6	1048.8	1050.2	1051.6
165°	1069.3	1069.0	1068.8	1068.7	1068.6	1068.6	1068.6	1068.6	1068.6	1070.0	1071.5
167.5°	1087.3	1086.7	1086.0	1085.4	1085.1	1085.1	1085.0	1085.0	1084.9	1086.4	1087.8
170°	1097.0	1096.5	1095.8	1095.1	1094.8	1094.6	1094.4	1094.1	1093.9	1095.4	1096.8
172.5°	1103.8	1103.2	1102.6	1101.9	1101.5	1101.4	1101.1	1100.9	1100.7	1102.2	1103.6
175°	1112.1	1111.4	1110.9	1110.2	1109.7	1109.3	1108.9	1108.4	1108.1	1109.5	1111.0
177.5°	1115.6	1115.1	1114.7	1114.1	1113.7	1113.3	1113.0	1112.7	1112.4	1113.3	1114.4
180°	1114.7	1114.7	1114.7	1114.7	1114.7	1114.7	1114.7	1114.7	1114.7	1114.7	1114.7



TEST NUMBER: P331664-830

CATALOG NUMBER: S122RDIP-S485D925U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
0°	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0
2.5°	1048.5	1052.2	1053.9	1053.9	1055.8	1055.0	1054.1
5°	1108.7	1115.4	1116.8	1123.1	1127.8	1126.3	1127.0
7.5°	1168.7	1179.4	1190.1	1194.9	1195.7	1198.5	1199.6
10°	1205.5	1214.4	1230.9	1228.4	1240.8	1247.7	1236.1
12.5°	1241.0	1252.9	1264.4	1267.5	1274.5	1276.8	1272.1
15°	1273.1	1279.4	1280.2	1278.4	1280.5	1278.7	1272.1
17.5°	1243.1	1232.8	1212.0	1202.1	1194.3	1182.8	1178.2
20°	1193.5	1163.3	1128.1	1114.0	1097.5	1065.1	1072.8
22.5°	1086.6	1052.1	1016.9	975.7	956.1	925.4	923.6
25°	920.1	860.6	795.1	749.3	722.6	692.0	678.6
27.5°	715.4	640.5	586.8	559.7	534.9	510.7	509.6
30°	580.8	524.4	483.0	459.7	444.6	434.3	436.5
32.5°	489.6	450.9	422.9	403.7	392.5	384.7	384.7
35°	400.2	373.8	355.8	347.8	339.7	334.0	334.4
37.5°	342.5	326.6	316.6	307.7	302.7	299.9	298.3
40°	312.9	299.9	292.2	286.9	282.7	278.8	278.1
42.5°	289.5	278.8	271.0	266.8	263.0	260.1	259.5
45°	256.9	248.2	241.1	236.5	234.8	232.3	232.3
47.5°	228.6	219.9	214.4	211.5	208.5	206.9	206.8
50°	209.4	202.7	197.8	196.0	193.6	192.6	192.2
52.5°	192.3	187.3	183.7	182.6	181.4	180.1	180.3
55°	168.9	166.2	164.8	163.6	161.9	159.8	161.2
57.5°	149.3	146.9	143.1	139.8	138.2	136.7	137.2
60°	135.5	130.5	125.6	121.8	120.7	117.5	117.5
62.5°	118.1	111.1	105.1	102.9	101.9	100.4	100.1
65°	90.8	88.0	86.6	85.2	84.5	84.5	83.8
67.5°	75.2	74.1	72.6	72.2	71.5	71.4	71.1
70°	66.5	65.1	64.4	64.1	63.3	63.7	62.7
72.5°	58.1	56.9	56.8	55.9	55.5	55.5	54.8
75°	45.7	45.7	45.4	45.1	44.4	44.0	44.4
77.5°	35.2	35.3	34.6	34.6	34.5	34.6	34.2
80°	28.2	28.5	28.2	27.8	27.4	27.8	27.4
82.5°	22.2	21.8	21.7	21.6	21.6	21.3	21.3
85°	12.6	13.0	12.6	12.3	12.3	12.3	12.6
87.5°	11.1	11.0	11.0	11.0	11.1	11.1	10.9
90°	31.7	31.3	31.1	31.4	31.6	31.8	32.0
92.5°	30.2	30.3	30.3	30.3	30.3	30.4	30.4
95°	60.2	60.2	59.9	59.6	59.2	58.7	58.3
97.5°	101.2	101.2	101.2	101.1	101.1	101.0	101.0
100°	129.8	129.8	129.7	129.5	129.3	129.0	128.8
102.5°	161.2	161.4	161.3	161.1	160.9	160.7	160.5
105°	208.2	208.6	208.8	208.8	208.8	208.8	208.8
107.5°	258.4	258.5	258.2	257.2	256.3	255.3	254.3
110°	292.6	292.6	292.2	291.6	291.0	290.3	289.7



TEST NUMBER: P331664-830

CATALOG NUMBER: S122RDIP-S485D925U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
112.5°	326.4	325.9	325.4	325.0	324.5	324.0	323.6
115°	379.4	379.2	378.7	378.1	377.5	376.8	376.3
117.5°	430.1	429.5	429.0	428.4	427.7	427.1	426.5
120°	464.7	464.7	464.4	463.7	463.1	462.5	461.8
122.5°	499.3	498.8	498.3	497.9	497.4	496.9	496.4
125°	551.2	550.5	550.2	550.0	549.7	549.5	549.3
127.5°	601.6	600.9	600.1	599.5	598.8	598.1	597.5
130°	636.5	636.0	635.5	634.6	633.8	632.9	632.1
132.5°	669.6	668.6	667.9	667.2	666.6	665.9	665.2
135°	719.9	719.6	719.3	718.6	718.0	717.4	716.7
137.5°	767.4	767.2	766.8	765.9	765.1	764.2	763.4
140°	799.6	799.6	799.1	798.2	797.4	796.6	795.8
142.5°	828.6	828.8	828.5	827.6	826.8	826.0	825.1
145°	872.6	872.8	872.5	871.7	870.8	870.0	869.1
147.5°	911.3	911.8	911.6	910.9	910.0	909.3	908.4
150°	935.9	936.5	936.5	935.9	935.3	934.6	934.1
152.5°	960.5	961.3	961.3	960.5	959.7	958.9	958.1
155°	991.7	992.8	993.0	992.3	991.7	991.1	990.4
157.5°	1020.7	1022.1	1022.3	1021.3	1020.3	1019.3	1018.3
160°	1037.5	1038.8	1039.0	1038.1	1037.3	1036.4	1035.6
162.5°	1053.0	1054.4	1054.7	1053.7	1052.6	1051.7	1050.7
165°	1072.9	1074.4	1074.6	1073.6	1072.5	1071.5	1070.4
167.5°	1089.3	1090.7	1090.9	1089.9	1088.7	1087.7	1086.6
170°	1098.3	1099.8	1099.9	1098.6	1097.4	1096.1	1094.9
172.5°	1105.1	1106.5	1106.6	1105.4	1104.2	1102.9	1101.6
175°	1112.4	1113.9	1114.0	1112.8	1111.4	1110.2	1109.0
177.5°	1115.4	1116.3	1116.3	1115.4	1114.4	1113.3	1112.4
180°	1114.7	1114.7	1114.7	1114.7	1114.7	1114.7	1114.7

(END OF REPORT)