

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331703-830

Luminaire Tested: **S122RDIP-S675D1080U830-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P331703-830  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S122RDIP-S675D1080U830-4F0-1E-UDD-F1  
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 675 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 1080 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5819.7 lumens  
Efficiency: N/A  
Efficacy: 102.3 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: Semi-Indirect


Input Watts (W): 56.9  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331703-830

CATALOG NUMBER: S122RDIP-S675D1080U830-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

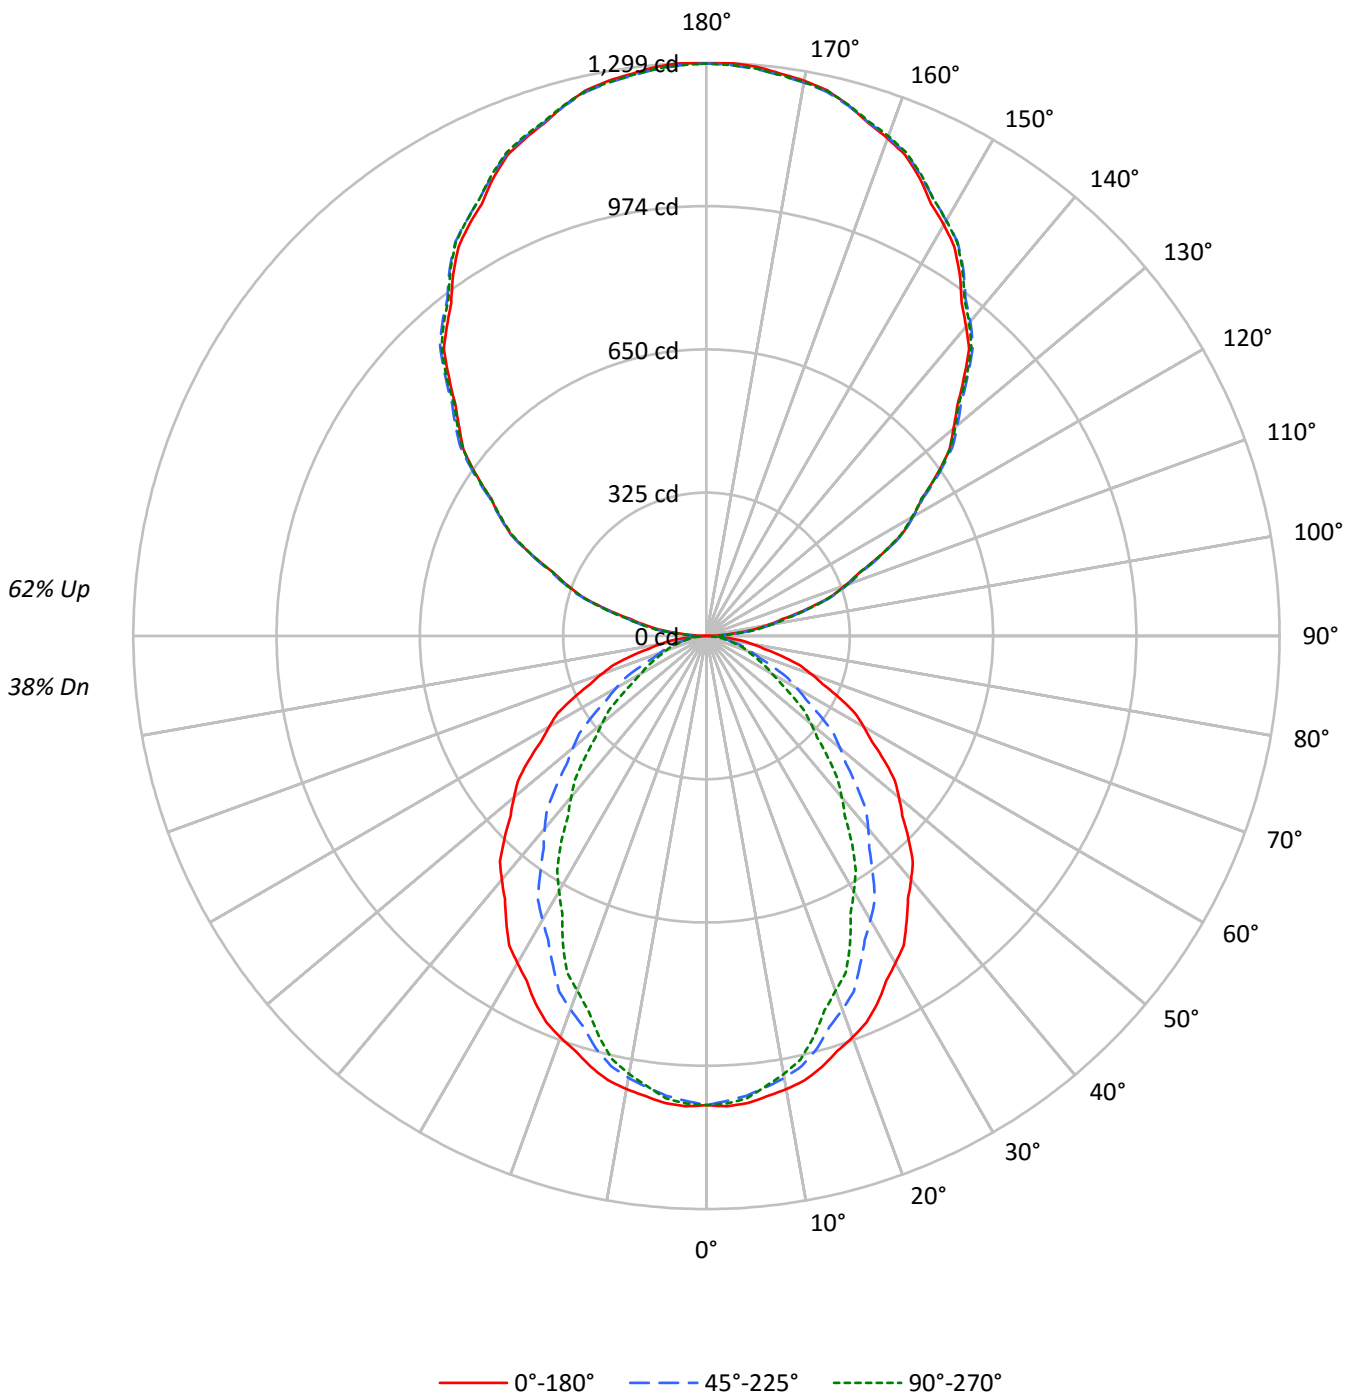



TEST NUMBER: P331703-830

CATALOG NUMBER: S122RDIP-S675D1080U830-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	104	104	104	104	95	95	95	95	76	76	76	60	60	60	45	45	45	38								
1	95	91	88	84	86	83	80	77	67	65	63	53	52	51	40	39	38	32								
2	87	80	74	69	79	73	68	64	60	56	53	47	45	43	36	34	33	28								
3	80	71	64	58	72	64	58	54	53	48	45	42	39	37	32	30	28	24								
4	73	63	55	49	66	57	51	46	47	42	39	38	34	32	29	27	25	21								
5	67	56	48	42	61	51	44	39	42	37	33	34	30	28	26	24	22	18								
6	62	50	42	37	56	46	39	34	38	33	29	31	27	24	24	21	19	16								
7	57	45	38	32	52	42	35	30	35	30	26	28	24	22	22	19	17	15								
8	53	41	34	29	48	38	31	27	32	27	23	26	22	19	20	18	16	13								
9	49	38	30	26	45	35	28	24	29	24	21	24	20	17	19	16	14	12								
10	46	35	28	23	42	32	26	21	27	22	19	22	18	16	17	15	13	11								

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	17166	17166	17166
5°	17232	16951	17045
10°	17100	16674	16531
15°	16904	16181	15714
20°	16632	15474	14698
25°	16352	14672	13714
30°	15966	13848	12450
35°	15589	12952	11341
40°	15209	12026	10058
45°	14764	10985	8896
50°	14307	9934	7759
55°	13841	8802	6663
60°	13298	7611	5532
65°	12684	6395	5039
70°	11948	5268	4631
75°	11042	4803	4323
80°	9754	4296	3933
85°	7669	3390	3390



TEST NUMBER: P331703-830

CATALOG NUMBER: S122RDIP-S675D1080U830-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	99.5	1.7
10°-20°	273.3	4.7
20°-30°	383.7	6.6
30°-40°	418.4	7.2
40°-50°	384.7	6.6
50°-60°	302.2	5.2
60°-70°	197.0	3.4
70°-80°	101.6	1.7
80°-90°	31.5	0.5
90°-100°	82.2	1.4
100°-110°	255.3	4.4
110°-120°	436.4	7.5
120°-130°	573.9	9.9
130°-140°	644.2	11.1
140°-150°	631.6	10.9
150°-160°	529.8	9.1
160°-170°	351.4	6.0
170°-180°	122.8	2.1
0°-30°	756.5	13.0
0°-40°	1174.9	20.2
0°-60°	1861.8	32.0
0°-90°	2192.0	37.7
90°-120°	774.0	13.3
90°-150°	2623.7	45.1
90°-180°	3628.0	62.3
0°-180°	5819.7	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1063	1063	1063	1063	1063	
5°	1063	1058	1046	1054	1052	101
15°	1011	999	968	950	940	285
25°	918	885	824	786	770	422
35°	791	740	657	599	575	495
45°	647	580	481	415	390	499
55°	492	415	313	257	237	439
65°	332	254	167	136	132	329
75°	177	112	77	71	69	187
85°	41	22	18	18	18	49
90°	1	15	38	36	37	5
95°	57	67	70	70	68	65
105°	235	239	241	243	243	249
115°	438	444	442	441	438	433
125°	637	646	644	641	639	569
135°	824	836	839	837	834	637
145°	1001	1008	1015	1016	1012	625
155°	1144	1147	1151	1156	1153	526
165°	1245	1244	1244	1251	1246	351
175°	1295	1292	1290	1297	1291	123
180°	1297	1297	1297	1297	1297	



TEST NUMBER: P331703-830

CATALOG NUMBER: S122RDIP-S675D1080U830-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1063.2	1063.2	1063.2	1063.2	1063.2	1063.2	1063.2	1063.2	1063.2	1063.2	1063.2
2.5°	1067.1	1066.2	1065.4	1064.5	1063.7	1062.2	1060.4	1058.5	1056.7	1054.8	1056.5
5°	1063.2	1062.2	1061.1	1060.0	1058.9	1057.1	1054.2	1051.5	1048.7	1045.9	1047.8
7.5°	1052.3	1050.9	1049.6	1048.3	1047.0	1044.6	1041.4	1038.2	1034.9	1031.7	1032.2
10°	1043.0	1041.5	1040.0	1038.5	1037.0	1034.2	1029.8	1025.6	1021.3	1017.0	1016.4
12.5°	1031.4	1029.6	1027.7	1026.0	1024.1	1020.5	1015.0	1009.6	1004.0	998.5	997.4
15°	1011.3	1008.9	1006.5	1004.2	1001.8	997.0	989.8	982.5	975.2	968.0	963.9
17.5°	986.5	982.9	979.3	975.6	972.0	965.6	956.3	947.0	937.6	928.3	923.5
20°	968.0	963.7	959.4	955.2	950.8	943.4	932.6	922.0	911.3	900.6	895.2
22.5°	947.9	943.2	938.4	933.6	928.8	920.4	908.3	896.3	884.2	872.1	865.3
25°	917.9	911.1	904.3	897.4	890.6	880.1	866.0	851.9	837.7	823.6	814.8
27.5°	881.7	874.3	866.9	859.4	852.0	840.3	824.4	808.5	792.6	776.7	766.5
30°	856.4	848.2	840.1	832.0	823.9	811.2	794.1	777.0	759.9	742.8	731.9
32.5°	831.7	822.2	812.8	803.2	793.7	780.2	762.8	745.4	727.9	710.5	698.0
35°	790.9	780.0	769.1	758.2	747.3	732.4	713.6	694.8	676.0	657.1	643.7
37.5°	750.2	738.1	726.1	714.2	702.2	686.2	666.2	646.1	626.0	606.0	591.2
40°	721.6	708.8	696.0	683.2	670.3	653.6	632.8	612.1	591.4	570.6	555.4
42.5°	692.4	678.9	665.3	651.9	638.4	620.9	599.5	578.1	556.6	535.2	519.4
45°	646.6	632.3	617.9	603.6	589.3	570.9	548.5	526.0	503.5	481.1	465.9
47.5°	601.9	586.7	571.6	556.4	541.2	522.1	498.9	475.7	452.5	429.3	414.2
50°	569.6	554.4	539.2	524.1	508.9	489.6	466.0	442.5	419.0	395.5	380.7
52.5°	538.1	522.2	506.3	490.5	474.6	455.2	432.2	409.2	386.2	363.2	348.9
55°	491.7	475.0	458.4	441.7	425.0	405.1	382.0	358.9	335.8	312.7	299.9
57.5°	444.1	427.1	409.9	392.9	375.7	356.1	333.8	311.7	289.5	267.3	255.5
60°	411.8	394.7	377.6	360.5	343.4	323.9	301.8	279.7	257.8	235.7	224.8
62.5°	380.2	363.2	346.0	328.9	311.8	292.8	271.8	250.8	229.8	208.8	198.4
65°	332.0	314.6	297.3	280.0	262.7	244.4	225.2	205.9	186.6	167.4	160.1
67.5°	285.4	268.2	251.0	233.8	216.6	199.3	182.0	164.8	147.4	130.1	126.8
70°	253.1	236.4	219.7	203.0	186.3	170.6	155.9	141.1	126.4	111.6	109.4
72.5°	222.3	206.2	190.3	174.3	158.3	144.4	132.5	120.6	108.9	97.0	95.2
75°	177.0	162.1	147.1	132.1	117.2	106.0	98.8	91.5	84.3	77.0	75.5
77.5°	132.6	119.4	106.3	93.2	80.1	71.7	68.2	64.8	61.3	57.8	56.8
80°	104.9	94.0	83.0	72.2	61.3	54.8	52.6	50.4	48.4	46.2	45.3
82.5°	79.5	71.0	62.5	53.9	45.4	40.4	39.0	37.5	36.1	34.7	34.1
85°	41.4	36.9	32.4	27.9	23.4	20.8	20.2	19.6	18.9	18.3	18.3
87.5°	12.5	11.8	10.9	10.2	9.4	9.5	10.7	11.7	12.7	13.9	13.6
90°	1.1	4.1	7.0	9.9	12.8	16.9	22.2	27.6	33.0	38.4	37.8
92.5°	19.5	21.6	23.8	25.9	28.1	29.8	31.0	32.3	33.6	34.8	34.9
95°	56.9	59.4	61.8	64.2	66.6	68.1	68.6	69.1	69.6	70.0	70.0
97.5°	104.1	106.1	108.3	110.5	112.5	114.1	115.0	115.9	116.9	117.8	117.8
100°	139.0	141.0	143.0	144.9	146.8	148.2	148.9	149.6	150.3	151.1	151.1
102.5°	175.9	177.4	179.0	180.5	182.1	183.3	184.3	185.1	186.1	187.0	187.2
105°	235.4	236.1	236.9	237.6	238.3	238.9	239.4	239.9	240.3	240.8	241.4
107.5°	295.4	296.4	297.6	298.6	299.6	300.2	300.2	300.2	300.2	300.2	300.4
110°	333.9	335.4	336.9	338.3	339.8	340.5	340.5	340.5	340.5	340.5	340.5



TEST NUMBER: P331703-830

CATALOG NUMBER: S122RDIP-S675D1080U830-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	376.0	377.4	378.9	380.3	381.8	382.5	382.2	382.0	381.8	381.6	381.1
115°	437.9	439.4	440.8	442.3	443.7	444.2	443.7	443.3	442.8	442.3	442.1
117.5°	499.6	501.6	503.6	505.5	507.5	507.7	506.4	505.0	503.7	502.3	501.7
120°	540.8	542.8	544.8	546.7	548.7	548.7	546.7	544.8	542.8	540.8	540.8
122.5°	578.5	580.9	583.2	585.5	587.9	588.3	587.0	585.6	584.3	582.9	582.3
125°	637.2	639.4	641.6	643.8	645.9	646.7	645.9	645.3	644.5	643.8	643.0
127.5°	694.4	697.1	699.9	702.7	705.4	706.4	705.5	704.6	703.8	702.9	702.0
130°	730.3	733.4	736.6	739.7	742.9	744.2	743.8	743.3	742.8	742.3	741.8
132.5°	770.5	773.2	775.7	778.3	780.9	782.2	782.3	782.4	782.5	782.6	781.6
135°	824.4	827.1	829.8	832.5	835.1	836.7	837.2	837.6	838.2	838.7	838.4
137.5°	881.1	883.4	885.5	887.7	889.9	891.3	891.9	892.6	893.2	893.8	893.6
140°	915.3	917.5	919.6	921.9	924.1	925.8	927.0	928.2	929.4	930.6	930.6
142.5°	950.4	952.5	954.7	956.9	959.0	960.5	961.4	962.2	963.1	963.9	964.1
145°	1000.7	1002.4	1004.1	1005.8	1007.5	1009.1	1010.5	1012.0	1013.4	1014.9	1015.1
147.5°	1045.6	1047.6	1049.6	1051.7	1053.8	1055.3	1056.2	1057.2	1058.2	1059.1	1059.7
150°	1076.2	1077.7	1079.1	1080.6	1082.0	1083.3	1084.3	1085.2	1086.2	1087.2	1087.9
152.5°	1103.3	1104.8	1106.3	1107.8	1109.2	1110.5	1111.7	1112.9	1114.1	1115.2	1116.2
155°	1144.2	1144.8	1145.6	1146.3	1147.1	1147.7	1148.5	1149.2	1150.0	1150.7	1151.9
157.5°	1178.9	1179.4	1179.9	1180.3	1180.9	1181.3	1181.8	1182.2	1182.6	1183.1	1184.8
160°	1200.0	1200.4	1200.9	1201.4	1201.9	1202.2	1202.5	1202.8	1203.0	1203.2	1204.7
162.5°	1219.2	1219.3	1219.4	1219.5	1219.7	1219.7	1220.0	1220.2	1220.5	1220.8	1222.4
165°	1244.8	1244.6	1244.3	1244.1	1243.9	1243.8	1243.8	1243.8	1243.8	1243.8	1245.5
167.5°	1266.3	1265.6	1264.8	1264.1	1263.4	1263.0	1262.9	1262.9	1262.8	1262.8	1264.5
170°	1277.7	1277.0	1276.2	1275.4	1274.8	1274.3	1274.0	1273.8	1273.6	1273.3	1275.0
172.5°	1285.5	1284.9	1284.1	1283.4	1282.6	1282.1	1282.0	1281.7	1281.4	1281.2	1282.9
175°	1295.2	1294.5	1293.7	1293.0	1292.3	1291.7	1291.2	1290.7	1290.2	1289.7	1291.5
177.5°	1299.1	1298.5	1298.0	1297.4	1296.8	1296.3	1295.9	1295.5	1295.1	1294.8	1295.9
180°	1297.4	1297.4	1297.4	1297.4	1297.4	1297.4	1297.4	1297.4	1297.4	1297.4	1297.4



TEST NUMBER: P331703-830

CATALOG NUMBER: S122RDIP-S675D1080U830-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1063.2	1063.2	1063.2	1063.2	1063.2	1063.2	1063.2	1063.2
2.5°	1058.2	1059.9	1061.6	1062.2	1062.0	1061.6	1061.3	1060.9
5°	1049.7	1051.7	1053.6	1054.2	1053.6	1052.9	1052.3	1051.7
7.5°	1032.7	1033.3	1033.9	1033.6	1032.5	1031.4	1030.3	1029.2
10°	1015.8	1015.1	1014.5	1013.5	1012.2	1011.0	1009.7	1008.3
12.5°	996.3	995.1	993.9	992.3	990.1	988.1	985.9	983.7
15°	959.9	955.7	951.7	948.6	946.5	944.3	942.2	940.1
17.5°	918.7	913.8	909.0	904.7	901.1	897.4	893.7	890.0
20°	889.9	884.6	879.2	874.2	869.5	864.8	860.1	855.4
22.5°	858.4	851.5	844.6	839.4	835.8	832.4	828.9	825.4
25°	806.1	797.3	788.5	782.6	779.4	776.2	773.0	769.8
27.5°	756.2	746.0	735.8	728.1	723.0	717.9	712.8	707.8
30°	721.0	710.1	699.2	690.9	685.0	679.3	673.5	667.8
32.5°	685.6	673.2	660.7	651.8	646.3	640.9	635.5	630.1
35°	630.3	616.8	603.3	594.2	589.5	584.8	580.1	575.4
37.5°	576.3	561.5	546.7	536.5	531.1	525.8	520.4	515.0
40°	540.2	525.0	509.8	499.5	493.9	488.3	482.8	477.2
42.5°	503.8	488.0	472.4	461.8	456.5	451.1	445.7	440.3
45°	450.7	435.5	420.4	410.2	405.1	399.9	394.8	389.6
47.5°	399.2	384.1	368.9	359.1	354.4	349.8	345.1	340.4
50°	366.0	351.2	336.5	326.8	322.3	317.8	313.4	308.9
52.5°	334.7	320.4	306.1	297.0	292.8	288.7	284.6	280.4
55°	287.1	274.2	261.4	253.0	248.9	244.8	240.7	236.7
57.5°	243.7	232.1	220.3	212.6	209.2	205.9	202.4	199.0
60°	214.0	203.0	192.1	184.9	181.5	178.1	174.7	171.3
62.5°	188.0	177.6	167.2	161.0	158.9	156.9	154.9	152.8
65°	152.9	145.6	138.4	134.4	133.7	133.1	132.4	131.9
67.5°	123.4	120.1	116.8	114.7	114.0	113.4	112.7	112.0
70°	107.4	105.2	103.0	101.6	100.7	99.8	99.0	98.1
72.5°	93.4	91.6	89.8	88.7	88.1	87.7	87.1	86.6
75°	74.0	72.5	71.0	70.1	69.9	69.7	69.5	69.3
77.5°	56.0	55.1	54.3	53.7	53.3	53.1	52.7	52.3
80°	44.5	43.6	42.8	42.3	42.3	42.3	42.3	42.3
82.5°	33.6	33.1	32.6	32.3	32.3	32.3	32.3	32.3
85°	18.3	18.3	18.3	18.3	18.3	18.3	18.3	18.3
87.5°	13.3	13.0	12.7	12.6	12.7	12.7	12.8	12.8
90°	37.3	36.9	36.4	36.3	36.5	36.8	36.9	37.2
92.5°	35.0	35.1	35.3	35.3	35.3	35.3	35.4	35.4
95°	70.0	70.0	70.0	69.8	69.4	68.9	68.3	67.9
97.5°	117.8	117.8	117.8	117.8	117.7	117.7	117.6	117.6
100°	151.1	151.1	151.1	151.0	150.7	150.5	150.2	150.0
102.5°	187.4	187.6	187.8	187.8	187.5	187.3	187.0	186.8
105°	241.9	242.3	242.8	243.1	243.1	243.1	243.1	243.1
107.5°	300.6	300.8	301.0	300.5	299.4	298.3	297.2	296.1
110°	340.5	340.5	340.5	340.2	339.4	338.7	337.9	337.2





TEST NUMBER: P331703-830

CATALOG NUMBER: S122RDIP-S675D1080U830-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	380.5	379.9	379.4	378.8	378.2	377.7	377.2	376.6
115°	441.9	441.6	441.3	440.8	440.2	439.4	438.7	437.9
117.5°	501.1	500.6	500.0	499.4	498.6	497.9	497.1	496.4
120°	540.8	540.8	540.8	540.5	539.8	539.0	538.3	537.5
122.5°	581.7	581.2	580.5	580.0	579.5	578.9	578.4	577.9
125°	642.3	641.6	640.8	640.4	640.1	639.9	639.6	639.4
127.5°	701.2	700.2	699.4	698.5	697.8	697.0	696.3	695.4
130°	741.3	740.8	740.4	739.6	738.7	737.6	736.7	735.7
132.5°	780.4	779.4	778.4	777.4	776.7	775.8	775.1	774.3
135°	838.2	837.9	837.6	837.2	836.4	835.8	835.0	834.2
137.5°	893.4	893.2	893.1	892.5	891.5	890.5	889.6	888.5
140°	930.6	930.6	930.6	930.1	929.2	928.2	927.2	926.2
142.5°	964.3	964.5	964.7	964.3	963.3	962.3	961.4	960.4
145°	1015.4	1015.7	1015.9	1015.5	1014.6	1013.6	1012.6	1011.6
147.5°	1060.3	1060.7	1061.3	1061.1	1060.2	1059.2	1058.3	1057.4
150°	1088.6	1089.4	1090.1	1090.1	1089.4	1088.6	1087.9	1087.2
152.5°	1117.1	1117.9	1118.9	1118.9	1117.9	1117.1	1116.2	1115.2
155°	1153.1	1154.3	1155.6	1155.7	1155.1	1154.3	1153.6	1152.8
157.5°	1186.4	1188.1	1189.7	1190.0	1188.7	1187.6	1186.5	1185.2
160°	1206.2	1207.6	1209.1	1209.3	1208.3	1207.4	1206.4	1205.4
162.5°	1224.1	1225.7	1227.4	1227.6	1226.4	1225.3	1224.1	1222.9
165°	1247.2	1248.9	1250.6	1250.8	1249.6	1248.4	1247.2	1245.9
167.5°	1266.2	1267.9	1269.6	1269.8	1268.6	1267.2	1266.0	1264.8
170°	1276.7	1278.4	1280.1	1280.3	1278.7	1277.3	1275.8	1274.4
172.5°	1284.6	1286.3	1288.0	1288.1	1286.7	1285.2	1283.7	1282.2
175°	1293.2	1294.9	1296.6	1296.7	1295.2	1293.7	1292.3	1290.8
177.5°	1297.1	1298.3	1299.4	1299.4	1298.3	1297.1	1295.9	1294.8
180°	1297.4	1297.4	1297.4	1297.4	1297.4	1297.4	1297.4	1297.4

(END OF REPORT)