

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331722-830

Luminaire Tested: **S122RDIP-S865D725U830-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P331722-830  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-16,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S122RDIP-S865D725U830-4F0-1E-UDD-F4  
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 865 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 725 LUMENS PER FOOT, BATWING OPTIC  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5512.0 lumens  
Efficiency: N/A  
Efficacy: 101.3 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 54.4  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331722-830

CATALOG NUMBER: S122RDIP-S865D725U830-4F0-1E-UDD-F4

### Luminous Intensity Polar Plot

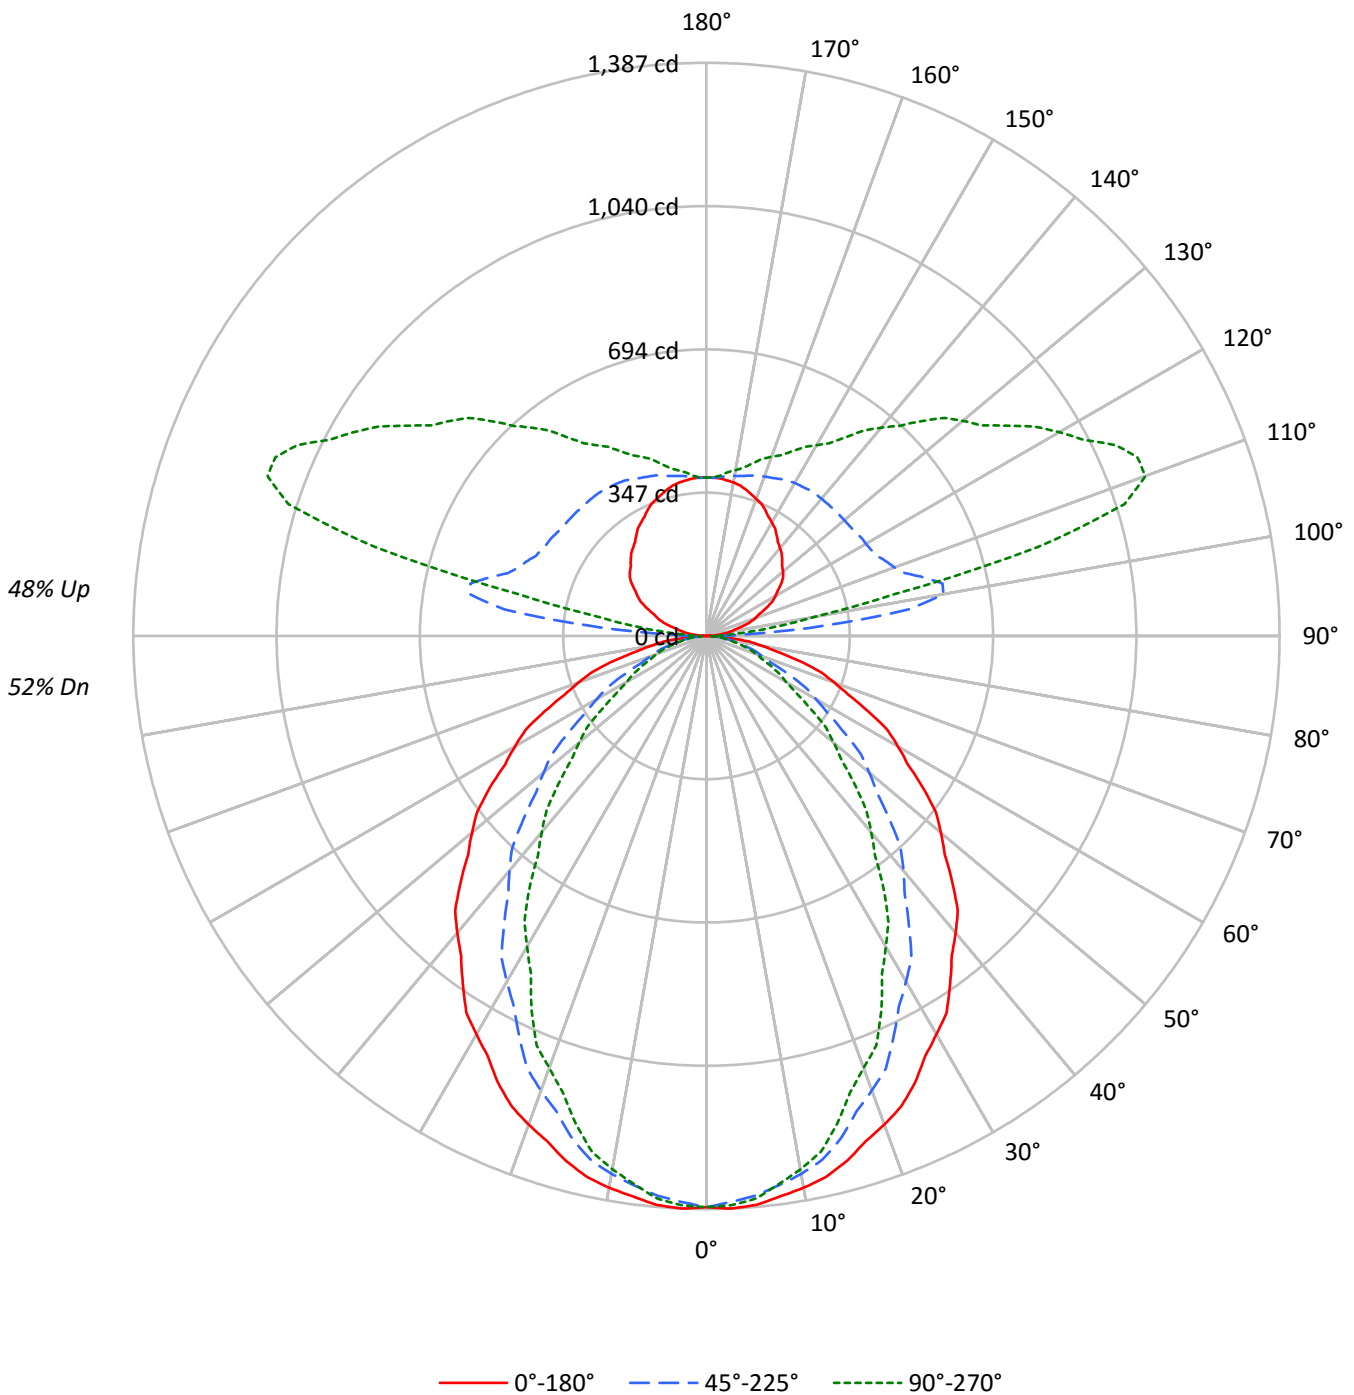



TEST NUMBER: P331722-830

CATALOG NUMBER: S122RDIP-S865D725U830-4F0-1E-UDD-F4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	99	99	99	99	84	84	84	70	70	70	58	58	58	52
1	99	94	91	87	91	88	84	81	75	72	70	63	61	60	52	51	50	44
2	90	83	77	72	83	77	72	68	66	62	59	56	53	51	46	44	43	38
3	83	73	66	61	76	68	62	57	59	54	50	50	46	43	41	39	37	33
4	76	65	58	52	70	61	54	49	52	47	43	45	41	38	37	34	32	29
5	70	58	51	45	64	55	48	42	47	42	38	40	36	33	34	31	28	25
6	64	53	45	39	60	49	42	37	43	37	33	37	32	29	31	28	25	22
7	60	48	40	34	55	45	38	33	39	33	29	33	29	26	28	25	23	20
8	56	43	36	31	51	41	34	29	36	30	26	31	26	23	26	23	20	18
9	52	40	32	27	48	37	31	26	33	27	24	28	24	21	24	21	19	16
10	48	37	30	25	45	34	28	24	30	25	21	26	22	19	22	19	17	15

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	22315	22315	22315
5°	22400	22034	22156
10°	22228	21674	21489
15°	21972	21031	20425
20°	21618	20113	19105
25°	21257	19073	17826
30°	20752	18000	16183
35°	20262	16837	14741
40°	19770	15633	13076
45°	19192	14280	11565
50°	18600	12913	10083
55°	17990	11443	8659
60°	17286	9894	7188
65°	16485	8313	6548
70°	15526	6850	6019
75°	14361	6245	5614
80°	12673	5579	5114
85°	9967	4409	4409



TEST NUMBER: P331722-830

CATALOG NUMBER: S122RDIP-S865D725U830-4F0-1E-UDD-F4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	129.4	2.3
10°-20°	355.2	6.4
20°-30°	498.8	9.0
30°-40°	543.9	9.9
40°-50°	500.1	9.1
50°-60°	392.8	7.1
60°-70°	256.1	4.6
70°-80°	132.0	2.4
80°-90°	37.7	0.7
90°-100°	153.2	2.8
100°-110°	519.8	9.4
110°-120°	552.3	10.0
120°-130°	454.6	8.2
130°-140°	365.1	6.6
140°-150°	275.9	5.0
150°-160°	193.9	3.5
160°-170°	114.1	2.1
170°-180°	37.1	0.7
0°-30°	983.3	17.8
0°-40°	1527.2	27.7
0°-60°	2420.1	43.9
0°-90°	2845.9	51.6
90°-120°	1225.3	22.2
90°-150°	2320.9	42.1
90°-180°	2666.0	48.4
0°-180°	5512.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1382	1382	1382	1382	1382	
5°	1382	1375	1360	1370	1367	131
15°	1314	1299	1258	1235	1222	370
25°	1193	1151	1071	1021	1001	548
35°	1028	962	854	778	748	643
45°	840	754	625	540	506	649
55°	639	539	406	334	308	571
65°	432	330	218	177	171	428
75°	230	145	100	92	90	244
85°	54	29	24	24	24	63
90°	1	10	25	24	24	4
95°	26	63	289	109	84	27
105°	90	136	546	976	830	96
115°	158	200	457	943	1093	157
125°	221	262	439	764	886	196
135°	259	310	434	642	735	200
145°	296	340	432	536	586	186
155°	337	364	419	474	493	155
165°	367	378	402	426	432	103
175°	382	383	386	391	390	36
180°	383	383	383	383	383	



TEST NUMBER: P331722-830

CATALOG NUMBER: S122RDIP-S865D725U830-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1382.1	1382.1	1382.1	1382.1	1382.1	1382.1	1382.1	1382.1	1382.1	1382.1	1382.1
2.5°	1387.0	1385.9	1384.8	1383.7	1382.6	1380.8	1378.4	1375.9	1373.5	1371.0	1373.3
5°	1382.1	1380.6	1379.2	1377.8	1376.5	1373.9	1370.4	1366.8	1363.1	1359.5	1362.0
7.5°	1367.7	1366.0	1364.3	1362.6	1360.8	1357.9	1353.7	1349.4	1345.2	1341.0	1341.7
10°	1355.8	1353.8	1351.9	1349.9	1347.9	1344.3	1338.7	1333.1	1327.6	1322.0	1321.2
12.5°	1340.8	1338.3	1336.0	1333.6	1331.2	1326.4	1319.3	1312.2	1305.0	1298.0	1296.5
15°	1314.5	1311.5	1308.3	1305.3	1302.2	1296.0	1286.6	1277.1	1267.6	1258.2	1252.9
17.5°	1282.2	1277.5	1272.9	1268.2	1263.6	1255.2	1243.0	1230.9	1218.8	1206.6	1200.4
20°	1258.2	1252.6	1247.1	1241.5	1236.0	1226.2	1212.3	1198.4	1184.6	1170.6	1163.7
22.5°	1232.2	1226.0	1219.7	1213.5	1207.3	1196.4	1180.6	1165.0	1149.3	1133.6	1124.6
25°	1193.2	1184.3	1175.4	1166.5	1157.6	1144.0	1125.6	1107.3	1088.9	1070.6	1059.2
27.5°	1146.1	1136.4	1126.8	1117.1	1107.5	1092.3	1071.6	1050.9	1030.2	1009.6	996.3
30°	1113.1	1102.6	1092.0	1081.5	1070.9	1054.5	1032.3	1010.0	987.8	965.5	951.4
32.5°	1081.1	1068.7	1056.4	1044.1	1031.7	1014.3	991.6	968.8	946.2	923.5	907.4
35°	1028.0	1013.9	999.8	985.5	971.4	952.1	927.6	903.1	878.7	854.2	836.7
37.5°	975.1	959.5	944.0	928.3	912.8	891.9	865.9	839.8	813.8	787.7	768.4
40°	938.0	921.3	904.7	888.0	871.3	849.5	822.6	795.6	768.6	741.7	721.9
42.5°	900.0	882.4	864.9	847.3	829.7	807.0	779.2	751.3	723.5	695.6	675.2
45°	840.5	821.8	803.2	784.6	766.0	742.1	712.9	683.7	654.5	625.4	605.6
47.5°	782.4	762.7	743.0	723.2	703.5	678.5	648.5	618.3	588.1	558.1	538.5
50°	740.5	720.7	701.0	681.2	661.5	636.3	605.8	575.1	544.6	514.1	494.8
52.5°	699.4	678.7	658.2	637.5	616.9	591.6	561.8	531.8	501.9	472.0	453.5
55°	639.1	617.5	595.8	574.1	552.4	526.5	496.5	466.5	436.5	406.5	389.8
57.5°	577.3	555.1	532.8	510.6	488.4	462.9	433.9	405.1	376.3	347.4	332.2
60°	535.3	513.0	490.9	468.6	446.4	420.9	392.3	363.6	335.1	306.4	292.3
62.5°	494.3	472.0	449.8	427.5	405.3	380.6	353.3	326.0	298.7	271.4	257.9
65°	431.5	409.0	386.4	363.9	341.5	317.6	292.7	267.7	242.6	217.6	208.2
67.5°	371.0	348.6	326.3	303.9	281.5	259.1	236.7	214.1	191.6	169.1	164.8
70°	328.9	307.3	285.6	263.9	242.2	221.8	202.6	183.4	164.3	145.1	142.3
72.5°	288.9	268.2	247.3	226.6	205.8	187.7	172.3	156.8	141.5	126.1	123.8
75°	230.2	210.7	191.2	171.7	152.3	137.9	128.4	118.9	109.5	100.1	98.1
77.5°	172.4	155.2	138.2	121.1	104.1	93.3	88.7	84.2	79.6	75.0	73.9
80°	136.3	122.2	108.0	93.8	79.6	71.2	68.3	65.6	62.8	60.0	58.9
82.5°	103.3	92.3	81.2	70.1	59.1	52.6	50.7	48.8	46.9	45.1	44.4
85°	53.8	48.0	42.1	36.3	30.4	27.1	26.3	25.4	24.6	23.8	23.8
87.5°	16.1	14.8	13.7	12.2	10.7	10.2	10.9	12.0	12.9	13.0	12.6
90°	0.8	2.9	5.9	7.4	8.9	11.0	14.7	19.9	24.3	25.1	24.3
92.5°	9.0	13.0	18.3	21.5	26.5	33.5	50.1	73.5	94.4	95.8	80.9
95°	25.8	28.7	36.1	42.7	54.5	72.2	106.1	170.2	255.7	288.8	252.7
97.5°	42.0	46.0	53.8	63.8	77.4	97.4	140.0	229.3	371.4	493.0	517.3
100°	56.7	58.9	65.6	77.4	92.1	112.7	151.7	241.7	400.8	582.0	688.2
102.5°	70.3	71.9	78.5	90.3	105.7	126.3	162.4	242.2	389.6	585.0	751.8
105°	89.9	92.8	98.0	109.1	125.3	145.9	180.5	246.1	367.7	545.9	742.0
107.5°	111.1	113.5	118.5	128.7	144.7	165.5	199.1	256.3	356.8	504.1	677.2
110°	125.3	128.2	132.6	142.2	157.7	179.1	211.4	264.5	354.4	484.1	636.6



TEST NUMBER: P331722-830

CATALOG NUMBER: S122RDIP-S865D725U830-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	138.2	141.2	146.2	155.1	170.0	192.0	223.3	273.3	355.0	471.1	608.3
115°	158.4	162.1	166.5	175.3	190.1	210.0	241.7	286.6	358.1	456.9	573.3
117.5°	179.4	182.3	186.7	194.5	208.7	229.3	258.6	300.8	363.4	449.9	551.1
120°	192.3	195.3	199.6	206.3	221.0	241.7	270.4	310.2	366.9	445.7	539.3
122.5°	204.7	207.1	211.4	218.7	233.4	254.7	281.6	318.5	371.1	443.4	529.3
125°	221.0	223.3	227.6	236.5	251.3	271.8	298.4	331.6	377.2	439.1	515.0
127.5°	234.0	237.0	243.2	252.9	267.0	288.2	314.1	343.7	383.6	436.6	501.7
130°	241.7	244.6	251.9	262.3	277.0	297.7	323.5	351.5	388.3	435.5	492.9
132.5°	248.7	252.3	260.2	271.2	286.4	307.1	331.7	359.1	393.0	434.9	485.9
135°	259.4	262.3	271.2	282.2	299.2	319.8	343.4	369.1	398.6	433.9	476.0
137.5°	269.4	272.9	281.7	293.5	310.4	329.5	352.8	376.8	403.6	433.9	469.0
140°	277.0	279.9	288.8	300.6	316.8	336.0	358.1	380.9	406.0	433.2	465.0
142.5°	284.6	287.1	295.3	307.1	322.7	340.7	362.2	384.5	407.7	433.2	460.8
145°	296.1	299.2	306.5	317.5	332.2	348.5	368.4	389.0	409.6	431.8	455.3
147.5°	308.6	310.8	317.8	328.0	340.3	354.7	373.4	391.5	410.3	429.1	449.8
150°	316.8	319.1	324.9	334.5	345.5	358.8	375.8	392.7	409.6	427.3	445.0
152.5°	325.1	326.1	332.0	340.4	350.8	363.0	378.1	393.3	408.5	424.4	440.9
155°	336.7	337.4	341.9	350.0	358.1	369.1	381.6	394.2	406.7	419.2	433.2
157.5°	346.5	347.1	350.7	357.8	364.3	373.5	384.2	394.2	403.3	414.0	426.0
160°	352.9	353.6	356.6	362.5	368.4	376.5	385.3	394.2	401.5	410.4	420.8
162.5°	359.4	358.9	361.9	366.6	371.9	378.2	386.0	393.6	399.8	407.5	415.9
165°	366.9	366.2	367.7	372.1	375.8	380.2	386.8	392.0	396.4	401.5	408.2
167.5°	373.2	372.2	373.5	376.4	379.0	381.8	386.6	391.0	393.0	396.4	400.5
170°	377.2	375.8	376.5	378.7	380.2	382.4	386.1	389.7	391.2	393.4	396.4
172.5°	379.6	378.7	378.2	380.5	381.4	383.0	385.5	388.0	388.9	389.9	392.3
175°	382.4	381.6	380.9	382.4	382.4	383.1	384.6	386.1	385.3	386.1	386.8
177.5°	383.7	382.6	381.9	383.1	383.1	383.1	383.7	384.9	383.7	383.1	383.7
180°	383.1	383.1	383.1	383.1	383.1	383.1	383.1	383.1	383.1	383.1	383.1



TEST NUMBER: P331722-830

CATALOG NUMBER: S122RDIP-S865D725U830-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1382.1	1382.1	1382.1	1382.1	1382.1	1382.1	1382.1	1382.1
2.5°	1375.5	1377.7	1379.9	1380.8	1380.4	1379.9	1379.5	1379.0
5°	1364.5	1367.0	1369.5	1370.4	1369.5	1368.7	1367.8	1367.0
7.5°	1342.5	1343.1	1343.9	1343.5	1342.1	1340.7	1339.2	1337.8
10°	1320.3	1319.5	1318.6	1317.4	1315.7	1314.1	1312.4	1310.7
12.5°	1295.0	1293.5	1291.9	1289.9	1287.0	1284.3	1281.5	1278.7
15°	1247.6	1242.4	1237.1	1233.0	1230.3	1227.5	1224.7	1221.9
17.5°	1194.1	1187.8	1181.6	1176.0	1171.2	1166.5	1161.7	1156.9
20°	1156.8	1149.8	1142.8	1136.3	1130.2	1124.1	1117.9	1111.9
22.5°	1115.8	1106.8	1097.9	1091.1	1086.6	1081.9	1077.4	1072.9
25°	1047.8	1036.4	1025.0	1017.2	1013.0	1008.9	1004.8	1000.6
27.5°	983.0	969.7	956.4	946.5	939.9	933.2	926.6	920.0
30°	937.2	923.0	908.8	898.0	890.5	883.0	875.5	868.0
32.5°	891.2	875.0	858.8	847.2	840.2	833.1	826.0	819.0
35°	819.2	801.7	784.2	772.4	766.3	760.2	754.0	747.9
37.5°	749.1	729.8	710.6	697.4	690.4	683.3	676.4	669.4
40°	702.2	682.5	662.7	649.2	642.1	634.8	627.5	620.4
42.5°	654.9	634.4	614.1	600.3	593.3	586.4	579.3	572.3
45°	585.9	566.2	546.4	533.2	526.5	519.9	513.2	506.5
47.5°	518.8	499.2	479.6	466.7	460.7	454.6	448.6	442.5
50°	475.7	456.5	437.3	424.8	419.0	413.1	407.3	401.4
52.5°	435.0	416.5	397.9	386.1	380.6	375.2	369.9	364.5
55°	373.2	356.5	339.8	328.8	323.5	318.2	312.9	307.6
57.5°	316.9	301.6	286.3	276.4	272.0	267.5	263.1	258.6
60°	278.1	263.9	249.7	240.4	235.9	231.5	227.1	222.6
62.5°	244.4	230.9	217.4	209.2	206.6	204.0	201.2	198.6
65°	198.7	189.3	179.8	174.7	173.8	173.1	172.2	171.4
67.5°	160.4	156.1	151.7	149.1	148.3	147.3	146.5	145.6
70°	139.5	136.8	133.9	132.1	130.9	129.8	128.7	127.5
72.5°	121.4	119.0	116.7	115.3	114.5	113.9	113.2	112.5
75°	96.1	94.3	92.3	91.1	90.9	90.6	90.3	90.0
77.5°	72.9	71.7	70.6	69.8	69.4	68.9	68.5	68.1
80°	57.8	56.7	55.6	55.0	55.0	55.0	55.0	55.0
82.5°	43.7	43.0	42.3	42.0	42.0	42.0	42.0	42.0
85°	23.8	23.8	23.8	23.8	23.8	23.8	23.8	23.8
87.5°	12.3	11.8	11.9	11.9	11.9	11.9	11.9	11.9
90°	23.6	22.1	23.6	24.3	24.3	24.3	24.3	24.3
92.5°	64.3	55.1	48.9	44.4	43.7	41.4	42.0	40.8
95°	193.0	148.1	117.2	100.9	91.3	85.5	83.2	84.0
97.5°	450.4	368.5	288.8	235.6	200.4	182.3	171.5	165.3
100°	672.7	581.4	480.4	391.2	330.1	298.4	277.0	263.7
102.5°	818.3	797.7	723.8	629.3	562.9	508.8	482.1	464.2
105°	895.2	978.5	988.1	963.7	918.0	872.3	840.7	830.4
107.5°	839.8	965.2	1041.8	1077.5	1083.3	1080.7	1074.4	1060.6
110°	792.0	924.0	1018.2	1078.6	1110.3	1124.4	1131.0	1130.2





TEST NUMBER: P331722-830

CATALOG NUMBER: S122RDIP-S865D725U830-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	748.5	875.0	975.8	1045.1	1089.1	1112.6	1125.1	1129.1
115°	694.7	808.2	904.7	980.6	1032.9	1066.9	1086.0	1092.7
117.5°	654.4	754.0	841.6	912.8	966.1	1001.9	1022.1	1027.7
120°	634.3	725.8	803.8	870.9	922.5	957.1	978.5	985.8
122.5°	618.5	702.2	776.1	836.7	883.0	917.0	936.0	942.2
125°	595.3	671.2	736.0	791.3	834.1	862.0	880.4	886.4
127.5°	572.5	641.1	702.3	753.3	790.6	816.8	832.7	837.4
130°	557.7	621.1	679.3	727.9	764.0	789.1	803.8	809.7
132.5°	543.6	602.3	655.7	701.4	737.0	762.0	775.5	780.8
135°	523.9	572.5	621.1	662.3	694.1	718.4	731.6	734.6
137.5°	508.1	548.7	587.4	623.3	652.2	673.2	684.8	689.2
140°	498.0	533.5	567.3	599.7	623.3	642.4	653.6	658.0
142.5°	489.8	519.9	549.0	576.2	598.6	616.0	625.8	626.7
145°	478.2	502.5	525.4	546.7	564.4	576.9	584.3	586.4
147.5°	469.2	488.3	506.1	521.8	536.4	546.4	551.4	552.7
150°	462.7	478.9	494.4	507.7	518.7	527.5	532.0	532.7
152.5°	456.2	471.3	484.4	495.9	504.5	512.2	515.5	515.6
155°	447.2	459.0	470.0	478.2	486.3	491.4	494.4	492.9
157.5°	436.8	446.7	455.9	462.2	468.0	472.3	473.6	473.6
160°	430.3	438.4	446.5	451.7	456.9	460.5	461.2	461.2
162.5°	423.8	430.7	437.6	441.7	446.8	449.3	450.1	449.4
165°	414.1	419.2	424.4	427.3	430.3	433.2	433.2	432.5
167.5°	404.8	408.8	412.3	415.0	416.3	417.9	417.7	416.9
170°	400.1	402.3	405.2	406.7	407.5	409.6	408.9	407.5
172.5°	394.7	396.4	398.8	399.6	400.4	401.4	400.7	399.8
175°	389.0	389.7	390.5	391.2	391.2	392.0	391.2	389.7
177.5°	384.9	384.9	385.5	385.5	385.5	385.5	384.9	383.7
180°	383.1	383.1	383.1	383.1	383.1	383.1	383.1	383.1

(END OF REPORT)