

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331456-930

Luminaire Tested: **S122DIP-S1005D1080U930-4F0-1E-UDD-A**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P331456-930  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S122DIP-S1005D1080U930-4F0-1E-UDD-A  
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 1005 LUMENS PER FOOT, ASYMMETRIC DIFFUSER  
UPLIGHT 1080 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 7099.8 lumens  
Efficiency: N/A  
Efficacy: 99.0 lumens/watt  
Spacing Criteria (0/90/45): 1.08 / 1.16 / 1.23  
Luminous Opening: Rectangular (W 4' x L: 0.17' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 71.7  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331456-930

CATALOG NUMBER: S122DIP-S1005D1080U930-4F0-1E-UDD-A

### Luminous Intensity Polar Plot

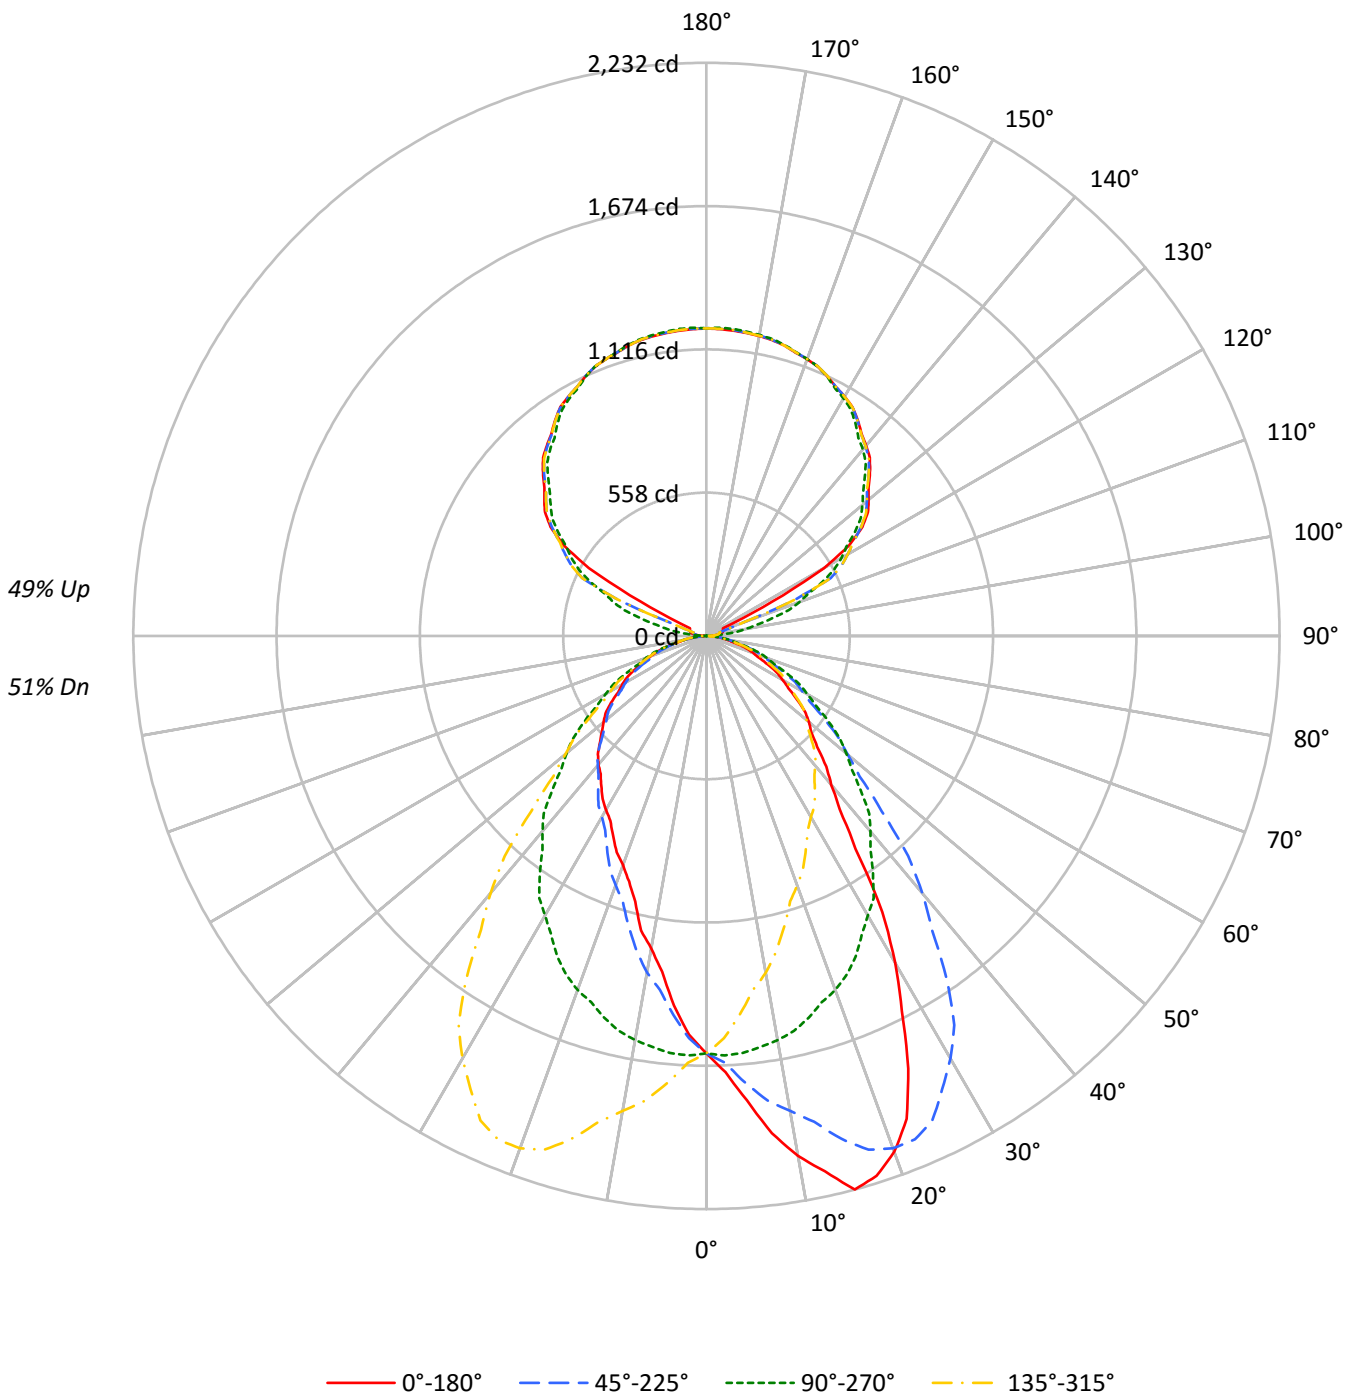



TEST NUMBER: P331456-930

CATALOG NUMBER: S122DIP-S1005D1080U930-4F0-1E-UDD-A

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	107	107	107	107	99	99	99	99	84	84	84		70	70	70		57	57	57	51
1	98	94	91	87	91	87	84	81	74	72	70		62	60	59		51	50	49	44
2	90	83	77	72	83	77	72	67	65	62	58		55	52	50		45	43	42	37
3	82	73	66	61	76	68	62	57	58	54	50		49	46	43		41	38	36	32
4	76	65	58	52	70	61	54	49	52	47	43		44	40	37		37	34	32	28
5	70	58	50	45	64	54	47	42	47	41	37		40	36	32		33	30	28	25
6	64	53	45	39	59	49	42	37	42	37	33		36	32	29		30	27	25	22
7	60	48	40	34	55	44	38	33	39	33	29		33	29	26		28	25	22	20
8	55	43	36	31	51	41	34	29	35	30	26		30	26	23		26	22	20	18
9	52	40	32	27	48	37	31	26	32	27	23		28	24	21		24	21	18	16
10	48	36	29	25	45	34	28	24	30	25	21		26	22	19		22	19	17	15

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	26248	26248	26248	26248
5°	29428	26420	23412	26420
10°	33721	26202	20261	26202
15°	37305	25723	17901	25723
20°	36737	25206	16318	25206
25°	33127	24522	15316	24522
30°	27374	23426	14585	23426
35°	19951	22277	14063	22277
40°	15934	20925	13774	20925
45°	13924	19358	13381	19358
50°	13089	17844	13122	17844
55°	12065	16304	12769	16304
60°	11057	14667	12226	14667
65°	10074	13200	11694	13200
70°	9144	11769	10914	11769
75°	8110	10175	9669	10175
80°	6974	8424	7782	8424
85°	6262	6262	4631	6262



TEST NUMBER: P331456-930

CATALOG NUMBER: S122DIP-S1005D1080U930-4F0-1E-UDD-A

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	154.8	2.2
10°-20°	450.1	6.3
20°-30°	653.3	9.2
30°-40°	689.3	9.7
40°-50°	610.4	8.6
50°-60°	487.1	6.9
60°-70°	331.1	4.7
70°-80°	169.7	2.4
80°-90°	43.9	0.6
90°-100°	40.0	0.6
100°-110°	146.5	2.1
110°-120°	391.7	5.5
120°-130°	646.5	9.1
130°-140°	687.6	9.7
140°-150°	639.1	9.0
150°-160°	513.8	7.2
160°-170°	331.1	4.7
170°-180°	114.0	1.6
0°-30°	1258.2	17.7
0°-40°	1947.5	27.4
0°-60°	3045.0	42.9
0°-90°	3589.7	50.6
90°-120°	578.1	8.1
90°-150°	2551.3	35.9
90°-180°	3510.0	49.4
0°-180°	7099.8	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	1626	1626	1626	1626	1626	
5°	1816	1630	1444	1630	1816	181
15°	2232	1539	1071	1539	2232	616
25°	1860	1376	860	1376	1860	840
35°	1012	1130	714	1130	1012	658
45°	610	848	586	848	610	480
55°	429	579	454	579	429	384
65°	264	346	306	346	264	262
75°	130	163	155	163	130	139
85°	34	34	25	34	34	38
90°	23	1	23	1	23	12
95°	37	56	37	56	37	35
105°	66	264	66	264	66	68
115°	71	498	71	498	71	178
125°	741	705	741	705	741	641
135°	900	872	900	872	900	694
145°	1027	1012	1027	1012	1027	642
155°	1115	1114	1115	1114	1115	514
165°	1171	1174	1171	1174	1171	331
175°	1193	1200	1193	1200	1193	114
180°	1198	1198	1198	1198	1198	



TEST NUMBER: P331456-930

CATALOG NUMBER: S122DIP-S1005D1080U930-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7
2.5°	1700.7	1701.2	1702.2	1694.2	1693.2	1693.2	1686.2	1680.3	1673.2	1663.7	1664.8
5°	1815.7	1822.5	1825.0	1817.5	1806.3	1805.1	1794.5	1776.9	1760.7	1747.6	1738.2
7.5°	1952.9	1955.7	1949.5	1939.7	1931.3	1916.3	1896.5	1877.1	1850.1	1825.2	1806.7
10°	2056.8	2060.6	2050.0	2035.6	2023.7	2006.3	1977.5	1948.2	1912.5	1878.2	1850.6
12.5°	2135.8	2145.1	2131.4	2129.6	2109.3	2085.2	2051.0	2036.1	1986.0	1938.1	1908.7
15°	2231.8	2231.1	2232.5	2220.5	2205.5	2201.8	2165.6	2126.2	2055.6	2027.5	1978.7
17.5°	2204.1	2213.5	2217.9	2217.8	2217.5	2215.1	2203.4	2178.6	2143.2	2097.6	2041.3
20°	2138.1	2150.6	2152.5	2166.8	2175.0	2185.6	2190.0	2183.0	2161.2	2123.1	2074.4
22.5°	2036.1	2039.6	2045.5	2067.8	2085.5	2112.1	2126.0	2149.0	2140.7	2122.1	2081.4
25°	1859.5	1853.2	1875.0	1886.3	1926.9	1969.4	2000.0	2033.8	2063.8	2081.9	2070.0
27.5°	1647.2	1637.9	1670.6	1700.5	1733.5	1779.5	1827.2	1883.5	1930.4	1989.0	2009.1
30°	1468.3	1473.9	1505.1	1537.0	1587.0	1652.0	1705.7	1767.6	1834.4	1900.1	1945.6
32.5°	1275.4	1297.0	1316.7	1365.5	1409.6	1482.1	1560.7	1638.1	1721.5	1796.1	1866.7
35°	1012.2	1037.1	1064.7	1100.2	1162.1	1234.0	1310.8	1415.2	1528.9	1630.8	1714.5
37.5°	852.0	848.0	863.7	889.5	939.6	997.6	1086.1	1189.1	1323.0	1442.7	1560.7
40°	756.0	753.5	764.8	788.5	826.6	869.1	946.6	1037.1	1161.5	1307.7	1448.3
42.5°	690.1	691.5	697.8	714.5	740.6	775.6	833.6	910.7	1024.6	1162.3	1313.4
45°	609.8	614.2	621.1	629.2	644.2	672.9	705.4	760.4	850.4	965.3	1114.0
47.5°	552.0	552.2	559.2	566.3	575.2	591.4	617.9	652.4	715.9	809.5	937.3
50°	521.1	516.7	521.7	527.3	536.7	548.0	565.4	597.9	640.4	716.0	822.9
52.5°	483.1	483.2	487.7	489.8	498.2	509.5	525.5	548.0	586.4	645.6	733.4
55°	428.6	431.7	434.2	438.0	445.5	453.6	466.1	481.1	511.1	555.5	620.4
57.5°	377.4	378.4	380.9	388.0	392.7	400.2	412.1	425.7	445.2	478.1	526.9
60°	342.4	342.4	347.4	350.5	356.8	364.3	373.7	386.8	404.2	431.1	470.5
62.5°	310.4	309.9	311.9	317.0	321.8	328.8	338.1	349.3	365.7	389.6	422.0
65°	263.7	262.4	266.2	267.4	272.4	279.3	286.8	298.6	311.8	329.3	358.0
67.5°	218.7	220.2	222.2	224.5	227.3	234.6	239.5	247.9	259.0	273.5	293.0
70°	193.7	193.7	193.7	195.6	199.3	203.1	208.1	214.9	225.6	238.1	255.5
72.5°	165.7	167.7	169.7	168.6	173.3	175.5	181.6	185.5	195.6	203.6	219.1
75°	130.0	130.0	130.0	133.1	134.9	136.8	140.6	144.3	149.4	159.3	167.5
77.5°	96.9	96.7	97.3	98.1	100.1	102.3	103.5	106.8	111.5	116.1	122.9
80°	75.0	76.2	76.9	78.1	78.1	79.3	80.0	84.4	87.5	90.6	95.0
82.5°	58.0	58.2	58.4	58.6	59.1	59.8	61.5	62.9	64.0	66.6	70.0
85°	33.8	33.1	33.1	34.3	33.8	33.8	35.0	36.2	36.2	36.9	38.7
87.5°	17.7	17.6	18.0	17.4	17.4	17.8	17.5	16.9	17.1	17.4	17.7
90°	23.4	23.0	22.7	22.3	21.9	21.2	20.2	19.2	18.3	17.4	15.8
92.5°	23.4	23.2	22.9	22.7	22.5	22.1	21.6	21.1	20.6	20.1	19.3
95°	37.3	37.4	37.7	37.8	38.1	37.7	36.7	35.7	34.7	33.8	32.4
97.5°	49.7	49.5	49.3	49.1	48.8	48.3	47.5	46.8	46.0	45.2	42.2
100°	58.0	57.7	57.3	56.9	56.5	55.6	54.1	52.5	51.0	49.4	46.1
102.5°	62.2	61.7	61.1	60.6	60.1	58.8	56.8	54.8	52.8	50.8	48.2
105°	65.9	65.1	64.3	63.6	62.8	61.3	59.2	57.1	55.0	52.8	50.4
107.5°	67.8	67.0	66.2	65.5	64.7	65.4	67.5	69.7	71.8	74.0	78.1
110°	68.5	67.7	66.9	66.1	65.4	74.6	93.9	113.2	132.4	151.6	207.3



TEST NUMBER: P331456-930

CATALOG NUMBER: S122DIP-S1005D1080U930-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	69.1	68.6	67.9	67.3	66.7	101.5	171.8	242.1	312.3	382.5	396.3
115°	71.1	85.0	98.8	112.7	126.5	178.1	267.3	356.4	445.6	534.8	529.9
117.5°	290.2	335.7	381.3	426.9	472.5	506.1	527.6	549.2	570.7	592.3	589.0
120°	528.7	554.6	580.7	606.7	632.7	644.6	642.2	639.9	637.6	635.3	631.9
122.5°	659.7	664.8	669.8	674.9	679.9	681.8	680.4	679.0	677.6	676.2	672.5
125°	741.0	740.5	739.9	739.3	738.7	737.8	736.4	735.1	733.7	732.4	728.7
127.5°	792.3	792.2	792.1	792.0	791.9	790.8	788.9	786.9	785.0	783.0	780.2
130°	824.3	824.4	824.6	824.8	825.0	824.0	821.9	819.8	817.7	815.5	813.4
132.5°	855.4	855.7	855.8	856.0	856.2	855.4	853.6	851.7	849.9	848.2	846.0
135°	900.5	900.9	901.2	901.6	902.0	901.2	899.4	897.4	895.5	893.6	891.9
137.5°	941.6	942.2	942.9	943.5	944.2	943.5	941.7	939.8	937.9	936.0	934.1
140°	967.3	968.2	969.1	970.1	971.1	970.7	969.0	967.3	965.5	963.8	961.6
142.5°	992.2	993.2	994.1	995.1	996.1	995.7	994.2	992.5	991.0	989.4	987.0
145°	1027.0	1028.0	1029.0	1030.0	1030.9	1030.7	1029.3	1028.0	1026.6	1025.3	1022.1
147.5°	1057.7	1058.5	1059.3	1060.1	1060.9	1060.9	1059.9	1058.8	1057.9	1056.9	1053.6
150°	1076.4	1077.4	1078.4	1079.3	1080.3	1080.2	1079.0	1077.9	1076.8	1075.5	1072.5
152.5°	1092.4	1093.6	1094.9	1096.2	1097.5	1097.6	1096.4	1095.2	1094.1	1092.9	1090.0
155°	1114.6	1116.1	1117.7	1119.2	1120.7	1121.0	1119.8	1118.6	1117.4	1116.3	1114.0
157.5°	1134.8	1136.4	1137.8	1139.4	1140.8	1140.9	1139.6	1138.3	1137.0	1135.7	1134.1
160°	1146.6	1148.0	1149.3	1150.7	1152.0	1152.1	1151.0	1149.8	1148.7	1147.5	1146.4
162.5°	1156.3	1158.0	1159.7	1161.3	1162.9	1163.2	1161.8	1160.5	1159.2	1157.9	1156.9
165°	1170.9	1172.2	1173.6	1174.9	1176.3	1176.3	1174.9	1173.6	1172.2	1170.9	1170.4
167.5°	1180.1	1181.9	1183.6	1185.3	1187.0	1187.2	1185.9	1184.5	1183.2	1181.9	1181.3
170°	1185.6	1187.4	1189.1	1190.8	1192.5	1192.8	1191.4	1190.1	1188.7	1187.4	1187.0
172.5°	1189.8	1191.6	1193.3	1195.0	1196.8	1196.9	1195.6	1194.3	1192.9	1191.6	1191.2
175°	1193.4	1195.4	1197.3	1199.2	1201.2	1201.4	1200.1	1198.7	1197.4	1196.0	1195.6
177.5°	1195.7	1197.1	1198.5	1199.9	1201.3	1201.4	1200.3	1199.2	1198.2	1197.1	1196.9
180°	1197.8	1197.8	1197.8	1197.8	1197.8	1197.8	1197.8	1197.8	1197.8	1197.8	1197.8



TEST NUMBER: P331456-930

CATALOG NUMBER: S122DIP-S1005D1080U930-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7
2.5°	1668.3	1664.3	1661.7	1652.8	1644.7	1636.7	1634.3	1635.2	1624.2	1613.7	1609.2
5°	1733.2	1720.7	1708.9	1692.0	1672.0	1650.1	1638.8	1630.1	1608.3	1584.5	1570.8
7.5°	1791.5	1773.6	1750.7	1719.0	1689.9	1655.5	1633.6	1614.2	1582.3	1548.7	1528.3
10°	1826.9	1802.5	1773.2	1734.5	1698.8	1657.0	1627.6	1598.2	1560.7	1520.8	1495.7
12.5°	1857.4	1824.6	1795.7	1746.0	1703.8	1651.5	1616.7	1575.2	1535.8	1488.2	1463.8
15°	1930.1	1869.4	1814.4	1758.2	1706.3	1633.2	1594.5	1538.9	1487.0	1428.3	1400.2
17.5°	1986.2	1918.0	1831.4	1760.0	1699.5	1618.5	1561.6	1495.0	1433.7	1366.6	1328.4
20°	2018.1	1940.0	1846.9	1761.9	1689.5	1597.0	1535.1	1467.0	1395.2	1319.6	1278.4
22.5°	2037.1	1955.0	1863.0	1754.4	1669.5	1579.5	1501.6	1427.0	1354.2	1272.6	1229.4
25°	2043.1	1968.1	1870.7	1748.2	1644.5	1542.6	1448.9	1376.5	1288.3	1212.1	1149.0
27.5°	2013.4	1959.7	1865.9	1736.4	1615.6	1496.6	1392.0	1309.9	1217.0	1134.2	1070.8
30°	1976.9	1945.6	1854.4	1724.4	1592.6	1464.5	1349.6	1256.5	1164.0	1080.3	1015.3
32.5°	1920.4	1913.7	1833.4	1707.5	1568.1	1424.1	1305.1	1211.0	1108.6	1026.3	964.3
35°	1809.5	1839.4	1788.8	1669.5	1522.0	1366.4	1237.7	1130.2	1024.1	945.3	887.2
37.5°	1660.8	1735.2	1722.0	1613.9	1459.8	1303.7	1161.6	1049.3	948.1	868.6	811.6
40°	1558.3	1653.3	1667.0	1571.4	1415.8	1255.2	1104.6	992.8	894.1	821.7	764.1
42.5°	1448.3	1559.3	1597.0	1520.4	1367.8	1204.3	1053.7	937.8	840.1	769.6	718.7
45°	1264.0	1410.8	1479.0	1435.2	1287.8	1120.3	965.3	847.8	759.1	692.9	653.5
47.5°	1091.7	1252.1	1343.7	1328.2	1198.7	1032.8	879.6	766.9	680.5	627.7	592.5
50°	969.7	1134.7	1245.2	1250.3	1134.7	970.3	816.6	710.4	631.0	581.7	552.9
52.5°	863.7	1021.2	1141.7	1168.2	1063.2	905.3	760.1	654.4	584.6	539.2	513.5
55°	725.4	858.5	992.2	1040.9	956.6	806.7	672.3	579.2	513.6	482.3	459.8
57.5°	603.1	714.0	837.5	891.4	839.4	711.0	585.1	504.2	451.0	423.6	406.3
60°	538.6	626.1	736.1	800.4	755.4	641.1	531.1	454.2	410.5	386.1	369.9
62.5°	478.6	556.1	649.1	707.9	683.4	575.6	477.1	409.3	371.5	348.6	336.9
65°	394.8	456.1	528.0	582.3	566.1	484.2	403.7	345.5	315.5	297.4	288.0
67.5°	325.1	369.4	419.2	466.8	453.7	395.7	331.0	285.8	263.4	247.8	242.1
70°	281.2	314.9	359.3	397.4	386.8	339.2	288.0	249.3	229.9	216.8	211.2
72.5°	239.2	266.9	300.8	331.9	324.7	285.3	242.6	213.3	198.4	186.3	181.7
75°	180.6	201.8	222.4	243.0	241.2	210.6	185.6	163.1	151.2	141.9	140.0
77.5°	133.3	145.2	159.2	171.5	168.0	150.6	130.9	118.1	109.3	103.1	102.1
80°	101.8	108.7	118.7	127.4	123.1	115.6	100.0	90.6	84.4	78.1	75.6
82.5°	73.9	80.7	86.7	91.5	88.1	81.1	71.5	65.1	61.4	57.1	56.1
85°	38.7	42.5	45.0	46.2	45.0	40.6	36.2	33.8	30.7	28.8	28.1
87.5°	17.9	17.5	17.2	17.9	16.0	15.5	13.1	11.2	11.1	11.0	10.4
90°	14.3	12.7	11.2	9.4	7.3	5.1	3.0	0.9	3.0	5.1	7.3
92.5°	18.6	17.8	17.0	16.7	17.0	17.1	17.3	17.5	17.3	17.1	17.0
95°	31.1	29.8	28.4	30.9	37.3	43.6	50.0	56.3	50.0	43.6	37.3
97.5°	39.0	35.9	32.8	40.2	58.0	76.0	93.9	111.8	93.9	76.0	58.0
100°	42.9	39.5	36.3	47.9	74.3	100.6	127.0	153.4	127.0	100.6	74.3
102.5°	105.6	133.0	160.4	176.8	182.4	188.0	193.6	199.2	193.6	188.0	182.4
105°	158.0	210.6	263.2	286.6	280.8	275.0	269.3	263.5	269.3	275.0	280.8
107.5°	200.2	263.2	326.3	355.5	350.7	346.1	341.4	336.8	341.4	346.1	350.7
110°	263.0	318.6	374.3	400.1	396.1	392.1	388.0	383.9	388.0	392.1	396.1





TEST NUMBER: P331456-930

CATALOG NUMBER: S122DIP-S1005D1080U930-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	410.1	423.8	437.6	442.6	439.0	435.5	431.9	428.4	431.9	435.5	439.0
115°	525.1	520.3	515.5	511.4	508.2	504.9	501.7	498.4	501.7	504.9	508.2
117.5°	585.7	582.4	579.0	575.6	571.9	568.3	564.6	560.9	564.6	568.3	571.9
120°	628.4	624.9	621.4	618.2	615.4	612.5	609.6	606.7	609.6	612.5	615.4
122.5°	668.6	664.9	661.1	657.7	654.7	651.6	648.6	645.6	648.6	651.6	654.7
125°	725.0	721.4	717.7	714.6	712.2	709.6	707.1	704.7	707.1	709.6	712.2
127.5°	777.5	774.8	772.0	769.3	766.5	763.8	761.0	758.2	761.0	763.8	766.5
130°	811.3	809.2	807.1	804.5	801.4	798.3	795.2	792.1	795.2	798.3	801.4
132.5°	843.9	841.8	839.7	837.3	834.7	832.1	829.5	826.8	829.5	832.1	834.7
135°	890.1	888.4	886.6	884.2	881.2	878.1	875.0	871.9	875.0	878.1	881.2
137.5°	932.1	930.2	928.1	926.1	924.0	921.8	919.7	917.5	919.7	921.8	924.0
140°	959.5	957.4	955.3	953.5	951.9	950.4	948.8	947.3	948.8	950.4	951.9
142.5°	984.6	982.1	979.7	977.8	976.4	975.0	973.6	972.2	973.6	975.0	976.4
145°	1018.7	1015.5	1012.2	1010.6	1010.9	1011.1	1011.2	1011.5	1011.2	1011.1	1010.9
147.5°	1050.4	1047.2	1043.9	1042.7	1043.4	1044.2	1044.9	1045.6	1044.9	1044.2	1043.4
150°	1069.4	1066.3	1063.2	1062.4	1063.7	1065.1	1066.4	1067.8	1066.4	1065.1	1063.7
152.5°	1087.0	1084.1	1081.2	1080.5	1082.0	1083.5	1085.0	1086.5	1085.0	1083.5	1082.0
155°	1111.7	1109.4	1107.1	1106.8	1108.5	1110.3	1112.0	1113.7	1112.0	1110.3	1108.5
157.5°	1132.5	1130.9	1129.3	1129.2	1130.7	1132.1	1133.6	1135.1	1133.6	1132.1	1130.7
160°	1145.2	1144.0	1142.9	1142.9	1144.0	1145.2	1146.4	1147.5	1146.4	1145.2	1144.0
162.5°	1155.9	1154.9	1153.9	1154.0	1155.1	1156.3	1157.5	1158.6	1157.5	1156.3	1155.1
165°	1169.8	1169.1	1168.6	1168.9	1170.0	1171.2	1172.3	1173.5	1172.3	1171.2	1170.0
167.5°	1180.7	1180.2	1179.7	1180.0	1181.1	1182.3	1183.5	1184.6	1183.5	1182.3	1181.1
170°	1186.6	1186.3	1185.9	1186.3	1187.4	1188.5	1189.7	1190.8	1189.7	1188.5	1187.4
172.5°	1190.7	1190.4	1190.0	1190.4	1191.6	1192.7	1193.8	1195.0	1193.8	1192.7	1191.6
175°	1195.3	1194.9	1194.5	1195.0	1196.4	1197.7	1199.1	1200.4	1199.1	1197.7	1196.4
177.5°	1196.8	1196.6	1196.5	1196.9	1198.0	1199.1	1200.2	1201.3	1200.2	1199.1	1198.0
180°	1197.8	1197.8	1197.8	1197.8	1197.8	1197.8	1197.8	1197.8	1197.8	1197.8	1197.8



TEST NUMBER: P331456-930

CATALOG NUMBER: S122DIP-S1005D1080U930-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7
2.5°	1604.3	1601.2	1590.7	1585.3	1576.3	1567.7	1562.3	1564.8	1566.8	1565.8	1564.2
5°	1558.3	1546.4	1528.3	1512.6	1501.4	1480.8	1472.0	1467.7	1464.0	1459.5	1455.1
7.5°	1503.5	1484.8	1458.8	1436.6	1415.5	1389.9	1375.3	1366.6	1357.6	1347.7	1339.0
10°	1464.5	1438.3	1410.8	1379.6	1354.6	1331.5	1310.8	1297.1	1284.6	1272.8	1264.0
12.5°	1423.6	1393.3	1359.3	1316.6	1289.1	1256.0	1252.9	1228.7	1209.1	1201.8	1191.5
15°	1358.3	1315.8	1272.8	1222.1	1200.3	1170.3	1151.5	1132.8	1115.9	1104.0	1100.9
17.5°	1284.3	1229.2	1186.3	1150.0	1114.2	1083.5	1066.2	1051.2	1037.3	1021.4	1019.3
20°	1227.8	1180.2	1133.4	1101.6	1064.7	1033.4	1012.2	997.2	985.3	975.9	967.8
22.5°	1174.3	1122.3	1079.4	1044.6	1008.2	982.9	966.2	951.7	941.8	931.5	923.8
25°	1088.4	1047.8	1000.9	961.6	931.6	915.3	901.6	889.1	882.9	876.0	867.2
27.5°	1013.3	968.2	924.3	893.8	867.5	853.1	843.3	834.9	829.0	825.0	820.0
30°	960.3	914.7	880.4	850.4	828.5	814.2	807.9	802.9	796.0	793.5	791.0
32.5°	909.3	868.2	838.9	812.9	792.0	782.6	776.9	772.4	767.0	764.5	759.5
35°	837.2	802.9	774.1	759.8	742.9	734.7	730.4	724.1	719.2	716.6	716.0
37.5°	769.4	739.6	720.6	702.1	695.0	690.1	684.0	679.8	678.3	677.9	677.3
40°	725.4	701.0	684.2	669.2	666.0	658.5	653.5	649.8	649.8	650.4	649.8
42.5°	685.4	663.6	648.7	635.7	632.0	627.5	622.6	622.3	623.3	625.4	623.3
45°	624.8	609.2	598.6	592.3	585.5	581.1	580.4	582.3	582.9	583.6	585.5
47.5°	569.1	558.7	549.1	542.2	539.2	538.4	537.7	541.0	544.0	545.1	548.0
50°	536.1	524.2	516.1	511.7	509.2	507.9	509.2	513.0	515.4	518.6	520.5
52.5°	499.1	490.7	485.1	481.8	480.7	481.5	481.8	486.0	490.0	491.1	492.0
55°	448.0	441.7	440.5	434.9	437.3	436.8	439.9	442.4	446.1	449.9	450.5
57.5°	397.0	392.0	388.7	389.1	389.9	392.6	395.3	399.7	403.7	407.6	408.0
60°	363.1	360.5	358.7	358.7	359.9	363.6	366.7	371.1	373.7	376.1	378.0
62.5°	332.0	329.5	327.7	328.6	331.9	334.1	337.8	340.1	342.7	345.1	346.0
65°	283.1	281.8	283.6	284.9	285.5	288.7	293.0	294.9	297.4	298.6	303.0
67.5°	237.9	238.1	237.9	239.7	243.3	244.0	248.2	252.6	253.1	255.4	258.3
70°	207.4	208.7	209.9	211.2	214.3	215.6	218.7	220.5	223.1	224.9	226.8
72.5°	179.4	179.7	180.9	180.7	183.3	186.1	188.7	190.5	193.1	195.4	197.3
75°	138.1	138.1	139.3	140.0	143.1	146.2	145.6	146.8	149.4	151.8	153.1
77.5°	100.9	99.5	100.9	101.5	102.5	105.1	105.6	107.4	110.2	109.3	110.7
80°	76.9	75.0	76.9	77.5	77.5	80.6	80.6	81.9	83.7	81.9	83.7
82.5°	54.9	54.0	55.4	55.5	56.5	56.6	57.6	57.9	59.8	58.9	59.8
85°	27.5	26.9	27.5	26.9	27.5	28.1	28.1	27.5	27.5	28.8	26.9
87.5°	10.4	10.2	10.0	10.4	10.2	9.9	9.6	9.9	10.0	9.2	9.4
90°	9.4	11.2	12.7	14.3	15.8	17.4	18.3	19.2	20.2	21.2	21.9
92.5°	16.7	17.0	17.8	18.6	19.3	20.1	20.6	21.1	21.6	22.1	22.5
95°	30.9	28.4	29.8	31.1	32.4	33.8	34.7	35.7	36.7	37.7	38.1
97.5°	40.2	32.8	35.9	39.0	42.2	45.2	46.0	46.8	47.5	48.3	48.8
100°	47.9	36.3	39.5	42.9	46.1	49.4	51.0	52.5	54.1	55.6	56.5
102.5°	176.8	160.4	133.0	105.6	78.2	50.8	52.8	54.8	56.8	58.8	60.1
105°	286.6	263.2	210.6	158.0	105.4	52.8	55.0	57.1	59.2	61.3	62.8
107.5°	355.5	326.3	263.2	200.2	137.1	74.0	71.8	69.7	67.5	65.4	64.7
110°	400.1	374.3	318.6	263.0	207.3	151.6	132.4	113.2	93.9	74.6	65.4



TEST NUMBER: P331456-930

CATALOG NUMBER: S122DIP-S1005D1080U930-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	442.6	437.6	423.8	410.1	396.3	382.5	312.3	242.1	171.8	101.5	66.7
115°	511.4	515.5	520.3	525.1	529.9	534.8	445.6	356.4	267.3	178.1	126.5
117.5°	575.6	579.0	582.4	585.7	589.0	592.3	570.7	549.2	527.6	506.1	472.5
120°	618.2	621.4	624.9	628.4	631.9	635.3	637.6	639.9	642.2	644.6	632.7
122.5°	657.7	661.1	664.9	668.6	672.5	676.2	677.6	679.0	680.4	681.8	679.9
125°	714.6	717.7	721.4	725.0	728.7	732.4	733.7	735.1	736.4	737.8	738.7
127.5°	769.3	772.0	774.8	777.5	780.2	783.0	785.0	786.9	788.9	790.8	791.9
130°	804.5	807.1	809.2	811.3	813.4	815.5	817.7	819.8	821.9	824.0	825.0
132.5°	837.3	839.7	841.8	843.9	846.0	848.2	849.9	851.7	853.6	855.4	856.2
135°	884.2	886.6	888.4	890.1	891.9	893.6	895.5	897.4	899.4	901.2	902.0
137.5°	926.1	928.1	930.2	932.1	934.1	936.0	937.9	939.8	941.7	943.5	944.2
140°	953.5	955.3	957.4	959.5	961.6	963.8	965.5	967.3	969.0	970.7	971.1
142.5°	977.8	979.7	982.1	984.6	987.0	989.4	991.0	992.5	994.2	995.7	996.1
145°	1010.6	1012.2	1015.5	1018.7	1022.1	1025.3	1026.6	1028.0	1029.3	1030.7	1030.9
147.5°	1042.7	1043.9	1047.2	1050.4	1053.6	1056.9	1057.9	1058.8	1059.9	1060.9	1060.9
150°	1062.4	1063.2	1066.3	1069.4	1072.5	1075.5	1076.8	1077.9	1079.0	1080.2	1080.3
152.5°	1080.5	1081.2	1084.1	1087.0	1090.0	1092.9	1094.1	1095.2	1096.4	1097.6	1097.5
155°	1106.8	1107.1	1109.4	1111.7	1114.0	1116.3	1117.4	1118.6	1119.8	1121.0	1120.7
157.5°	1129.2	1129.3	1130.9	1132.5	1134.1	1135.7	1137.0	1138.3	1139.6	1140.9	1140.8
160°	1142.9	1142.9	1144.0	1145.2	1146.4	1147.5	1148.7	1149.8	1151.0	1152.1	1152.0
162.5°	1154.0	1153.9	1154.9	1155.9	1156.9	1157.9	1159.2	1160.5	1161.8	1163.2	1162.9
165°	1168.9	1168.6	1169.1	1169.8	1170.4	1170.9	1172.2	1173.6	1174.9	1176.3	1176.3
167.5°	1180.0	1179.7	1180.2	1180.7	1181.3	1181.9	1183.2	1184.5	1185.9	1187.2	1187.0
170°	1186.3	1185.9	1186.3	1186.6	1187.0	1187.4	1188.7	1190.1	1191.4	1192.8	1192.5
172.5°	1190.4	1190.0	1190.4	1190.7	1191.2	1191.6	1192.9	1194.3	1195.6	1196.9	1196.8
175°	1195.0	1194.5	1194.9	1195.3	1195.6	1196.0	1197.4	1198.7	1200.1	1201.4	1201.2
177.5°	1196.9	1196.5	1196.6	1196.8	1196.9	1197.1	1198.2	1199.2	1200.3	1201.4	1201.3
180°	1197.8	1197.8	1197.8	1197.8	1197.8	1197.8	1197.8	1197.8	1197.8	1197.8	1197.8



TEST NUMBER: P331456-930

CATALOG NUMBER: S122DIP-S1005D1080U930-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7
2.5°	1559.3	1558.3	1558.3	1553.8	1558.3	1558.3	1559.3	1564.2	1565.8	1566.8	1564.8
5°	1446.4	1444.5	1441.4	1444.5	1441.4	1444.5	1446.4	1455.1	1459.5	1464.0	1467.7
7.5°	1334.8	1327.3	1326.2	1318.8	1326.2	1327.3	1334.8	1339.0	1347.7	1357.6	1366.6
10°	1253.4	1248.4	1247.7	1235.8	1247.7	1248.4	1253.4	1264.0	1272.8	1284.6	1297.1
12.5°	1191.4	1179.4	1181.8	1174.8	1181.8	1179.4	1191.4	1191.5	1201.8	1209.1	1228.7
15°	1084.0	1084.0	1081.6	1070.9	1081.6	1084.0	1084.0	1100.9	1104.0	1115.9	1132.8
17.5°	1007.0	1005.7	999.7	1002.7	999.7	1005.7	1007.0	1019.3	1021.4	1037.3	1051.2
20°	960.9	957.2	949.7	949.7	949.7	957.2	960.9	967.8	975.9	985.3	997.2
22.5°	917.5	917.2	909.2	911.7	909.2	917.2	917.5	923.8	931.5	941.8	951.7
25°	866.6	861.6	857.9	859.7	857.9	861.6	866.6	867.2	876.0	882.9	889.1
27.5°	818.4	815.6	815.4	810.2	815.4	815.6	818.4	820.0	825.0	829.0	834.9
30°	790.4	784.2	785.4	782.3	785.4	784.2	790.4	791.0	793.5	796.0	802.9
32.5°	758.4	756.1	754.9	752.3	754.9	756.1	758.4	759.5	764.5	767.0	772.4
35°	714.8	715.4	712.2	713.5	712.2	715.4	714.8	716.0	716.6	719.2	724.1
37.5°	676.7	678.7	677.2	677.5	677.2	678.7	676.7	677.3	677.9	678.3	679.8
40°	651.7	651.7	651.7	653.5	651.7	651.7	651.7	649.8	650.4	649.8	649.8
42.5°	627.7	626.7	625.7	625.6	625.7	626.7	627.7	623.3	625.4	623.3	622.3
45°	586.7	588.6	589.2	586.0	589.2	588.6	586.7	585.5	583.6	582.9	582.3
47.5°	549.6	549.8	549.6	552.4	549.6	549.8	549.6	548.0	545.1	544.0	541.0
50°	523.6	522.4	523.6	522.4	523.6	522.4	523.6	520.5	518.6	515.4	513.0
52.5°	496.1	496.4	495.6	495.4	495.6	496.4	496.1	492.0	491.1	490.0	486.0
55°	453.0	454.2	453.6	453.6	453.6	454.2	453.0	450.5	449.9	446.1	442.4
57.5°	408.4	409.5	410.3	407.6	410.3	409.5	408.4	408.0	407.6	403.7	399.7
60°	377.4	380.5	379.8	378.6	379.8	380.5	377.4	378.0	376.1	373.7	371.1
62.5°	348.9	350.0	349.9	349.7	349.9	350.0	348.9	346.0	345.1	342.7	340.1
65°	304.9	306.1	304.3	306.1	304.3	306.1	304.9	303.0	298.6	297.4	294.9
67.5°	257.6	258.0	259.3	260.2	259.3	258.0	257.6	258.3	255.4	253.1	252.6
70°	228.0	227.5	229.3	231.2	229.3	227.5	228.0	226.8	224.9	223.1	220.5
72.5°	197.1	198.4	197.8	199.2	197.8	198.4	197.1	197.3	195.4	193.1	190.5
75°	151.8	153.7	153.1	155.0	153.1	153.7	151.8	153.1	151.8	149.4	146.8
77.5°	109.7	110.0	109.7	110.7	109.7	110.0	109.7	110.7	109.3	110.2	107.4
80°	83.7	82.5	81.2	83.7	81.2	82.5	83.7	83.7	81.9	83.7	81.9
82.5°	58.2	58.9	57.7	57.7	57.7	58.9	58.2	59.8	58.9	59.8	57.9
85°	26.9	26.3	25.0	25.0	25.0	26.3	26.9	26.9	28.8	27.5	27.5
87.5°	9.5	9.0	9.1	8.6	9.1	9.0	9.5	9.4	9.2	10.0	9.9
90°	22.3	22.7	23.0	23.4	23.0	22.7	22.3	21.9	21.2	20.2	19.2
92.5°	22.7	22.9	23.2	23.4	23.2	22.9	22.7	22.5	22.1	21.6	21.1
95°	37.8	37.7	37.4	37.3	37.4	37.7	37.8	38.1	37.7	36.7	35.7
97.5°	49.1	49.3	49.5	49.7	49.5	49.3	49.1	48.8	48.3	47.5	46.8
100°	56.9	57.3	57.7	58.0	57.7	57.3	56.9	56.5	55.6	54.1	52.5
102.5°	60.6	61.1	61.7	62.2	61.7	61.1	60.6	60.1	58.8	56.8	54.8
105°	63.6	64.3	65.1	65.9	65.1	64.3	63.6	62.8	61.3	59.2	57.1
107.5°	65.5	66.2	67.0	67.8	67.0	66.2	65.5	64.7	65.4	67.5	69.7
110°	66.1	66.9	67.7	68.5	67.7	66.9	66.1	65.4	74.6	93.9	113.2



TEST NUMBER: P331456-930

CATALOG NUMBER: S122DIP-S1005D1080U930-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	67.3	67.9	68.6	69.1	68.6	67.9	67.3	66.7	101.5	171.8	242.1
115°	112.7	98.8	85.0	71.1	85.0	98.8	112.7	126.5	178.1	267.3	356.4
117.5°	426.9	381.3	335.7	290.2	335.7	381.3	426.9	472.5	506.1	527.6	549.2
120°	606.7	580.7	554.6	528.7	554.6	580.7	606.7	632.7	644.6	642.2	639.9
122.5°	674.9	669.8	664.8	659.7	664.8	669.8	674.9	679.9	681.8	680.4	679.0
125°	739.3	739.9	740.5	741.0	740.5	739.9	739.3	738.7	737.8	736.4	735.1
127.5°	792.0	792.1	792.2	792.3	792.2	792.1	792.0	791.9	790.8	788.9	786.9
130°	824.8	824.6	824.4	824.3	824.4	824.6	824.8	825.0	824.0	821.9	819.8
132.5°	856.0	855.8	855.7	855.4	855.7	855.8	856.0	856.2	855.4	853.6	851.7
135°	901.6	901.2	900.9	900.5	900.9	901.2	901.6	902.0	901.2	899.4	897.4
137.5°	943.5	942.9	942.2	941.6	942.2	942.9	943.5	944.2	943.5	941.7	939.8
140°	970.1	969.1	968.2	967.3	968.2	969.1	970.1	971.1	970.7	969.0	967.3
142.5°	995.1	994.1	993.2	992.2	993.2	994.1	995.1	996.1	995.7	994.2	992.5
145°	1030.0	1029.0	1028.0	1027.0	1028.0	1029.0	1030.0	1030.9	1030.7	1029.3	1028.0
147.5°	1060.1	1059.3	1058.5	1057.7	1058.5	1059.3	1060.1	1060.9	1060.9	1059.9	1058.8
150°	1079.3	1078.4	1077.4	1076.4	1077.4	1078.4	1079.3	1080.3	1080.2	1079.0	1077.9
152.5°	1096.2	1094.9	1093.6	1092.4	1093.6	1094.9	1096.2	1097.5	1097.6	1096.4	1095.2
155°	1119.2	1117.7	1116.1	1114.6	1116.1	1117.7	1119.2	1120.7	1121.0	1119.8	1118.6
157.5°	1139.4	1137.8	1136.4	1134.8	1136.4	1137.8	1139.4	1140.8	1140.9	1139.6	1138.3
160°	1150.7	1149.3	1148.0	1146.6	1148.0	1149.3	1150.7	1152.0	1152.1	1151.0	1149.8
162.5°	1161.3	1159.7	1158.0	1156.3	1158.0	1159.7	1161.3	1162.9	1163.2	1161.8	1160.5
165°	1174.9	1173.6	1172.2	1170.9	1172.2	1173.6	1174.9	1176.3	1176.3	1174.9	1173.6
167.5°	1185.3	1183.6	1181.9	1180.1	1181.9	1183.6	1185.3	1187.0	1187.2	1185.9	1184.5
170°	1190.8	1189.1	1187.4	1185.6	1187.4	1189.1	1190.8	1192.5	1192.8	1191.4	1190.1
172.5°	1195.0	1193.3	1191.6	1189.8	1191.6	1193.3	1195.0	1196.8	1196.9	1195.6	1194.3
175°	1199.2	1197.3	1195.4	1193.4	1195.4	1197.3	1199.2	1201.2	1201.4	1200.1	1198.7
177.5°	1199.9	1198.5	1197.1	1195.7	1197.1	1198.5	1199.9	1201.3	1201.4	1200.3	1199.2
180°	1197.8	1197.8	1197.8	1197.8	1197.8	1197.8	1197.8	1197.8	1197.8	1197.8	1197.8



TEST NUMBER: P331456-930

CATALOG NUMBER: S122DIP-S1005D1080U930-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7
2.5°	1562.3	1567.7	1576.3	1585.3	1590.7	1601.2	1604.3	1609.2	1613.7	1624.2	1635.2
5°	1472.0	1480.8	1501.4	1512.6	1528.3	1546.4	1558.3	1570.8	1584.5	1608.3	1630.1
7.5°	1375.3	1389.9	1415.5	1436.6	1458.8	1484.8	1503.5	1528.3	1548.7	1582.3	1614.2
10°	1310.8	1331.5	1354.6	1379.6	1410.8	1438.3	1464.5	1495.7	1520.8	1560.7	1598.2
12.5°	1252.9	1256.0	1289.1	1316.6	1359.3	1393.3	1423.6	1463.8	1488.2	1535.8	1575.2
15°	1151.5	1170.3	1200.3	1222.1	1272.8	1315.8	1358.3	1400.2	1428.3	1487.0	1538.9
17.5°	1066.2	1083.5	1114.2	1150.0	1186.3	1229.2	1284.3	1328.4	1366.6	1433.7	1495.0
20°	1012.2	1033.4	1064.7	1101.6	1133.4	1180.2	1227.8	1278.4	1319.6	1395.2	1467.0
22.5°	966.2	982.9	1008.2	1044.6	1079.4	1122.3	1174.3	1229.4	1272.6	1354.2	1427.0
25°	901.6	915.3	931.6	961.6	1000.9	1047.8	1088.4	1149.0	1212.1	1288.3	1376.5
27.5°	843.3	853.1	867.5	893.8	924.3	968.2	1013.3	1070.8	1134.2	1217.0	1309.9
30°	807.9	814.2	828.5	850.4	880.4	914.7	960.3	1015.3	1080.3	1164.0	1256.5
32.5°	776.9	782.6	792.0	812.9	838.9	868.2	909.3	964.3	1026.3	1108.6	1211.0
35°	730.4	734.7	742.9	759.8	774.1	802.9	837.2	887.2	945.3	1024.1	1130.2
37.5°	684.0	690.1	695.0	702.1	720.6	739.6	769.4	811.6	868.6	948.1	1049.3
40°	653.5	658.5	666.0	669.2	684.2	701.0	725.4	764.1	821.7	894.1	992.8
42.5°	622.6	627.5	632.0	635.7	648.7	663.6	685.4	718.7	769.6	840.1	937.8
45°	580.4	581.1	585.5	592.3	598.6	609.2	624.8	653.5	692.9	759.1	847.8
47.5°	537.7	538.4	539.2	542.2	549.1	558.7	569.1	592.5	627.7	680.5	766.9
50°	509.2	507.9	509.2	511.7	516.1	524.2	536.1	552.9	581.7	631.0	710.4
52.5°	481.8	481.5	480.7	481.8	485.1	490.7	499.1	513.5	539.2	584.6	654.4
55°	439.9	436.8	437.3	434.9	440.5	441.7	448.0	459.8	482.3	513.6	579.2
57.5°	395.3	392.6	389.9	389.1	388.7	392.0	397.0	406.3	423.6	451.0	504.2
60°	366.7	363.6	359.9	358.7	358.7	360.5	363.1	369.9	386.1	410.5	454.2
62.5°	337.8	334.1	331.9	328.6	327.7	329.5	332.0	336.9	348.6	371.5	409.3
65°	293.0	288.7	285.5	284.9	283.6	281.8	283.1	288.0	297.4	315.5	345.5
67.5°	248.2	244.0	243.3	239.7	237.9	238.1	237.9	242.1	247.8	263.4	285.8
70°	218.7	215.6	214.3	211.2	209.9	208.7	207.4	211.2	216.8	229.9	249.3
72.5°	188.7	186.1	183.3	180.7	180.9	179.7	179.4	181.7	186.3	198.4	213.3
75°	145.6	146.2	143.1	140.0	139.3	138.1	138.1	140.0	141.9	151.2	163.1
77.5°	105.6	105.1	102.5	101.5	100.9	99.5	100.9	102.1	103.1	109.3	118.1
80°	80.6	80.6	77.5	77.5	76.9	75.0	76.9	75.6	78.1	84.4	90.6
82.5°	57.6	56.6	56.5	55.5	55.4	54.0	54.9	56.1	57.1	61.4	65.1
85°	28.1	28.1	27.5	26.9	27.5	26.9	27.5	28.1	28.8	30.7	33.8
87.5°	9.6	9.9	10.2	10.4	10.0	10.2	10.4	10.4	11.0	11.1	11.2
90°	18.3	17.4	15.8	14.3	12.7	11.2	9.4	7.3	5.1	3.0	0.9
92.5°	20.6	20.1	19.3	18.6	17.8	17.0	16.7	17.0	17.1	17.3	17.5
95°	34.7	33.8	32.4	31.1	29.8	28.4	30.9	37.3	43.6	50.0	56.3
97.5°	46.0	45.2	42.2	39.0	35.9	32.8	40.2	58.0	76.0	93.9	111.8
100°	51.0	49.4	46.1	42.9	39.5	36.3	47.9	74.3	100.6	127.0	153.4
102.5°	52.8	50.8	78.2	105.6	133.0	160.4	176.8	182.4	188.0	193.6	199.2
105°	55.0	52.8	105.4	158.0	210.6	263.2	286.6	280.8	275.0	269.3	263.5
107.5°	71.8	74.0	137.1	200.2	263.2	326.3	355.5	350.7	346.1	341.4	336.8
110°	132.4	151.6	207.3	263.0	318.6	374.3	400.1	396.1	392.1	388.0	383.9



TEST NUMBER: P331456-930

CATALOG NUMBER: S122DIP-S1005D1080U930-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	312.3	382.5	396.3	410.1	423.8	437.6	442.6	439.0	435.5	431.9	428.4
115°	445.6	534.8	529.9	525.1	520.3	515.5	511.4	508.2	504.9	501.7	498.4
117.5°	570.7	592.3	589.0	585.7	582.4	579.0	575.6	571.9	568.3	564.6	560.9
120°	637.6	635.3	631.9	628.4	624.9	621.4	618.2	615.4	612.5	609.6	606.7
122.5°	677.6	676.2	672.5	668.6	664.9	661.1	657.7	654.7	651.6	648.6	645.6
125°	733.7	732.4	728.7	725.0	721.4	717.7	714.6	712.2	709.6	707.1	704.7
127.5°	785.0	783.0	780.2	777.5	774.8	772.0	769.3	766.5	763.8	761.0	758.2
130°	817.7	815.5	813.4	811.3	809.2	807.1	804.5	801.4	798.3	795.2	792.1
132.5°	849.9	848.2	846.0	843.9	841.8	839.7	837.3	834.7	832.1	829.5	826.8
135°	895.5	893.6	891.9	890.1	888.4	886.6	884.2	881.2	878.1	875.0	871.9
137.5°	937.9	936.0	934.1	932.1	930.2	928.1	926.1	924.0	921.8	919.7	917.5
140°	965.5	963.8	961.6	959.5	957.4	955.3	953.5	951.9	950.4	948.8	947.3
142.5°	991.0	989.4	987.0	984.6	982.1	979.7	977.8	976.4	975.0	973.6	972.2
145°	1026.6	1025.3	1022.1	1018.7	1015.5	1012.2	1010.6	1010.9	1011.1	1011.2	1011.5
147.5°	1057.9	1056.9	1053.6	1050.4	1047.2	1043.9	1042.7	1043.4	1044.2	1044.9	1045.6
150°	1076.8	1075.5	1072.5	1069.4	1066.3	1063.2	1062.4	1063.7	1065.1	1066.4	1067.8
152.5°	1094.1	1092.9	1090.0	1087.0	1084.1	1081.2	1080.5	1082.0	1083.5	1085.0	1086.5
155°	1117.4	1116.3	1114.0	1111.7	1109.4	1107.1	1106.8	1108.5	1110.3	1112.0	1113.7
157.5°	1137.0	1135.7	1134.1	1132.5	1130.9	1129.3	1129.2	1130.7	1132.1	1133.6	1135.1
160°	1148.7	1147.5	1146.4	1145.2	1144.0	1142.9	1142.9	1144.0	1145.2	1146.4	1147.5
162.5°	1159.2	1157.9	1156.9	1155.9	1154.9	1153.9	1154.0	1155.1	1156.3	1157.5	1158.6
165°	1172.2	1170.9	1170.4	1169.8	1169.1	1168.6	1168.9	1170.0	1171.2	1172.3	1173.5
167.5°	1183.2	1181.9	1181.3	1180.7	1180.2	1179.7	1180.0	1181.1	1182.3	1183.5	1184.6
170°	1188.7	1187.4	1187.0	1186.6	1186.3	1185.9	1186.3	1187.4	1188.5	1189.7	1190.8
172.5°	1192.9	1191.6	1191.2	1190.7	1190.4	1190.0	1190.4	1191.6	1192.7	1193.8	1195.0
175°	1197.4	1196.0	1195.6	1195.3	1194.9	1194.5	1195.0	1196.4	1197.7	1199.1	1200.4
177.5°	1198.2	1197.1	1196.9	1196.8	1196.6	1196.5	1196.9	1198.0	1199.1	1200.2	1201.3
180°	1197.8	1197.8	1197.8	1197.8	1197.8	1197.8	1197.8	1197.8	1197.8	1197.8	1197.8



TEST NUMBER: P331456-930

CATALOG NUMBER: S122DIP-S1005D1080U930-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7
2.5°	1634.3	1636.7	1644.7	1652.8	1661.7	1664.3	1668.3	1664.8	1663.7	1673.2	1680.3
5°	1638.8	1650.1	1672.0	1692.0	1708.9	1720.7	1733.2	1738.2	1747.6	1760.7	1776.9
7.5°	1633.6	1655.5	1689.9	1719.0	1750.7	1773.6	1791.5	1806.7	1825.2	1850.1	1877.1
10°	1627.6	1657.0	1698.8	1734.5	1773.2	1802.5	1826.9	1850.6	1878.2	1912.5	1948.2
12.5°	1616.7	1651.5	1703.8	1746.0	1795.7	1824.6	1857.4	1908.7	1938.1	1986.0	2036.1
15°	1594.5	1633.2	1706.3	1758.2	1814.4	1869.4	1930.1	1978.7	2027.5	2055.6	2126.2
17.5°	1561.6	1618.5	1699.5	1760.0	1831.4	1918.0	1986.2	2041.3	2097.6	2143.2	2178.6
20°	1535.1	1597.0	1689.5	1761.9	1846.9	1940.0	2018.1	2074.4	2123.1	2161.2	2183.0
22.5°	1501.6	1579.5	1669.5	1754.4	1863.0	1955.0	2037.1	2081.4	2122.1	2140.7	2149.0
25°	1448.9	1542.6	1644.5	1748.2	1870.7	1968.1	2043.1	2070.0	2081.9	2063.8	2033.8
27.5°	1392.0	1496.6	1615.6	1736.4	1865.9	1959.7	2013.4	2009.1	1989.0	1930.4	1883.5
30°	1349.6	1464.5	1592.6	1724.4	1854.4	1945.6	1976.9	1945.6	1900.1	1834.4	1767.6
32.5°	1305.1	1424.1	1568.1	1707.5	1833.4	1913.7	1920.4	1866.7	1796.1	1721.5	1638.1
35°	1237.7	1366.4	1522.0	1669.5	1788.8	1839.4	1809.5	1714.5	1630.8	1528.9	1415.2
37.5°	1161.6	1303.7	1459.8	1613.9	1722.0	1735.2	1660.8	1560.7	1442.7	1323.0	1189.1
40°	1104.6	1255.2	1415.8	1571.4	1667.0	1653.3	1558.3	1448.3	1307.7	1161.5	1037.1
42.5°	1053.7	1204.3	1367.8	1520.4	1597.0	1559.3	1448.3	1313.4	1162.3	1024.6	910.7
45°	965.3	1120.3	1287.8	1435.2	1479.0	1410.8	1264.0	1114.0	965.3	850.4	760.4
47.5°	879.6	1032.8	1198.7	1328.2	1343.7	1252.1	1091.7	937.3	809.5	715.9	652.4
50°	816.6	970.3	1134.7	1250.3	1245.2	1134.7	969.7	822.9	716.0	640.4	597.9
52.5°	760.1	905.3	1063.2	1168.2	1141.7	1021.2	863.7	733.4	645.6	586.4	548.0
55°	672.3	806.7	956.6	1040.9	992.2	858.5	725.4	620.4	555.5	511.1	481.1
57.5°	585.1	711.0	839.4	891.4	837.5	714.0	603.1	526.9	478.1	445.2	425.7
60°	531.1	641.1	755.4	800.4	736.1	626.1	538.6	470.5	431.1	404.2	386.8
62.5°	477.1	575.6	683.4	707.9	649.1	556.1	478.6	422.0	389.6	365.7	349.3
65°	403.7	484.2	566.1	582.3	528.0	456.1	394.8	358.0	329.3	311.8	298.6
67.5°	331.0	395.7	453.7	466.8	419.2	369.4	325.1	293.0	273.5	259.0	247.9
70°	288.0	339.2	386.8	397.4	359.3	314.9	281.2	255.5	238.1	225.6	214.9
72.5°	242.6	285.3	324.7	331.9	300.8	266.9	239.2	219.1	203.6	195.6	185.5
75°	185.6	210.6	241.2	243.0	222.4	201.8	180.6	167.5	159.3	149.4	144.3
77.5°	130.9	150.6	168.0	171.5	159.2	145.2	133.3	122.9	116.1	111.5	106.8
80°	100.0	115.6	123.1	127.4	118.7	108.7	101.8	95.0	90.6	87.5	84.4
82.5°	71.5	81.1	88.1	91.5	86.7	80.7	73.9	70.0	66.6	64.0	62.9
85°	36.2	40.6	45.0	46.2	45.0	42.5	38.7	38.7	36.9	36.2	36.2
87.5°	13.1	15.5	16.0	17.9	17.2	17.5	17.9	17.7	17.4	17.1	16.9
90°	3.0	5.1	7.3	9.4	11.2	12.7	14.3	15.8	17.4	18.3	19.2
92.5°	17.3	17.1	17.0	16.7	17.0	17.8	18.6	19.3	20.1	20.6	21.1
95°	50.0	43.6	37.3	30.9	28.4	29.8	31.1	32.4	33.8	34.7	35.7
97.5°	93.9	76.0	58.0	40.2	32.8	35.9	39.0	42.2	45.2	46.0	46.8
100°	127.0	100.6	74.3	47.9	36.3	39.5	42.9	46.1	49.4	51.0	52.5
102.5°	193.6	188.0	182.4	176.8	160.4	133.0	105.6	78.2	50.8	52.8	54.8
105°	269.3	275.0	280.8	286.6	263.2	210.6	158.0	105.4	52.8	55.0	57.1
107.5°	341.4	346.1	350.7	355.5	326.3	263.2	200.2	137.1	74.0	71.8	69.7
110°	388.0	392.1	396.1	400.1	374.3	318.6	263.0	207.3	151.6	132.4	113.2





TEST NUMBER: P331456-930

CATALOG NUMBER: S122DIP-S1005D1080U930-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	431.9	435.5	439.0	442.6	437.6	423.8	410.1	396.3	382.5	312.3	242.1
115°	501.7	504.9	508.2	511.4	515.5	520.3	525.1	529.9	534.8	445.6	356.4
117.5°	564.6	568.3	571.9	575.6	579.0	582.4	585.7	589.0	592.3	570.7	549.2
120°	609.6	612.5	615.4	618.2	621.4	624.9	628.4	631.9	635.3	637.6	639.9
122.5°	648.6	651.6	654.7	657.7	661.1	664.9	668.6	672.5	676.2	677.6	679.0
125°	707.1	709.6	712.2	714.6	717.7	721.4	725.0	728.7	732.4	733.7	735.1
127.5°	761.0	763.8	766.5	769.3	772.0	774.8	777.5	780.2	783.0	785.0	786.9
130°	795.2	798.3	801.4	804.5	807.1	809.2	811.3	813.4	815.5	817.7	819.8
132.5°	829.5	832.1	834.7	837.3	839.7	841.8	843.9	846.0	848.2	849.9	851.7
135°	875.0	878.1	881.2	884.2	886.6	888.4	890.1	891.9	893.6	895.5	897.4
137.5°	919.7	921.8	924.0	926.1	928.1	930.2	932.1	934.1	936.0	937.9	939.8
140°	948.8	950.4	951.9	953.5	955.3	957.4	959.5	961.6	963.8	965.5	967.3
142.5°	973.6	975.0	976.4	977.8	979.7	982.1	984.6	987.0	989.4	991.0	992.5
145°	1011.2	1011.1	1010.9	1010.6	1012.2	1015.5	1018.7	1022.1	1025.3	1026.6	1028.0
147.5°	1044.9	1044.2	1043.4	1042.7	1043.9	1047.2	1050.4	1053.6	1056.9	1057.9	1058.8
150°	1066.4	1065.1	1063.7	1062.4	1063.2	1066.3	1069.4	1072.5	1075.5	1076.8	1077.9
152.5°	1085.0	1083.5	1082.0	1080.5	1081.2	1084.1	1087.0	1090.0	1092.9	1094.1	1095.2
155°	1112.0	1110.3	1108.5	1106.8	1107.1	1109.4	1111.7	1114.0	1116.3	1117.4	1118.6
157.5°	1133.6	1132.1	1130.7	1129.2	1129.3	1130.9	1132.5	1134.1	1135.7	1137.0	1138.3
160°	1146.4	1145.2	1144.0	1142.9	1142.9	1144.0	1145.2	1146.4	1147.5	1148.7	1149.8
162.5°	1157.5	1156.3	1155.1	1154.0	1153.9	1154.9	1155.9	1156.9	1157.9	1159.2	1160.5
165°	1172.3	1171.2	1170.0	1168.9	1168.6	1169.1	1169.8	1170.4	1170.9	1172.2	1173.6
167.5°	1183.5	1182.3	1181.1	1180.0	1179.7	1180.2	1180.7	1181.3	1181.9	1183.2	1184.5
170°	1189.7	1188.5	1187.4	1186.3	1185.9	1186.3	1186.6	1187.0	1187.4	1188.7	1190.1
172.5°	1193.8	1192.7	1191.6	1190.4	1190.0	1190.4	1190.7	1191.2	1191.6	1192.9	1194.3
175°	1199.1	1197.7	1196.4	1195.0	1194.5	1194.9	1195.3	1195.6	1196.0	1197.4	1198.7
177.5°	1200.2	1199.1	1198.0	1196.9	1196.5	1196.6	1196.8	1196.9	1197.1	1198.2	1199.2
180°	1197.8	1197.8	1197.8	1197.8	1197.8	1197.8	1197.8	1197.8	1197.8	1197.8	1197.8



TEST NUMBER: P331456-930

CATALOG NUMBER: S122DIP-S1005D1080U930-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
0°	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7
2.5°	1686.2	1693.2	1693.2	1694.2	1702.2	1701.2	1700.7
5°	1794.5	1805.1	1806.3	1817.5	1825.0	1822.5	1815.7
7.5°	1896.5	1916.3	1931.3	1939.7	1949.5	1955.7	1952.9
10°	1977.5	2006.3	2023.7	2035.6	2050.0	2060.6	2056.8
12.5°	2051.0	2085.2	2109.3	2129.6	2131.4	2145.1	2135.8
15°	2165.6	2201.8	2205.5	2220.5	2232.5	2231.1	2231.8
17.5°	2203.4	2215.1	2217.5	2217.8	2217.9	2213.5	2204.1
20°	2190.0	2185.6	2175.0	2166.8	2152.5	2150.6	2138.1
22.5°	2126.0	2112.1	2085.5	2067.8	2045.5	2039.6	2036.1
25°	2000.0	1969.4	1926.9	1886.3	1875.0	1853.2	1859.5
27.5°	1827.2	1779.5	1733.5	1700.5	1670.6	1637.9	1647.2
30°	1705.7	1652.0	1587.0	1537.0	1505.1	1473.9	1468.3
32.5°	1560.7	1482.1	1409.6	1365.5	1316.7	1297.0	1275.4
35°	1310.8	1234.0	1162.1	1100.2	1064.7	1037.1	1012.2
37.5°	1086.1	997.6	939.6	889.5	863.7	848.0	852.0
40°	946.6	869.1	826.6	788.5	764.8	753.5	756.0
42.5°	833.6	775.6	740.6	714.5	697.8	691.5	690.1
45°	705.4	672.9	644.2	629.2	621.1	614.2	609.8
47.5°	617.9	591.4	575.2	566.3	559.2	552.2	552.0
50°	565.4	548.0	536.7	527.3	521.7	516.7	521.1
52.5°	525.5	509.5	498.2	489.8	487.7	483.2	483.1
55°	466.1	453.6	445.5	438.0	434.2	431.7	428.6
57.5°	412.1	400.2	392.7	388.0	380.9	378.4	377.4
60°	373.7	364.3	356.8	350.5	347.4	342.4	342.4
62.5°	338.1	328.8	321.8	317.0	311.9	309.9	310.4
65°	286.8	279.3	272.4	267.4	266.2	262.4	263.7
67.5°	239.5	234.6	227.3	224.5	222.2	220.2	218.7
70°	208.1	203.1	199.3	195.6	193.7	193.7	193.7
72.5°	181.6	175.5	173.3	168.6	169.7	167.7	165.7
75°	140.6	136.8	134.9	133.1	130.0	130.0	130.0
77.5°	103.5	102.3	100.1	98.1	97.3	96.7	96.9
80°	80.0	79.3	78.1	78.1	76.9	76.2	75.0
82.5°	61.5	59.8	59.1	58.6	58.4	58.2	58.0
85°	35.0	33.8	33.8	34.3	33.1	33.1	33.8
87.5°	17.5	17.8	17.4	17.4	18.0	17.6	17.7
90°	20.2	21.2	21.9	22.3	22.7	23.0	23.4
92.5°	21.6	22.1	22.5	22.7	22.9	23.2	23.4
95°	36.7	37.7	38.1	37.8	37.7	37.4	37.3
97.5°	47.5	48.3	48.8	49.1	49.3	49.5	49.7
100°	54.1	55.6	56.5	56.9	57.3	57.7	58.0
102.5°	56.8	58.8	60.1	60.6	61.1	61.7	62.2
105°	59.2	61.3	62.8	63.6	64.3	65.1	65.9
107.5°	67.5	65.4	64.7	65.5	66.2	67.0	67.8
110°	93.9	74.6	65.4	66.1	66.9	67.7	68.5



TEST NUMBER: P331456-930

CATALOG NUMBER: S122DIP-S1005D1080U930-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
112.5°	171.8	101.5	66.7	67.3	67.9	68.6	69.1
115°	267.3	178.1	126.5	112.7	98.8	85.0	71.1
117.5°	527.6	506.1	472.5	426.9	381.3	335.7	290.2
120°	642.2	644.6	632.7	606.7	580.7	554.6	528.7
122.5°	680.4	681.8	679.9	674.9	669.8	664.8	659.7
125°	736.4	737.8	738.7	739.3	739.9	740.5	741.0
127.5°	788.9	790.8	791.9	792.0	792.1	792.2	792.3
130°	821.9	824.0	825.0	824.8	824.6	824.4	824.3
132.5°	853.6	855.4	856.2	856.0	855.8	855.7	855.4
135°	899.4	901.2	902.0	901.6	901.2	900.9	900.5
137.5°	941.7	943.5	944.2	943.5	942.9	942.2	941.6
140°	969.0	970.7	971.1	970.1	969.1	968.2	967.3
142.5°	994.2	995.7	996.1	995.1	994.1	993.2	992.2
145°	1029.3	1030.7	1030.9	1030.0	1029.0	1028.0	1027.0
147.5°	1059.9	1060.9	1060.9	1060.1	1059.3	1058.5	1057.7
150°	1079.0	1080.2	1080.3	1079.3	1078.4	1077.4	1076.4
152.5°	1096.4	1097.6	1097.5	1096.2	1094.9	1093.6	1092.4
155°	1119.8	1121.0	1120.7	1119.2	1117.7	1116.1	1114.6
157.5°	1139.6	1140.9	1140.8	1139.4	1137.8	1136.4	1134.8
160°	1151.0	1152.1	1152.0	1150.7	1149.3	1148.0	1146.6
162.5°	1161.8	1163.2	1162.9	1161.3	1159.7	1158.0	1156.3
165°	1174.9	1176.3	1176.3	1174.9	1173.6	1172.2	1170.9
167.5°	1185.9	1187.2	1187.0	1185.3	1183.6	1181.9	1180.1
170°	1191.4	1192.8	1192.5	1190.8	1189.1	1187.4	1185.6
172.5°	1195.6	1196.9	1196.8	1195.0	1193.3	1191.6	1189.8
175°	1200.1	1201.4	1201.2	1199.2	1197.3	1195.4	1193.4
177.5°	1200.3	1201.4	1201.3	1199.9	1198.5	1197.1	1195.7
180°	1197.8	1197.8	1197.8	1197.8	1197.8	1197.8	1197.8

(END OF REPORT)