

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331459-930

Luminaire Tested: **S122DIP-S1005D1080U930-4F0-1E-UDD-D**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331459-930
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIP-S1005D1080U930-4F0-1E-UDD-D
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1005 LUMENS PER FOOT, DROP SATIN WHITE DIFFUSER
UPLIGHT 1080 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6802.2 lumens
Efficiency: N/A
Efficacy: 94.9 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.32 / 1.42
Luminous Opening: Rectangular w/ Sides (W: 0.17' x L: 4' x H: 0.08')
CIE Type: General Diffuse


Input Watts (W): 71.7
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331459-930

CATALOG NUMBER: S122DIP-S1005D1080U930-4F0-1E-UDD-D

Luminous Intensity Polar Plot

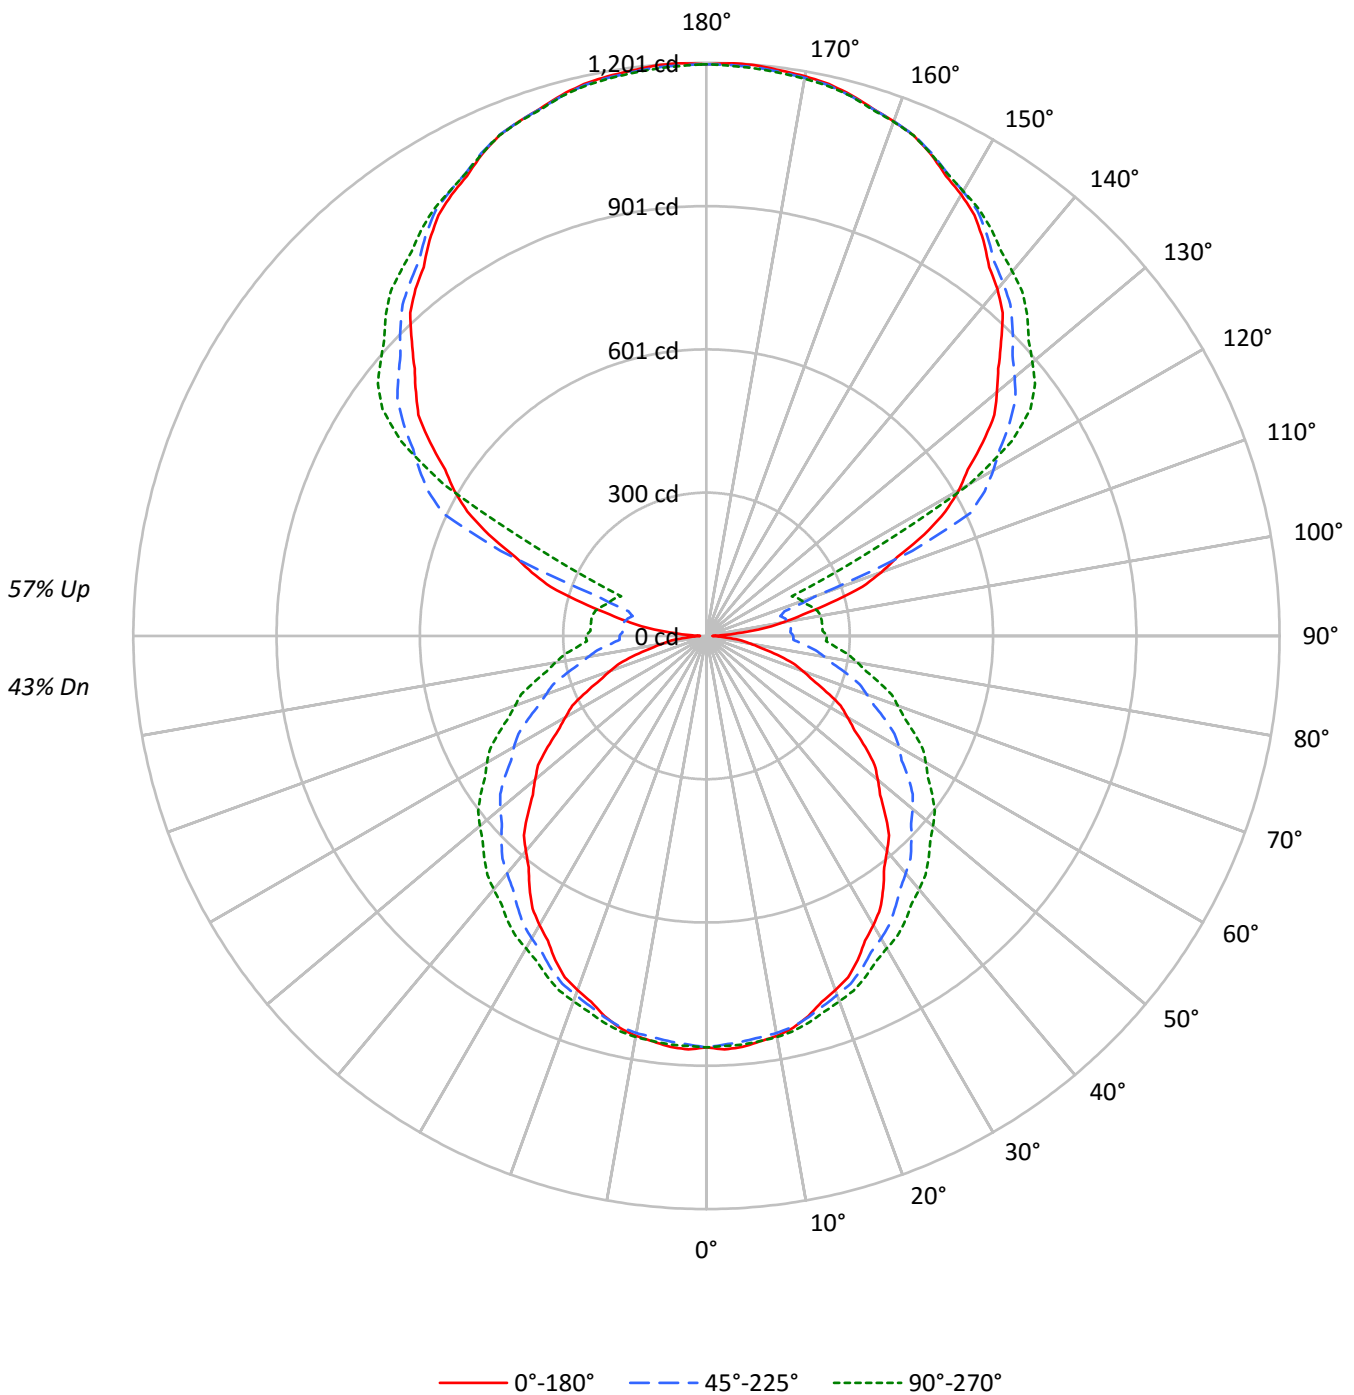



TEST NUMBER: P331459-930

CATALOG NUMBER: S122DIP-S1005D1080U930-4F0-1E-UDD-D

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	105	105	105	105	96	96	96	96	79	79	79	64	64	64	50	50	50	43
1	95	90	86	82	86	82	79	75	68	65	62	54	52	51	42	41	39	34
2	86	78	71	66	78	71	65	61	59	54	51	47	44	41	36	34	32	27
3	78	68	60	54	71	62	55	50	51	46	42	41	37	34	32	29	27	22
4	71	60	52	45	65	55	48	42	45	40	35	36	32	29	28	25	23	19
5	65	53	45	39	59	49	41	36	40	35	30	32	28	25	25	22	20	16
6	60	47	39	33	54	44	36	31	36	30	26	29	25	22	23	19	17	14
7	55	43	35	29	50	39	32	27	33	27	23	26	22	19	21	17	15	12
8	51	39	31	25	47	36	29	24	30	24	20	24	20	17	19	16	13	11
9	48	35	28	22	43	32	26	21	27	22	18	22	18	15	17	14	12	10
10	44	32	25	20	40	30	23	19	25	20	16	20	16	13	16	13	11	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	13919	13919	13919
5°	13988	13400	13350
10°	13899	13004	12858
15°	13709	12584	12339
20°	13467	12136	11842
25°	13227	11701	11390
30°	12890	11257	10936
35°	12550	10828	10617
40°	12191	10461	10297
45°	11850	10133	10022
50°	11485	9837	9754
55°	11101	9519	9479
60°	10631	9187	9189
65°	10145	8801	8846
70°	9596	8384	8474
75°	8897	7976	8132
80°	7792	7559	7784
85°	6733	7197	7515



TEST NUMBER: P331459-930

CATALOG NUMBER: S122DIP-S1005D1080U930-4F0-1E-UDD-D

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	81.7	1.2
10°-20°	234.3	3.4
20°-30°	355.0	5.2
30°-40°	432.4	6.4
40°-50°	465.2	6.8
50°-60°	451.7	6.6
60°-70°	394.4	5.8
70°-80°	303.7	4.5
80°-90°	206.7	3.0
90°-100°	180.4	2.7
100°-110°	249.0	3.7
110°-120°	459.4	6.8
120°-130°	684.3	10.1
130°-140°	703.4	10.3
140°-150°	641.8	9.4
150°-160°	513.8	7.6
160°-170°	331.1	4.9
170°-180°	114.0	1.7
0°-30°	670.9	9.9
0°-40°	1103.3	16.2
0°-60°	2020.2	29.7
0°-90°	2925.0	43.0
90°-120°	888.8	13.1
90°-150°	2918.3	42.9
90°-180°	3877.0	57.0
0°-180°	6802.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	862	862	862	862	862	
5°	865	861	853	860	860	82
15°	825	827	827	838	837	232
25°	750	759	770	784	788	345
35°	646	667	691	717	727	404
45°	530	564	607	644	658	409
55°	406	452	516	559	577	363
65°	277	339	412	462	480	275
75°	154	224	304	355	374	163
85°	45	123	202	253	272	48
90°	13	96	182	235	253	11
95°	66	99	178	227	243	77
105°	270	319	160	212	231	289
115°	503	535	610	263	197	495
125°	707	721	775	813	828	631
135°	873	887	907	941	950	675
145°	1012	1011	1025	1038	1041	633
155°	1114	1107	1116	1121	1115	513
165°	1174	1169	1171	1176	1171	331
175°	1200	1195	1196	1201	1193	114
180°	1198	1198	1198	1198	1198	



TEST NUMBER: P331459-930

CATALOG NUMBER: S122DIP-S1005D1080U930-4F0-1E-UDD-D

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	862.1	862.1	862.1	862.1	862.1	862.1	862.1	862.1	862.1	862.1	862.1
2.5°	867.2	866.5	865.8	865.1	864.5	863.3	861.8	860.2	858.7	857.1	858.3
5°	864.6	863.8	863.0	862.1	861.3	860.1	858.4	856.7	855.1	853.4	855.1
7.5°	856.9	856.3	855.7	855.2	854.7	853.8	852.5	851.2	849.9	848.6	850.6
10°	850.9	850.4	849.8	849.2	848.6	848.0	847.2	846.3	845.5	844.7	846.9
12.5°	840.9	841.0	841.1	841.2	841.3	841.1	840.5	839.8	839.3	838.6	840.9
15°	824.7	825.2	825.7	826.3	826.9	827.1	827.1	827.1	827.1	827.1	829.6
17.5°	803.6	804.9	806.0	807.1	808.3	809.3	810.2	811.1	812.0	812.9	815.5
20°	789.7	791.1	792.5	793.9	795.2	796.5	797.6	798.7	799.8	801.0	804.0
22.5°	774.7	776.2	777.9	779.5	781.1	782.7	784.2	785.8	787.3	788.9	792.0
25°	749.7	751.6	753.6	755.5	757.5	759.7	762.1	764.7	767.2	769.6	773.0
27.5°	719.7	722.8	726.0	729.2	732.4	735.4	738.3	741.3	744.2	747.2	751.4
30°	699.7	703.3	706.9	710.5	714.1	717.8	721.4	725.0	728.6	732.2	736.6
32.5°	677.7	681.8	685.8	689.9	693.9	698.1	702.4	706.6	710.9	715.2	720.3
35°	646.0	650.7	655.4	660.1	664.9	669.8	675.1	680.4	685.7	691.0	697.1
37.5°	611.5	616.9	622.4	627.8	633.2	639.4	646.2	653.1	659.9	666.8	673.5
40°	588.5	594.6	600.7	606.8	612.9	619.7	627.2	634.7	642.2	649.7	657.0
42.5°	566.6	572.6	578.7	584.8	590.9	598.3	606.9	615.6	624.1	632.8	640.6
45°	529.8	537.3	544.8	552.3	559.8	568.3	578.1	587.8	597.5	607.2	615.9
47.5°	493.6	501.7	509.9	518.0	526.2	536.0	547.4	558.7	570.1	581.5	590.5
50°	468.6	477.2	485.8	494.4	503.0	513.6	526.0	538.5	551.0	563.5	573.0
52.5°	444.6	453.6	462.7	471.7	480.8	491.9	505.0	518.2	531.3	544.5	554.2
55°	406.1	416.0	426.1	436.1	446.1	458.3	472.7	487.1	501.6	516.0	526.0
57.5°	368.1	379.4	390.6	401.9	413.2	426.2	440.9	455.6	470.3	485.0	495.8
60°	341.1	353.0	365.0	376.9	388.9	402.8	418.6	434.4	450.2	466.0	476.6
62.5°	317.2	329.5	341.9	354.2	366.6	380.7	396.6	412.4	428.3	444.1	455.3
65°	277.4	291.0	304.6	318.2	331.8	346.8	363.2	379.5	395.9	412.3	423.7
67.5°	240.9	255.1	269.3	283.6	297.7	313.2	330.0	346.8	363.5	380.3	391.8
70°	214.9	229.3	243.8	258.2	272.6	288.5	305.7	322.9	340.1	357.3	369.2
72.5°	190.9	205.8	220.7	235.5	250.5	266.6	284.1	301.5	318.9	336.4	348.1
75°	153.7	169.3	184.7	200.3	215.9	232.5	250.3	268.1	285.8	303.6	315.5
77.5°	117.7	134.0	150.3	166.5	182.8	199.9	218.0	236.0	254.0	272.1	284.1
80°	93.7	110.6	127.6	144.6	161.4	179.0	197.0	215.1	233.1	251.1	262.8
82.5°	73.7	90.4	107.1	123.8	140.6	158.1	176.3	194.6	212.9	231.1	242.8
85°	45.0	62.2	79.4	96.6	113.8	131.3	149.1	166.9	184.7	202.4	214.1
87.5°	24.7	41.7	58.6	75.6	92.5	110.1	128.2	146.3	164.3	182.4	193.9
90°	13.4	31.6	49.8	68.0	86.3	105.0	124.3	143.7	163.0	182.3	194.4
92.5°	29.0	43.8	58.6	73.4	88.2	104.5	122.5	140.3	158.2	176.0	187.4
95°	66.4	73.1	79.7	86.4	93.1	105.5	123.4	141.5	159.5	177.5	189.0
97.5°	120.6	114.2	107.9	101.7	95.3	101.7	120.8	140.0	159.1	178.2	189.2
100°	162.2	146.0	130.0	113.8	97.7	99.1	117.9	136.7	155.6	174.3	186.1
102.5°	206.9	210.7	214.5	218.3	222.1	217.8	205.6	193.3	181.0	168.8	180.8
105°	269.7	283.6	297.4	311.2	325.1	312.9	274.8	236.6	198.4	160.3	172.2
107.5°	342.8	353.9	365.0	376.1	387.2	368.1	318.9	269.7	220.5	171.2	178.4
110°	389.0	398.5	408.1	417.8	427.3	411.1	369.1	327.0	284.9	242.9	232.5



TEST NUMBER: P331459-930

CATALOG NUMBER: S122DIP-S1005D1080U930-4F0-1E-UDD-D

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	433.3	441.6	449.8	458.0	466.3	470.0	469.2	468.4	467.6	466.8	405.4
115°	503.4	509.6	516.0	522.4	528.6	540.5	557.8	575.1	592.4	609.8	528.9
117.5°	564.7	570.3	576.0	581.6	587.3	597.5	612.5	627.3	642.1	657.0	643.7
120°	610.4	614.4	618.4	622.4	626.5	635.7	650.3	664.9	679.5	694.0	704.1
122.5°	649.3	652.7	656.2	659.7	663.2	672.1	686.3	700.5	714.7	729.0	737.8
125°	707.1	709.6	712.2	714.6	717.1	724.6	737.2	749.7	762.3	774.9	783.7
127.5°	760.7	763.2	765.6	768.2	770.7	776.9	786.8	796.6	806.6	816.4	825.3
130°	794.7	797.4	800.3	803.1	805.8	811.2	819.2	827.1	835.1	843.0	851.8
132.5°	829.3	831.7	834.1	836.3	838.7	843.2	849.8	856.4	863.0	869.7	877.9
135°	873.2	876.2	879.3	882.4	885.5	889.2	893.8	898.3	902.8	907.3	915.1
137.5°	918.8	920.8	922.9	925.0	927.2	929.8	932.9	936.1	939.3	942.6	949.5
140°	948.5	949.8	951.0	952.4	953.6	955.6	958.2	960.9	963.6	966.3	972.4
142.5°	973.5	974.6	975.8	976.8	978.0	979.7	982.3	984.9	987.4	989.9	995.1
145°	1011.5	1011.2	1011.1	1010.9	1010.6	1012.2	1015.5	1018.7	1022.1	1025.3	1028.3
147.5°	1045.6	1044.9	1044.2	1043.4	1042.7	1043.9	1047.2	1050.4	1053.6	1056.9	1058.1
150°	1067.8	1066.4	1065.1	1063.7	1062.4	1063.2	1066.3	1069.4	1072.5	1075.5	1076.8
152.5°	1086.5	1085.0	1083.5	1082.0	1080.5	1081.2	1084.1	1087.0	1090.0	1092.9	1094.1
155°	1113.7	1112.0	1110.3	1108.5	1106.8	1107.1	1109.4	1111.7	1114.0	1116.3	1117.4
157.5°	1135.1	1133.6	1132.1	1130.7	1129.2	1129.3	1130.9	1132.5	1134.1	1135.7	1137.0
160°	1147.5	1146.4	1145.2	1144.0	1142.9	1142.9	1144.0	1145.2	1146.4	1147.5	1148.7
162.5°	1158.6	1157.5	1156.3	1155.1	1154.0	1153.9	1154.9	1155.9	1156.9	1157.9	1159.2
165°	1173.5	1172.3	1171.2	1170.0	1168.9	1168.6	1169.1	1169.8	1170.4	1170.9	1172.2
167.5°	1184.6	1183.5	1182.3	1181.1	1180.0	1179.7	1180.2	1180.7	1181.3	1181.9	1183.2
170°	1190.8	1189.7	1188.5	1187.4	1186.3	1185.9	1186.3	1186.6	1187.0	1187.4	1188.7
172.5°	1195.0	1193.8	1192.7	1191.6	1190.4	1190.0	1190.4	1190.7	1191.2	1191.6	1192.9
175°	1200.4	1199.1	1197.7	1196.4	1195.0	1194.5	1194.9	1195.3	1195.6	1196.0	1197.4
177.5°	1201.3	1200.2	1199.1	1198.0	1196.9	1196.5	1196.6	1196.8	1196.9	1197.1	1198.2
180°	1197.8	1197.8	1197.8	1197.8	1197.8	1197.8	1197.8	1197.8	1197.8	1197.8	1197.8



TEST NUMBER: P331459-930

CATALOG NUMBER: S122DIP-S1005D1080U930-4F0-1E-UDD-D

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	862.1	862.1	862.1	862.1	862.1	862.1	862.1	862.1
2.5°	859.3	860.5	861.6	861.9	861.4	861.0	860.5	860.1
5°	856.7	858.4	860.1	860.7	860.5	860.2	859.9	859.7
7.5°	852.6	854.7	856.6	857.5	857.2	857.0	856.6	856.4
10°	849.1	851.3	853.5	854.5	854.2	853.9	853.7	853.4
12.5°	843.1	845.3	847.5	848.5	848.2	847.9	847.7	847.4
15°	832.2	834.6	837.1	838.3	838.0	837.7	837.4	837.1
17.5°	818.2	820.8	823.4	824.7	824.7	824.7	824.7	824.7
20°	807.0	810.1	813.1	814.6	814.6	814.6	814.6	814.6
22.5°	795.0	798.1	801.1	802.9	803.3	803.8	804.2	804.7
25°	776.3	779.7	783.0	785.1	785.9	786.8	787.6	788.4
27.5°	755.6	759.9	764.1	766.5	767.1	767.7	768.3	768.9
30°	741.1	745.5	750.0	752.6	753.4	754.2	755.1	755.9
32.5°	725.5	730.5	735.6	738.9	740.5	741.9	743.5	744.9
35°	703.2	709.3	715.4	719.4	721.4	723.3	725.3	727.2
37.5°	680.3	687.1	693.8	698.2	700.3	702.4	704.4	706.5
40°	664.1	671.4	678.6	683.5	686.0	688.4	691.0	693.5
42.5°	648.5	656.4	664.3	669.4	672.0	674.5	676.9	679.5
45°	624.4	633.1	641.6	647.3	650.1	652.9	655.7	658.4
47.5°	599.5	608.5	617.5	623.5	626.6	629.7	632.7	635.8
50°	582.4	591.8	601.3	607.6	610.6	613.6	616.7	619.7
52.5°	563.9	573.5	583.2	589.6	592.9	596.2	599.5	602.8
55°	536.1	546.0	556.0	562.8	566.4	570.1	573.6	577.2
57.5°	506.6	517.4	528.2	535.3	539.0	542.7	546.3	550.0
60°	487.1	497.7	508.3	515.5	519.3	523.3	527.2	531.0
62.5°	466.5	477.7	488.9	496.4	500.0	503.7	507.4	511.0
65°	435.1	446.5	457.9	465.4	469.0	472.5	476.2	479.8
67.5°	403.3	414.8	426.3	434.0	437.7	441.5	445.3	449.1
70°	381.2	393.1	405.1	412.7	416.0	419.4	422.7	426.1
72.5°	359.8	371.5	383.2	391.1	395.1	399.1	403.1	407.1
75°	327.5	339.4	351.4	359.1	362.7	366.4	370.0	373.6
77.5°	295.9	307.8	319.7	327.6	331.4	335.3	339.2	343.1
80°	274.4	286.2	297.8	305.6	309.5	313.3	317.2	321.1
82.5°	254.5	266.1	277.8	285.4	289.1	292.8	296.4	300.1
85°	225.8	237.4	249.1	256.8	260.7	264.6	268.5	272.4
87.5°	205.5	217.0	228.4	236.0	239.7	243.3	247.0	250.5
90°	206.4	218.5	230.6	238.5	242.1	245.9	249.6	253.3
92.5°	198.9	210.2	221.6	229.0	232.6	236.2	239.8	243.3
95°	200.5	212.1	223.6	230.9	234.0	237.2	240.3	243.4
97.5°	200.2	211.3	222.3	229.7	233.2	236.7	240.2	243.7
100°	198.0	209.8	221.6	229.3	232.7	236.1	239.5	243.0
102.5°	192.8	204.9	217.0	224.8	228.4	232.0	235.5	239.1
105°	184.0	195.8	207.7	215.5	219.3	223.1	227.0	230.8
107.5°	185.6	192.7	199.9	205.4	209.2	213.0	216.9	220.7
110°	222.2	211.7	201.4	198.1	201.9	205.8	209.6	213.4



TEST NUMBER: P331459-930

CATALOG NUMBER: S122DIP-S1005D1080U930-4F0-1E-UDD-D

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	344.1	282.7	221.3	192.4	196.1	199.7	203.4	207.1
115°	448.0	367.2	286.3	240.5	229.7	218.9	208.1	197.3
117.5°	630.3	616.9	603.6	575.6	532.8	490.1	447.4	404.6
120°	714.2	724.3	734.3	727.9	705.0	682.0	659.1	636.2
122.5°	746.8	755.8	764.7	767.9	765.5	763.0	760.6	758.2
125°	792.6	801.4	810.2	816.2	819.3	822.3	825.4	828.5
127.5°	834.1	843.0	851.8	857.5	860.1	862.7	865.3	867.8
130°	860.6	869.4	878.2	883.6	885.6	887.6	889.7	891.7
132.5°	886.1	894.4	902.6	907.8	909.8	911.8	913.9	915.9
135°	922.8	930.6	938.3	943.1	944.9	946.8	948.7	950.5
137.5°	956.5	963.5	970.5	974.6	975.8	977.1	978.4	979.6
140°	978.6	984.8	991.0	994.4	995.2	995.8	996.5	997.2
142.5°	1000.2	1005.3	1010.5	1013.3	1013.7	1014.2	1014.7	1015.2
145°	1031.4	1034.4	1037.4	1039.1	1039.5	1039.9	1040.3	1040.8
147.5°	1059.3	1060.5	1061.8	1062.3	1062.2	1062.0	1061.8	1061.7
150°	1077.9	1079.0	1080.2	1080.3	1079.3	1078.4	1077.4	1076.4
152.5°	1095.2	1096.4	1097.6	1097.5	1096.2	1094.9	1093.6	1092.4
155°	1118.6	1119.8	1121.0	1120.7	1119.2	1117.7	1116.1	1114.6
157.5°	1138.3	1139.6	1140.9	1140.8	1139.4	1137.8	1136.4	1134.8
160°	1149.8	1151.0	1152.1	1152.0	1150.7	1149.3	1148.0	1146.6
162.5°	1160.5	1161.8	1163.2	1162.9	1161.3	1159.7	1158.0	1156.3
165°	1173.6	1174.9	1176.3	1176.3	1174.9	1173.6	1172.2	1170.9
167.5°	1184.5	1185.9	1187.2	1187.0	1185.3	1183.6	1181.9	1180.1
170°	1190.1	1191.4	1192.8	1192.5	1190.8	1189.1	1187.4	1185.6
172.5°	1194.3	1195.6	1196.9	1196.8	1195.0	1193.3	1191.6	1189.8
175°	1198.7	1200.1	1201.4	1201.2	1199.2	1197.3	1195.4	1193.4
177.5°	1199.2	1200.3	1201.4	1201.3	1199.9	1198.5	1197.1	1195.7
180°	1197.8	1197.8	1197.8	1197.8	1197.8	1197.8	1197.8	1197.8

(END OF REPORT)