

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331426-930

Luminaire Tested: **S122DIP-S1005D330U930-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P331426-930  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S122DIP-S1005D330U930-4F0-1E-UDD-F  
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 1005 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 330 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4374.5 lumens  
Efficiency: N/A  
Efficacy: 87.8 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: Semi-Direct


Input Watts (W): 49.8  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331426-930

CATALOG NUMBER: S122DIP-S1005D330U930-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

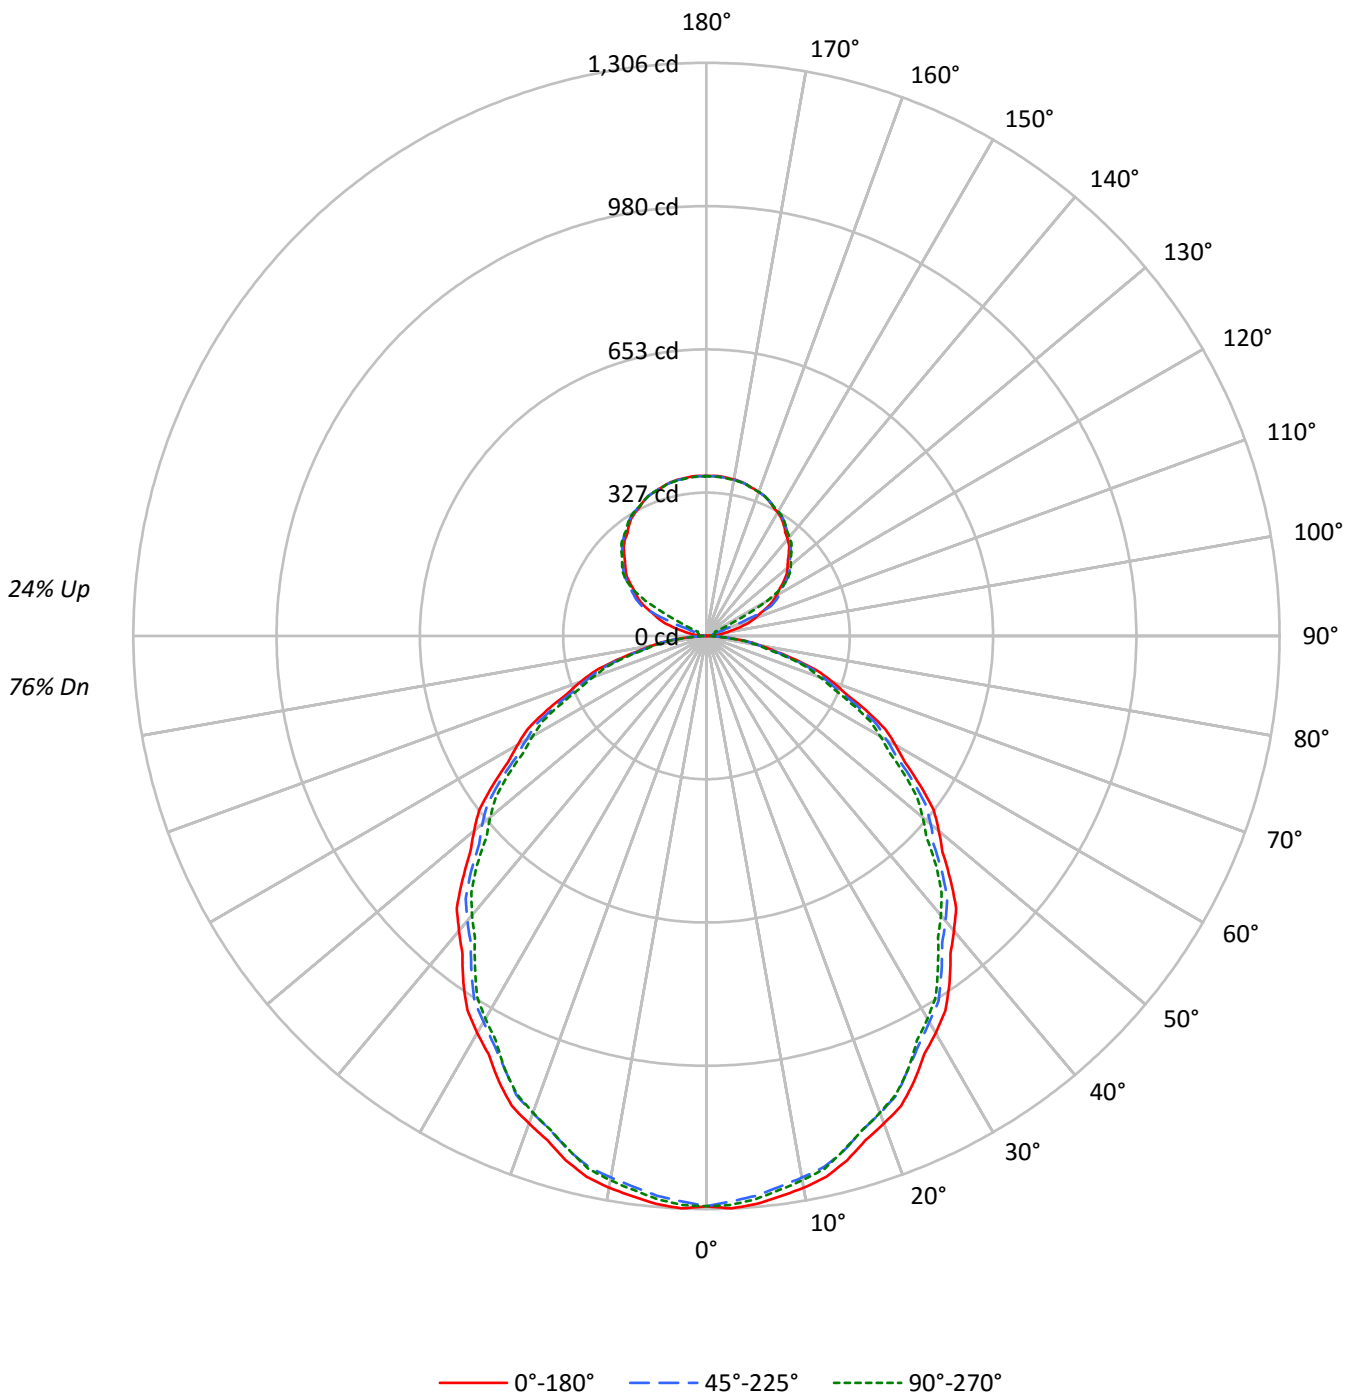



TEST NUMBER: P331426-930

CATALOG NUMBER: S122DIP-S1005D330U930-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	113	113	113	113	108	108	108	108	98	98	98	88	88	88	80	80	80	76
1	104	99	95	91	98	94	91	88	86	83	80	78	76	74	70	69	67	64
2	94	87	80	75	89	83	77	72	75	71	67	68	65	62	62	59	57	53
3	86	76	68	62	82	73	66	60	66	61	56	60	56	52	55	51	48	45
4	79	68	59	53	75	65	57	51	59	53	48	54	49	45	49	45	42	39
5	73	60	52	46	69	58	50	44	53	47	42	49	43	39	44	40	36	34
6	67	54	46	40	64	52	44	39	48	41	36	44	38	34	40	36	32	30
7	62	49	41	35	59	47	40	34	44	37	32	40	35	30	37	32	29	26
8	58	45	37	31	55	43	36	30	40	33	29	37	31	27	34	29	26	24
9	54	41	33	28	51	40	32	27	37	30	26	34	28	25	31	27	23	21
10	50	38	30	25	48	36	29	25	34	28	23	31	26	22	29	24	21	19

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	20980	20980	20980
5°	21060	20757	20879
10°	20935	20546	20649
15°	20677	20279	20259
20°	20309	19880	19859
25°	19946	19388	19388
30°	19475	18938	18776
35°	19036	18398	18126
40°	18487	17856	17513
45°	17945	17317	16890
50°	17357	16759	16164
55°	16743	16110	15510
60°	16059	15332	14767
65°	15320	14560	13891
70°	14389	13624	12977
75°	13094	12545	12239
80°	11623	11269	10693
85°	9485	9040	8096



TEST NUMBER: P331426-930

CATALOG NUMBER: S122DIP-S1005D330U930-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	122.2	2.8
10°-20°	343.8	7.9
20°-30°	505.4	11.6
30°-40°	587.0	13.4
40°-50°	586.4	13.4
50°-60°	511.4	11.7
60°-70°	378.1	8.6
70°-80°	214.2	4.9
80°-90°	58.5	1.3
90°-100°	12.1	0.3
100°-110°	44.6	1.0
110°-120°	119.1	2.7
120°-130°	196.6	4.5
130°-140°	209.1	4.8
140°-150°	194.4	4.4
150°-160°	156.3	3.6
160°-170°	100.7	2.3
170°-180°	34.7	0.8
0°-30°	971.4	22.2
0°-40°	1558.4	35.6
0°-60°	2656.1	60.7
0°-90°	3306.9	75.6
90°-120°	175.8	4.0
90°-150°	776.0	17.7
90°-180°	1068.0	24.4
0°-180°	4374.5	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1299	1299	1299	1299	1299	
5°	1299	1294	1281	1290	1288	123
15°	1237	1229	1213	1218	1212	348
25°	1120	1109	1088	1090	1088	515
35°	966	953	933	926	920	603
45°	786	777	758	745	740	606
55°	595	587	572	558	551	532
65°	401	393	381	370	364	397
75°	210	207	201	194	196	224
85°	51	50	49	45	44	59
90°	0	3	5	7	7	3
95°	17	9	10	12	11	21
105°	80	84	16	19	20	86
115°	152	156	163	46	22	149
125°	214	218	223	225	225	191
135°	265	269	272	274	274	205
145°	308	308	312	314	312	192
155°	339	337	340	341	339	156
165°	357	356	356	358	356	101
175°	365	363	364	365	363	35
180°	364	364	364	364	364	



TEST NUMBER: P331426-930

CATALOG NUMBER: S122DIP-S1005D330U930-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1299.4	1299.4	1299.4	1299.4	1299.4	1299.4	1299.4	1299.4	1299.4	1299.4	1299.4
2.5°	1305.5	1304.3	1303.3	1302.1	1301.0	1299.3	1296.8	1294.4	1291.9	1289.5	1291.7
5°	1299.4	1298.4	1297.2	1296.1	1295.0	1292.9	1289.9	1286.8	1283.8	1280.7	1283.0
7.5°	1287.9	1286.2	1284.5	1282.8	1281.1	1278.6	1275.5	1272.4	1269.3	1266.2	1268.4
10°	1276.9	1275.0	1273.1	1271.1	1269.2	1266.6	1263.2	1259.9	1256.5	1253.2	1255.5
12.5°	1262.0	1260.2	1258.5	1256.8	1255.1	1252.5	1249.2	1245.9	1242.6	1239.3	1240.8
15°	1237.0	1235.3	1233.6	1232.0	1230.3	1227.7	1224.1	1220.4	1216.8	1213.2	1214.4
17.5°	1205.0	1203.3	1201.7	1200.0	1198.3	1195.6	1192.0	1188.3	1184.6	1181.0	1182.3
20°	1182.0	1180.3	1178.7	1177.0	1175.3	1172.6	1168.7	1164.8	1160.9	1157.0	1157.8
22.5°	1159.0	1156.7	1154.4	1152.0	1149.7	1146.7	1143.0	1139.4	1135.7	1132.0	1132.2
25°	1119.6	1117.3	1115.1	1112.9	1110.7	1107.2	1102.4	1097.7	1093.0	1088.3	1088.8
27.5°	1074.6	1072.5	1070.6	1068.5	1066.6	1063.7	1060.0	1056.2	1052.6	1048.8	1048.0
30°	1044.6	1042.4	1040.1	1037.9	1035.7	1032.5	1028.3	1024.2	1020.0	1015.8	1015.0
32.5°	1012.6	1010.8	1009.0	1007.2	1005.4	1002.4	998.0	993.6	989.2	984.8	983.3
35°	965.8	963.0	960.3	957.5	954.7	951.1	946.6	942.2	937.8	933.4	931.7
37.5°	913.1	910.7	908.2	905.8	903.4	899.9	895.4	891.0	886.6	882.2	880.0
40°	877.1	874.9	872.7	870.5	868.2	865.0	860.5	856.1	851.6	847.2	844.7
42.5°	842.1	839.9	837.7	835.5	833.2	829.9	825.5	821.0	816.6	812.1	809.4
45°	785.9	784.0	782.0	780.1	778.1	775.1	770.9	766.8	762.6	758.4	755.4
47.5°	729.9	728.1	726.3	724.5	722.6	719.5	715.2	710.9	706.5	702.2	699.0
50°	691.0	689.6	688.2	686.8	685.4	682.7	678.9	675.0	671.1	667.2	663.3
52.5°	653.0	651.2	649.3	647.5	645.6	642.9	639.2	635.5	631.9	628.3	625.0
55°	594.8	593.0	591.4	589.8	588.1	585.5	582.3	578.9	575.6	572.3	568.9
57.5°	536.3	534.9	533.6	532.3	530.9	528.5	524.8	521.1	517.5	513.8	510.5
60°	497.3	496.2	495.0	494.0	492.8	490.3	486.5	482.6	478.7	474.8	471.7
62.5°	459.3	457.5	455.8	454.0	452.2	449.8	446.8	443.8	440.8	437.8	435.0
65°	401.0	399.4	397.8	396.1	394.4	392.2	389.4	386.6	383.8	381.1	378.6
67.5°	341.9	340.6	339.2	337.9	336.6	334.6	332.1	329.6	327.1	324.7	322.7
70°	304.8	303.8	302.6	301.6	300.4	298.6	296.1	293.6	291.1	288.6	286.7
72.5°	266.8	265.8	264.6	263.6	262.4	261.1	259.5	257.9	256.2	254.6	252.7
75°	209.9	209.4	208.8	208.2	207.7	206.7	205.3	203.9	202.5	201.1	199.5
77.5°	158.9	158.0	157.0	156.1	155.2	154.4	153.8	153.3	152.7	152.2	151.3
80°	125.0	124.7	124.4	124.1	123.8	123.4	122.9	122.3	121.7	121.2	120.3
82.5°	92.9	92.9	92.9	92.8	92.7	92.5	92.2	91.9	91.6	91.2	90.2
85°	51.2	51.0	50.7	50.4	50.1	49.8	49.6	49.2	49.0	48.8	47.9
87.5°	18.0	17.7	17.4	17.1	16.8	16.5	16.1	15.7	15.4	15.1	14.4
90°	0.2	0.9	1.5	2.2	2.9	3.4	3.8	4.3	4.8	5.3	5.5
92.5°	5.3	5.3	5.2	5.1	5.1	5.2	5.4	5.6	5.9	6.1	6.3
95°	17.1	15.2	13.3	11.3	9.4	8.6	9.0	9.5	9.9	10.3	10.6
97.5°	34.0	28.5	23.1	17.7	12.2	9.9	10.9	11.8	12.8	13.8	14.0
100°	46.6	38.6	30.6	22.6	14.6	11.0	12.1	13.0	14.0	15.0	15.5
102.5°	60.6	58.9	57.2	55.5	53.8	48.8	40.4	32.1	23.8	15.4	16.1
105°	80.1	81.9	83.6	85.4	87.2	80.1	64.1	48.1	32.0	16.1	16.7
107.5°	102.4	103.9	105.3	106.7	108.1	99.2	80.1	60.9	41.7	22.5	21.9
110°	116.8	118.0	119.3	120.5	121.7	113.8	96.9	80.0	63.0	46.1	40.3



TEST NUMBER: P331426-930

CATALOG NUMBER: S122DIP-S1005D330U930-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	130.3	131.3	132.5	133.5	134.6	133.1	128.9	124.7	120.5	116.3	95.0
115°	151.6	152.5	153.6	154.6	155.6	156.8	158.2	159.7	161.2	162.7	135.5
117.5°	170.6	171.7	172.8	174.0	175.0	176.1	177.2	178.1	179.1	180.2	173.6
120°	184.5	185.4	186.3	187.2	188.0	189.0	190.0	191.1	192.2	193.2	194.0
122.5°	196.3	197.3	198.2	199.1	200.1	201.1	202.2	203.3	204.6	205.7	206.1
125°	214.3	215.1	215.8	216.6	217.4	218.3	219.4	220.5	221.6	222.7	223.1
127.5°	230.6	231.5	232.3	233.2	234.0	234.8	235.6	236.5	237.3	238.1	238.7
130°	240.9	241.9	242.8	243.8	244.7	245.5	246.1	246.8	247.4	248.1	248.7
132.5°	251.5	252.3	253.1	253.9	254.7	255.4	256.0	256.7	257.3	258.0	258.5
135°	265.2	266.1	267.1	268.0	269.0	269.7	270.2	270.8	271.3	271.8	272.4
137.5°	279.1	279.7	280.4	281.0	281.7	282.3	282.9	283.5	284.1	284.7	285.3
140°	288.1	288.6	289.0	289.5	290.0	290.6	291.2	291.9	292.5	293.1	293.7
142.5°	295.7	296.1	296.5	297.0	297.4	298.0	298.7	299.5	300.2	300.9	301.4
145°	307.6	307.6	307.5	307.4	307.4	307.9	308.8	309.9	310.9	311.9	312.3
147.5°	318.0	317.8	317.6	317.3	317.2	317.5	318.5	319.5	320.5	321.5	321.7
150°	324.7	324.3	323.9	323.5	323.1	323.4	324.3	325.3	326.2	327.2	327.5
152.5°	330.4	330.0	329.5	329.1	328.6	328.8	329.7	330.6	331.5	332.4	332.7
155°	338.8	338.2	337.7	337.1	336.6	336.7	337.5	338.1	338.8	339.5	339.9
157.5°	345.2	344.8	344.3	343.9	343.4	343.5	344.0	344.5	345.0	345.4	345.8
160°	349.0	348.7	348.3	348.0	347.6	347.6	348.0	348.3	348.7	349.0	349.4
162.5°	352.4	352.0	351.7	351.3	351.0	351.0	351.2	351.6	351.9	352.2	352.6
165°	356.9	356.6	356.2	355.9	355.6	355.5	355.6	355.8	356.0	356.1	356.5
167.5°	360.3	360.0	359.6	359.2	358.9	358.8	359.0	359.1	359.3	359.5	359.9
170°	362.2	361.8	361.5	361.2	360.8	360.7	360.8	360.9	361.0	361.2	361.6
172.5°	363.5	363.1	362.7	362.4	362.1	361.9	362.1	362.2	362.3	362.4	362.8
175°	365.1	364.7	364.3	363.9	363.5	363.3	363.5	363.5	363.7	363.8	364.2
177.5°	365.3	365.0	364.7	364.4	364.0	363.9	363.9	364.0	364.0	364.1	364.4
180°	364.3	364.3	364.3	364.3	364.3	364.3	364.3	364.3	364.3	364.3	364.3



TEST NUMBER: P331426-930

CATALOG NUMBER: S122DIP-S1005D330U930-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1299.4	1299.4	1299.4	1299.4	1299.4	1299.4	1299.4	1299.4
2.5°	1293.9	1296.1	1298.4	1299.3	1298.8	1298.4	1297.9	1297.5
5°	1285.2	1287.4	1289.6	1290.5	1289.9	1289.3	1288.7	1288.2
7.5°	1270.6	1272.8	1275.1	1275.9	1275.3	1274.7	1274.1	1273.5
10°	1257.7	1259.9	1262.1	1262.8	1262.0	1261.1	1260.3	1259.5
12.5°	1242.4	1243.9	1245.5	1245.9	1245.3	1244.7	1244.1	1243.5
15°	1215.4	1216.6	1217.6	1217.6	1216.2	1214.8	1213.4	1212.0
17.5°	1183.6	1184.9	1186.1	1186.1	1184.7	1183.4	1182.1	1180.7
20°	1158.7	1159.5	1160.3	1160.2	1159.1	1158.0	1156.9	1155.8
22.5°	1132.4	1132.5	1132.7	1132.5	1131.8	1131.1	1130.4	1129.8
25°	1089.4	1090.0	1090.5	1090.5	1090.0	1089.4	1088.8	1088.3
27.5°	1047.2	1046.3	1045.5	1044.4	1043.1	1041.7	1040.4	1039.1
30°	1014.2	1013.3	1012.5	1011.5	1010.4	1009.3	1008.2	1007.1
32.5°	981.9	980.3	978.8	977.5	976.4	975.3	974.2	973.1
35°	930.0	928.4	926.7	925.2	923.8	922.4	921.0	919.6
37.5°	878.0	876.0	873.9	872.2	870.9	869.5	868.2	866.9
40°	842.1	839.7	837.1	835.4	834.2	833.2	832.0	830.9
42.5°	806.7	804.0	801.3	799.2	797.6	796.1	794.5	792.9
45°	752.4	749.3	746.2	744.1	743.0	741.9	740.8	739.7
47.5°	695.8	692.5	689.3	686.9	685.3	683.7	682.1	680.4
50°	659.4	655.6	651.7	649.1	647.7	646.3	644.9	643.5
52.5°	621.8	618.6	615.4	612.9	611.0	609.2	607.3	605.5
55°	565.6	562.2	559.0	556.6	555.2	553.8	552.4	551.0
57.5°	507.2	503.9	500.7	498.5	497.5	496.4	495.4	494.3
60°	468.7	465.6	462.6	460.6	459.8	459.0	458.1	457.3
62.5°	432.2	429.3	426.5	424.5	423.5	422.4	421.3	420.3
65°	376.1	373.6	371.1	369.2	367.8	366.4	365.0	363.6
67.5°	320.7	318.8	316.8	315.3	314.2	313.1	312.0	310.9
70°	284.7	282.8	280.9	279.3	278.2	277.1	276.0	274.9
72.5°	250.8	248.8	246.9	245.5	244.6	243.7	242.8	241.9
75°	197.9	196.2	194.5	194.0	194.5	195.0	195.6	196.2
77.5°	150.5	149.7	148.9	148.1	147.2	146.5	145.7	145.0
80°	119.5	118.7	117.9	117.2	116.6	116.1	115.5	115.0
82.5°	89.1	88.1	87.0	86.4	86.3	86.2	86.1	85.9
85°	47.0	46.2	45.4	44.8	44.6	44.3	44.0	43.7
87.5°	13.9	13.2	12.6	12.2	12.0	11.8	11.6	11.4
90°	5.9	6.1	6.4	6.7	6.8	6.8	7.0	7.1
92.5°	6.4	6.6	6.7	6.8	6.9	7.0	7.0	7.1
95°	10.8	11.2	11.4	11.6	11.5	11.4	11.4	11.3
97.5°	14.3	14.4	14.7	14.8	14.9	15.0	15.1	15.2
100°	16.0	16.5	16.9	17.2	17.3	17.4	17.5	17.7
102.5°	16.6	17.3	17.9	18.3	18.4	18.6	18.8	18.9
105°	17.4	18.0	18.7	19.1	19.3	19.6	19.8	20.1
107.5°	21.2	20.5	19.9	19.6	19.9	20.1	20.4	20.6
110°	34.4	28.5	22.7	19.9	20.1	20.4	20.6	20.8





TEST NUMBER: P331426-930

CATALOG NUMBER: S122DIP-S1005D330U930-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	73.6	52.3	30.9	20.3	20.5	20.6	20.9	21.0
115°	108.4	81.3	54.1	38.5	34.2	30.1	25.8	21.6
117.5°	167.1	160.5	153.9	143.7	129.9	116.0	102.2	88.3
120°	194.6	195.3	196.0	192.4	184.5	176.6	168.7	160.8
122.5°	206.5	206.9	207.3	206.8	205.3	203.7	202.2	200.6
125°	223.6	224.0	224.4	224.7	224.9	225.0	225.2	225.3
127.5°	239.4	239.9	240.5	240.8	240.9	240.9	240.9	241.0
130°	249.3	250.0	250.6	250.9	250.9	250.8	250.8	250.7
132.5°	259.1	259.6	260.2	260.4	260.3	260.3	260.2	260.2
135°	273.0	273.5	274.1	274.3	274.3	274.1	274.0	273.9
137.5°	285.8	286.4	287.0	287.1	287.0	286.8	286.6	286.4
140°	294.2	294.7	295.2	295.4	295.1	294.8	294.5	294.2
142.5°	301.9	302.4	302.9	303.0	302.6	302.4	302.1	301.7
145°	312.7	313.1	313.5	313.6	313.2	313.0	312.7	312.3
147.5°	322.0	322.4	322.7	322.7	322.5	322.2	322.0	321.7
150°	327.8	328.2	328.6	328.6	328.3	328.0	327.7	327.4
152.5°	333.1	333.5	333.8	333.8	333.4	333.0	332.6	332.2
155°	340.2	340.6	341.0	340.9	340.4	340.0	339.5	339.0
157.5°	346.3	346.7	347.0	347.0	346.5	346.1	345.6	345.2
160°	349.8	350.1	350.4	350.4	350.0	349.6	349.2	348.8
162.5°	352.9	353.4	353.8	353.8	353.2	352.7	352.2	351.7
165°	356.9	357.3	357.8	357.8	357.3	356.9	356.5	356.1
167.5°	360.3	360.7	361.1	361.0	360.5	360.0	359.5	358.9
170°	362.0	362.4	362.8	362.7	362.2	361.7	361.2	360.6
172.5°	363.2	363.6	364.0	364.0	363.5	363.0	362.4	361.9
175°	364.6	365.0	365.4	365.3	364.8	364.2	363.5	363.0
177.5°	364.8	365.1	365.4	365.3	364.9	364.5	364.1	363.7
180°	364.3	364.3	364.3	364.3	364.3	364.3	364.3	364.3

(END OF REPORT)