

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331447-930

Luminaire Tested: **S122DIP-S1005D925U930-4F0-1E-UDD-A**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P331447-930  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S122DIP-S1005D925U930-4F0-1E-UDD-A  
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 1005 LUMENS PER FOOT, ASYMMETRIC DIFFUSER  
UPLIGHT 925 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6604.9 lumens  
Efficiency: N/A  
Efficacy: 98.9 lumens/watt  
Spacing Criteria (0/90/45): 1.08 / 1.16 / 1.23  
Luminous Opening: Rectangular (W 4' x L: 0.17' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 66.8  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331447-930

CATALOG NUMBER: S122DIP-S1005D925U930-4F0-1E-UDD-A

### Luminous Intensity Polar Plot

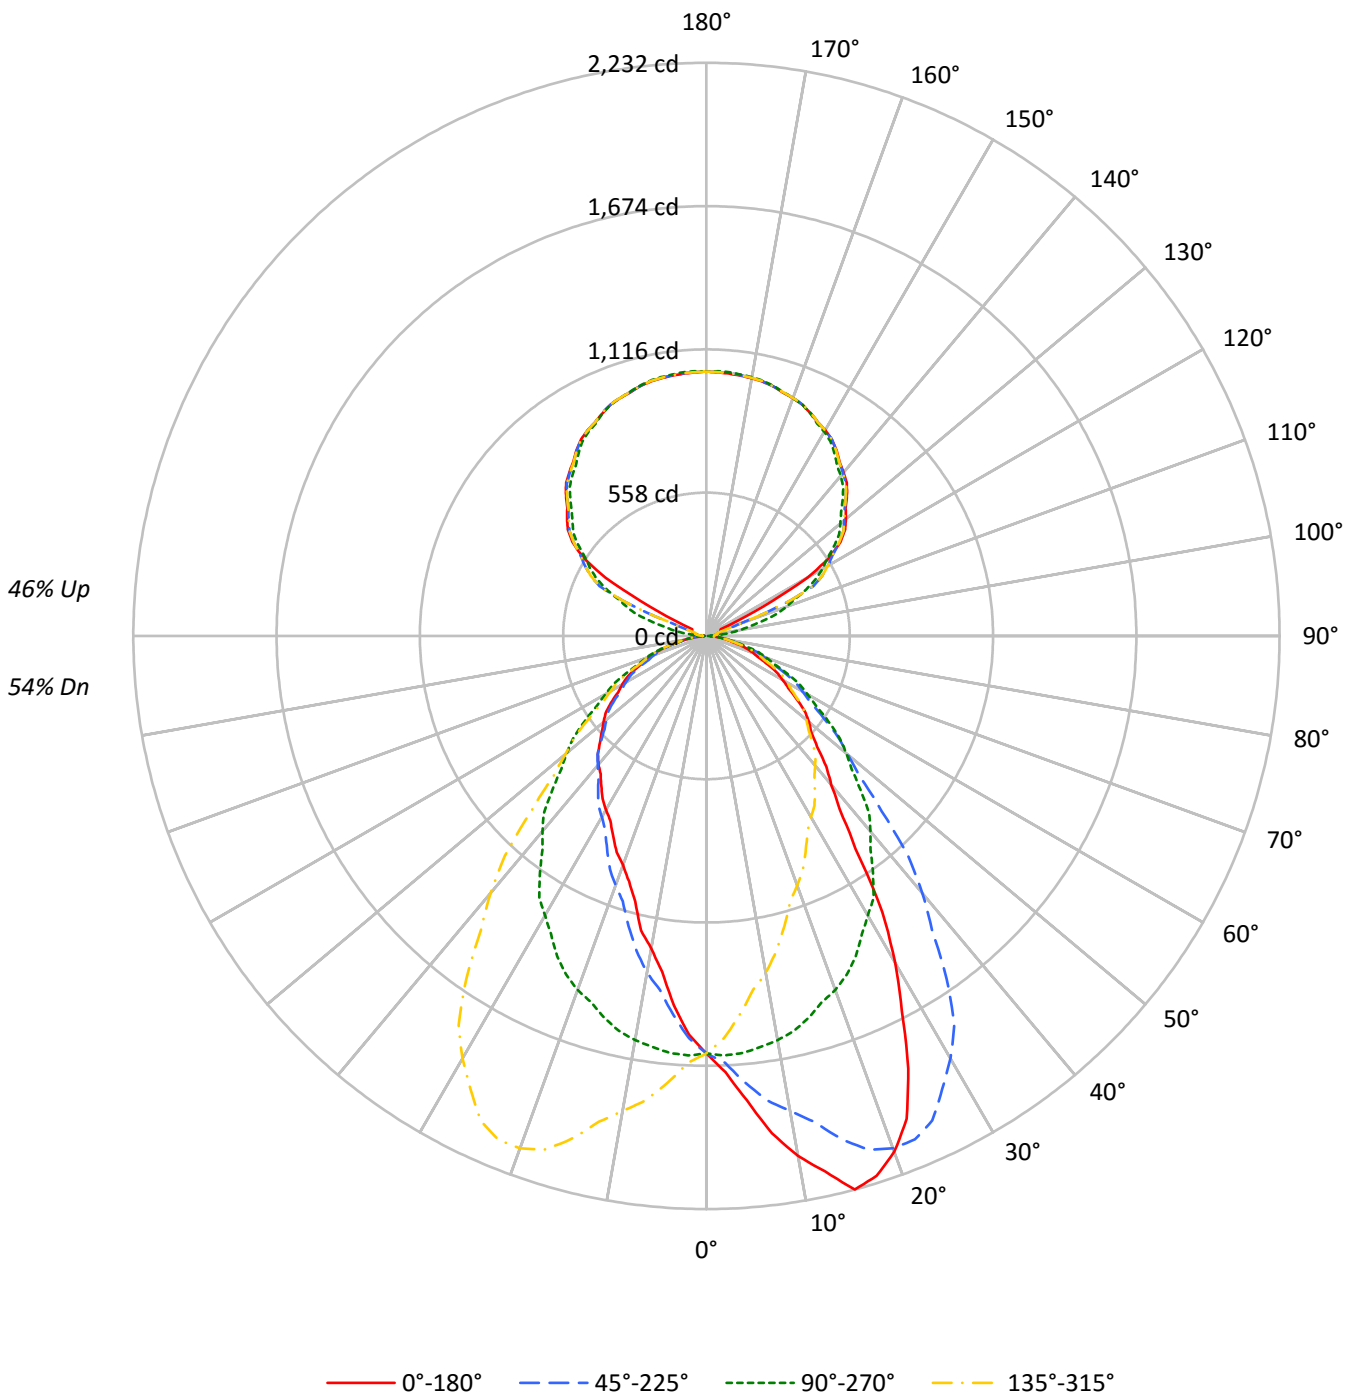



TEST NUMBER: P331447-930

CATALOG NUMBER: S122DIP-S1005D925U930-4F0-1E-UDD-A

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	100	100	100	100	86	86	86	72	72	72	60	60	60	54
1	99	95	91	88	92	88	85	82	76	74	72	65	63	61	54	53	52	47
2	91	84	78	73	84	78	73	68	67	63	60	57	54	52	48	46	44	40
3	83	74	67	61	77	69	63	58	60	55	51	51	48	45	43	41	38	35
4	76	66	58	52	71	62	55	50	53	48	44	46	42	39	39	36	34	30
5	70	59	51	45	65	55	48	43	48	43	38	41	37	34	35	32	30	27
6	65	53	45	40	60	50	43	38	44	38	34	38	33	30	32	29	26	24
7	60	48	40	35	56	45	38	33	40	34	30	34	30	27	30	26	24	21
8	56	44	36	31	52	41	34	30	36	31	27	32	27	24	27	24	21	19
9	52	40	33	28	49	38	31	27	33	28	24	29	25	22	25	22	19	17
10	49	37	30	25	46	35	28	24	31	26	22	27	23	20	24	20	18	16

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	26248	26248	26248	26248
5°	29428	26420	23412	26420
10°	33721	26202	20261	26202
15°	37305	25723	17901	25723
20°	36737	25206	16318	25206
25°	33127	24522	15316	24522
30°	27374	23426	14585	23426
35°	19951	22277	14063	22277
40°	15934	20925	13774	20925
45°	13924	19358	13381	19358
50°	13089	17844	13122	17844
55°	12065	16304	12769	16304
60°	11057	14667	12226	14667
65°	10074	13200	11694	13200
70°	9144	11769	10914	11769
75°	8110	10175	9669	10175
80°	6974	8424	7782	8424
85°	6262	6262	4631	6262



TEST NUMBER: P331447-930

CATALOG NUMBER: S122DIP-S1005D925U930-4F0-1E-UDD-A

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	154.8	2.3
10°-20°	450.1	6.8
20°-30°	653.3	9.9
30°-40°	689.3	10.4
40°-50°	610.4	9.2
50°-60°	487.1	7.4
60°-70°	331.1	5.0
70°-80°	169.7	2.6
80°-90°	43.5	0.7
90°-100°	34.3	0.5
100°-110°	125.9	1.9
110°-120°	336.5	5.1
120°-130°	555.4	8.4
130°-140°	590.7	8.9
140°-150°	549.0	8.3
150°-160°	441.4	6.7
160°-170°	284.5	4.3
170°-180°	97.9	1.5
0°-30°	1258.2	19.0
0°-40°	1947.5	29.5
0°-60°	3045.0	46.1
0°-90°	3589.3	54.3
90°-120°	496.7	7.5
90°-150°	2191.9	33.2
90°-180°	3016.0	45.7
0°-180°	6604.9	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	1626	1626	1626	1626	1626	
5°	1816	1630	1444	1630	1816	181
15°	2232	1539	1071	1539	2232	616
25°	1860	1376	860	1376	1860	840
35°	1012	1130	714	1130	1012	658
45°	610	848	586	848	610	480
55°	429	579	454	579	429	384
65°	264	346	306	346	264	262
75°	130	163	155	163	130	139
85°	34	34	25	34	34	37
90°	20	1	20	1	20	11
95°	32	48	32	48	32	30
105°	57	226	57	226	57	59
115°	61	428	61	428	61	153
125°	637	605	637	605	637	551
135°	774	749	774	749	774	596
145°	882	869	882	869	882	552
155°	958	957	958	957	958	442
165°	1006	1008	1006	1008	1006	284
175°	1025	1031	1025	1031	1025	98
180°	1029	1029	1029	1029	1029	



TEST NUMBER: P331447-930

CATALOG NUMBER: S122DIP-S1005D925U930-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7
2.5°	1700.7	1701.2	1702.2	1694.2	1693.2	1693.2	1686.2	1680.3	1673.2	1663.7	1664.8
5°	1815.7	1822.5	1825.0	1817.5	1806.3	1805.1	1794.5	1776.9	1760.7	1747.6	1738.2
7.5°	1952.9	1955.7	1949.5	1939.7	1931.3	1916.3	1896.5	1877.1	1850.1	1825.2	1806.7
10°	2056.8	2060.6	2050.0	2035.6	2023.7	2006.3	1977.5	1948.2	1912.5	1878.2	1850.6
12.5°	2135.8	2145.1	2131.4	2129.6	2109.3	2085.2	2051.0	2036.1	1986.0	1938.1	1908.7
15°	2231.8	2231.1	2232.5	2220.5	2205.5	2201.8	2165.6	2126.2	2055.6	2027.5	1978.7
17.5°	2204.1	2213.5	2217.9	2217.8	2217.5	2215.1	2203.4	2178.6	2143.2	2097.6	2041.3
20°	2138.1	2150.6	2152.5	2166.8	2175.0	2185.6	2190.0	2183.0	2161.2	2123.1	2074.4
22.5°	2036.1	2039.6	2045.5	2067.8	2085.5	2112.1	2126.0	2149.0	2140.7	2122.1	2081.4
25°	1859.5	1853.2	1875.0	1886.3	1926.9	1969.4	2000.0	2033.8	2063.8	2081.9	2070.0
27.5°	1647.2	1637.9	1670.6	1700.5	1733.5	1779.5	1827.2	1883.5	1930.4	1989.0	2009.1
30°	1468.3	1473.9	1505.1	1537.0	1587.0	1652.0	1705.7	1767.6	1834.4	1900.1	1945.6
32.5°	1275.4	1297.0	1316.7	1365.5	1409.6	1482.1	1560.7	1638.1	1721.5	1796.1	1866.7
35°	1012.2	1037.1	1064.7	1100.2	1162.1	1234.0	1310.8	1415.2	1528.9	1630.8	1714.5
37.5°	852.0	848.0	863.7	889.5	939.6	997.6	1086.1	1189.1	1323.0	1442.7	1560.7
40°	756.0	753.5	764.8	788.5	826.6	869.1	946.6	1037.1	1161.5	1307.7	1448.3
42.5°	690.1	691.5	697.8	714.5	740.6	775.6	833.6	910.7	1024.6	1162.3	1313.4
45°	609.8	614.2	621.1	629.2	644.2	672.9	705.4	760.4	850.4	965.3	1114.0
47.5°	552.0	552.2	559.2	566.3	575.2	591.4	617.9	652.4	715.9	809.5	937.3
50°	521.1	516.7	521.7	527.3	536.7	548.0	565.4	597.9	640.4	716.0	822.9
52.5°	483.1	483.2	487.7	489.8	498.2	509.5	525.5	548.0	586.4	645.6	733.4
55°	428.6	431.7	434.2	438.0	445.5	453.6	466.1	481.1	511.1	555.5	620.4
57.5°	377.4	378.4	380.9	388.0	392.7	400.2	412.1	425.7	445.2	478.1	526.9
60°	342.4	342.4	347.4	350.5	356.8	364.3	373.7	386.8	404.2	431.1	470.5
62.5°	310.4	309.9	311.9	317.0	321.8	328.8	338.1	349.3	365.7	389.6	422.0
65°	263.7	262.4	266.2	267.4	272.4	279.3	286.8	298.6	311.8	329.3	358.0
67.5°	218.7	220.2	222.2	224.5	227.3	234.6	239.5	247.9	259.0	273.5	293.0
70°	193.7	193.7	193.7	195.6	199.3	203.1	208.1	214.9	225.6	238.1	255.5
72.5°	165.7	167.7	169.7	168.6	173.3	175.5	181.6	185.5	195.6	203.6	219.1
75°	130.0	130.0	130.0	133.1	134.9	136.8	140.6	144.3	149.4	159.3	167.5
77.5°	96.9	96.7	97.3	98.1	100.1	102.3	103.5	106.8	111.5	116.1	122.9
80°	75.0	76.2	76.9	78.1	78.1	79.3	80.0	84.4	87.5	90.6	95.0
82.5°	58.0	58.2	58.4	58.6	59.1	59.8	61.5	62.9	64.0	66.6	70.0
85°	33.8	33.1	33.1	34.3	33.8	33.8	35.0	36.2	36.2	36.9	38.7
87.5°	17.0	17.0	17.4	16.8	16.7	17.1	17.0	16.3	16.6	17.0	17.2
90°	20.1	19.8	19.4	19.1	18.8	18.2	17.4	16.6	15.7	14.9	13.5
92.5°	20.1	19.9	19.7	19.5	19.3	19.0	18.6	18.1	17.7	17.3	16.6
95°	32.0	32.2	32.4	32.5	32.7	32.4	31.6	30.7	29.8	29.0	27.9
97.5°	42.7	42.6	42.3	42.2	41.9	41.5	40.8	40.2	39.5	38.9	36.2
100°	49.9	49.6	49.2	48.9	48.6	47.8	46.4	45.1	43.8	42.5	39.6
102.5°	53.5	53.0	52.5	52.1	51.6	50.5	48.8	47.0	45.3	43.6	39.6
105°	56.6	55.9	55.3	54.6	54.0	52.7	50.9	49.1	47.2	45.4	39.6
107.5°	58.2	57.6	56.9	56.3	55.6	56.2	58.0	59.8	61.7	63.6	117.7
110°	58.9	58.1	57.5	56.8	56.2	64.1	80.6	97.2	113.7	130.3	178.1



TEST NUMBER: P331447-930

CATALOG NUMBER: S122DIP-S1005D925U930-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	59.4	58.9	58.4	57.8	57.3	87.2	147.6	208.0	268.3	328.6	340.5
115°	61.1	73.0	84.9	96.8	108.7	153.0	229.6	306.2	382.8	459.4	455.3
117.5°	249.3	288.5	327.6	366.7	405.9	434.7	453.3	471.8	490.3	508.8	506.1
120°	454.2	476.5	498.9	521.2	543.6	553.8	551.8	549.8	547.8	545.8	542.8
122.5°	566.8	571.1	575.4	579.8	584.2	585.7	584.5	583.3	582.1	581.0	577.7
125°	636.7	636.2	635.6	635.1	634.6	633.8	632.7	631.5	630.4	629.2	626.1
127.5°	680.7	680.6	680.5	680.4	680.3	679.5	677.8	676.0	674.3	672.7	670.3
130°	708.1	708.3	708.4	708.7	708.8	707.9	706.1	704.3	702.5	700.7	698.9
132.5°	734.9	735.1	735.2	735.4	735.6	734.9	733.4	731.8	730.3	728.6	726.8
135°	773.6	774.0	774.3	774.6	774.9	774.3	772.7	771.0	769.3	767.7	766.2
137.5°	808.9	809.5	810.1	810.7	811.2	810.7	809.0	807.4	805.8	804.2	802.5
140°	831.0	831.8	832.7	833.5	834.3	834.0	832.5	831.0	829.5	828.0	826.2
142.5°	852.4	853.3	854.1	854.9	855.7	855.5	854.1	852.7	851.4	850.0	848.0
145°	882.4	883.2	884.0	884.8	885.7	885.5	884.4	883.2	882.0	880.8	878.1
147.5°	908.7	909.4	910.1	910.8	911.5	911.4	910.5	909.7	908.8	908.0	905.2
150°	924.8	925.6	926.4	927.3	928.1	928.1	927.1	926.0	925.0	924.1	921.5
152.5°	938.5	939.6	940.7	941.8	942.9	942.9	941.9	940.9	940.0	939.0	936.5
155°	957.6	958.9	960.2	961.6	962.9	963.0	962.1	961.1	960.0	959.0	957.1
157.5°	975.0	976.2	977.5	978.8	980.2	980.2	979.1	978.0	976.9	975.8	974.4
160°	985.1	986.3	987.4	988.6	989.8	989.9	988.9	987.8	986.8	985.9	984.9
162.5°	993.4	994.9	996.3	997.8	999.1	999.3	998.2	997.0	995.9	994.8	993.9
165°	1006.0	1007.1	1008.3	1009.4	1010.6	1010.6	1009.4	1008.3	1007.1	1006.0	1005.5
167.5°	1013.8	1015.4	1016.8	1018.3	1019.8	1020.0	1018.8	1017.7	1016.5	1015.4	1014.9
170°	1018.6	1020.1	1021.6	1023.1	1024.6	1024.7	1023.6	1022.5	1021.2	1020.1	1019.8
172.5°	1022.2	1023.7	1025.2	1026.6	1028.2	1028.3	1027.2	1026.0	1024.8	1023.7	1023.4
175°	1025.3	1027.0	1028.7	1030.3	1031.9	1032.2	1031.0	1029.9	1028.7	1027.5	1027.2
177.5°	1027.3	1028.4	1029.6	1030.9	1032.0	1032.2	1031.3	1030.3	1029.4	1028.4	1028.3
180°	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1



TEST NUMBER: P331447-930

CATALOG NUMBER: S122DIP-S1005D925U930-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7
2.5°	1668.3	1664.3	1661.7	1652.8	1644.7	1636.7	1634.3	1635.2	1624.2	1613.7	1609.2
5°	1733.2	1720.7	1708.9	1692.0	1672.0	1650.1	1638.8	1630.1	1608.3	1584.5	1570.8
7.5°	1791.5	1773.6	1750.7	1719.0	1689.9	1655.5	1633.6	1614.2	1582.3	1548.7	1528.3
10°	1826.9	1802.5	1773.2	1734.5	1698.8	1657.0	1627.6	1598.2	1560.7	1520.8	1495.7
12.5°	1857.4	1824.6	1795.7	1746.0	1703.8	1651.5	1616.7	1575.2	1535.8	1488.2	1463.8
15°	1930.1	1869.4	1814.4	1758.2	1706.3	1633.2	1594.5	1538.9	1487.0	1428.3	1400.2
17.5°	1986.2	1918.0	1831.4	1760.0	1699.5	1618.5	1561.6	1495.0	1433.7	1366.6	1328.4
20°	2018.1	1940.0	1846.9	1761.9	1689.5	1597.0	1535.1	1467.0	1395.2	1319.6	1278.4
22.5°	2037.1	1955.0	1863.0	1754.4	1669.5	1579.5	1501.6	1427.0	1354.2	1272.6	1229.4
25°	2043.1	1968.1	1870.7	1748.2	1644.5	1542.6	1448.9	1376.5	1288.3	1212.1	1149.0
27.5°	2013.4	1959.7	1865.9	1736.4	1615.6	1496.6	1392.0	1309.9	1217.0	1134.2	1070.8
30°	1976.9	1945.6	1854.4	1724.4	1592.6	1464.5	1349.6	1256.5	1164.0	1080.3	1015.3
32.5°	1920.4	1913.7	1833.4	1707.5	1568.1	1424.1	1305.1	1211.0	1108.6	1026.3	964.3
35°	1809.5	1839.4	1788.8	1669.5	1522.0	1366.4	1237.7	1130.2	1024.1	945.3	887.2
37.5°	1660.8	1735.2	1722.0	1613.9	1459.8	1303.7	1161.6	1049.3	948.1	868.6	811.6
40°	1558.3	1653.3	1667.0	1571.4	1415.8	1255.2	1104.6	992.8	894.1	821.7	764.1
42.5°	1448.3	1559.3	1597.0	1520.4	1367.8	1204.3	1053.7	937.8	840.1	769.6	718.7
45°	1264.0	1410.8	1479.0	1435.2	1287.8	1120.3	965.3	847.8	759.1	692.9	653.5
47.5°	1091.7	1252.1	1343.7	1328.2	1198.7	1032.8	879.6	766.9	680.5	627.7	592.5
50°	969.7	1134.7	1245.2	1250.3	1134.7	970.3	816.6	710.4	631.0	581.7	552.9
52.5°	863.7	1021.2	1141.7	1168.2	1063.2	905.3	760.1	654.4	584.6	539.2	513.5
55°	725.4	858.5	992.2	1040.9	956.6	806.7	672.3	579.2	513.6	482.3	459.8
57.5°	603.1	714.0	837.5	891.4	839.4	711.0	585.1	504.2	451.0	423.6	406.3
60°	538.6	626.1	736.1	800.4	755.4	641.1	531.1	454.2	410.5	386.1	369.9
62.5°	478.6	556.1	649.1	707.9	683.4	575.6	477.1	409.3	371.5	348.6	336.9
65°	394.8	456.1	528.0	582.3	566.1	484.2	403.7	345.5	315.5	297.4	288.0
67.5°	325.1	369.4	419.2	466.8	453.7	395.7	331.0	285.8	263.4	247.8	242.1
70°	281.2	314.9	359.3	397.4	386.8	339.2	288.0	249.3	229.9	216.8	211.2
72.5°	239.2	266.9	300.8	331.9	324.7	285.3	242.6	213.3	198.4	186.3	181.7
75°	180.6	201.8	222.4	243.0	241.2	210.6	185.6	163.1	151.2	141.9	140.0
77.5°	133.3	145.2	159.2	171.5	168.0	150.6	130.9	118.1	109.3	103.1	102.1
80°	101.8	108.7	118.7	127.4	123.1	115.6	100.0	90.6	84.4	78.1	75.6
82.5°	73.9	80.7	86.7	91.5	88.1	81.1	71.5	65.1	61.4	57.1	56.1
85°	38.7	42.5	45.0	46.2	45.0	40.6	36.2	33.8	30.7	28.8	28.1
87.5°	17.4	17.2	16.9	17.6	15.7	15.4	13.0	11.2	11.0	10.8	10.3
90°	12.2	10.9	9.6	8.0	6.2	4.4	2.5	0.7	2.5	4.4	6.2
92.5°	16.0	15.3	14.6	14.3	14.5	14.7	14.8	15.0	14.8	14.7	14.5
95°	26.7	25.6	24.4	26.6	32.0	37.5	43.0	48.4	43.0	37.5	32.0
97.5°	33.5	30.8	28.1	34.5	49.9	65.3	80.6	96.0	80.6	65.3	49.9
100°	36.9	34.0	31.2	41.1	63.8	86.4	109.1	131.8	109.1	86.4	63.8
102.5°	90.7	114.2	137.8	151.9	156.7	161.5	166.3	171.1	166.3	161.5	156.7
105°	135.7	180.9	226.1	246.2	241.2	236.3	231.3	226.3	231.3	236.3	241.2
107.5°	171.9	226.1	280.3	305.4	301.3	297.3	293.3	289.3	293.3	297.3	301.3
110°	225.9	273.8	321.6	343.7	340.3	336.8	333.4	329.9	333.4	336.8	340.3





TEST NUMBER: P331447-930

CATALOG NUMBER: S122DIP-S1005D925U930-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	352.3	364.1	375.9	380.3	377.2	374.1	371.0	367.9	371.0	374.1	377.2
115°	451.2	447.0	442.9	439.4	436.6	433.7	431.0	428.1	431.0	433.7	436.6
117.5°	503.2	500.3	497.5	494.5	491.4	488.2	485.0	481.9	485.0	488.2	491.4
120°	539.8	536.9	533.9	531.2	528.6	526.2	523.7	521.2	523.7	526.2	528.6
122.5°	574.5	571.2	567.9	565.0	562.4	559.8	557.2	554.6	557.2	559.8	562.4
125°	622.9	619.8	616.6	614.0	611.8	609.7	607.5	605.4	607.5	609.7	611.8
127.5°	668.0	665.6	663.2	660.9	658.5	656.2	653.8	651.3	653.8	656.2	658.5
130°	697.0	695.2	693.4	691.1	688.5	685.8	683.2	680.6	683.2	685.8	688.5
132.5°	725.0	723.3	721.4	719.3	717.1	714.9	712.6	710.4	712.6	714.9	717.1
135°	764.8	763.2	761.7	759.7	757.0	754.4	751.7	749.1	751.7	754.4	757.0
137.5°	800.8	799.1	797.4	795.7	793.8	792.0	790.1	788.2	790.1	792.0	793.8
140°	824.3	822.6	820.8	819.1	817.8	816.5	815.2	813.8	815.2	816.5	817.8
142.5°	845.9	843.8	841.7	840.1	838.9	837.7	836.5	835.3	836.5	837.7	838.9
145°	875.2	872.5	869.6	868.3	868.5	868.6	868.8	868.9	868.8	868.6	868.5
147.5°	902.5	899.6	896.8	895.8	896.4	897.1	897.6	898.3	897.6	897.1	896.4
150°	918.8	916.2	913.5	912.7	913.9	915.0	916.2	917.4	916.2	915.0	913.9
152.5°	933.9	931.4	928.9	928.3	929.6	930.8	932.1	933.4	932.1	930.8	929.6
155°	955.1	953.1	951.1	950.9	952.4	953.8	955.4	956.8	955.4	953.8	952.4
157.5°	973.0	971.6	970.2	970.1	971.3	972.7	973.9	975.1	973.9	972.7	971.3
160°	983.9	982.8	981.9	981.9	982.8	983.9	984.9	985.9	984.9	983.9	982.8
162.5°	993.0	992.2	991.3	991.4	992.4	993.4	994.4	995.4	994.4	993.4	992.4
165°	1004.9	1004.4	1004.0	1004.2	1005.2	1006.2	1007.2	1008.2	1007.2	1006.2	1005.2
167.5°	1014.4	1014.0	1013.5	1013.7	1014.7	1015.8	1016.8	1017.7	1016.8	1015.8	1014.7
170°	1019.5	1019.1	1018.8	1019.1	1020.1	1021.1	1022.1	1023.1	1022.1	1021.1	1020.1
172.5°	1023.0	1022.7	1022.4	1022.7	1023.7	1024.7	1025.6	1026.6	1025.6	1024.7	1023.7
175°	1026.9	1026.5	1026.2	1026.6	1027.8	1029.0	1030.1	1031.3	1030.1	1029.0	1027.8
177.5°	1028.2	1028.1	1027.9	1028.3	1029.2	1030.2	1031.1	1032.0	1031.1	1030.2	1029.2
180°	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1



TEST NUMBER: P331447-930

CATALOG NUMBER: S122DIP-S1005D925U930-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7
2.5°	1604.3	1601.2	1590.7	1585.3	1576.3	1567.7	1562.3	1564.8	1566.8	1565.8	1564.2
5°	1558.3	1546.4	1528.3	1512.6	1501.4	1480.8	1472.0	1467.7	1464.0	1459.5	1455.1
7.5°	1503.5	1484.8	1458.8	1436.6	1415.5	1389.9	1375.3	1366.6	1357.6	1347.7	1339.0
10°	1464.5	1438.3	1410.8	1379.6	1354.6	1331.5	1310.8	1297.1	1284.6	1272.8	1264.0
12.5°	1423.6	1393.3	1359.3	1316.6	1289.1	1256.0	1252.9	1228.7	1209.1	1201.8	1191.5
15°	1358.3	1315.8	1272.8	1222.1	1200.3	1170.3	1151.5	1132.8	1115.9	1104.0	1100.9
17.5°	1284.3	1229.2	1186.3	1150.0	1114.2	1083.5	1066.2	1051.2	1037.3	1021.4	1019.3
20°	1227.8	1180.2	1133.4	1101.6	1064.7	1033.4	1012.2	997.2	985.3	975.9	967.8
22.5°	1174.3	1122.3	1079.4	1044.6	1008.2	982.9	966.2	951.7	941.8	931.5	923.8
25°	1088.4	1047.8	1000.9	961.6	931.6	915.3	901.6	889.1	882.9	876.0	867.2
27.5°	1013.3	968.2	924.3	893.8	867.5	853.1	843.3	834.9	829.0	825.0	820.0
30°	960.3	914.7	880.4	850.4	828.5	814.2	807.9	802.9	796.0	793.5	791.0
32.5°	909.3	868.2	838.9	812.9	792.0	782.6	776.9	772.4	767.0	764.5	759.5
35°	837.2	802.9	774.1	759.8	742.9	734.7	730.4	724.1	719.2	716.6	716.0
37.5°	769.4	739.6	720.6	702.1	695.0	690.1	684.0	679.8	678.3	677.9	677.3
40°	725.4	701.0	684.2	669.2	666.0	658.5	653.5	649.8	649.8	650.4	649.8
42.5°	685.4	663.6	648.7	635.7	632.0	627.5	622.6	622.3	623.3	625.4	623.3
45°	624.8	609.2	598.6	592.3	585.5	581.1	580.4	582.3	582.9	583.6	585.5
47.5°	569.1	558.7	549.1	542.2	539.2	538.4	537.7	541.0	544.0	545.1	548.0
50°	536.1	524.2	516.1	511.7	509.2	507.9	509.2	513.0	515.4	518.6	520.5
52.5°	499.1	490.7	485.1	481.8	480.7	481.5	481.8	486.0	490.0	491.1	492.0
55°	448.0	441.7	440.5	434.9	437.3	436.8	439.9	442.4	446.1	449.9	450.5
57.5°	397.0	392.0	388.7	389.1	389.9	392.6	395.3	399.7	403.7	407.6	408.0
60°	363.1	360.5	358.7	358.7	359.9	363.6	366.7	371.1	373.7	376.1	378.0
62.5°	332.0	329.5	327.7	328.6	331.9	334.1	337.8	340.1	342.7	345.1	346.0
65°	283.1	281.8	283.6	284.9	285.5	288.7	293.0	294.9	297.4	298.6	303.0
67.5°	237.9	238.1	237.9	239.7	243.3	244.0	248.2	252.6	253.1	255.4	258.3
70°	207.4	208.7	209.9	211.2	214.3	215.6	218.7	220.5	223.1	224.9	226.8
72.5°	179.4	179.7	180.9	180.7	183.3	186.1	188.7	190.5	193.1	195.4	197.3
75°	138.1	138.1	139.3	140.0	143.1	146.2	145.6	146.8	149.4	151.8	153.1
77.5°	100.9	99.5	100.9	101.5	102.5	105.1	105.6	107.4	110.2	109.3	110.7
80°	76.9	75.0	76.9	77.5	77.5	80.6	80.6	81.9	83.7	81.9	83.7
82.5°	54.9	54.0	55.4	55.5	56.5	56.6	57.6	57.9	59.8	58.9	59.8
85°	27.5	26.9	27.5	26.9	27.5	28.1	28.1	27.5	27.5	28.8	26.9
87.5°	10.1	9.9	9.7	9.9	9.7	9.5	9.1	9.3	9.5	8.6	8.7
90°	8.0	9.6	10.9	12.2	13.5	14.9	15.7	16.6	17.4	18.2	18.8
92.5°	14.3	14.6	15.3	16.0	16.6	17.3	17.7	18.1	18.6	19.0	19.3
95°	26.6	24.4	25.6	26.7	27.9	29.0	29.8	30.7	31.6	32.4	32.7
97.5°	34.5	28.1	30.8	33.5	36.2	38.9	39.5	40.2	40.8	41.5	41.9
100°	41.1	31.2	34.0	36.9	39.6	42.5	43.8	45.1	46.4	47.8	48.6
102.5°	151.9	137.8	114.2	90.7	67.2	43.6	45.3	47.0	48.8	50.5	51.6
105°	246.2	226.1	180.9	135.7	90.6	45.4	47.2	49.1	50.9	52.7	54.0
107.5°	305.4	280.3	226.1	171.9	117.7	63.6	61.7	59.8	58.0	56.2	55.6
110°	343.7	321.6	273.8	225.9	178.1	130.3	113.7	97.2	80.6	64.1	56.2



TEST NUMBER: P331447-930

CATALOG NUMBER: S122DIP-S1005D925U930-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	380.3	375.9	364.1	352.3	340.5	328.6	268.3	208.0	147.6	87.2	57.3
115°	439.4	442.9	447.0	451.2	455.3	459.4	382.8	306.2	229.6	153.0	108.7
117.5°	494.5	497.5	500.3	503.2	506.1	508.8	490.3	471.8	453.3	434.7	405.9
120°	531.2	533.9	536.9	539.8	542.8	545.8	547.8	549.8	551.8	553.8	543.6
122.5°	565.0	567.9	571.2	574.5	577.7	581.0	582.1	583.3	584.5	585.7	584.2
125°	614.0	616.6	619.8	622.9	626.1	629.2	630.4	631.5	632.7	633.8	634.6
127.5°	660.9	663.2	665.6	668.0	670.3	672.7	674.3	676.0	677.8	679.5	680.3
130°	691.1	693.4	695.2	697.0	698.9	700.7	702.5	704.3	706.1	707.9	708.8
132.5°	719.3	721.4	723.3	725.0	726.8	728.6	730.3	731.8	733.4	734.9	735.6
135°	759.7	761.7	763.2	764.8	766.2	767.7	769.3	771.0	772.7	774.3	774.9
137.5°	795.7	797.4	799.1	800.8	802.5	804.2	805.8	807.4	809.0	810.7	811.2
140°	819.1	820.8	822.6	824.3	826.2	828.0	829.5	831.0	832.5	834.0	834.3
142.5°	840.1	841.7	843.8	845.9	848.0	850.0	851.4	852.7	854.1	855.5	855.7
145°	868.3	869.6	872.5	875.2	878.1	880.8	882.0	883.2	884.4	885.5	885.7
147.5°	895.8	896.8	899.6	902.5	905.2	908.0	908.8	909.7	910.5	911.4	911.5
150°	912.7	913.5	916.2	918.8	921.5	924.1	925.0	926.0	927.1	928.1	928.1
152.5°	928.3	928.9	931.4	933.9	936.5	939.0	940.0	940.9	941.9	942.9	942.9
155°	950.9	951.1	953.1	955.1	957.1	959.0	960.0	961.1	962.1	963.0	962.9
157.5°	970.1	970.2	971.6	973.0	974.4	975.8	976.9	978.0	979.1	980.2	980.2
160°	981.9	981.9	982.8	983.9	984.9	985.9	986.8	987.8	988.9	989.9	989.8
162.5°	991.4	991.3	992.2	993.0	993.9	994.8	995.9	997.0	998.2	999.3	999.1
165°	1004.2	1004.0	1004.4	1004.9	1005.5	1006.0	1007.1	1008.3	1009.4	1010.6	1010.6
167.5°	1013.7	1013.5	1014.0	1014.4	1014.9	1015.4	1016.5	1017.7	1018.8	1020.0	1019.8
170°	1019.1	1018.8	1019.1	1019.5	1019.8	1020.1	1021.2	1022.5	1023.6	1024.7	1024.6
172.5°	1022.7	1022.4	1022.7	1023.0	1023.4	1023.7	1024.8	1026.0	1027.2	1028.3	1028.2
175°	1026.6	1026.2	1026.5	1026.9	1027.2	1027.5	1028.7	1029.9	1031.0	1032.2	1031.9
177.5°	1028.3	1027.9	1028.1	1028.2	1028.3	1028.4	1029.4	1030.3	1031.3	1032.2	1032.0
180°	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1



TEST NUMBER: P331447-930

CATALOG NUMBER: S122DIP-S1005D925U930-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7
2.5°	1559.3	1558.3	1558.3	1553.8	1558.3	1558.3	1559.3	1564.2	1565.8	1566.8	1564.8
5°	1446.4	1444.5	1441.4	1444.5	1441.4	1444.5	1446.4	1455.1	1459.5	1464.0	1467.7
7.5°	1334.8	1327.3	1326.2	1318.8	1326.2	1327.3	1334.8	1339.0	1347.7	1357.6	1366.6
10°	1253.4	1248.4	1247.7	1235.8	1247.7	1248.4	1253.4	1264.0	1272.8	1284.6	1297.1
12.5°	1191.4	1179.4	1181.8	1174.8	1181.8	1179.4	1191.4	1191.5	1201.8	1209.1	1228.7
15°	1084.0	1084.0	1081.6	1070.9	1081.6	1084.0	1084.0	1100.9	1104.0	1115.9	1132.8
17.5°	1007.0	1005.7	999.7	1002.7	999.7	1005.7	1007.0	1019.3	1021.4	1037.3	1051.2
20°	960.9	957.2	949.7	949.7	949.7	957.2	960.9	967.8	975.9	985.3	997.2
22.5°	917.5	917.2	909.2	911.7	909.2	917.2	917.5	923.8	931.5	941.8	951.7
25°	866.6	861.6	857.9	859.7	857.9	861.6	866.6	867.2	876.0	882.9	889.1
27.5°	818.4	815.6	815.4	810.2	815.4	815.6	818.4	820.0	825.0	829.0	834.9
30°	790.4	784.2	785.4	782.3	785.4	784.2	790.4	791.0	793.5	796.0	802.9
32.5°	758.4	756.1	754.9	752.3	754.9	756.1	758.4	759.5	764.5	767.0	772.4
35°	714.8	715.4	712.2	713.5	712.2	715.4	714.8	716.0	716.6	719.2	724.1
37.5°	676.7	678.7	677.2	677.5	677.2	678.7	676.7	677.3	677.9	678.3	679.8
40°	651.7	651.7	651.7	653.5	651.7	651.7	651.7	649.8	650.4	649.8	649.8
42.5°	627.7	626.7	625.7	625.6	625.7	626.7	627.7	623.3	625.4	623.3	622.3
45°	586.7	588.6	589.2	586.0	589.2	588.6	586.7	585.5	583.6	582.9	582.3
47.5°	549.6	549.8	549.6	552.4	549.6	549.8	549.6	548.0	545.1	544.0	541.0
50°	523.6	522.4	523.6	522.4	523.6	522.4	523.6	520.5	518.6	515.4	513.0
52.5°	496.1	496.4	495.6	495.4	495.6	496.4	496.1	492.0	491.1	490.0	486.0
55°	453.0	454.2	453.6	453.6	453.6	454.2	453.0	450.5	449.9	446.1	442.4
57.5°	408.4	409.5	410.3	407.6	410.3	409.5	408.4	408.0	407.6	403.7	399.7
60°	377.4	380.5	379.8	378.6	379.8	380.5	377.4	378.0	376.1	373.7	371.1
62.5°	348.9	350.0	349.9	349.7	349.9	350.0	348.9	346.0	345.1	342.7	340.1
65°	304.9	306.1	304.3	306.1	304.3	306.1	304.9	303.0	298.6	297.4	294.9
67.5°	257.6	258.0	259.3	260.2	259.3	258.0	257.6	258.3	255.4	253.1	252.6
70°	228.0	227.5	229.3	231.2	229.3	227.5	228.0	226.8	224.9	223.1	220.5
72.5°	197.1	198.4	197.8	199.2	197.8	198.4	197.1	197.3	195.4	193.1	190.5
75°	151.8	153.7	153.1	155.0	153.1	153.7	151.8	153.1	151.8	149.4	146.8
77.5°	109.7	110.0	109.7	110.7	109.7	110.0	109.7	110.7	109.3	110.2	107.4
80°	83.7	82.5	81.2	83.7	81.2	82.5	83.7	83.7	81.9	83.7	81.9
82.5°	58.2	58.9	57.7	57.7	57.7	58.9	58.2	59.8	58.9	59.8	57.9
85°	26.9	26.3	25.0	25.0	25.0	26.3	26.9	26.9	28.8	27.5	27.5
87.5°	8.8	8.4	8.5	8.0	8.5	8.4	8.8	8.7	8.6	9.5	9.3
90°	19.1	19.4	19.8	20.1	19.8	19.4	19.1	18.8	18.2	17.4	16.6
92.5°	19.5	19.7	19.9	20.1	19.9	19.7	19.5	19.3	19.0	18.6	18.1
95°	32.5	32.4	32.2	32.0	32.2	32.4	32.5	32.7	32.4	31.6	30.7
97.5°	42.2	42.3	42.6	42.7	42.6	42.3	42.2	41.9	41.5	40.8	40.2
100°	48.9	49.2	49.6	49.9	49.6	49.2	48.9	48.6	47.8	46.4	45.1
102.5°	52.1	52.5	53.0	53.5	53.0	52.5	52.1	51.6	50.5	48.8	47.0
105°	54.6	55.3	55.9	56.6	55.9	55.3	54.6	54.0	52.7	50.9	49.1
107.5°	56.3	56.9	57.6	58.2	57.6	56.9	56.3	55.6	56.2	58.0	59.8
110°	56.8	57.5	58.1	58.9	58.1	57.5	56.8	56.2	64.1	80.6	97.2



TEST NUMBER: P331447-930

CATALOG NUMBER: S122DIP-S1005D925U930-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	57.8	58.4	58.9	59.4	58.9	58.4	57.8	57.3	87.2	147.6	208.0
115°	96.8	84.9	73.0	61.1	73.0	84.9	96.8	108.7	153.0	229.6	306.2
117.5°	366.7	327.6	288.5	249.3	288.5	327.6	366.7	405.9	434.7	453.3	471.8
120°	521.2	498.9	476.5	454.2	476.5	498.9	521.2	543.6	553.8	551.8	549.8
122.5°	579.8	575.4	571.1	566.8	571.1	575.4	579.8	584.2	585.7	584.5	583.3
125°	635.1	635.6	636.2	636.7	636.2	635.6	635.1	634.6	633.8	632.7	631.5
127.5°	680.4	680.5	680.6	680.7	680.6	680.5	680.4	680.3	679.5	677.8	676.0
130°	708.7	708.4	708.3	708.1	708.3	708.4	708.7	708.8	707.9	706.1	704.3
132.5°	735.4	735.2	735.1	734.9	735.1	735.2	735.4	735.6	734.9	733.4	731.8
135°	774.6	774.3	774.0	773.6	774.0	774.3	774.6	774.9	774.3	772.7	771.0
137.5°	810.7	810.1	809.5	808.9	809.5	810.1	810.7	811.2	810.7	809.0	807.4
140°	833.5	832.7	831.8	831.0	831.8	832.7	833.5	834.3	834.0	832.5	831.0
142.5°	854.9	854.1	853.3	852.4	853.3	854.1	854.9	855.7	855.5	854.1	852.7
145°	884.8	884.0	883.2	882.4	883.2	884.0	884.8	885.7	885.5	884.4	883.2
147.5°	910.8	910.1	909.4	908.7	909.4	910.1	910.8	911.5	911.4	910.5	909.7
150°	927.3	926.4	925.6	924.8	925.6	926.4	927.3	928.1	928.1	927.1	926.0
152.5°	941.8	940.7	939.6	938.5	939.6	940.7	941.8	942.9	942.9	941.9	940.9
155°	961.6	960.2	958.9	957.6	958.9	960.2	961.6	962.9	963.0	962.1	961.1
157.5°	978.8	977.5	976.2	975.0	976.2	977.5	978.8	980.2	980.2	979.1	978.0
160°	988.6	987.4	986.3	985.1	986.3	987.4	988.6	989.8	989.9	988.9	987.8
162.5°	997.8	996.3	994.9	993.4	994.9	996.3	997.8	999.1	999.3	998.2	997.0
165°	1009.4	1008.3	1007.1	1006.0	1007.1	1008.3	1009.4	1010.6	1010.6	1009.4	1008.3
167.5°	1018.3	1016.8	1015.4	1013.8	1015.4	1016.8	1018.3	1019.8	1020.0	1018.8	1017.7
170°	1023.1	1021.6	1020.1	1018.6	1020.1	1021.6	1023.1	1024.6	1024.7	1023.6	1022.5
172.5°	1026.6	1025.2	1023.7	1022.2	1023.7	1025.2	1026.6	1028.2	1028.3	1027.2	1026.0
175°	1030.3	1028.7	1027.0	1025.3	1027.0	1028.7	1030.3	1031.9	1032.2	1031.0	1029.9
177.5°	1030.9	1029.6	1028.4	1027.3	1028.4	1029.6	1030.9	1032.0	1032.2	1031.3	1030.3
180°	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1



TEST NUMBER: P331447-930

CATALOG NUMBER: S122DIP-S1005D925U930-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7
2.5°	1562.3	1567.7	1576.3	1585.3	1590.7	1601.2	1604.3	1609.2	1613.7	1624.2	1635.2
5°	1472.0	1480.8	1501.4	1512.6	1528.3	1546.4	1558.3	1570.8	1584.5	1608.3	1630.1
7.5°	1375.3	1389.9	1415.5	1436.6	1458.8	1484.8	1503.5	1528.3	1548.7	1582.3	1614.2
10°	1310.8	1331.5	1354.6	1379.6	1410.8	1438.3	1464.5	1495.7	1520.8	1560.7	1598.2
12.5°	1252.9	1256.0	1289.1	1316.6	1359.3	1393.3	1423.6	1463.8	1488.2	1535.8	1575.2
15°	1151.5	1170.3	1200.3	1222.1	1272.8	1315.8	1358.3	1400.2	1428.3	1487.0	1538.9
17.5°	1066.2	1083.5	1114.2	1150.0	1186.3	1229.2	1284.3	1328.4	1366.6	1433.7	1495.0
20°	1012.2	1033.4	1064.7	1101.6	1133.4	1180.2	1227.8	1278.4	1319.6	1395.2	1467.0
22.5°	966.2	982.9	1008.2	1044.6	1079.4	1122.3	1174.3	1229.4	1272.6	1354.2	1427.0
25°	901.6	915.3	931.6	961.6	1000.9	1047.8	1088.4	1149.0	1212.1	1288.3	1376.5
27.5°	843.3	853.1	867.5	893.8	924.3	968.2	1013.3	1070.8	1134.2	1217.0	1309.9
30°	807.9	814.2	828.5	850.4	880.4	914.7	960.3	1015.3	1080.3	1164.0	1256.5
32.5°	776.9	782.6	792.0	812.9	838.9	868.2	909.3	964.3	1026.3	1108.6	1211.0
35°	730.4	734.7	742.9	759.8	774.1	802.9	837.2	887.2	945.3	1024.1	1130.2
37.5°	684.0	690.1	695.0	702.1	720.6	739.6	769.4	811.6	868.6	948.1	1049.3
40°	653.5	658.5	666.0	669.2	684.2	701.0	725.4	764.1	821.7	894.1	992.8
42.5°	622.6	627.5	632.0	635.7	648.7	663.6	685.4	718.7	769.6	840.1	937.8
45°	580.4	581.1	585.5	592.3	598.6	609.2	624.8	653.5	692.9	759.1	847.8
47.5°	537.7	538.4	539.2	542.2	549.1	558.7	569.1	592.5	627.7	680.5	766.9
50°	509.2	507.9	509.2	511.7	516.1	524.2	536.1	552.9	581.7	631.0	710.4
52.5°	481.8	481.5	480.7	481.8	485.1	490.7	499.1	513.5	539.2	584.6	654.4
55°	439.9	436.8	437.3	434.9	440.5	441.7	448.0	459.8	482.3	513.6	579.2
57.5°	395.3	392.6	389.9	389.1	388.7	392.0	397.0	406.3	423.6	451.0	504.2
60°	366.7	363.6	359.9	358.7	358.7	360.5	363.1	369.9	386.1	410.5	454.2
62.5°	337.8	334.1	331.9	328.6	327.7	329.5	332.0	336.9	348.6	371.5	409.3
65°	293.0	288.7	285.5	284.9	283.6	281.8	283.1	288.0	297.4	315.5	345.5
67.5°	248.2	244.0	243.3	239.7	237.9	238.1	237.9	242.1	247.8	263.4	285.8
70°	218.7	215.6	214.3	211.2	209.9	208.7	207.4	211.2	216.8	229.9	249.3
72.5°	188.7	186.1	183.3	180.7	180.9	179.7	179.4	181.7	186.3	198.4	213.3
75°	145.6	146.2	143.1	140.0	139.3	138.1	138.1	140.0	141.9	151.2	163.1
77.5°	105.6	105.1	102.5	101.5	100.9	99.5	100.9	102.1	103.1	109.3	118.1
80°	80.6	80.6	77.5	77.5	76.9	75.0	76.9	75.6	78.1	84.4	90.6
82.5°	57.6	56.6	56.5	55.5	55.4	54.0	54.9	56.1	57.1	61.4	65.1
85°	28.1	28.1	27.5	26.9	27.5	26.9	27.5	28.1	28.8	30.7	33.8
87.5°	9.1	9.5	9.7	9.9	9.7	9.9	10.1	10.3	10.8	11.0	11.2
90°	15.7	14.9	13.5	12.2	10.9	9.6	8.0	6.2	4.4	2.5	0.7
92.5°	17.7	17.3	16.6	16.0	15.3	14.6	14.3	14.5	14.7	14.8	15.0
95°	29.8	29.0	27.9	26.7	25.6	24.4	26.6	32.0	37.5	43.0	48.4
97.5°	39.5	38.9	36.2	33.5	30.8	28.1	34.5	49.9	65.3	80.6	96.0
100°	43.8	42.5	39.6	36.9	34.0	31.2	41.1	63.8	86.4	109.1	131.8
102.5°	45.3	43.6	67.2	90.7	114.2	137.8	151.9	156.7	161.5	166.3	171.1
105°	47.2	45.4	90.6	135.7	180.9	226.1	246.2	241.2	236.3	231.3	226.3
107.5°	61.7	63.6	117.7	171.9	226.1	280.3	305.4	301.3	297.3	293.3	289.3
110°	113.7	130.3	178.1	225.9	273.8	321.6	343.7	340.3	336.8	333.4	329.9



TEST NUMBER: P331447-930

CATALOG NUMBER: S122DIP-S1005D925U930-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	268.3	328.6	340.5	352.3	364.1	375.9	380.3	377.2	374.1	371.0	367.9
115°	382.8	459.4	455.3	451.2	447.0	442.9	439.4	436.6	433.7	431.0	428.1
117.5°	490.3	508.8	506.1	503.2	500.3	497.5	494.5	491.4	488.2	485.0	481.9
120°	547.8	545.8	542.8	539.8	536.9	533.9	531.2	528.6	526.2	523.7	521.2
122.5°	582.1	581.0	577.7	574.5	571.2	567.9	565.0	562.4	559.8	557.2	554.6
125°	630.4	629.2	626.1	622.9	619.8	616.6	614.0	611.8	609.7	607.5	605.4
127.5°	674.3	672.7	670.3	668.0	665.6	663.2	660.9	658.5	656.2	653.8	651.3
130°	702.5	700.7	698.9	697.0	695.2	693.4	691.1	688.5	685.8	683.2	680.6
132.5°	730.3	728.6	726.8	725.0	723.3	721.4	719.3	717.1	714.9	712.6	710.4
135°	769.3	767.7	766.2	764.8	763.2	761.7	759.7	757.0	754.4	751.7	749.1
137.5°	805.8	804.2	802.5	800.8	799.1	797.4	795.7	793.8	792.0	790.1	788.2
140°	829.5	828.0	826.2	824.3	822.6	820.8	819.1	817.8	816.5	815.2	813.8
142.5°	851.4	850.0	848.0	845.9	843.8	841.7	840.1	838.9	837.7	836.5	835.3
145°	882.0	880.8	878.1	875.2	872.5	869.6	868.3	868.5	868.6	868.8	868.9
147.5°	908.8	908.0	905.2	902.5	899.6	896.8	895.8	896.4	897.1	897.6	898.3
150°	925.0	924.1	921.5	918.8	916.2	913.5	912.7	913.9	915.0	916.2	917.4
152.5°	940.0	939.0	936.5	933.9	931.4	928.9	928.3	929.6	930.8	932.1	933.4
155°	960.0	959.0	957.1	955.1	953.1	951.1	950.9	952.4	953.8	955.4	956.8
157.5°	976.9	975.8	974.4	973.0	971.6	970.2	970.1	971.3	972.7	973.9	975.1
160°	986.8	985.9	984.9	983.9	982.8	981.9	981.9	982.8	983.9	984.9	985.9
162.5°	995.9	994.8	993.9	993.0	992.2	991.3	991.4	992.4	993.4	994.4	995.4
165°	1007.1	1006.0	1005.5	1004.9	1004.4	1004.0	1004.2	1005.2	1006.2	1007.2	1008.2
167.5°	1016.5	1015.4	1014.9	1014.4	1014.0	1013.5	1013.7	1014.7	1015.8	1016.8	1017.7
170°	1021.2	1020.1	1019.8	1019.5	1019.1	1018.8	1019.1	1020.1	1021.1	1022.1	1023.1
172.5°	1024.8	1023.7	1023.4	1023.0	1022.7	1022.4	1022.7	1023.7	1024.7	1025.6	1026.6
175°	1028.7	1027.5	1027.2	1026.9	1026.5	1026.2	1026.6	1027.8	1029.0	1030.1	1031.3
177.5°	1029.4	1028.4	1028.3	1028.2	1028.1	1027.9	1028.3	1029.2	1030.2	1031.1	1032.0
180°	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1



TEST NUMBER: P331447-930

CATALOG NUMBER: S122DIP-S1005D925U930-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7
2.5°	1634.3	1636.7	1644.7	1652.8	1661.7	1664.3	1668.3	1664.8	1663.7	1673.2	1680.3
5°	1638.8	1650.1	1672.0	1692.0	1708.9	1720.7	1733.2	1738.2	1747.6	1760.7	1776.9
7.5°	1633.6	1655.5	1689.9	1719.0	1750.7	1773.6	1791.5	1806.7	1825.2	1850.1	1877.1
10°	1627.6	1657.0	1698.8	1734.5	1773.2	1802.5	1826.9	1850.6	1878.2	1912.5	1948.2
12.5°	1616.7	1651.5	1703.8	1746.0	1795.7	1824.6	1857.4	1908.7	1938.1	1986.0	2036.1
15°	1594.5	1633.2	1706.3	1758.2	1814.4	1869.4	1930.1	1978.7	2027.5	2055.6	2126.2
17.5°	1561.6	1618.5	1699.5	1760.0	1831.4	1918.0	1986.2	2041.3	2097.6	2143.2	2178.6
20°	1535.1	1597.0	1689.5	1761.9	1846.9	1940.0	2018.1	2074.4	2123.1	2161.2	2183.0
22.5°	1501.6	1579.5	1669.5	1754.4	1863.0	1955.0	2037.1	2081.4	2122.1	2140.7	2149.0
25°	1448.9	1542.6	1644.5	1748.2	1870.7	1968.1	2043.1	2070.0	2081.9	2063.8	2033.8
27.5°	1392.0	1496.6	1615.6	1736.4	1865.9	1959.7	2013.4	2009.1	1989.0	1930.4	1883.5
30°	1349.6	1464.5	1592.6	1724.4	1854.4	1945.6	1976.9	1945.6	1900.1	1834.4	1767.6
32.5°	1305.1	1424.1	1568.1	1707.5	1833.4	1913.7	1920.4	1866.7	1796.1	1721.5	1638.1
35°	1237.7	1366.4	1522.0	1669.5	1788.8	1839.4	1809.5	1714.5	1630.8	1528.9	1415.2
37.5°	1161.6	1303.7	1459.8	1613.9	1722.0	1735.2	1660.8	1560.7	1442.7	1323.0	1189.1
40°	1104.6	1255.2	1415.8	1571.4	1667.0	1653.3	1558.3	1448.3	1307.7	1161.5	1037.1
42.5°	1053.7	1204.3	1367.8	1520.4	1597.0	1559.3	1448.3	1313.4	1162.3	1024.6	910.7
45°	965.3	1120.3	1287.8	1435.2	1479.0	1410.8	1264.0	1114.0	965.3	850.4	760.4
47.5°	879.6	1032.8	1198.7	1328.2	1343.7	1252.1	1091.7	937.3	809.5	715.9	652.4
50°	816.6	970.3	1134.7	1250.3	1245.2	1134.7	969.7	822.9	716.0	640.4	597.9
52.5°	760.1	905.3	1063.2	1168.2	1141.7	1021.2	863.7	733.4	645.6	586.4	548.0
55°	672.3	806.7	956.6	1040.9	992.2	858.5	725.4	620.4	555.5	511.1	481.1
57.5°	585.1	711.0	839.4	891.4	837.5	714.0	603.1	526.9	478.1	445.2	425.7
60°	531.1	641.1	755.4	800.4	736.1	626.1	538.6	470.5	431.1	404.2	386.8
62.5°	477.1	575.6	683.4	707.9	649.1	556.1	478.6	422.0	389.6	365.7	349.3
65°	403.7	484.2	566.1	582.3	528.0	456.1	394.8	358.0	329.3	311.8	298.6
67.5°	331.0	395.7	453.7	466.8	419.2	369.4	325.1	293.0	273.5	259.0	247.9
70°	288.0	339.2	386.8	397.4	359.3	314.9	281.2	255.5	238.1	225.6	214.9
72.5°	242.6	285.3	324.7	331.9	300.8	266.9	239.2	219.1	203.6	195.6	185.5
75°	185.6	210.6	241.2	243.0	222.4	201.8	180.6	167.5	159.3	149.4	144.3
77.5°	130.9	150.6	168.0	171.5	159.2	145.2	133.3	122.9	116.1	111.5	106.8
80°	100.0	115.6	123.1	127.4	118.7	108.7	101.8	95.0	90.6	87.5	84.4
82.5°	71.5	81.1	88.1	91.5	86.7	80.7	73.9	70.0	66.6	64.0	62.9
85°	36.2	40.6	45.0	46.2	45.0	42.5	38.7	38.7	36.9	36.2	36.2
87.5°	13.0	15.4	15.7	17.6	16.9	17.2	17.4	17.2	17.0	16.6	16.3
90°	2.5	4.4	6.2	8.0	9.6	10.9	12.2	13.5	14.9	15.7	16.6
92.5°	14.8	14.7	14.5	14.3	14.6	15.3	16.0	16.6	17.3	17.7	18.1
95°	43.0	37.5	32.0	26.6	24.4	25.6	26.7	27.9	29.0	29.8	30.7
97.5°	80.6	65.3	49.9	34.5	28.1	30.8	33.5	36.2	38.9	39.5	40.2
100°	109.1	86.4	63.8	41.1	31.2	34.0	36.9	39.6	42.5	43.8	45.1
102.5°	166.3	161.5	156.7	151.9	137.8	114.2	90.7	67.2	43.6	45.3	47.0
105°	231.3	236.3	241.2	246.2	226.1	180.9	135.7	90.6	45.4	47.2	49.1
107.5°	293.3	297.3	301.3	305.4	280.3	226.1	171.9	117.7	63.6	61.7	59.8
110°	333.4	336.8	340.3	343.7	321.6	273.8	225.9	178.1	130.3	113.7	97.2





TEST NUMBER: P331447-930

CATALOG NUMBER: S122DIP-S1005D925U930-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	371.0	374.1	377.2	380.3	375.9	364.1	352.3	340.5	328.6	268.3	208.0
115°	431.0	433.7	436.6	439.4	442.9	447.0	451.2	455.3	459.4	382.8	306.2
117.5°	485.0	488.2	491.4	494.5	497.5	500.3	503.2	506.1	508.8	490.3	471.8
120°	523.7	526.2	528.6	531.2	533.9	536.9	539.8	542.8	545.8	547.8	549.8
122.5°	557.2	559.8	562.4	565.0	567.9	571.2	574.5	577.7	581.0	582.1	583.3
125°	607.5	609.7	611.8	614.0	616.6	619.8	622.9	626.1	629.2	630.4	631.5
127.5°	653.8	656.2	658.5	660.9	663.2	665.6	668.0	670.3	672.7	674.3	676.0
130°	683.2	685.8	688.5	691.1	693.4	695.2	697.0	698.9	700.7	702.5	704.3
132.5°	712.6	714.9	717.1	719.3	721.4	723.3	725.0	726.8	728.6	730.3	731.8
135°	751.7	754.4	757.0	759.7	761.7	763.2	764.8	766.2	767.7	769.3	771.0
137.5°	790.1	792.0	793.8	795.7	797.4	799.1	800.8	802.5	804.2	805.8	807.4
140°	815.2	816.5	817.8	819.1	820.8	822.6	824.3	826.2	828.0	829.5	831.0
142.5°	836.5	837.7	838.9	840.1	841.7	843.8	845.9	848.0	850.0	851.4	852.7
145°	868.8	868.6	868.5	868.3	869.6	872.5	875.2	878.1	880.8	882.0	883.2
147.5°	897.6	897.1	896.4	895.8	896.8	899.6	902.5	905.2	908.0	908.8	909.7
150°	916.2	915.0	913.9	912.7	913.5	916.2	918.8	921.5	924.1	925.0	926.0
152.5°	932.1	930.8	929.6	928.3	928.9	931.4	933.9	936.5	939.0	940.0	940.9
155°	955.4	953.8	952.4	950.9	951.1	953.1	955.1	957.1	959.0	960.0	961.1
157.5°	973.9	972.7	971.3	970.1	970.2	971.6	973.0	974.4	975.8	976.9	978.0
160°	984.9	983.9	982.8	981.9	981.9	982.8	983.9	984.9	985.9	986.8	987.8
162.5°	994.4	993.4	992.4	991.4	991.3	992.2	993.0	993.9	994.8	995.9	997.0
165°	1007.2	1006.2	1005.2	1004.2	1004.0	1004.4	1004.9	1005.5	1006.0	1007.1	1008.3
167.5°	1016.8	1015.8	1014.7	1013.7	1013.5	1014.0	1014.4	1014.9	1015.4	1016.5	1017.7
170°	1022.1	1021.1	1020.1	1019.1	1018.8	1019.1	1019.5	1019.8	1020.1	1021.2	1022.5
172.5°	1025.6	1024.7	1023.7	1022.7	1022.4	1022.7	1023.0	1023.4	1023.7	1024.8	1026.0
175°	1030.1	1029.0	1027.8	1026.6	1026.2	1026.5	1026.9	1027.2	1027.5	1028.7	1029.9
177.5°	1031.1	1030.2	1029.2	1028.3	1027.9	1028.1	1028.2	1028.3	1028.4	1029.4	1030.3
180°	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1



TEST NUMBER: P331447-930

CATALOG NUMBER: S122DIP-S1005D925U930-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
0°	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7
2.5°	1686.2	1693.2	1693.2	1694.2	1702.2	1701.2	1700.7
5°	1794.5	1805.1	1806.3	1817.5	1825.0	1822.5	1815.7
7.5°	1896.5	1916.3	1931.3	1939.7	1949.5	1955.7	1952.9
10°	1977.5	2006.3	2023.7	2035.6	2050.0	2060.6	2056.8
12.5°	2051.0	2085.2	2109.3	2129.6	2131.4	2145.1	2135.8
15°	2165.6	2201.8	2205.5	2220.5	2232.5	2231.1	2231.8
17.5°	2203.4	2215.1	2217.5	2217.8	2217.9	2213.5	2204.1
20°	2190.0	2185.6	2175.0	2166.8	2152.5	2150.6	2138.1
22.5°	2126.0	2112.1	2085.5	2067.8	2045.5	2039.6	2036.1
25°	2000.0	1969.4	1926.9	1886.3	1875.0	1853.2	1859.5
27.5°	1827.2	1779.5	1733.5	1700.5	1670.6	1637.9	1647.2
30°	1705.7	1652.0	1587.0	1537.0	1505.1	1473.9	1468.3
32.5°	1560.7	1482.1	1409.6	1365.5	1316.7	1297.0	1275.4
35°	1310.8	1234.0	1162.1	1100.2	1064.7	1037.1	1012.2
37.5°	1086.1	997.6	939.6	889.5	863.7	848.0	852.0
40°	946.6	869.1	826.6	788.5	764.8	753.5	756.0
42.5°	833.6	775.6	740.6	714.5	697.8	691.5	690.1
45°	705.4	672.9	644.2	629.2	621.1	614.2	609.8
47.5°	617.9	591.4	575.2	566.3	559.2	552.2	552.0
50°	565.4	548.0	536.7	527.3	521.7	516.7	521.1
52.5°	525.5	509.5	498.2	489.8	487.7	483.2	483.1
55°	466.1	453.6	445.5	438.0	434.2	431.7	428.6
57.5°	412.1	400.2	392.7	388.0	380.9	378.4	377.4
60°	373.7	364.3	356.8	350.5	347.4	342.4	342.4
62.5°	338.1	328.8	321.8	317.0	311.9	309.9	310.4
65°	286.8	279.3	272.4	267.4	266.2	262.4	263.7
67.5°	239.5	234.6	227.3	224.5	222.2	220.2	218.7
70°	208.1	203.1	199.3	195.6	193.7	193.7	193.7
72.5°	181.6	175.5	173.3	168.6	169.7	167.7	165.7
75°	140.6	136.8	134.9	133.1	130.0	130.0	130.0
77.5°	103.5	102.3	100.1	98.1	97.3	96.7	96.9
80°	80.0	79.3	78.1	78.1	76.9	76.2	75.0
82.5°	61.5	59.8	59.1	58.6	58.4	58.2	58.0
85°	35.0	33.8	33.8	34.3	33.1	33.1	33.8
87.5°	17.0	17.1	16.7	16.8	17.4	17.0	17.0
90°	17.4	18.2	18.8	19.1	19.4	19.8	20.1
92.5°	18.6	19.0	19.3	19.5	19.7	19.9	20.1
95°	31.6	32.4	32.7	32.5	32.4	32.2	32.0
97.5°	40.8	41.5	41.9	42.2	42.3	42.6	42.7
100°	46.4	47.8	48.6	48.9	49.2	49.6	49.9
102.5°	48.8	50.5	51.6	52.1	52.5	53.0	53.5
105°	50.9	52.7	54.0	54.6	55.3	55.9	56.6
107.5°	58.0	56.2	55.6	56.3	56.9	57.6	58.2
110°	80.6	64.1	56.2	56.8	57.5	58.1	58.9



TEST NUMBER: P331447-930

CATALOG NUMBER: S122DIP-S1005D925U930-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
112.5°	147.6	87.2	57.3	57.8	58.4	58.9	59.4
115°	229.6	153.0	108.7	96.8	84.9	73.0	61.1
117.5°	453.3	434.7	405.9	366.7	327.6	288.5	249.3
120°	551.8	553.8	543.6	521.2	498.9	476.5	454.2
122.5°	584.5	585.7	584.2	579.8	575.4	571.1	566.8
125°	632.7	633.8	634.6	635.1	635.6	636.2	636.7
127.5°	677.8	679.5	680.3	680.4	680.5	680.6	680.7
130°	706.1	707.9	708.8	708.7	708.4	708.3	708.1
132.5°	733.4	734.9	735.6	735.4	735.2	735.1	734.9
135°	772.7	774.3	774.9	774.6	774.3	774.0	773.6
137.5°	809.0	810.7	811.2	810.7	810.1	809.5	808.9
140°	832.5	834.0	834.3	833.5	832.7	831.8	831.0
142.5°	854.1	855.5	855.7	854.9	854.1	853.3	852.4
145°	884.4	885.5	885.7	884.8	884.0	883.2	882.4
147.5°	910.5	911.4	911.5	910.8	910.1	909.4	908.7
150°	927.1	928.1	928.1	927.3	926.4	925.6	924.8
152.5°	941.9	942.9	942.9	941.8	940.7	939.6	938.5
155°	962.1	963.0	962.9	961.6	960.2	958.9	957.6
157.5°	979.1	980.2	980.2	978.8	977.5	976.2	975.0
160°	988.9	989.9	989.8	988.6	987.4	986.3	985.1
162.5°	998.2	999.3	999.1	997.8	996.3	994.9	993.4
165°	1009.4	1010.6	1010.6	1009.4	1008.3	1007.1	1006.0
167.5°	1018.8	1020.0	1019.8	1018.3	1016.8	1015.4	1013.8
170°	1023.6	1024.7	1024.6	1023.1	1021.6	1020.1	1018.6
172.5°	1027.2	1028.3	1028.2	1026.6	1025.2	1023.7	1022.2
175°	1031.0	1032.2	1031.9	1030.3	1028.7	1027.0	1025.3
177.5°	1031.3	1032.2	1032.0	1030.9	1029.6	1028.4	1027.3
180°	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1

(END OF REPORT)