

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331451-930

Luminaire Tested: **S122DIP-S1005D925U930-4F0-1E-UDD-D1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331451-930
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIP-S1005D925U930-4F0-1E-UDD-D1
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1005 LUMENS PER FOOT, DROP SATIN WHITE DIFFUSER
UPLIGHT 925 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5988.9 lumens
Efficiency: N/A
Efficacy: 89.7 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.32 / 1.42
Luminous Opening: Rectangular w/ Sides (W: 0.17' x L: 4' x H: 0.08')
CIE Type: General Diffuse


Input Watts (W): 66.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331451-930

CATALOG NUMBER: S122DIP-S1005D925U930-4F0-1E-UDD-D1

Luminous Intensity Polar Plot

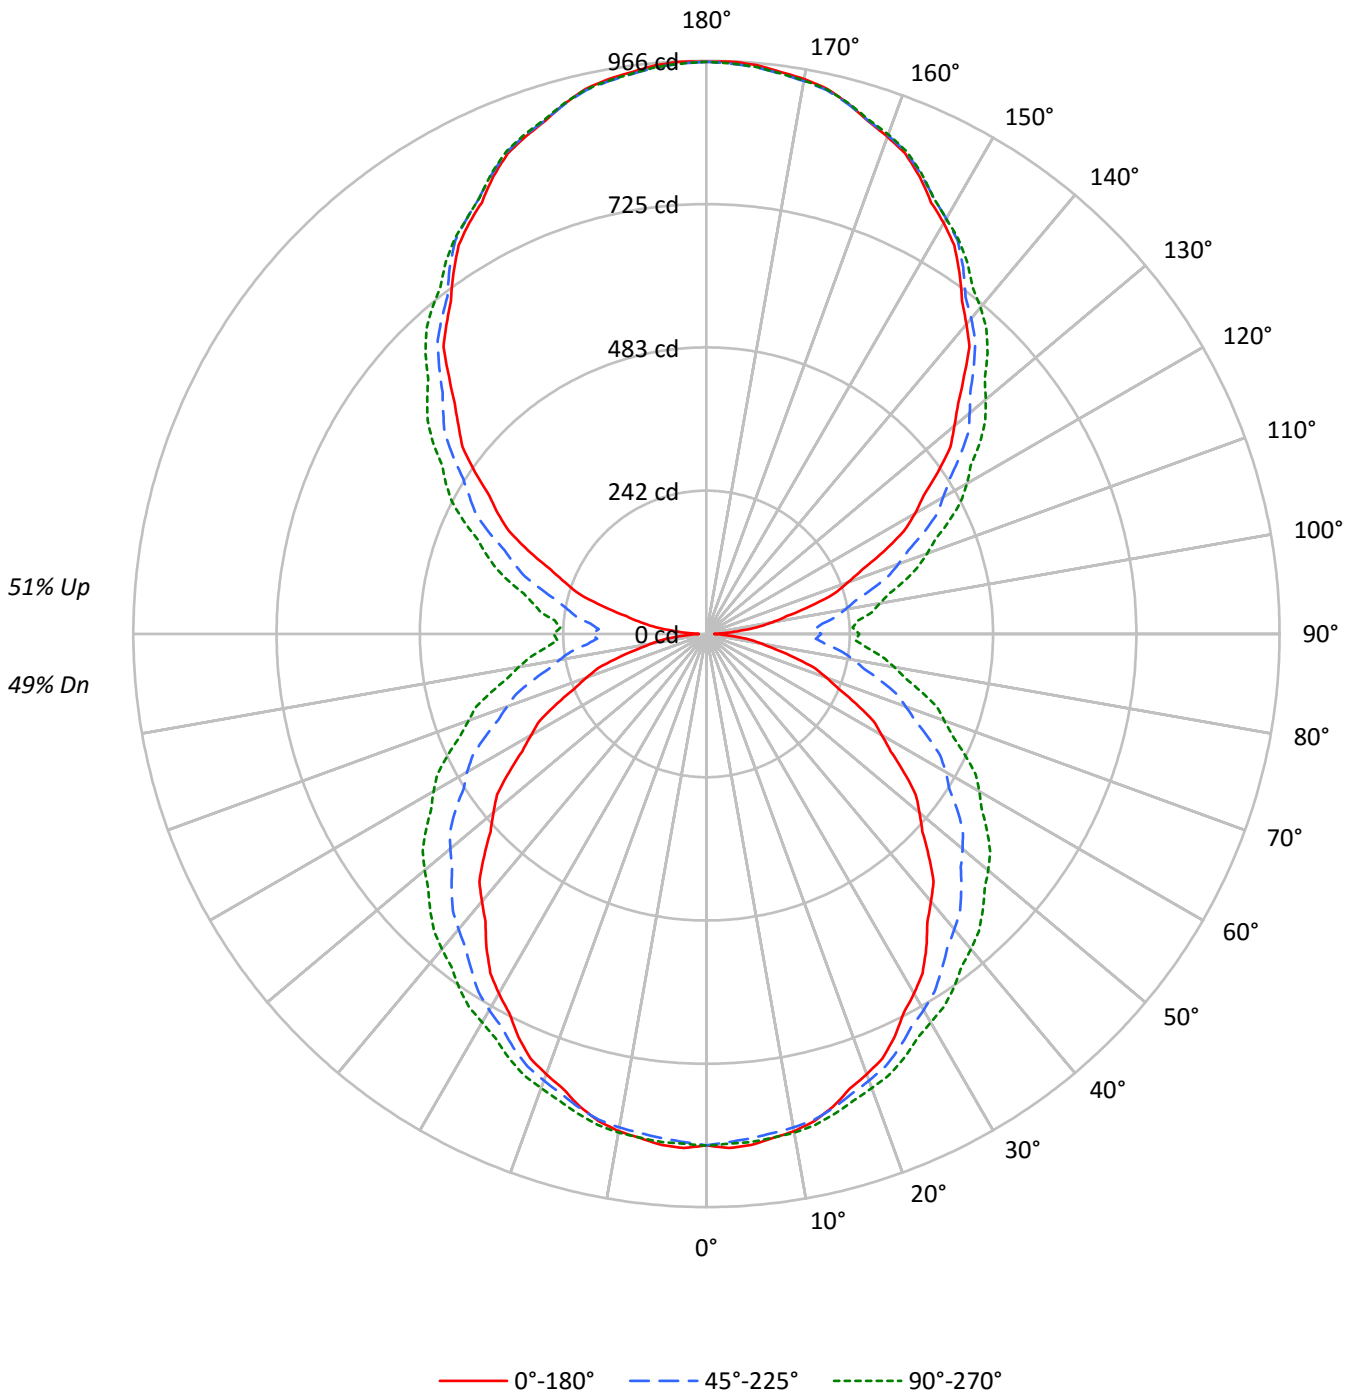



TEST NUMBER: P331451-930

CATALOG NUMBER: S122DIP-S1005D925U930-4F0-1E-UDD-D1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	107	107	107	107	98	98	98	98	83	83	83	68	68	68	55	55	55	49
1	96	91	87	83	88	84	80	77	70	67	65	58	56	54	46	45	44	38
2	87	79	72	66	79	72	67	62	61	56	52	50	47	44	40	38	36	31
3	79	69	61	55	72	63	56	51	53	48	43	44	40	36	35	32	30	25
4	72	60	52	46	66	56	48	43	47	41	37	39	34	31	31	28	25	21
5	66	54	45	39	60	50	42	36	42	36	31	34	30	26	28	24	22	18
6	61	48	40	33	55	44	37	31	37	32	27	31	26	23	25	22	19	16
7	56	43	35	29	51	40	33	27	34	28	24	28	24	20	23	19	17	14
8	52	39	31	26	47	36	29	24	31	25	21	26	21	18	21	17	15	12
9	48	36	28	23	44	33	26	21	28	23	19	24	19	16	19	16	13	11
10	45	33	25	20	41	30	24	19	26	20	17	22	17	14	18	14	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	13919	13919	13919
5°	13988	13400	13350
10°	13899	13004	12858
15°	13709	12584	12339
20°	13467	12136	11842
25°	13227	11701	11390
30°	12890	11257	10936
35°	12550	10828	10617
40°	12191	10461	10297
45°	11850	10133	10022
50°	11485	9837	9754
55°	11101	9519	9479
60°	10631	9187	9189
65°	10145	8801	8846
70°	9596	8384	8474
75°	8897	7976	8132
80°	7792	7559	7784
85°	6733	7197	7515



TEST NUMBER: P331451-930

CATALOG NUMBER: S122DIP-S1005D925U930-4F0-1E-UDD-D1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	81.7	1.4
10°-20°	234.3	3.9
20°-30°	355.0	5.9
30°-40°	432.4	7.2
40°-50°	465.2	7.8
50°-60°	451.7	7.5
60°-70°	394.4	6.6
70°-80°	303.7	5.1
80°-90°	207.6	3.5
90°-100°	201.5	3.4
100°-110°	292.3	4.9
110°-120°	392.1	6.5
120°-130°	464.3	7.8
130°-140°	494.6	8.3
140°-150°	472.2	7.9
150°-160°	393.7	6.6
160°-170°	261.1	4.4
170°-180°	91.3	1.5
0°-30°	670.9	11.2
0°-40°	1103.3	18.4
0°-60°	2020.2	33.7
0°-90°	2925.9	48.9
90°-120°	885.8	14.8
90°-150°	2316.9	38.7
90°-180°	3063.0	51.1
0°-180°	5988.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	862	862	862	862	862	
5°	865	861	853	860	860	82
15°	825	827	827	838	837	232
25°	750	759	770	784	788	345
35°	646	667	691	717	727	404
45°	530	564	607	644	658	409
55°	406	452	516	559	577	363
65°	277	339	412	462	480	275
75°	154	224	304	355	374	163
85°	45	123	202	253	272	48
90°	13	96	193	240	258	11
95°	52	120	196	241	257	56
105°	181	221	286	330	346	192
115°	330	351	404	439	452	326
125°	476	485	521	551	563	426
135°	614	623	637	661	670	474
145°	744	749	754	762	766	465
155°	850	853	855	859	857	391
165°	925	924	924	929	926	261
175°	962	960	958	964	959	91
180°	964	964	964	964	964	



TEST NUMBER: P331451-930

CATALOG NUMBER: S122DIP-S1005D925U930-4F0-1E-UDD-D1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	862.1	862.1	862.1	862.1	862.1	862.1	862.1	862.1	862.1	862.1	862.1
2.5°	867.2	866.5	865.8	865.1	864.5	863.3	861.8	860.2	858.7	857.1	858.3
5°	864.6	863.8	863.0	862.1	861.3	860.1	858.4	856.7	855.1	853.4	855.1
7.5°	856.9	856.3	855.7	855.2	854.7	853.8	852.5	851.2	849.9	848.6	850.6
10°	850.9	850.4	849.8	849.2	848.6	848.0	847.2	846.3	845.5	844.7	846.9
12.5°	840.9	841.0	841.1	841.2	841.3	841.1	840.5	839.8	839.3	838.6	840.9
15°	824.7	825.2	825.7	826.3	826.9	827.1	827.1	827.1	827.1	827.1	829.6
17.5°	803.6	804.9	806.0	807.1	808.3	809.3	810.2	811.1	812.0	812.9	815.5
20°	789.7	791.1	792.5	793.9	795.2	796.5	797.6	798.7	799.8	801.0	804.0
22.5°	774.7	776.2	777.9	779.5	781.1	782.7	784.2	785.8	787.3	788.9	792.0
25°	749.7	751.6	753.6	755.5	757.5	759.7	762.1	764.7	767.2	769.6	773.0
27.5°	719.7	722.8	726.0	729.2	732.4	735.4	738.3	741.3	744.2	747.2	751.4
30°	699.7	703.3	706.9	710.5	714.1	717.8	721.4	725.0	728.6	732.2	736.6
32.5°	677.7	681.8	685.8	689.9	693.9	698.1	702.4	706.6	710.9	715.2	720.3
35°	646.0	650.7	655.4	660.1	664.9	669.8	675.1	680.4	685.7	691.0	697.1
37.5°	611.5	616.9	622.4	627.8	633.2	639.4	646.2	653.1	659.9	666.8	673.5
40°	588.5	594.6	600.7	606.8	612.9	619.7	627.2	634.7	642.2	649.7	657.0
42.5°	566.6	572.6	578.7	584.8	590.9	598.3	606.9	615.6	624.1	632.8	640.6
45°	529.8	537.3	544.8	552.3	559.8	568.3	578.1	587.8	597.5	607.2	615.9
47.5°	493.6	501.7	509.9	518.0	526.2	536.0	547.4	558.7	570.1	581.5	590.5
50°	468.6	477.2	485.8	494.4	503.0	513.6	526.0	538.5	551.0	563.5	573.0
52.5°	444.6	453.6	462.7	471.7	480.8	491.9	505.0	518.2	531.3	544.5	554.2
55°	406.1	416.0	426.1	436.1	446.1	458.3	472.7	487.1	501.6	516.0	526.0
57.5°	368.1	379.4	390.6	401.9	413.2	426.2	440.9	455.6	470.3	485.0	495.8
60°	341.1	353.0	365.0	376.9	388.9	402.8	418.6	434.4	450.2	466.0	476.6
62.5°	317.2	329.5	341.9	354.2	366.6	380.7	396.6	412.4	428.3	444.1	455.3
65°	277.4	291.0	304.6	318.2	331.8	346.8	363.2	379.5	395.9	412.3	423.7
67.5°	240.9	255.1	269.3	283.6	297.7	313.2	330.0	346.8	363.5	380.3	391.8
70°	214.9	229.3	243.8	258.2	272.6	288.5	305.7	322.9	340.1	357.3	369.2
72.5°	190.9	205.8	220.7	235.5	250.5	266.6	284.1	301.5	318.9	336.4	348.1
75°	153.7	169.3	184.7	200.3	215.9	232.5	250.3	268.1	285.8	303.6	315.5
77.5°	117.7	134.0	150.3	166.5	182.8	199.9	218.0	236.0	254.0	272.1	284.1
80°	93.7	110.6	127.6	144.6	161.4	179.0	197.0	215.1	233.1	251.1	262.8
82.5°	73.7	90.4	107.1	123.8	140.6	158.1	176.3	194.6	212.9	231.1	242.8
85°	45.0	62.2	79.4	96.6	113.8	131.3	149.1	166.9	184.7	202.4	214.1
87.5°	24.6	41.7	58.6	75.6	92.6	110.4	128.9	147.5	166.1	184.6	195.9
90°	13.3	31.6	49.9	68.2	86.4	106.4	128.2	149.9	171.6	193.4	204.2
92.5°	26.0	42.6	59.1	75.7	92.3	109.7	127.7	145.7	163.8	181.8	192.7
95°	52.3	67.2	82.0	96.9	111.8	127.7	144.7	161.8	178.7	195.8	206.4
97.5°	86.0	99.2	112.4	125.6	138.8	153.8	170.5	187.1	203.8	220.5	230.7
100°	112.1	123.8	135.5	147.2	159.0	172.8	189.0	205.0	221.1	237.3	247.5
102.5°	138.4	149.0	159.5	170.1	180.6	193.7	209.5	225.3	241.2	256.9	267.1
105°	181.2	189.8	198.4	206.9	215.6	227.2	242.1	256.8	271.7	286.4	296.5
107.5°	225.5	232.8	240.0	247.2	254.5	265.0	278.8	292.6	306.5	320.3	329.8
110°	253.2	259.8	266.4	273.0	279.7	289.8	303.5	317.1	330.7	344.2	353.1



TEST NUMBER: P331451-930

CATALOG NUMBER: S122DIP-S1005D925U930-4F0-1E-UDD-D1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	284.4	290.2	295.9	301.7	307.4	316.7	329.5	342.3	355.1	367.9	376.3
115°	330.4	334.6	338.8	342.8	347.0	355.1	367.3	379.4	391.5	403.7	411.8
117.5°	375.1	378.5	382.0	385.4	388.9	395.8	406.4	416.9	427.5	438.0	445.8
120°	405.7	408.2	410.8	413.4	415.9	422.0	431.7	441.3	451.0	460.6	468.5
122.5°	433.7	435.9	438.1	440.2	442.4	448.2	457.6	467.1	476.5	485.9	493.0
125°	476.1	477.7	479.3	480.9	482.6	487.5	495.9	504.2	512.6	520.9	527.8
127.5°	518.5	520.3	522.0	523.8	525.6	529.8	536.3	542.8	549.3	555.9	562.1
130°	545.2	547.2	549.3	551.4	553.5	557.3	562.7	568.2	573.6	579.1	585.5
132.5°	575.1	576.7	578.4	580.1	581.7	584.8	589.4	593.9	598.5	603.1	608.7
135°	613.9	615.9	617.9	619.9	621.8	624.4	627.5	630.7	633.8	637.0	642.6
137.5°	656.1	657.6	659.2	660.8	662.3	664.0	665.7	667.3	669.0	670.7	675.7
140°	681.4	682.8	684.1	685.5	686.8	688.3	689.7	691.1	692.6	694.1	698.5
142.5°	707.5	708.8	710.2	711.5	712.9	713.9	714.6	715.3	716.1	716.8	720.5
145°	743.6	744.9	746.2	747.5	748.7	749.9	751.0	752.0	753.2	754.2	756.1
147.5°	777.0	778.5	780.1	781.5	783.1	784.2	785.0	785.6	786.4	787.1	787.7
150°	799.8	800.9	801.9	803.1	804.1	805.0	805.8	806.5	807.2	808.0	808.5
152.5°	819.9	821.1	822.1	823.2	824.3	825.3	826.1	827.0	827.9	828.8	829.5
155°	850.3	850.8	851.3	851.9	852.4	853.0	853.5	854.0	854.6	855.1	856.1
157.5°	876.1	876.4	876.9	877.2	877.6	877.9	878.2	878.6	878.9	879.2	880.4
160°	891.8	892.1	892.4	892.8	893.2	893.5	893.6	893.8	894.0	894.1	895.3
162.5°	906.0	906.1	906.2	906.3	906.4	906.4	906.7	906.9	907.0	907.2	908.4
165°	925.1	925.0	924.7	924.5	924.4	924.3	924.3	924.3	924.3	924.3	925.5
167.5°	941.0	940.5	940.0	939.4	938.9	938.6	938.6	938.5	938.5	938.4	939.7
170°	949.5	948.9	948.4	947.9	947.3	947.0	946.8	946.6	946.4	946.2	947.5
172.5°	955.4	954.8	954.3	953.7	953.2	952.8	952.7	952.4	952.3	952.1	953.4
175°	962.5	962.0	961.4	960.9	960.3	959.9	959.5	959.2	958.8	958.5	959.7
177.5°	965.5	965.0	964.6	964.2	963.7	963.4	963.0	962.8	962.5	962.2	963.0
180°	964.2	964.2	964.2	964.2	964.2	964.2	964.2	964.2	964.2	964.2	964.2



TEST NUMBER: P331451-930

CATALOG NUMBER: S122DIP-S1005D925U930-4F0-1E-UDD-D1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	862.1	862.1	862.1	862.1	862.1	862.1	862.1	862.1
2.5°	859.3	860.5	861.6	861.9	861.4	861.0	860.5	860.1
5°	856.7	858.4	860.1	860.7	860.5	860.2	859.9	859.7
7.5°	852.6	854.7	856.6	857.5	857.2	857.0	856.6	856.4
10°	849.1	851.3	853.5	854.5	854.2	853.9	853.7	853.4
12.5°	843.1	845.3	847.5	848.5	848.2	847.9	847.7	847.4
15°	832.2	834.6	837.1	838.3	838.0	837.7	837.4	837.1
17.5°	818.2	820.8	823.4	824.7	824.7	824.7	824.7	824.7
20°	807.0	810.1	813.1	814.6	814.6	814.6	814.6	814.6
22.5°	795.0	798.1	801.1	802.9	803.3	803.8	804.2	804.7
25°	776.3	779.7	783.0	785.1	785.9	786.8	787.6	788.4
27.5°	755.6	759.9	764.1	766.5	767.1	767.7	768.3	768.9
30°	741.1	745.5	750.0	752.6	753.4	754.2	755.1	755.9
32.5°	725.5	730.5	735.6	738.9	740.5	741.9	743.5	744.9
35°	703.2	709.3	715.4	719.4	721.4	723.3	725.3	727.2
37.5°	680.3	687.1	693.8	698.2	700.3	702.4	704.4	706.5
40°	664.1	671.4	678.6	683.5	686.0	688.4	691.0	693.5
42.5°	648.5	656.4	664.3	669.4	672.0	674.5	676.9	679.5
45°	624.4	633.1	641.6	647.3	650.1	652.9	655.7	658.4
47.5°	599.5	608.5	617.5	623.5	626.6	629.7	632.7	635.8
50°	582.4	591.8	601.3	607.6	610.6	613.6	616.7	619.7
52.5°	563.9	573.5	583.2	589.6	592.9	596.2	599.5	602.8
55°	536.1	546.0	556.0	562.8	566.4	570.1	573.6	577.2
57.5°	506.6	517.4	528.2	535.3	539.0	542.7	546.3	550.0
60°	487.1	497.7	508.3	515.5	519.3	523.3	527.2	531.0
62.5°	466.5	477.7	488.9	496.4	500.0	503.7	507.4	511.0
65°	435.1	446.5	457.9	465.4	469.0	472.5	476.2	479.8
67.5°	403.3	414.8	426.3	434.0	437.7	441.5	445.3	449.1
70°	381.2	393.1	405.1	412.7	416.0	419.4	422.7	426.1
72.5°	359.8	371.5	383.2	391.1	395.1	399.1	403.1	407.1
75°	327.5	339.4	351.4	359.1	362.7	366.4	370.0	373.6
77.5°	295.9	307.8	319.7	327.6	331.4	335.3	339.2	343.1
80°	274.4	286.2	297.8	305.6	309.5	313.3	317.2	321.1
82.5°	254.5	266.1	277.8	285.4	289.1	292.8	296.4	300.1
85°	225.8	237.4	249.1	256.8	260.7	264.6	268.5	272.4
87.5°	207.2	218.4	229.7	237.1	240.7	244.3	247.9	251.4
90°	214.9	225.7	236.4	243.5	247.0	250.5	254.0	257.6
92.5°	203.7	214.7	225.7	232.8	236.2	239.5	242.9	246.3
95°	216.9	227.4	238.0	244.8	247.7	250.7	253.6	256.6
97.5°	241.0	251.3	261.5	268.3	271.6	274.8	278.1	281.3
100°	257.8	268.1	278.3	284.9	287.8	290.7	293.5	296.4
102.5°	277.3	287.5	297.7	304.3	307.1	310.0	312.8	315.8
105°	306.6	316.7	326.8	333.4	336.4	339.4	342.5	345.5
107.5°	339.2	348.7	358.2	364.0	366.3	368.5	370.7	372.9
110°	362.0	370.9	379.8	385.5	388.0	390.5	393.1	395.5



TEST NUMBER: P331451-930

CATALOG NUMBER: S122DIP-S1005D925U930-4F0-1E-UDD-D1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	384.7	393.2	401.6	407.2	409.9	412.5	415.2	417.8
115°	420.0	428.1	436.3	441.6	444.1	446.6	449.1	451.7
117.5°	453.6	461.4	469.1	474.2	476.5	478.7	481.0	483.4
120°	476.2	484.0	491.8	496.9	499.4	501.9	504.4	507.0
122.5°	500.1	507.3	514.4	519.0	521.2	523.5	525.7	527.9
125°	534.8	541.8	548.7	553.3	555.7	558.0	560.3	562.6
127.5°	568.3	574.5	580.7	584.8	586.7	588.6	590.4	592.3
130°	591.7	598.0	604.3	608.2	609.8	611.2	612.7	614.2
132.5°	614.3	620.0	625.7	629.3	631.0	632.6	634.2	635.9
135°	648.2	654.0	659.6	663.2	665.0	666.6	668.3	669.9
137.5°	680.7	685.7	690.6	693.7	694.8	696.0	697.2	698.3
140°	703.0	707.4	711.8	714.5	715.5	716.4	717.4	718.3
142.5°	724.2	727.9	731.6	733.9	734.6	735.2	736.0	736.7
145°	757.9	759.8	761.7	762.9	763.5	764.2	764.9	765.6
147.5°	788.3	789.0	789.6	789.9	789.9	789.9	789.9	789.8
150°	809.0	809.6	810.1	810.1	809.6	809.0	808.5	808.0
152.5°	830.1	830.8	831.5	831.5	830.8	830.1	829.5	828.8
155°	857.0	857.9	858.8	858.9	858.3	857.9	857.3	856.7
157.5°	881.7	882.9	884.1	884.3	883.5	882.6	881.7	880.8
160°	896.3	897.4	898.5	898.7	898.0	897.2	896.5	895.8
162.5°	909.6	910.9	912.1	912.3	911.4	910.5	909.7	908.8
165°	926.8	928.1	929.4	929.5	928.6	927.7	926.8	925.9
167.5°	940.9	942.2	943.5	943.6	942.7	941.8	940.9	939.9
170°	948.8	950.1	951.3	951.4	950.3	949.3	948.1	947.1
172.5°	954.6	955.9	957.2	957.2	956.2	955.1	954.0	952.9
175°	961.0	962.2	963.5	963.6	962.5	961.4	960.3	959.3
177.5°	963.9	964.8	965.6	965.6	964.8	963.9	963.0	962.2
180°	964.2	964.2	964.2	964.2	964.2	964.2	964.2	964.2

(END OF REPORT)