

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331415-930

Luminaire Tested: **S122DIP-S865D1080U930-4F0-1E-UDD-D1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331415-930
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIP-S865D1080U930-4F0-1E-UDD-D1
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 865 LUMENS PER FOOT, DROP SATIN WHITE DIFFUSER
UPLIGHT 1080 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5990.3 lumens
Efficiency: N/A
Efficacy: 91.6 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.32 / 1.42
Luminous Opening: Rectangular w/ Sides (W: 0.17' x L: 4' x H: 0.08')
CIE Type: General Diffuse


Input Watts (W): 65.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331415-930

CATALOG NUMBER: S122DIP-S865D1080U930-4F0-1E-UDD-D1

Luminous Intensity Polar Plot

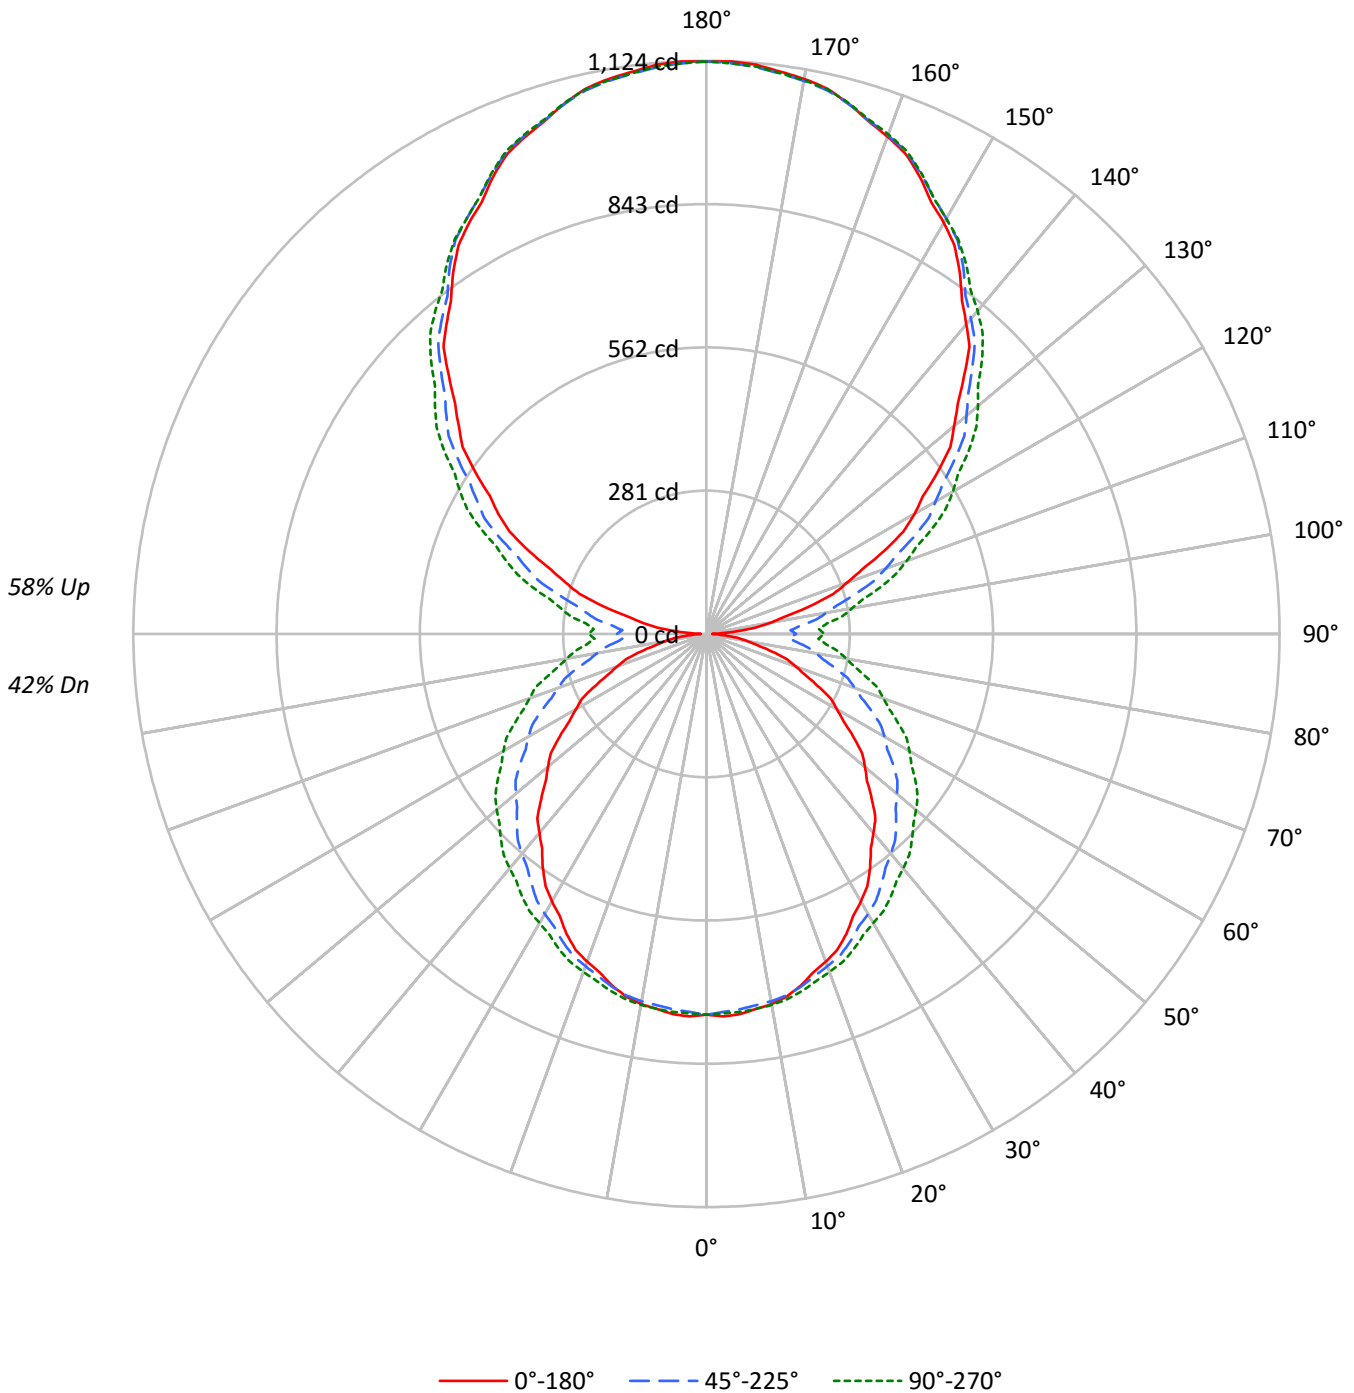



TEST NUMBER: P331415-930

CATALOG NUMBER: S122DIP-S865D1080U930-4F0-1E-UDD-D1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	105	105	105	105	96	96	96	96	79	79	79	63	63	63	49	49	49	42
1	95	90	86	82	86	82	78	75	67	65	62	54	52	50	41	40	39	33
2	86	78	71	66	78	71	65	60	58	54	50	46	43	41	36	34	32	27
3	78	68	60	54	71	62	55	50	51	46	42	41	37	34	31	29	26	22
4	71	60	52	45	64	55	47	42	45	40	35	36	32	29	28	25	22	18
5	65	53	45	38	59	49	41	36	40	34	30	32	28	25	25	22	19	16
6	60	47	39	33	54	43	36	31	36	30	26	29	25	21	22	19	17	14
7	55	43	35	29	50	39	32	27	32	27	23	26	22	19	20	17	15	12
8	51	39	31	25	46	35	28	24	29	24	20	24	20	17	19	16	13	11
9	48	35	28	22	43	32	26	21	27	22	18	22	18	15	17	14	12	10
10	44	32	25	20	40	30	23	19	25	20	16	20	16	13	16	13	11	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	12053	12053	12053
5°	12111	11602	11558
10°	12036	11258	11133
15°	11869	10896	10685
20°	11659	10507	10254
25°	11452	10132	9863
30°	11160	9747	9469
35°	10866	9375	9193
40°	10556	9059	8916
45°	10260	8774	8678
50°	9944	8519	8446
55°	9611	8242	8208
60°	9207	7957	7957
65°	8784	7620	7658
70°	8310	7260	7336
75°	7704	6907	7041
80°	6744	6545	6739
85°	5835	6234	6508



TEST NUMBER: P331415-930

CATALOG NUMBER: S122DIP-S865D1080U930-4F0-1E-UDD-D1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	70.7	1.2
10°-20°	202.8	3.4
20°-30°	307.4	5.1
30°-40°	374.4	6.2
40°-50°	402.8	6.7
50°-60°	391.1	6.5
60°-70°	341.5	5.7
70°-80°	262.9	4.4
80°-90°	180.9	3.0
90°-100°	192.7	3.2
100°-110°	309.6	5.2
110°-120°	436.2	7.3
120°-130°	529.2	8.8
130°-140°	570.9	9.5
140°-150°	548.8	9.2
150°-160°	458.3	7.7
160°-170°	304.0	5.1
170°-180°	106.2	1.8
0°-30°	580.9	9.7
0°-40°	955.3	15.9
0°-60°	1749.2	29.2
0°-90°	2534.6	42.3
90°-120°	938.4	15.7
90°-150°	2587.3	43.2
90°-180°	3456.0	57.7
0°-180°	5990.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	746	746	746	746	746	
5°	749	745	739	745	744	71
15°	714	716	716	725	725	201
25°	649	657	666	679	683	298
35°	559	578	598	621	630	349
45°	459	488	526	558	570	354
55°	352	392	447	484	500	314
65°	240	294	357	400	415	239
75°	133	194	263	308	324	141
85°	39	106	175	219	236	42
90°	12	87	176	216	231	10
95°	58	119	185	224	237	63
105°	209	245	301	340	353	221
115°	383	402	448	478	488	379
125°	553	563	594	619	629	495
135°	714	725	737	758	765	552
145°	866	872	878	885	887	541
155°	990	992	995	1000	997	455
165°	1077	1076	1076	1082	1078	304
175°	1120	1118	1116	1122	1117	106
180°	1122	1122	1122	1122	1122	



TEST NUMBER: P331415-930

CATALOG NUMBER: S122DIP-S865D1080U930-4F0-1E-UDD-D1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	746.5	746.5	746.5	746.5	746.5	746.5	746.5	746.5	746.5	746.5	746.5
2.5°	750.8	750.2	749.7	749.1	748.5	747.5	746.2	744.9	743.5	742.2	743.1
5°	748.6	748.0	747.2	746.5	745.8	744.7	743.2	741.8	740.4	738.9	740.4
7.5°	741.9	741.4	740.9	740.5	740.0	739.2	738.1	737.0	735.9	734.8	736.5
10°	736.8	736.3	735.8	735.3	734.8	734.3	733.5	732.8	732.1	731.3	733.3
12.5°	728.1	728.2	728.3	728.4	728.5	728.2	727.7	727.2	726.7	726.1	728.1
15°	714.0	714.5	715.0	715.5	715.9	716.2	716.2	716.2	716.2	716.2	718.4
17.5°	695.9	696.8	697.9	698.9	699.9	700.7	701.6	702.3	703.1	703.8	706.1
20°	683.7	684.9	686.2	687.4	688.5	689.7	690.6	691.5	692.5	693.5	696.1
22.5°	670.7	672.1	673.5	674.9	676.3	677.7	679.1	680.4	681.8	683.1	685.7
25°	649.1	650.8	652.5	654.2	655.8	657.8	659.9	662.1	664.2	666.4	669.3
27.5°	623.1	625.9	628.6	631.4	634.1	636.7	639.3	641.9	644.4	646.9	650.6
30°	605.8	608.9	612.1	615.2	618.3	621.5	624.6	627.7	630.9	634.0	637.8
32.5°	586.8	590.3	593.8	597.4	600.9	604.5	608.1	611.9	615.6	619.2	623.7
35°	559.3	563.4	567.5	571.6	575.7	580.0	584.6	589.1	593.7	598.3	603.6
37.5°	529.5	534.2	538.9	543.6	548.3	553.6	559.5	565.5	571.4	577.3	583.2
40°	509.6	514.9	520.2	525.5	530.7	536.6	543.1	549.6	556.1	562.6	568.8
42.5°	490.5	495.8	501.1	506.4	511.7	518.0	525.5	533.0	540.4	547.9	554.6
45°	458.7	465.2	471.7	478.2	484.7	492.1	500.5	509.0	517.4	525.8	533.2
47.5°	427.3	434.4	441.5	448.6	455.6	464.1	473.9	483.8	493.7	503.5	511.3
50°	405.7	413.1	420.6	428.0	435.5	444.7	455.4	466.3	477.1	488.0	496.1
52.5°	384.9	392.7	400.6	408.5	416.3	425.9	437.3	448.7	460.1	471.5	479.8
55°	351.6	360.3	368.9	377.6	386.2	396.8	409.3	421.8	434.3	446.8	455.4
57.5°	318.7	328.5	338.3	348.0	357.8	369.0	381.7	394.5	407.2	420.0	429.3
60°	295.4	305.7	316.0	326.4	336.7	348.7	362.4	376.1	389.8	403.6	412.7
62.5°	274.6	285.3	296.0	306.7	317.5	329.7	343.4	357.1	370.8	384.5	394.2
65°	240.2	251.9	263.7	275.5	287.3	300.3	314.5	328.6	342.8	357.0	366.9
67.5°	208.6	220.9	233.2	245.5	257.8	271.3	285.8	300.3	314.8	329.3	339.2
70°	186.1	198.6	211.1	223.6	236.1	249.8	264.7	279.6	294.5	309.4	319.8
72.5°	165.3	178.2	191.1	204.0	216.9	230.8	246.0	261.1	276.1	291.2	301.4
75°	133.1	146.5	160.0	173.5	186.9	201.4	216.7	232.1	247.5	262.9	273.2
77.5°	101.9	116.0	130.1	144.1	158.2	173.1	188.7	204.4	220.0	235.6	245.9
80°	81.1	95.8	110.5	125.1	139.8	154.9	170.6	186.2	201.8	217.4	227.6
82.5°	63.8	78.3	92.8	107.2	121.7	136.9	152.7	168.5	184.3	200.2	210.3
85°	39.0	53.9	68.7	83.6	98.6	113.7	129.1	144.5	159.9	175.3	185.4
87.5°	21.4	36.2	51.0	65.9	80.7	96.3	112.6	128.9	145.2	161.5	171.3
90°	11.7	28.2	44.7	61.1	77.6	95.9	115.9	135.9	156.0	175.9	185.2
92.5°	26.8	41.7	56.5	71.3	86.2	101.5	117.4	133.3	149.2	165.1	174.6
95°	57.9	71.3	84.7	98.1	111.5	125.6	140.5	155.3	170.2	185.0	194.1
97.5°	97.5	109.4	121.3	133.2	145.1	158.4	173.1	187.7	202.4	217.0	225.9
100°	127.8	138.4	149.0	159.6	170.2	182.5	196.6	210.7	224.8	238.9	247.8
102.5°	158.8	168.3	177.7	187.2	196.7	208.4	222.3	236.1	250.0	263.9	272.7
105°	209.0	216.6	224.2	231.9	239.5	249.7	262.6	275.6	288.5	301.4	310.2
107.5°	260.7	267.2	273.7	280.2	286.7	296.0	307.9	319.9	331.9	343.8	352.1
110°	293.2	299.2	305.3	311.4	317.5	326.4	338.2	349.9	361.7	373.5	381.2



TEST NUMBER: P331415-930

CATALOG NUMBER: S122DIP-S865D1080U930-4F0-1E-UDD-D1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	329.5	334.8	340.1	345.4	350.7	358.9	370.0	381.0	392.0	403.1	410.3
115°	383.1	387.0	390.9	394.8	398.8	405.9	416.3	426.7	437.1	447.5	454.5
117.5°	435.5	438.9	442.3	445.7	449.1	455.3	464.1	472.9	481.7	490.6	497.2
120°	471.1	473.7	476.4	479.0	481.7	487.0	494.9	502.8	510.8	518.7	525.4
122.5°	503.7	506.1	508.5	510.9	513.3	518.4	526.3	534.1	542.0	549.8	555.9
125°	553.3	555.2	557.1	559.1	560.9	565.4	572.4	579.5	586.6	593.6	599.5
127.5°	602.8	605.0	607.1	609.3	611.4	615.2	620.7	626.1	631.5	637.0	642.2
130°	633.8	636.3	638.9	641.3	643.8	647.3	652.0	656.6	661.3	665.9	671.2
132.5°	668.7	670.7	672.7	674.7	676.6	679.6	683.6	687.6	691.5	695.5	700.2
135°	714.2	716.5	718.8	721.1	723.5	726.0	728.9	731.6	734.5	737.4	742.2
137.5°	763.3	765.1	767.0	768.8	770.6	772.3	774.0	775.6	777.1	778.8	783.0
140°	792.8	794.4	796.1	797.8	799.4	801.0	802.6	804.0	805.6	807.1	811.0
142.5°	823.1	824.8	826.4	828.1	829.7	831.0	831.8	832.6	833.4	834.2	837.5
145°	865.6	867.1	868.5	870.0	871.5	872.9	874.1	875.4	876.6	877.9	879.5
147.5°	904.4	906.2	907.9	909.7	911.5	912.8	913.6	914.5	915.3	916.2	916.8
150°	930.9	932.2	933.4	934.7	936.0	937.0	937.9	938.7	939.6	940.4	941.0
152.5°	954.4	955.7	956.9	958.2	959.4	960.6	961.6	962.6	963.7	964.7	965.5
155°	989.7	990.3	990.9	991.6	992.2	992.8	993.4	994.1	994.7	995.3	996.4
157.5°	1019.8	1020.2	1020.6	1021.0	1021.5	1021.8	1022.2	1022.6	1023.0	1023.4	1024.8
160°	1038.0	1038.4	1038.8	1039.2	1039.7	1039.9	1040.2	1040.4	1040.6	1040.8	1042.0
162.5°	1054.6	1054.7	1054.8	1054.8	1055.0	1055.1	1055.3	1055.5	1055.7	1056.0	1057.4
165°	1076.8	1076.6	1076.4	1076.1	1076.0	1075.9	1075.9	1075.9	1075.9	1075.9	1077.3
167.5°	1095.4	1094.7	1094.1	1093.5	1092.8	1092.5	1092.4	1092.4	1092.3	1092.3	1093.8
170°	1105.2	1104.6	1103.9	1103.3	1102.7	1102.3	1102.0	1101.8	1101.6	1101.4	1102.9
172.5°	1112.0	1111.4	1110.8	1110.1	1109.5	1109.1	1108.9	1108.6	1108.4	1108.2	1109.7
175°	1120.4	1119.7	1119.1	1118.4	1117.9	1117.3	1116.9	1116.5	1116.1	1115.6	1117.1
177.5°	1123.7	1123.2	1122.7	1122.3	1121.8	1121.3	1121.0	1120.6	1120.3	1120.0	1121.0
180°	1122.3	1122.3	1122.3	1122.3	1122.3	1122.3	1122.3	1122.3	1122.3	1122.3	1122.3



TEST NUMBER: P331415-930

CATALOG NUMBER: S122DIP-S865D1080U930-4F0-1E-UDD-D1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	746.5	746.5	746.5	746.5	746.5	746.5	746.5	746.5
2.5°	744.0	745.0	746.0	746.3	745.9	745.5	745.1	744.8
5°	741.8	743.2	744.7	745.3	745.0	744.8	744.5	744.3
7.5°	738.3	740.0	741.8	742.5	742.2	742.0	741.8	741.5
10°	735.2	737.1	739.1	739.9	739.6	739.4	739.2	738.9
12.5°	730.0	731.9	733.9	734.7	734.4	734.2	733.9	733.7
15°	720.5	722.7	724.9	725.8	725.5	725.3	725.0	724.9
17.5°	708.4	710.6	712.9	714.0	714.0	714.0	714.0	714.0
20°	698.8	701.4	704.0	705.4	705.4	705.4	705.4	705.4
22.5°	688.4	691.0	693.7	695.2	695.5	695.9	696.3	696.8
25°	672.2	675.1	678.0	679.8	680.4	681.2	681.9	682.7
27.5°	654.3	657.9	661.5	663.7	664.2	664.7	665.3	665.8
30°	641.6	645.5	649.4	651.7	652.3	653.1	653.8	654.5
32.5°	628.1	632.5	636.9	639.8	641.1	642.4	643.7	645.0
35°	608.9	614.2	619.5	622.9	624.6	626.3	627.9	629.7
37.5°	589.0	594.8	600.7	604.5	606.3	608.1	609.9	611.7
40°	575.0	581.3	587.6	591.7	593.9	596.1	598.3	600.5
42.5°	561.5	568.3	575.2	579.7	581.8	584.0	586.1	588.3
45°	540.7	548.1	555.6	560.5	563.0	565.3	567.8	570.1
47.5°	519.1	526.8	534.7	539.9	542.5	545.2	547.8	550.5
50°	504.3	512.4	520.7	526.0	528.6	531.3	533.9	536.6
52.5°	488.2	496.6	504.9	510.5	513.4	516.2	519.0	521.9
55°	464.1	472.8	481.4	487.3	490.4	493.6	496.7	499.8
57.5°	438.6	447.9	457.3	463.6	466.7	469.9	473.0	476.2
60°	421.8	431.0	440.1	446.3	449.7	453.1	456.4	459.8
62.5°	403.9	413.6	423.3	429.8	432.9	436.1	439.3	442.5
65°	376.7	386.6	396.5	402.9	406.0	409.2	412.3	415.4
67.5°	349.2	359.1	369.2	375.8	379.0	382.3	385.6	388.8
70°	330.1	340.4	350.7	357.3	360.3	363.1	366.1	368.9
72.5°	311.5	321.6	331.8	338.6	342.1	345.5	349.0	352.5
75°	283.6	293.9	304.3	311.0	314.1	317.2	320.3	323.5
77.5°	256.2	266.5	276.8	283.6	287.0	290.3	293.8	297.1
80°	237.7	247.8	257.9	264.6	267.9	271.3	274.7	278.0
82.5°	220.4	230.4	240.5	247.2	250.4	253.5	256.7	259.8
85°	195.4	205.5	215.6	222.4	225.8	229.1	232.4	235.9
87.5°	181.0	190.7	200.5	206.8	210.0	213.1	216.2	219.3
90°	194.4	203.5	212.7	218.9	222.0	225.1	228.2	231.3
92.5°	184.2	193.6	203.2	209.4	212.3	215.2	218.2	221.1
95°	203.3	212.5	221.6	227.4	229.8	232.3	234.7	237.3
97.5°	234.8	243.7	252.6	258.4	261.2	264.0	266.8	269.6
100°	256.7	265.5	274.4	280.1	282.6	285.0	287.4	289.8
102.5°	281.6	290.5	299.4	305.0	307.4	309.9	312.3	314.8
105°	319.0	327.9	336.7	342.5	345.1	347.7	350.4	353.0
107.5°	360.4	368.6	376.8	381.8	383.4	385.1	386.9	388.5
110°	388.9	396.6	404.3	409.1	411.2	413.2	415.2	417.2



TEST NUMBER: P331415-930

CATALOG NUMBER: S122DIP-S865D1080U930-4F0-1E-UDD-D1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	417.4	424.6	431.8	436.5	438.7	440.8	443.0	445.2
115°	461.5	468.6	475.5	480.0	482.0	484.0	486.1	488.1
117.5°	503.8	510.4	517.0	521.2	523.0	524.8	526.7	528.5
120°	532.1	538.9	545.6	550.0	552.0	554.0	556.0	558.1
122.5°	561.9	567.9	574.0	577.9	579.7	581.5	583.3	585.1
125°	605.4	611.2	617.1	621.0	623.0	624.9	626.9	628.8
127.5°	647.4	652.6	657.8	661.1	662.6	664.0	665.4	666.9
130°	676.6	681.9	687.3	690.5	691.6	692.7	693.7	694.8
132.5°	704.8	709.5	714.1	717.1	718.4	719.6	720.9	722.1
135°	747.0	751.9	756.7	759.8	761.1	762.3	763.6	764.9
137.5°	787.3	791.6	795.8	798.3	799.2	799.9	800.7	801.5
140°	814.8	818.7	822.6	824.8	825.3	826.0	826.6	827.1
142.5°	840.7	843.9	847.2	849.1	849.5	849.9	850.3	850.7
145°	881.2	882.9	884.5	885.5	885.9	886.2	886.6	887.0
147.5°	917.5	918.1	918.8	919.0	918.8	918.6	918.4	918.1
150°	941.7	942.3	943.0	943.0	942.3	941.7	941.0	940.4
152.5°	966.3	967.0	967.8	967.8	967.0	966.3	965.5	964.7
155°	997.4	998.5	999.6	999.7	999.1	998.5	997.8	997.2
157.5°	1026.2	1027.7	1029.1	1029.3	1028.3	1027.3	1026.3	1025.2
160°	1043.3	1044.6	1045.9	1046.0	1045.2	1044.4	1043.5	1042.7
162.5°	1058.8	1060.2	1061.7	1061.8	1060.9	1059.9	1058.8	1057.9
165°	1078.8	1080.3	1081.7	1081.9	1080.9	1079.9	1078.8	1077.7
167.5°	1095.3	1096.7	1098.2	1098.4	1097.3	1096.2	1095.1	1094.1
170°	1104.3	1105.8	1107.3	1107.4	1106.1	1104.9	1103.6	1102.4
172.5°	1111.2	1112.6	1114.1	1114.2	1113.0	1111.7	1110.4	1109.1
175°	1118.6	1120.1	1121.5	1121.6	1120.4	1119.1	1117.9	1116.6
177.5°	1122.0	1123.0	1124.0	1124.0	1123.0	1122.0	1121.0	1120.0
180°	1122.3	1122.3	1122.3	1122.3	1122.3	1122.3	1122.3	1122.3

(END OF REPORT)