

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331734-930

Luminaire Tested: **S122RDIP-S865D1080U930-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331734-930
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-16,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122RDIP-S865D1080U930-4F0-1E-UDD-F4
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 865 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1080 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5890.3 lumens
Efficiency: N/A
Efficacy: 90.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 65.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331734-930

CATALOG NUMBER: S122RDIP-S865D1080U930-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

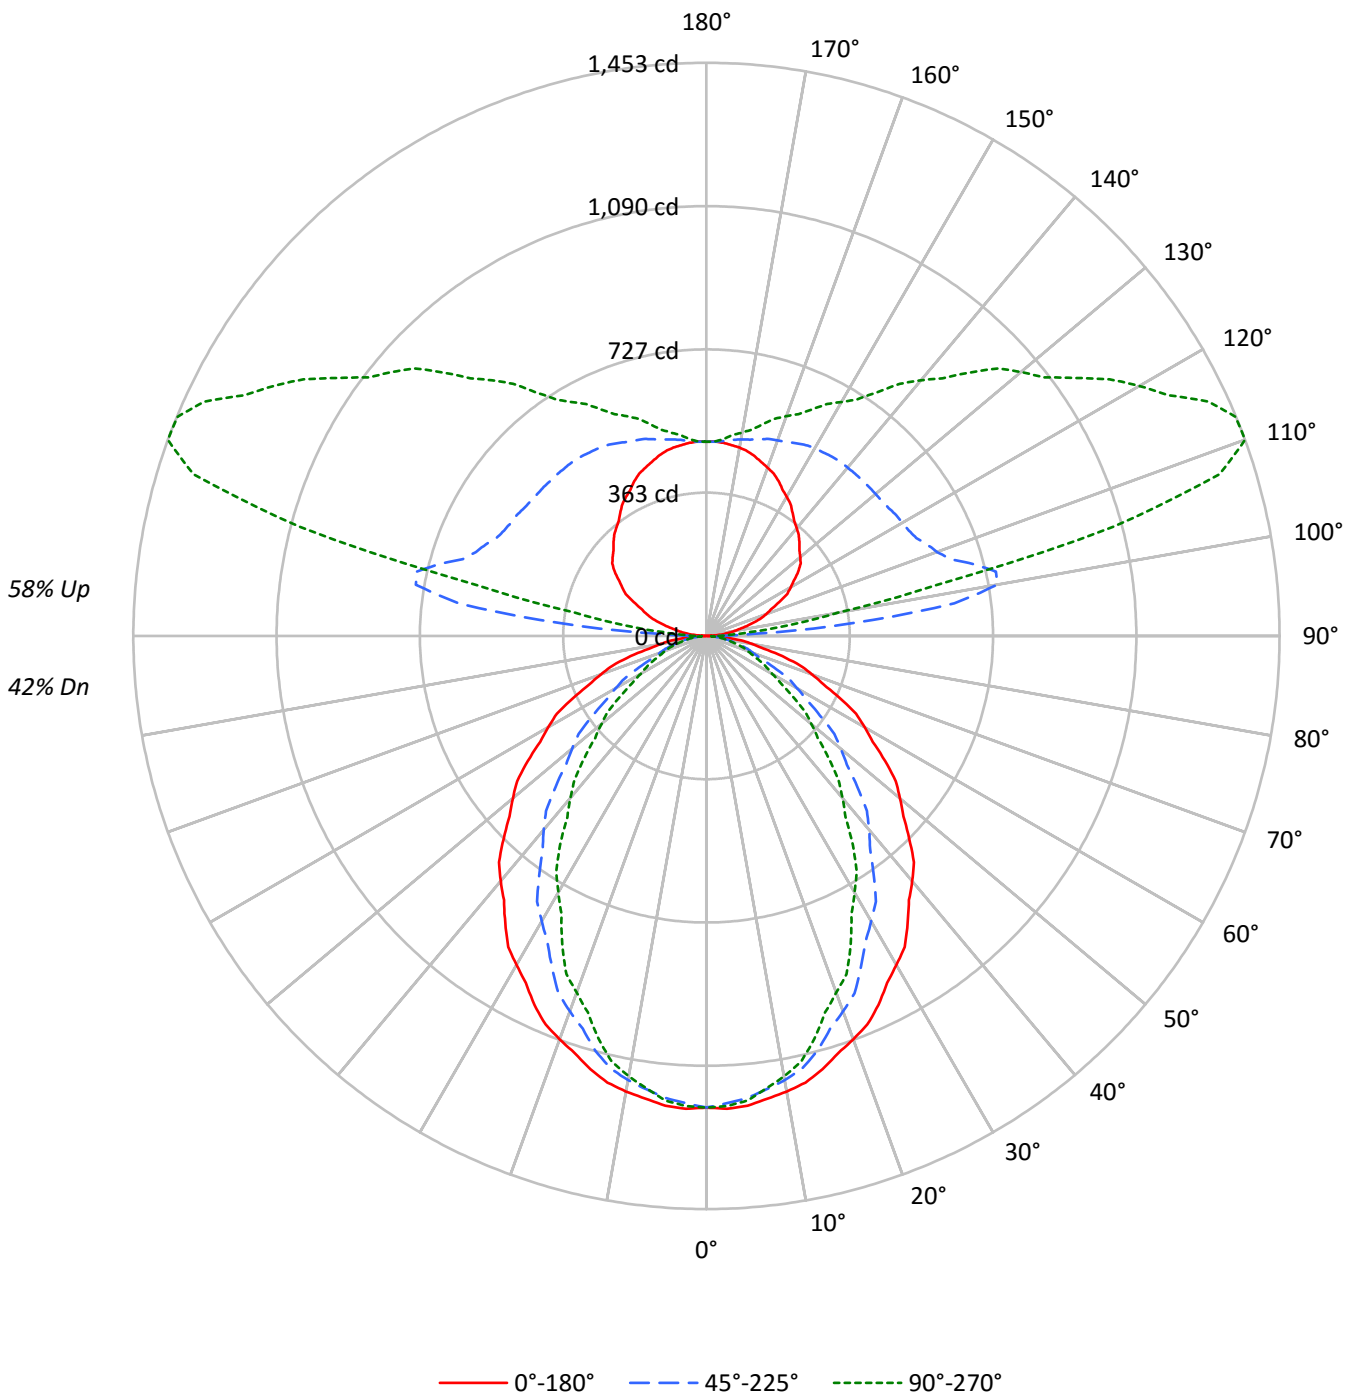



TEST NUMBER: P331734-930

CATALOG NUMBER: S122RDIP-S865D1080U930-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	105	105	105	105	96	96	96	96	79	79	79	63	63	63	49	49	49	42
1	96	92	89	85	88	84	81	78	70	67	65	56	55	53	44	43	42	36
2	88	81	75	70	80	74	69	65	61	58	55	50	47	45	39	37	36	31
3	81	71	64	59	73	66	60	55	55	50	46	44	41	39	35	33	31	27
4	74	63	56	50	67	58	52	47	49	44	40	40	36	33	31	29	27	23
5	68	57	49	43	62	52	45	40	44	39	35	36	32	29	28	26	24	20
6	63	51	43	38	57	47	40	35	39	34	30	32	29	26	26	23	21	18
7	58	46	38	33	53	43	36	31	36	31	27	30	26	23	24	21	19	16
8	54	42	34	29	49	39	32	27	33	28	24	27	23	20	22	19	17	15
9	50	38	31	26	46	35	29	25	30	25	22	25	21	18	20	17	15	13
10	47	35	28	23	43	33	26	22	28	23	19	23	19	17	19	16	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	19302	19302	19302
5°	19376	19060	19164
10°	19226	18748	18589
15°	19005	18191	17668
20°	18699	17399	16526
25°	18387	16498	15419
30°	17952	15571	13998
35°	17527	14564	12751
40°	17102	13523	11310
45°	16600	12353	10003
50°	16088	11170	8721
55°	15564	9897	7491
60°	14951	8561	6219
65°	14258	7194	5662
70°	13430	5925	5207
75°	12420	5402	4860
80°	10962	4826	4426
85°	8633	3798	3798



TEST NUMBER: P331734-930

CATALOG NUMBER: S122RDIP-S865D1080U930-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	111.9	1.9
10°-20°	307.2	5.2
20°-30°	431.5	7.3
30°-40°	470.5	8.0
40°-50°	432.6	7.3
50°-60°	339.7	5.8
60°-70°	221.5	3.8
70°-80°	114.2	1.9
80°-90°	34.1	0.6
90°-100°	196.9	3.3
100°-110°	668.2	11.3
110°-120°	709.9	12.1
120°-130°	584.4	9.9
130°-140°	469.3	8.0
140°-150°	354.6	6.0
150°-160°	249.2	4.2
160°-170°	146.7	2.5
170°-180°	47.8	0.8
0°-30°	850.6	14.4
0°-40°	1321.1	22.4
0°-60°	2093.4	35.5
0°-90°	2463.2	41.8
90°-120°	1575.1	26.7
90°-150°	2983.4	50.6
90°-180°	3427.0	58.2
0°-180°	5890.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1196	1196	1196	1196	1196	
5°	1196	1190	1176	1185	1182	113
15°	1137	1124	1088	1068	1057	320
25°	1032	995	926	883	866	474
35°	889	832	739	673	647	556
45°	727	652	541	467	438	561
55°	553	467	352	289	266	494
65°	373	285	188	153	148	370
75°	199	126	87	79	78	211
85°	47	25	20	20	20	55
90°	1	13	32	31	31	4
95°	33	81	371	140	108	35
105°	116	174	702	1254	1067	123
115°	204	257	587	1212	1405	202
125°	284	336	564	982	1139	252
135°	333	398	558	825	944	258
145°	381	438	555	689	754	239
155°	433	467	539	609	634	199
165°	472	486	516	547	556	133
175°	492	492	496	502	501	47
180°	492	492	492	492	492	



TEST NUMBER: P331734-930

CATALOG NUMBER: S122RDIP-S865D1080U930-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1195.5	1195.5	1195.5	1195.5	1195.5	1195.5	1195.5	1195.5	1195.5	1195.5	1195.5
2.5°	1199.8	1198.8	1197.8	1196.9	1196.0	1194.4	1192.3	1190.2	1188.1	1185.9	1187.9
5°	1195.5	1194.3	1193.0	1191.8	1190.7	1188.5	1185.4	1182.3	1179.1	1176.0	1178.1
7.5°	1183.1	1181.6	1180.1	1178.7	1177.1	1174.6	1170.9	1167.3	1163.6	1159.9	1160.6
10°	1172.7	1171.0	1169.4	1167.7	1166.0	1162.8	1158.0	1153.2	1148.3	1143.5	1142.8
12.5°	1159.8	1157.6	1155.6	1153.6	1151.4	1147.4	1141.2	1135.1	1128.9	1122.7	1121.4
15°	1137.0	1134.4	1131.7	1129.1	1126.4	1121.0	1112.9	1104.7	1096.5	1088.3	1083.8
17.5°	1109.1	1105.1	1101.1	1097.0	1093.0	1085.7	1075.2	1064.7	1054.3	1043.7	1038.4
20°	1088.3	1083.5	1078.7	1073.9	1069.1	1060.7	1048.6	1036.7	1024.7	1012.6	1006.6
22.5°	1065.8	1060.5	1055.1	1049.7	1044.3	1034.9	1021.2	1007.7	994.2	980.6	972.8
25°	1032.1	1024.4	1016.7	1009.0	1001.4	989.5	973.6	957.8	941.9	926.1	916.2
27.5°	991.4	983.0	974.7	966.3	958.0	944.9	926.9	909.1	891.1	873.3	861.8
30°	962.9	953.7	944.6	935.5	926.3	912.2	892.9	873.7	854.4	835.2	823.0
32.5°	935.1	924.5	913.8	903.1	892.4	877.3	857.7	838.0	818.5	798.8	784.9
35°	889.2	877.0	864.8	852.5	840.2	823.5	802.3	781.2	760.1	738.9	723.7
37.5°	843.4	830.0	816.5	803.0	789.5	771.5	749.0	726.4	703.9	681.3	664.6
40°	811.4	797.0	782.5	768.1	753.7	734.8	711.5	688.2	664.9	641.6	624.4
42.5°	778.5	763.3	748.1	733.0	717.7	698.1	674.0	649.9	625.8	601.7	584.1
45°	727.0	710.9	694.8	678.7	662.6	641.9	616.7	591.4	566.1	541.0	523.8
47.5°	676.8	659.7	642.7	625.6	608.5	586.9	560.9	534.8	508.7	482.7	465.8
50°	640.5	623.4	606.3	589.2	572.2	550.4	524.0	497.5	471.1	444.7	428.0
52.5°	605.0	587.1	569.3	551.5	533.6	511.8	485.9	460.0	434.1	408.3	392.2
55°	552.9	534.1	515.4	496.6	477.8	455.4	429.5	403.5	377.6	351.6	337.2
57.5°	499.4	480.1	460.9	441.6	422.5	400.4	375.4	350.4	325.5	300.5	287.3
60°	463.0	443.8	424.6	405.4	386.1	364.1	339.3	314.5	289.8	265.1	252.8
62.5°	427.5	408.3	389.1	369.8	350.6	329.2	305.6	282.0	258.4	234.7	223.1
65°	373.2	353.8	334.3	314.8	295.4	274.8	253.2	231.5	209.9	188.3	180.1
67.5°	320.9	301.6	282.3	262.9	243.5	224.1	204.7	185.2	165.8	146.3	142.5
70°	284.5	265.8	247.0	228.3	209.5	191.8	175.3	158.7	142.1	125.5	123.1
72.5°	249.9	232.0	213.9	196.0	178.0	162.3	149.0	135.7	122.4	109.1	107.0
75°	199.1	182.2	165.4	148.5	131.8	119.3	111.0	102.9	94.7	86.6	84.9
77.5°	149.1	134.3	119.5	104.8	90.0	80.7	76.7	72.8	68.9	64.9	63.9
80°	117.9	105.7	93.4	81.1	68.9	61.6	59.1	56.7	54.3	51.9	51.0
82.5°	89.4	79.8	70.2	60.7	51.1	45.5	43.9	42.2	40.6	39.0	38.4
85°	46.6	41.5	36.4	31.4	26.3	23.5	22.7	22.0	21.3	20.5	20.5
87.5°	14.0	13.0	12.3	11.1	9.9	9.8	10.7	12.1	13.2	13.4	13.0
90°	1.0	3.8	7.6	9.5	11.3	14.2	18.9	25.6	31.2	32.2	31.2
92.5°	11.6	16.6	23.5	27.6	34.1	43.0	64.4	94.5	121.4	123.1	104.0
95°	33.2	36.9	46.4	55.0	70.1	92.8	136.4	218.7	328.6	371.3	324.9
97.5°	54.0	59.1	69.1	82.0	99.5	125.2	179.9	294.7	477.4	633.8	664.9
100°	72.9	75.7	84.3	99.5	118.4	144.9	195.1	310.6	515.2	748.2	884.6
102.5°	90.3	92.5	100.9	116.1	135.8	162.3	208.7	311.4	500.8	752.0	966.5
105°	115.5	119.4	126.0	140.1	161.0	187.5	232.0	316.3	472.6	701.8	953.7
107.5°	142.8	145.9	152.3	165.3	186.1	212.7	255.9	329.4	458.6	648.0	870.6
110°	161.0	164.8	170.5	182.8	202.7	230.2	271.8	340.0	455.6	622.2	818.3



TEST NUMBER: P331734-930

CATALOG NUMBER: S122RDIP-S865D1080U930-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	177.7	181.5	187.9	199.4	218.6	246.8	287.0	351.4	456.3	605.6	782.0
115°	203.7	208.4	214.0	225.4	244.3	269.9	310.6	368.4	460.3	587.2	736.9
117.5°	230.6	234.3	240.0	250.1	268.2	294.7	332.4	386.6	467.1	578.3	708.4
120°	247.2	250.9	256.7	265.2	284.1	310.6	347.6	398.8	471.7	573.0	693.2
122.5°	263.1	266.1	271.8	281.1	300.0	327.3	362.0	409.4	477.0	570.0	680.4
125°	284.1	287.0	292.7	304.0	322.9	349.5	383.6	426.2	484.9	564.5	662.0
127.5°	300.8	304.6	312.6	325.1	343.2	370.5	403.7	441.9	493.1	561.3	645.0
130°	310.6	314.5	323.9	337.2	356.1	382.6	415.8	451.8	499.1	559.7	633.7
132.5°	319.8	324.3	334.5	348.5	368.3	394.8	426.4	461.6	505.2	559.0	624.5
135°	333.4	337.2	348.5	362.7	384.5	411.1	441.3	474.5	512.4	557.8	611.8
137.5°	346.3	350.8	362.2	377.3	398.9	423.5	453.5	484.4	518.9	557.7	602.9
140°	356.1	359.9	371.3	386.5	407.2	431.9	460.3	489.7	521.9	556.9	597.6
142.5°	366.0	369.0	379.6	394.8	414.8	438.0	465.6	494.2	524.2	556.9	592.3
145°	380.7	384.5	394.0	408.2	427.1	448.0	473.5	500.1	526.6	555.0	585.3
147.5°	396.6	399.5	408.5	421.7	437.4	455.9	480.0	503.3	527.3	551.6	578.1
150°	407.2	410.1	417.7	430.0	444.2	461.2	483.1	504.8	526.6	549.3	572.0
152.5°	417.8	419.2	426.7	437.6	451.0	466.5	486.1	505.6	525.1	545.5	566.7
155°	432.8	433.7	439.4	449.9	460.3	474.5	490.6	506.7	522.8	538.9	556.9
157.5°	445.3	446.3	450.9	459.9	468.2	480.2	493.8	506.7	518.4	532.1	547.6
160°	453.6	454.6	458.4	465.9	473.5	484.0	495.4	506.7	516.2	527.6	540.8
162.5°	462.0	461.5	465.2	471.2	478.1	486.2	496.1	506.0	513.9	523.7	534.8
165°	471.7	470.8	472.6	478.3	483.1	488.7	497.3	503.9	509.6	516.2	524.7
167.5°	479.6	478.5	480.2	483.8	487.2	490.8	497.0	502.6	505.2	509.6	514.9
170°	484.9	483.1	484.0	486.8	488.7	491.5	496.3	501.0	502.9	505.7	509.6
172.5°	488.0	486.8	486.2	489.1	490.2	492.3	495.5	498.7	499.9	501.2	504.3
175°	491.5	490.6	489.7	491.5	491.5	492.5	494.4	496.3	495.4	496.3	497.3
177.5°	493.3	491.7	491.0	492.5	492.5	492.5	493.3	494.8	493.3	492.5	493.3
180°	492.5	492.5	492.5	492.5	492.5	492.5	492.5	492.5	492.5	492.5	492.5



TEST NUMBER: P331734-930

CATALOG NUMBER: S122RDIP-S865D1080U930-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1195.5	1195.5	1195.5	1195.5	1195.5	1195.5	1195.5	1195.5
2.5°	1189.8	1191.7	1193.6	1194.4	1194.0	1193.6	1193.3	1192.9
5°	1180.3	1182.4	1184.6	1185.4	1184.6	1183.9	1183.2	1182.4
7.5°	1161.2	1161.8	1162.5	1162.1	1160.9	1159.7	1158.4	1157.2
10°	1142.1	1141.3	1140.6	1139.5	1138.1	1136.7	1135.2	1133.8
12.5°	1120.1	1118.8	1117.5	1115.7	1113.3	1110.9	1108.5	1106.1
15°	1079.2	1074.6	1070.1	1066.6	1064.2	1061.8	1059.4	1057.0
17.5°	1032.9	1027.4	1022.1	1017.2	1013.1	1009.0	1004.9	1000.7
20°	1000.6	994.6	988.6	982.9	977.6	972.3	967.0	961.8
22.5°	965.2	957.4	949.7	943.8	939.9	935.9	932.0	928.1
25°	906.4	896.5	886.6	879.9	876.3	872.7	869.1	865.5
27.5°	850.3	838.8	827.3	818.7	813.0	807.2	801.5	795.8
30°	810.7	798.4	786.1	776.7	770.3	763.8	757.3	750.8
32.5°	770.9	756.8	742.9	732.8	726.8	720.6	714.5	708.4
35°	708.6	693.5	678.3	668.1	662.8	657.5	652.2	646.9
37.5°	648.0	631.3	614.7	603.2	597.2	591.1	585.1	579.0
40°	607.4	590.4	573.2	561.6	555.4	549.1	542.8	536.6
42.5°	566.5	548.8	531.2	519.3	513.2	507.2	501.1	495.0
45°	506.8	489.8	472.6	461.2	455.4	449.7	443.9	438.1
47.5°	448.7	431.8	414.8	403.7	398.5	393.2	388.0	382.8
50°	411.5	394.8	378.3	367.5	362.4	357.3	352.3	347.2
52.5°	376.3	360.3	344.2	333.9	329.2	324.6	319.9	315.3
55°	322.8	308.3	293.9	284.4	279.8	275.2	270.7	266.1
57.5°	274.1	260.9	247.7	239.1	235.3	231.4	227.6	223.7
60°	240.5	228.3	216.0	208.0	204.1	200.2	196.4	192.6
62.5°	211.4	199.7	188.0	181.0	178.7	176.4	174.1	171.8
65°	171.9	163.7	155.6	151.1	150.3	149.7	149.0	148.2
67.5°	138.8	135.0	131.3	129.0	128.2	127.4	126.7	126.0
70°	120.7	118.3	115.9	114.2	113.2	112.3	111.3	110.3
72.5°	105.0	103.0	100.9	99.7	99.1	98.5	97.9	97.3
75°	83.2	81.5	79.8	78.8	78.6	78.4	78.1	77.9
77.5°	63.0	62.0	61.1	60.4	60.0	59.6	59.3	58.9
80°	50.0	49.1	48.1	47.6	47.6	47.6	47.6	47.6
82.5°	37.8	37.2	36.6	36.4	36.4	36.4	36.4	36.4
85°	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5
87.5°	12.6	12.1	12.2	12.3	12.3	12.3	12.3	12.3
90°	30.3	28.5	30.3	31.2	31.2	31.2	31.2	31.2
92.5°	82.6	70.8	62.9	57.0	56.3	53.2	54.0	52.5
95°	248.2	190.4	150.6	129.7	117.4	109.9	107.0	107.9
97.5°	579.0	473.8	371.3	302.9	257.6	234.3	220.5	212.5
100°	864.7	747.3	617.5	502.9	424.3	383.6	356.1	339.1
102.5°	1051.9	1025.3	930.4	809.0	723.6	654.1	619.8	596.7
105°	1150.7	1257.8	1270.1	1238.8	1180.1	1121.4	1080.7	1067.4
107.5°	1079.5	1240.7	1339.2	1385.0	1392.4	1389.2	1381.0	1363.4
110°	1018.1	1187.6	1308.9	1386.6	1427.3	1445.3	1453.8	1452.9



TEST NUMBER: P331734-930

CATALOG NUMBER: S122RDIP-S865D1080U930-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	962.1	1124.8	1254.3	1343.4	1400.0	1430.1	1446.3	1451.3
115°	893.2	1039.0	1163.0	1260.6	1327.9	1371.4	1396.0	1404.6
117.5°	841.2	969.3	1081.8	1173.3	1241.9	1287.8	1313.9	1321.0
120°	815.5	932.9	1033.3	1119.5	1185.8	1230.3	1257.8	1267.2
122.5°	795.0	902.6	997.7	1075.5	1135.0	1178.8	1203.2	1211.1
125°	765.2	862.8	946.2	1017.2	1072.1	1108.2	1131.8	1139.4
127.5°	735.9	824.2	902.8	968.3	1016.3	1049.9	1070.4	1076.5
130°	717.0	798.4	873.3	935.7	982.2	1014.4	1033.3	1040.9
132.5°	698.8	774.2	842.9	901.6	947.3	979.5	996.9	1003.7
135°	673.4	735.9	798.4	851.4	892.2	923.4	940.4	944.3
137.5°	653.1	705.4	755.0	801.3	838.4	865.3	880.3	885.9
140°	640.3	685.7	729.3	770.9	801.3	825.9	840.1	845.8
142.5°	629.7	668.3	705.8	740.6	769.4	791.8	804.5	805.6
145°	614.7	646.0	675.3	702.8	725.5	741.6	751.1	753.9
147.5°	603.2	627.8	650.7	670.7	689.5	702.4	708.8	710.5
150°	594.8	615.6	635.5	652.6	666.8	678.2	683.8	684.8
152.5°	586.4	605.8	622.6	637.4	648.6	658.4	662.6	662.8
155°	574.9	590.0	604.2	614.7	625.1	631.7	635.5	633.7
157.5°	561.4	574.1	586.0	594.2	601.6	607.1	608.8	608.8
160°	553.1	563.5	574.0	580.6	587.2	591.9	592.9	592.9
162.5°	544.8	553.7	562.6	567.7	574.3	577.6	578.5	577.7
165°	532.3	538.9	545.5	549.3	553.1	556.9	556.9	556.0
167.5°	520.3	525.5	530.0	533.5	535.1	537.2	537.0	535.9
170°	514.3	517.1	520.9	522.8	523.7	526.6	525.6	523.7
172.5°	507.4	509.6	512.6	513.7	514.7	516.0	515.0	513.9
175°	500.1	501.0	502.0	502.9	502.9	503.9	502.9	501.0
177.5°	494.8	494.8	495.5	495.5	495.5	495.5	494.8	493.3
180°	492.5	492.5	492.5	492.5	492.5	492.5	492.5	492.5

(END OF REPORT)